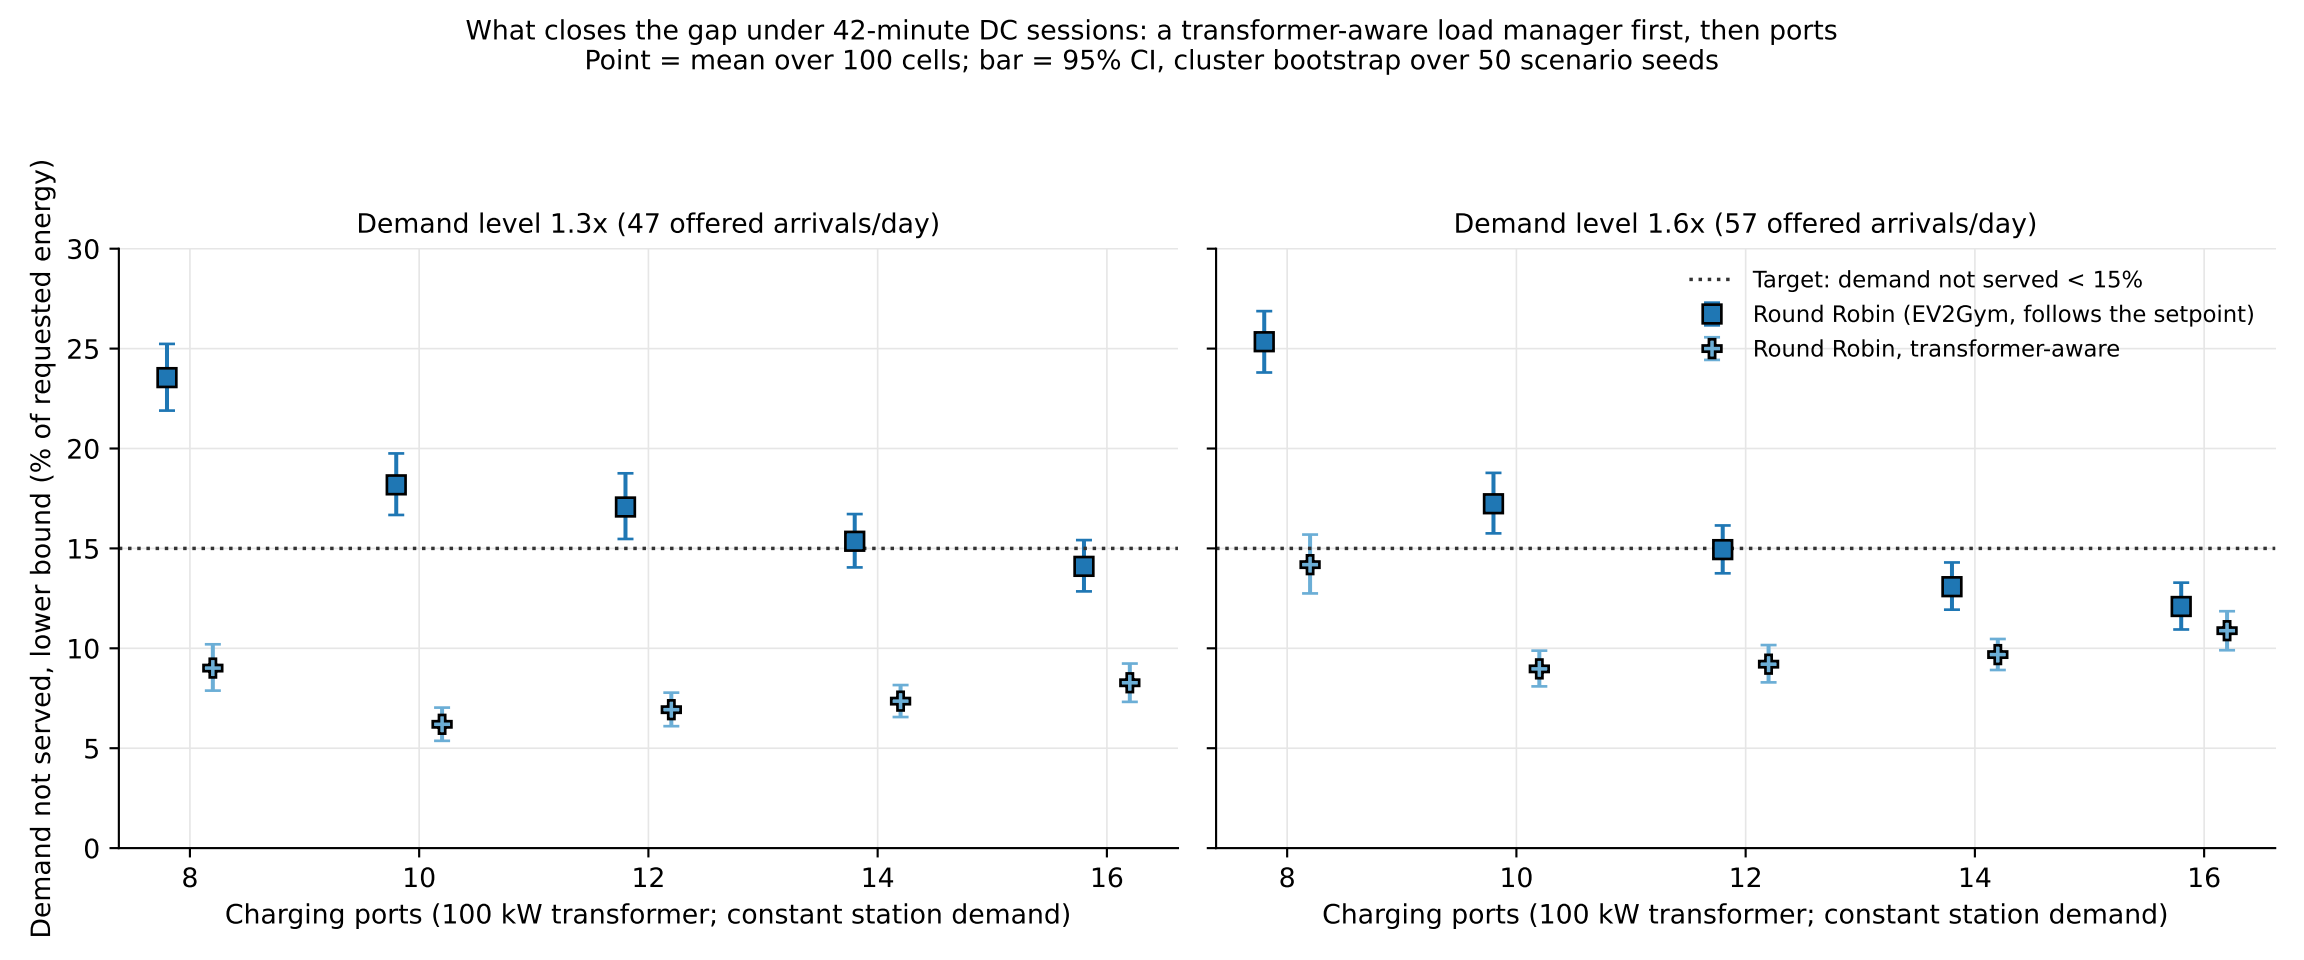
What closes the gap under 42-minute DC sessions: a transformer-aware load manager first, then ports
Point = mean over 100 cells; bar = 95% CI, cluster bootstrap over 50 scenario seeds
Demand level 1.3x (47 offered arrivals/day)
Demand level 1.6x (57 offered arrivals/day)
Demand not served, lower bound (% of requested energy)
Charging ports (100 kW transformer; constant station demand)
Target: demand not served < 15%
Round Robin (EV2Gym, follows the setpoint)
Round Robin, transformer-aware
0
5
10
15
20
25
30
8
10
12
14
16