



Note:

1. All Dimensions are in MM unless otherwise specified.
2. All Concrete grade shall be M15.
3. Pockets for Anchor Bolt Grouting should be provided with CC.
4. Pocket distance from Tower leg should be adjust according to the site conditions/ instruction of Engineering incharge.
5. All Brick work should be in Cement Sand Mortar (1:6).
6. 15 mm Plastering should be in Cement Mortar


PLAN

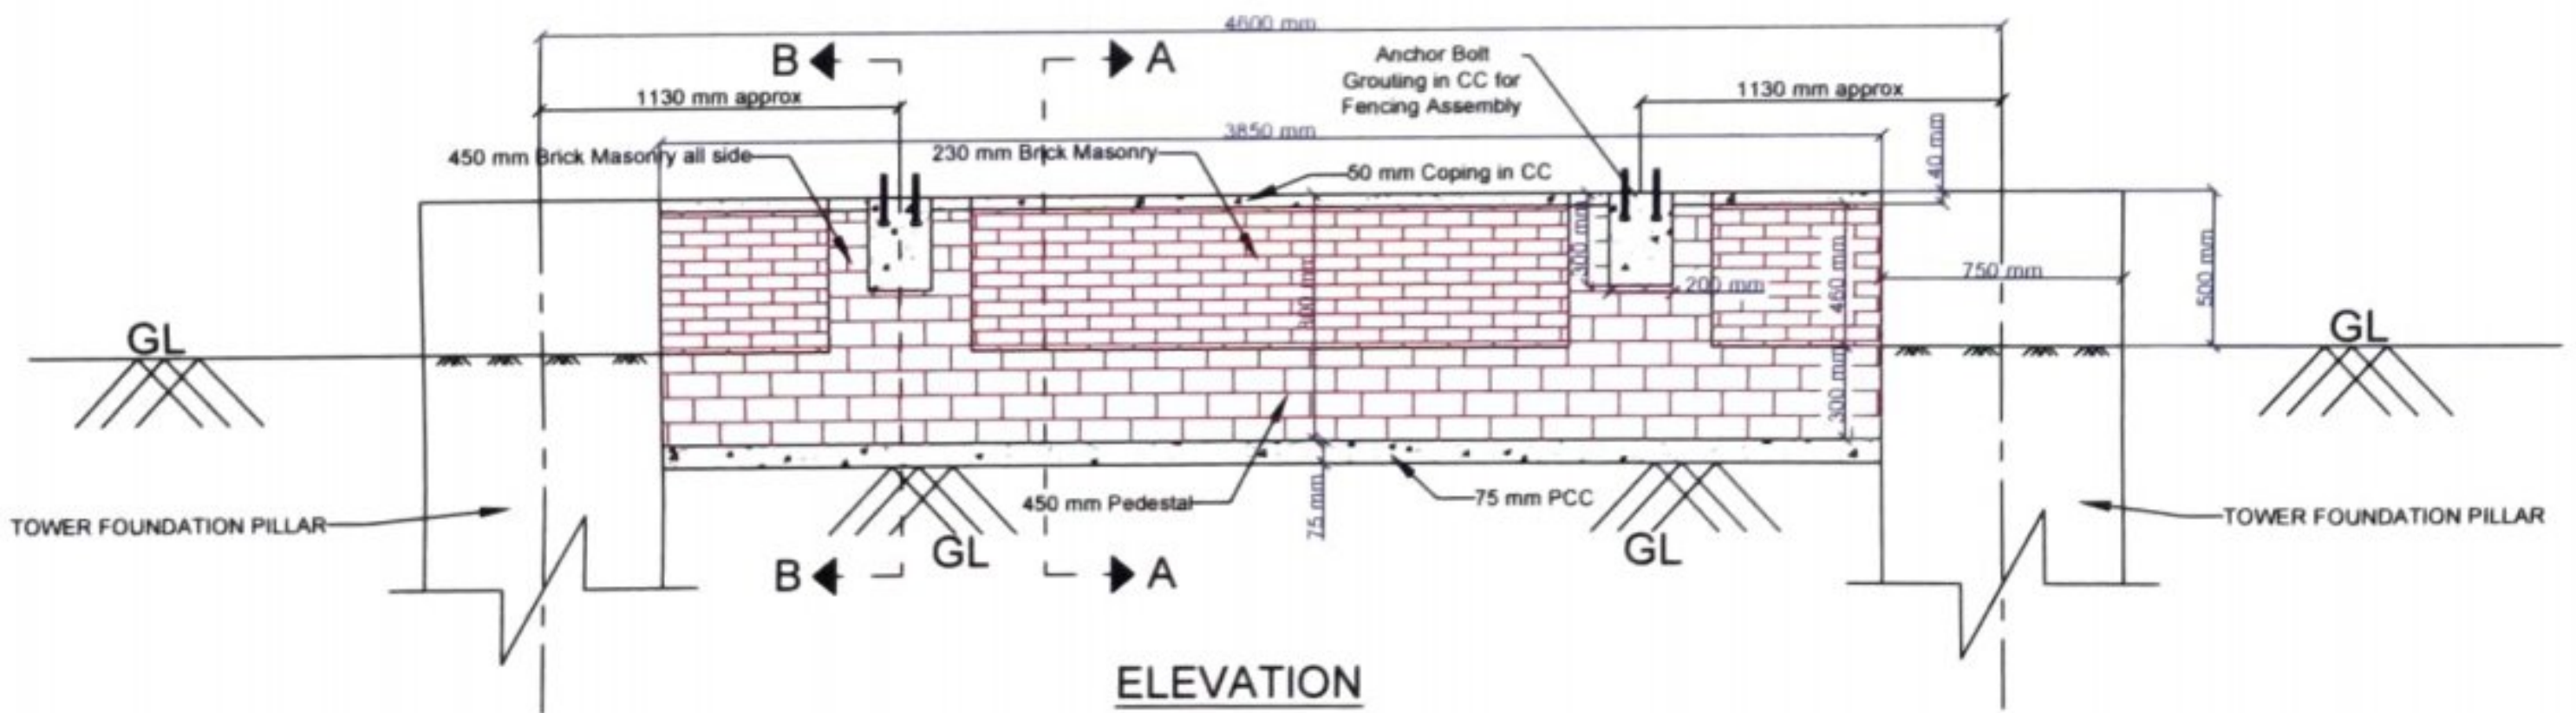

ELEVATION

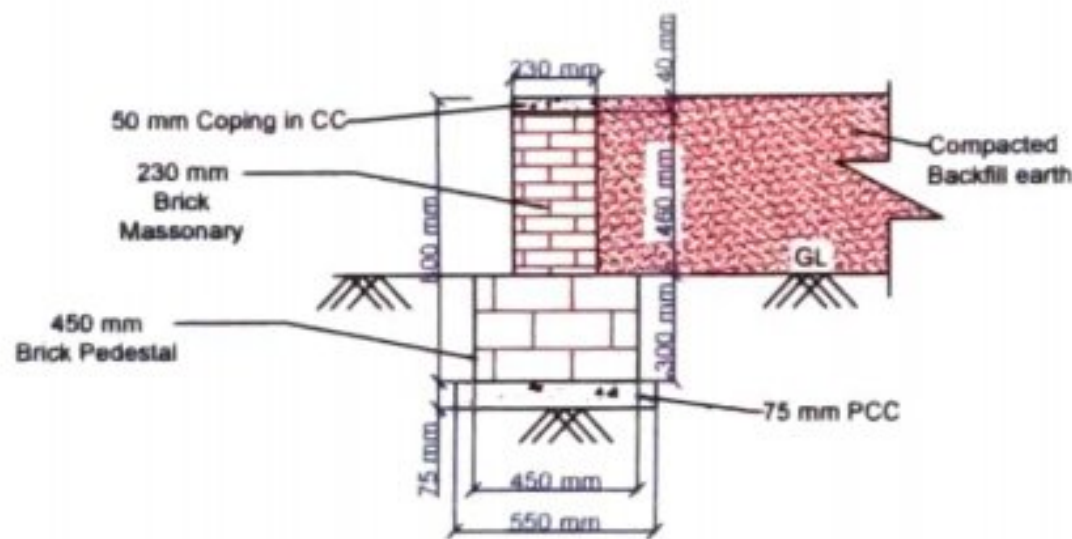

SECTION A-A

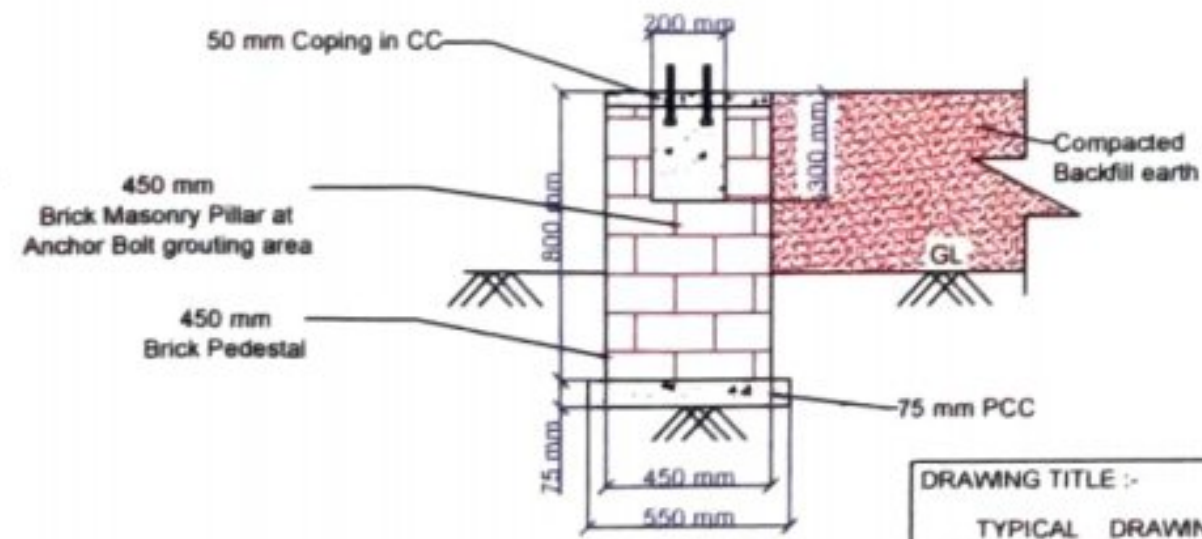

SECTION B-B

DRAWING TITLE :-

TYPICAL DRAWING BRICK WORK IN BETWEEN TOWER FOUNDATION PILLARS UNDER TOWER FENCING

NAD-KOTA-MTJ SECTION

DRG NO. :-

SCALE : NOT TO SCALE

DATE : 05.04.2023

उप मु. सं. एव. इंजी. (जी.एस.यू.)
प.ब.रे. कोटा
Dr. C.S.I.E (G.S.U.)
W.C. WCR