

INTERNATIONAL VALVE TECHNOLOGIES

Product Series of MAX SEAL Valves & Controls

CAST STEEL GATE, GLOBE & CHECK CATALOG

- Pressure Range: ANSI 150-2500
- Size Range: 2"-24" (optional sizes through 48")
- API 624 Low Emissions Certified Valves
- Various Materials Available
- Fabricated Automation Available

internationalvalvetech.com

(910) 738-2866

INTERNATIONAL VALVE TECHNOLOGIES

APPROVED CAST MODEL IDENTIFICATION

VALVE TYPE		END CONNECTION		PRESSURE CLASS		BODY MATERIAL		API TRIM		OPERATOR		SIZE	
												INCH	MM
CV	Check Valve - Swing (Cast)	1	Threaded	150	ANSI 150	CS	Carbon Steel (WCB)	T2	Trim 2	H*	Handwheel*	2”	50
GV	Gate Valve (Cast)	2	Socket Weld	300	ANSI 300	SS	Stainless Steel (CF8M)	T5	Trim 5	CW	Chainwheel	3”	80
GL	Globe Valve (Cast)	3	Butt Weld	600*	ANSI 600 / 600 WOG*	S4	Stainless Steel (CF8)	T8	Trim 8	G	Gear Operator	4”	100
		4	Flanged	900	ANSI 900			T10	Trim 10	A	Actuator	6”	150
		*	Consult Factory for Additional End Connections	1500	ANSI 1500			T12	Trim 12			8”	200
				2500	ANSI 2500			*	Additional Trims Avail.			10”	250
								SEE PAGE 19 FOR TRIM DETAILS				12”	300
												14”	350
												16”	400
												18”	450
												20”	500
												24”	600
												30”	750
												36”	900

**The operator portion of the model number identifier is assumed to be “H” (handwheel), therefore it is not listed in the gate or globe model numbers. If there is any other operator bessides the handwheel, it will be specified in the model number by the codes listed above.*

**Trims are according to API 600 trim materials*

**Please consult factory for any additional alloys, operators, end connections, special order products, etc.*

**'600' in the 'Pressure Class' column can be for ANSI 600 Class if it is a flanged model and 600WOG if threaded.*

CAST GATE VALVES

S. No.	SIZE	TORQUE(Nm) CLASS			
	NPS	150# Nm	150# in-lbs	300# Nm	300# in-lbs
1	2”	20	177	21	186
2	2 -1/2”	21	186	27	239
3	3”	23	204	33	292
4	4”	33	292	58	513
5	5”	48	425	99	867
6	6”	59	522	135	1195
7	8”	100	885	237	2098
8	10”	156	1381	381	3372
9	12”	229	2027	578	5116

CAST GLOBE VALVES

S. No.	SIZE	TORQUE(Nm) CLASS			
	NPS	150# Nm	150# in-lbs	300# Nm	300# in-lbs
1	2”	21	186	31	274
2	2 -1/2”	30	226	50	443
3	3”	42	372	74	655
4	4”	60	531	114	1009
5	5”	99	876	201	1779
6	6”	134	1186	288	2549
7	8”	220	1947	654	5788
8	10”	380	3363	1277	11302
9	12”	556	4921	2113	18702

CAST STEEL GATE VALVES

MODEL GV-4

YOKE SLEEVE

The upper portion of the Yoke Sleeve is hexagonally tapered to fix the handwheel. The standard material of the Yoke Sleeve is Nodular Ni-resist D2 with over 1150℃(2100°F) dissolution point in accordance with API Std. specifications.

BOLTING

The body-bonnet bolts are manufactured in accordance with API Std. 600 specifications. The nuts also strictly conform with ANSI B 1.1
The stud-bolt nuts, hexagonal, rigid and hot-forged, bear material notation as well as do the bolt nuts made according to ANSI B18.2.2

BONNET

The bonnet and valve body have the same wall thickness.
The body-bonnet flange drilling is spot-faced to exactly meet stud-bolt nuts. The bonnet back seat bushing guarantees packing replacement even when the valve is fully opened. The stem packing dimensions of the stuffing box are in accordance with API specifications.

STEM


The machined forged stem comes with a T-shape head, which connects the slot of the wedge. The spherically shaped contacting surface of the head gives greater strength and durability.
The stem dimensions are in accordance with API Std. 600 specifications.
The heat treated stem delivers adequate mechanical properties as well as excellent surface hardness. Further, opening/shutting friction is minimized by accurate machining and lapping.

SEAT RING

Bottom seated type seat rings are welded or screwed into the body.
The seating surface is finished by lapping. They are forgings that have been heat treated to delived the best mechanical properties and required hardness. The difference in hardness between seats and wedge is in accordance with API specifications.

FLEXIBLE WEDGE

The standard disc of our valves is a one-piece flexible wedge.
Slots are machined on both sides of the wedge to allow it to travel correctly in the integrally cast body guides.
The wedge seating surfaces have been accurately machined, grind and lapped to a mirror finish to prevent leakage and eliminate galling.

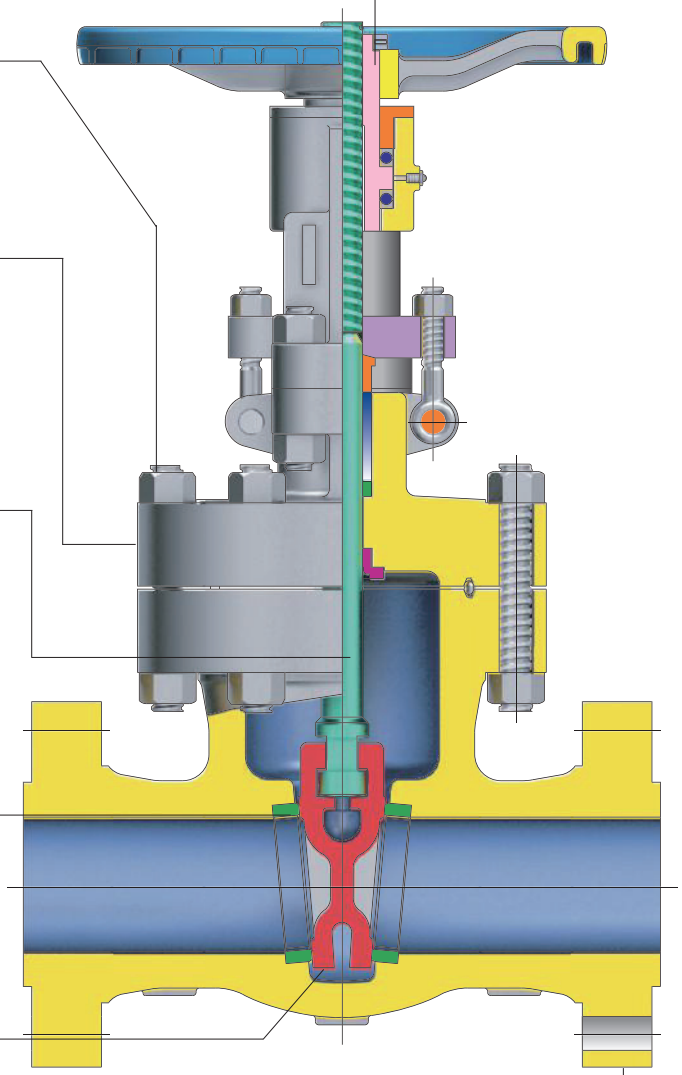

BODY

The cast steel body is designed to insure a wall thickness which is greater at any point than the minimum specified by API Std. 600. Special care has been taken with the design of the Class 150 valve body so that the elliptically shaped center section is free from intensified stresses in the critical area.
The body of above Class 300 are made circular in shape as much as possible to minimize distortion even under extreme operating conditions. Inlet and outlet port dimensions conform with ASME B16.34 Pipe Fitting. The welded-in type seat ring is standard to insure interchangeability. Except for Class 150, the standard body-bonnet joint is male and female.


INTERNATIONAL VALVE TECHNOLOGIES


GATE VALVES


BOLTED BONNET

MODEL GV-4

STANDARD TRIM OFFERED IS API TRIM 8 (SEE PAGE 19)

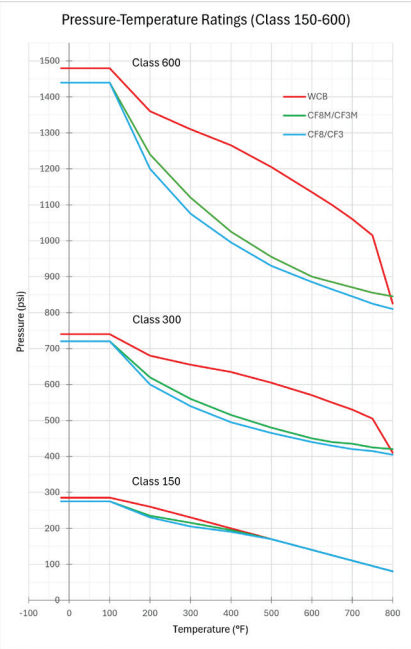

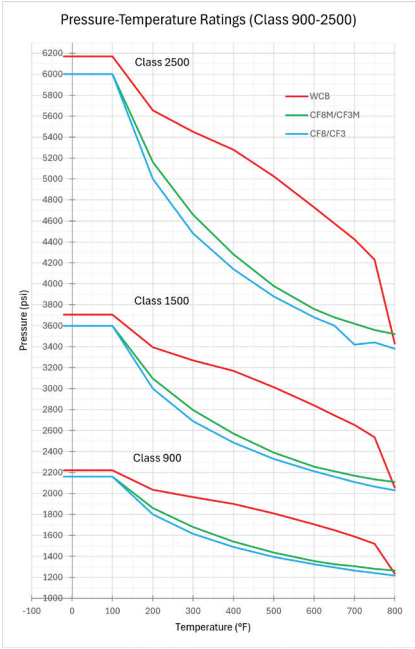

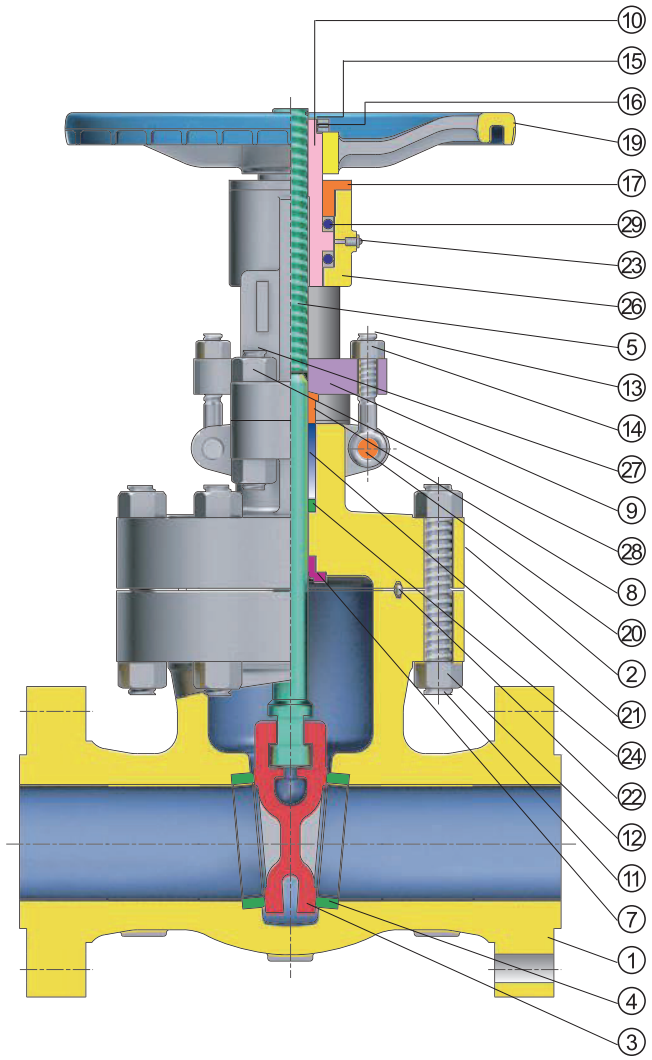

DESIGN SPECIFICATIONS

NO	NAME OF PART	ASTM SPECIFICATION
15	HANDLE NUT	STEEL
16	SET SCREW	STEEL
17	SLEEVE GLAND	STEEL
19	HANDWHEEL	A395
21	PACKING	GRAPHITE
22	GASKET	GRAPHITE
23	GREASE NIPPLE	STEEL
29	BEARING	GRAPHITE

NO	NAME OF PART	ASTM SPECIFICATION												
		STANDARD	HIGH TEMPERATURE SERVICE				LOW TEMPERATURE SERVICE		STAINLESS STEEL				ALLOY STEEL	
1	BODY	A216-WCB	A217-WC1	A217-WC6	A217-WC9	A217-C5	A352-LCB	A352-LC1/LC2/LC3	A351-CF8	A351-CF8M	A351-CF3	A351-CF3M	A351-CN7M	A351-CK3MCUN
2	BONNET	A216-WCB	A217-WC1	A217-WC6	A217-WC9	A217-C5	A352-LCB	A352-LC1/LC2/LC3	A351-CF8	A351-CF8M	A351-CF3	A351-CF3M	A351-CN7M	A351-CK3MCUN
3	*DISC	A217-CA15	A217-CA15	A217-CA15	A217-CA15	A217-CA15	A351-CF8	A351-CF8	A351-CF8	A351-CF8M	A351-CF3	A351-CF3M	A351-CN7M	A351-CK3MCUN
4	BODY SEAT RING	A105+STL	A182-F1	A182-F11	A182-F22	A182-F5a	A350-LF2	A350-LF2	A240-304	A240-316	A240-304L	A240-316L	ALLOY 20	A182-F51
5	STEM	A479-410					A276-304		A276-304	A276-316	A276-304L	A276-316L	ALLOY 20	A182-F51
7	BONNET BUSH	A479-410					A276-304		A276-304	A276-316	A276-304L	A276-316L	ALLOY 20	A276-304
8	PACKING GLAND	A479-410							A276-304				A276-304	
9	GLAND FLANGE	A105 or A283-D							AISI 304				AISI 304	
10	YOKE SLEEVE	A439-D2							A439-D2				A439-D2	
11	BONNET BOLT	A193-B7	A193-B7	A193-B16	A193-B16	A193-B16	A320-L7	A320-L7	A193-B8	A193-B8	A193-B8	A193-B8	A193-B8	A193-B8
12	BONNET NUT	A194-2H	A194-2H	A194-4	A194-4	A194-4	A194-4L	A194-4L	A194-8	A194-8	A194-8	A194-8	A194-8	A194-8
13	GLAND BOLT	A307-B							A193-B8				A193-B8	
14	GLAND NUT	A194-2H							A194-8				A194-8	
20	HINGE PIN	A108-1020							A276-304				A276-304	
24	LANTERN	A479-410					A276-304		A276-304	A276-316	A276-304L	A276-316L	ALLOY 20	A182-F51
26	YOKE	A216-WCB							A351-CF8				A351-CF8	
27	YOKE BOLT	A193-B7							A193-B8				A193-B8	
28	YOKE NUT	A194-2H							A194-8				A194-8	


*Note : In case of 12" and larger size, we'll use trim material overlayed one on the same or equivalent material of the Body.

GATE VALVES

BOLTED BONNET


ANSI 150/300/600 CLASS

CLASS 150

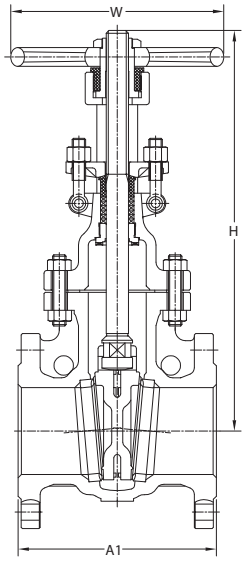


GV-4-150

CLASS 300

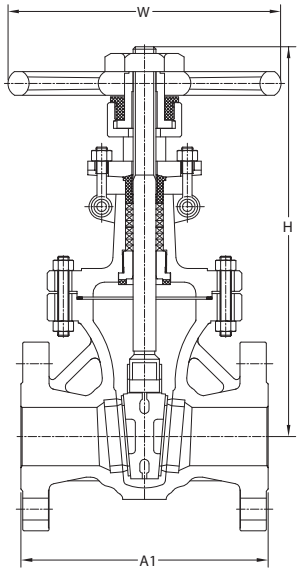


GV-4-300


CLASS 600

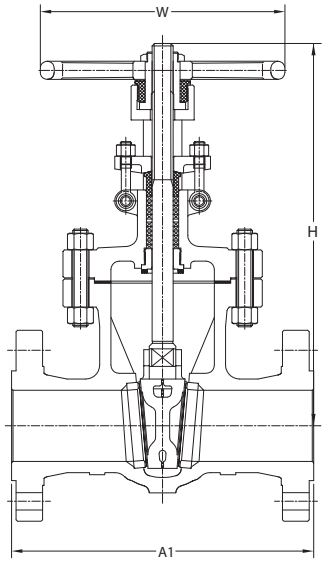

GV-4-600



BUTT WELD ENDS



RTJ ENDS

CLASS 150

VALVE SIZE		2	2.5	3	4	6	8	10	12	14	16	18	20	24	28	30	36	40	42	48	52	WEIGHT LBS
	mm	50	65	80	100	150	200	250	300	350	400	450	500	600	700	750	900	1000	1050	1200	1300	2.5" - 26
A1	in	7.0	7.5	8.0	9.0	10.5	11.5	13.0	14.0	15.0	16.0	17.0	18.0	20.0	24.0	24.0	28.0	30.0	32.0	34.0	36.0	3" - 34
	mm	178	190	203	229	267	292	330	356	381	406	432	457	508	610	610	711	762	813	864	914	4" - 50
A3	in	8.5	9.5	11.1	12.0	15.9	16.5	18.0	19.8	22.5	24.0	26.0	28.0	32.0	36.0	36.0	40.0	42.0	43.0	41.9	54.0	6" - 78
	mm	216	241	282	305	403	419	457	502	572	610	660	711	813	914	914	1016	1067	1092	1064	1372	8" - 120
H	in	13.7	16.6	18.0	22.3	29.5	36.7	46.3	52.2	60.0	71.2	87.2	99.3	112.2	129.3	139.0	156.7	169.0	181.1	204.7	224.4	10" - 171
	mm	347	422	457	566	749	931	1176	1326	1525	1809	2214	2522	2850	3284	3530	3980	4292	4600	5200	5700	12" - 244
W	in	7.9	7.9	7.9	9.8	11.8	14.0	15.7	17.7	19.7	22.0	19.7	24.8	24.8	28.0	28.0	31.5	35.4	35.4	35.4	39.4	14" - C/F
	mm	200	200	200	250	300	355	400	450	500	560	500	630	630	710	710	800	900	900	900	1000	16" - C/F

CLASS 300

VALVE SIZE		2	2.5	3	4	6	8	10	12	14	16	18	20	24	28	30	36	40	42	48	WEIGHT BAR / INCH
	mm	50	65	80	100	150	200	250	300	350	400	450	500	600	700	750	900	1000	1050	1200	2.5" - 34
A1&A3	in	8.5	9.5	11.1	12.0	15.9	16.5	18.0	19.8	30.0	33.0	36.0	39.0	45.0	53.0	55.0	68.0	76.0	78.0	87.2	3" - 47
	mm	216	241	282	305	403	419	457	502	762	838	914	991	1143	1346	1397	1727	1930	1981	2215	4" - 68
A2	in	9.1	10.1	11.7	12.6	16.5	17.1	18.6	20.4	30.6	33.6	36.6	39.8	45.9	54.0	56.0	69.1	-	-	-	6" - 133
	mm	232	257	298	321	419	435	473	518	778	854	930	1010	1165	1372	1422	1756	-	-	-	8" - 205
H	in	14.8	18.0	18.7	23.1	30.6	37.9	46.4	55.8	68.1	77.0	89.3	95.0	109.6	136.2	137.8	156.4	188.6	174.4	217.4	10" - 287
	mm	375	456	475	586	776	963	1179	1417	1730	1955	2267	2414	2785	3460	3501	3973	4791	4430	5522	12" - 464
W	in	7.9	7.9	8.9	9.8	14.0	15.7	17.7	19.7	19.7	19.7	24.8	24.8	31.5	35.4	35.4	35.4	39.4	39.4	39.4	14" - C/F
	mm	200	200	225	250	355	400	450	500	500	500	630	630	800	900	900	900	1000	1000	1000	16" - C/F

CLASS 600


VALVE SIZE		2	2.5	3	4	6	8	10	12	14	16	18	20	24	28	30	36	40	42	WEIGHT BAR / INCH
	mm	50	65	80	100	150	200	250	300	350	400	450	500	600	700	750	900	1000	1050	C/F
A1&A3	in	11.5	13.0	14.0	17.0	22.0	26.0	31.0	33.0	35.0	39.0	43.0	47.0	55.0	61.0	65.0	82.0	94.0	96.0	C/F
	mm	292	330	356	432	559	660	787	838	889	991	1092	1194	1397	1549	1651	2083	2387	2438	C/F
A2	in	11.6	13.1	14.1	17.1	22.1	26.1	31.1	33.1	35.1	39.1	43.1	47.2	55.4	61.5	65.5	82.6	-	-	C/F
	mm	295	333	359	435	562	663	790	841	892	994	1095	1200	1407	1562	1663	2098	-	-	C/F
H	in	18.5	19.4	22.0	26.9	37.4	42.6	49.8	66.9	73.0	84.3	103.0	108.2	111.1	128.8	138.6	179.5	207.6	240.1	C/F
	mm	471	494	558	682	951	1081	1264	1699	1855	2140	2616	2749	2823	3272	3521	4560	5273	6098	C/F
W	in	8.8	8.8	9.8	11.8	17.7	19.7	24.8	24.8	24.8	28.0	31.5	31.5	35.4	35.4	39.4	39.4	39.4	39.4	C/F
	mm	224	224	250	300	450	500	630	630	630	710	800	800	900	900	1000	1000	1000	1000	C/F

GATE VALVES

BOLTED BONNET


ANSI 900/1500/2500 CLASS

CLASS 900

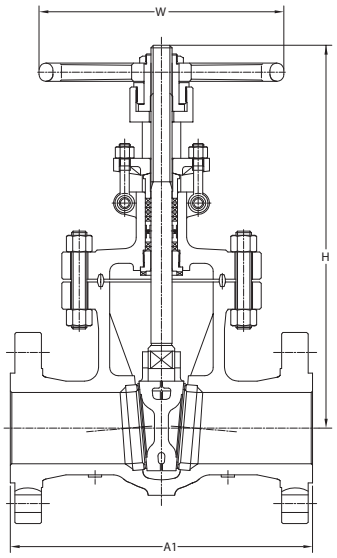


GV-4-900

CLASS 1500

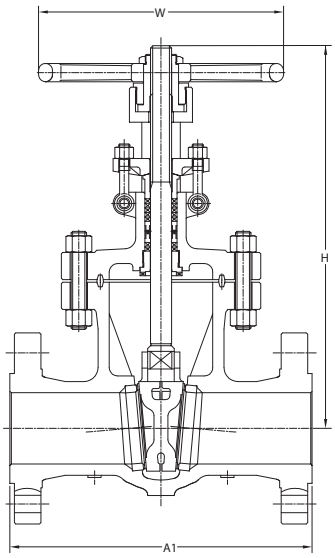


GV-4-1500


CLASS 2500

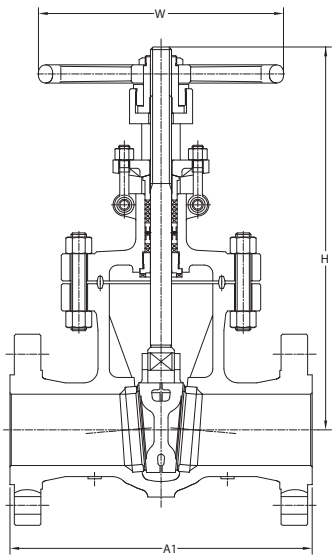

GV-4-2500



BUTT WELD ENDS



RTJ ENDS

CLASS 900

VALVE SIZE		2	2.5	3	4	6	8	10	12	14	16	18	20	24	WEIGHT BAR / INCH
	mm	50	65	80	100	150	200	250	300	350	400	450	500	600	C/F
A1&A3	in	14.5	16.5	15.0	18.0	24.0	29.0	33.0	38.0	40.5	44.5	48.0	52.0	61.0	C/F
	mm	368	419	381	457	610	737	838	965	1029	1130	1219	1321	1549	C/F
A2	in	14.6	16.6	15.1	18.1	24.1	29.1	33.1	38.1	40.9	44.9	48.5	52.5	61.7	C/F
	mm	371	422	384	460	613	740	841	968	1038	1140	1232	1334	1568	C/F
H	in	21.0	26.4	26.6	30.8	35.0	48.8	71.2	75.7	72.0	80.2	86.4	110.2	124.0	C/F
	mm	534	671	676	783	888	1239	1808	1923	1830	2036	2195	2800	3150	C/F
W	in	11.8	11.8	14.0	15.7	22.0	19.7	24.8	28.0	28.0	31.5	35.4	35.4	39.4	C/F
	mm	300	300	355	400	560	500	630	710	710	800	900	900	1000	C/F

CLASS 1500

VALVE SIZE		2	2.5	3	4	6	8	10	12	14	16	18	20	24	WEIGHT BAR / INCH
	mm	50	65	80	100	150	200	250	300	350	400	450	500	600	C/F
A1&A3	in	14.5	16.5	18.5	21.5	27.8	32.8	39.0	44.5	49.5	54.5	60.5	65.5	76.5	C/F
	mm	368	419	470	546	705	832	991	1130	1257	1384	1537	1664	1943	C/F
A2	in	14.6	16.6	18.6	21.6	28.0	33.1	39.4	45.1	50.2	55.4	61.4	66.4	77.6	C/F
	mm	371	422	473	549	711	842	1000	1146	1276	1406	1559	1686	1971	C/F
H	in	21.0	26.4	29.1	30.8	51.9	63.0	66.4	82.3	85.1	97.9	108.7	122.1	146.5	C/F
	mm	534	671	738	783	1318	1600	1686	2090	2162	2486	2762	3102	3721	C/F
W	in	11.8	11.8	15.7	19.7	19.7	28.0	28.0	35.4	35.4	35.4	39.4	39.4	39.4	C/F
	mm	300	300	400	500	500	710	710	900	900	900	1000	1000	1000	C/F


CLASS 2500

VALVE SIZE		2	2.5	3	4	6	8	10	12	WEIGHT BAR / INCH
	mm	50	65	80	100	150	200	250	300	C/F
A1&A3	in	17.8	20.0	22.8	26.5	36.0	40.2	50.0	56.0	C/F
	mm	451	508	578	673	914	1022	1270	1422	C/F
A2	in	17.9	20.2	23.0	26.9	36.5	40.9	50.9	56.9	C/F
	mm	454	514	584	683	927	1038	1292	1444	C/F
H	in	24.4	31.9	31.9	42.3	57.1	63.0	82.5	90.2	C/F
	mm	619	809	809	1074	1451	1600	2096	2292	C/F
W	in	11.8	17.7	17.7	24.8	24.8	28.0	31.5	35.4	C/F
	mm	300	450	450	630	630	710	800	900	C/F

CAST STEEL

GLOBE VALVES

MODEL GL-4

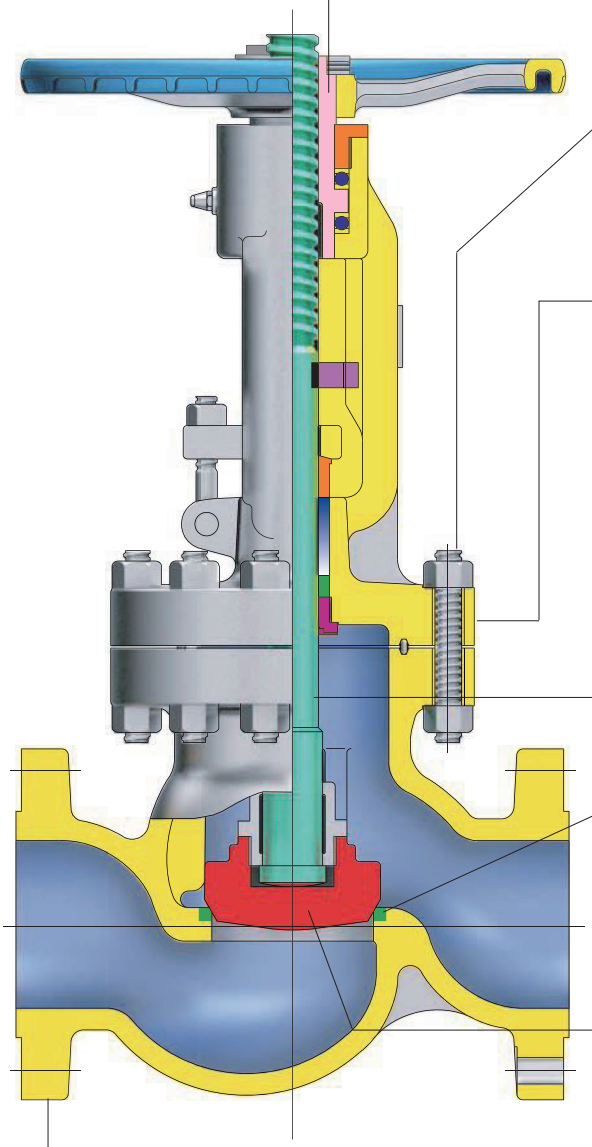

YOKE SLEEVE

The standard material of the Yoke Sleeve is Nodular Ni-resist D2 with over a 1150℃ (2100°F)dissolution point in conformity with API Std. Specifications.

BOLTING

The body-bonnet bolts are manufactured in accordance with API Std. 600 specifications. The nuts also strictly conform with ANSI B 1.1
The stud-bolt nuts, hexagonal, rigid and hot-forged, bear material notation as well as do the bolt nuts made according to ANSI B18.2.2

BONNET

The bonnet is integral or separate with the yoke and is the same material as the body. The body-bonnet flange drilling is spot-faced to exactly meet stud bolt nuts. The back seat bushing in the bonnet guarantees that the packing can be replaced even when the valve is fully opened. The stem packing dimensions of the stuffing box are in accordance with API Std. specifications.

STEM

The heat-treated stems of one-piece construction insure adequate mechanical properties and surface hardness.
Friction at the time of opening and shutting is reduced to a minimum friction to accurate machining and lapping.
The round finished surface of the stem head helps to achieve point contact with the inside of the disc housing to eliminate friction.

SEAT RING

The shoulder seated type seat ring is welded or screwed into body.
The seating surface is finished by lapping. The seat ring is forged and heat-treated to deliver the best mechanical properties and required hardness. The difference in hardness between the seats and disc conforms to API Std. specifications.

DISC

The disc of our globe valves is a loose disc and can freely revolve around the stem. This prevents friction and galling with the seating surface when the valve is shut. The disc is furnished with a conical seating surface that has been ground and lapped to a mirror finish. It is of one-piece construction, and forged and heat-treated to deliver the required mechanical properties and hardness.

BODY

The cast steel body is designed to insure a wall thickness which is greater at any point than the minimum specified by API Std. 600. Port and seat passage dimensions conform to ASME B16.34.
The welded-in type seat ring is standard to allow interchangeability.
The standard body-bonnet joint is male-female, and the flange is round for all valves. Accurate machining insures perfect coaxiality of the valve ends and seat ring in addition to exact perpendicularity of the body-bonnet flanges.


INTERNATIONAL VALVE TECHNOLOGIES


GLOBE VALVES


BOLTED BONNET

MODEL GL-4

STANDARD TRIM OFFERED IS API TRIM 8 (SEE PAGE 19)

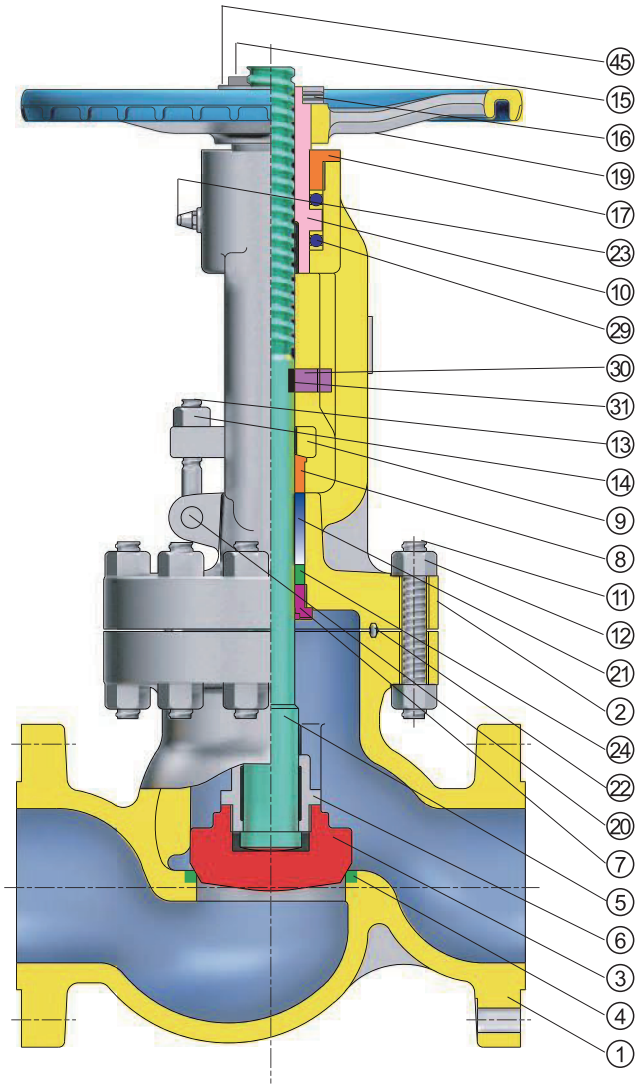

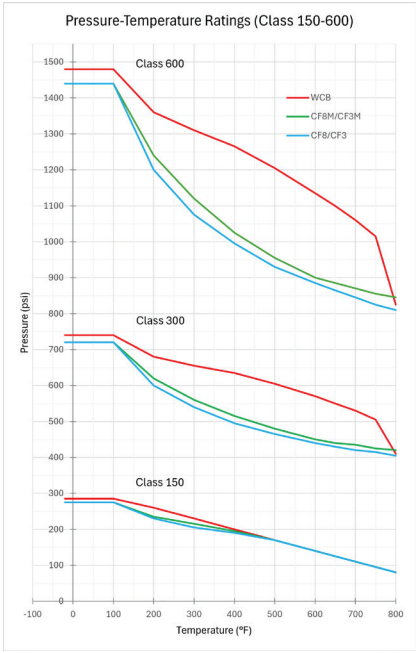

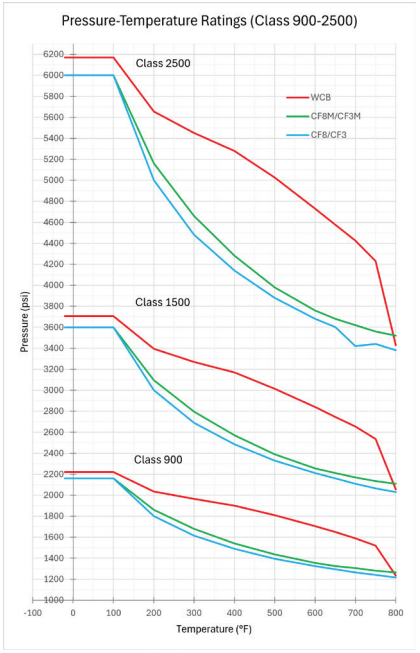

DESIGN SPECIFICATIONS

NO	NAME OF PART	ASTM SPECIFICATION
15	HANDLE NUT	STEEL
16	SET SCREW	STEEL
17	SLEEVE GLAND	STEEL
19	HANDWHEEL	A395
21	PACKING	GRAPHITE
22	GASKET	GRAPHITE
23	GREASE NIPPLE	STEEL
29	BEARING	A295-52100
30	STOPPER	A283-D
31	KEY	STEEL
45	WASHER	STEEL

NO	NAME OF PART	ASTM SPECIFICATION												
		STANDARD	HIGH TEMPERATURE SERVICE				LOW TEMPERATURE SERVICE		STAINLESS STEEL				ALLOY STEEL	
1	BODY	A216-WCB	A217-WC1	A217-WC6	A217-WC9	A217-C5	A352-LCB	A352-LC1/LC2/LC3	A351-CF8	A351-CF8M	A351-CF3	A351-CF3M	A351-CN7M	A351-CK3MCUN
2	BONNET	A216-WCB	A217-WC1	A217-WC6	A217-WC9	A217-C5	A352-LCB	A352-LC1/LC2/LC3	A351-CF8	A351-CF8M	A351-CF3	A351-CF3M	A351-CN7M	A351-CK3MCUN
3	*DISC	A217-CA15	A217-CA15	A217-CA15	A217-CA15	A217-CA15	A351-CF8	A351-CF8	A351-CF8	A351-CF8M	A351-CF3	A351-CF3M	A351-CN7M	A351-CK3MCUN
4	BODY SEAT RING	A105+STL	A182-F1	A182-F11	A182-F22	A182-F5a	A350-LF2	A350-LF2	A240-304	A240-316	A240-304L	A240-316L	ALLOY 20	A182-F51
5	STEM	A479-410					A276-304		A276-304	A276-316	A276-304L	A276-316L	ALLOY 20	A182-F51
6	DISC GLAND	A217-CA15	A217-CA15	A217-CA15	A217-CA15	A217-CA15	A351-CF8	A351-CF8	A276-304	A276-316	A276-304L	A276-316L	ALLOY 20	A182-F51
7	BONNET BUSH	A479-410					A276-304		A276-304	A276-316	A276-304L	A276-316L	ALLOY 20	A276-304
8	PACKING GLAND	A479-410					A276-304		A276-304				A276-304	
9	GLAND FLANGE	A105 or A283-D							AISI 304				AISI 304	
10	YOKE SLEEVE	A439-D2							A439-D2				A439-D2	
11	BONNET BOLT	A193-B7	A193-B7	A193-B16	A193-B16	A193-B16	A320-L7	A320-L7	A193-B8	A193-B8	A193-B8	A193-B8	A193-B8	A193-B8
12	BONNET NUT	A194-2H	A194-2H	A194-4	A194-4	A194-4	A194-4L	A194-4L	A194-8	A194-8	A194-8	A194-8	A194-8	A194-8
13	GLAND BOLT	A307-B							A193-B8				A193-B8	
14	GLAND NUT	A194-2H							A194-8				A194-8	
20	HINGE PIN	A108-1020							A276-304				A276-304	
24	PACKING RING	A479-410					A276-304		A276-304	A276-316	A276-304L	A276-316L	ALLOY 20	A182-F51


*Note : In case of 12" and larger size, we'll use trim material overlayed one on the same or equivalent material of the Body.

GLOBE VALVES


BOLTED BONNET

ANSI 150/300/600 CLASS


CLASS 150

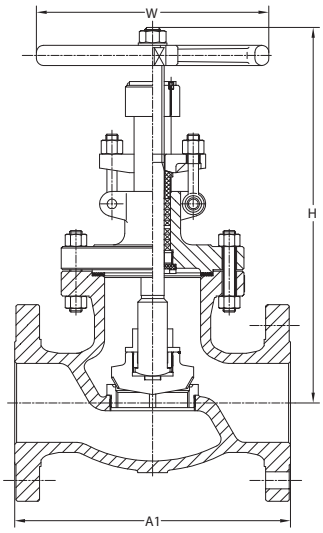


CLASS 300

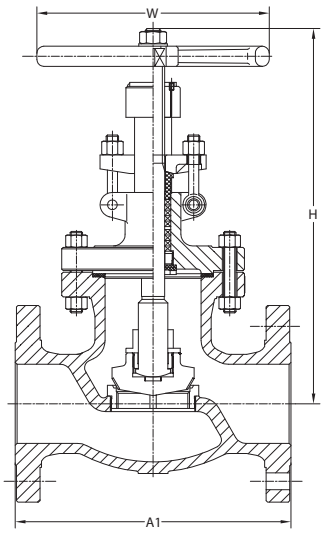

CLASS 600

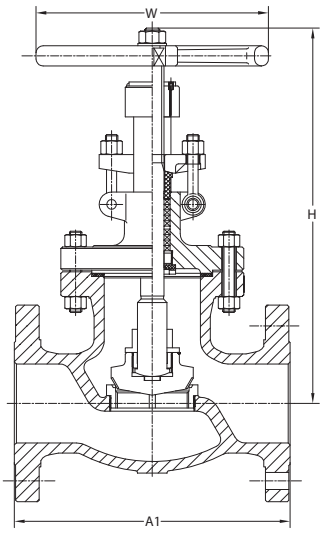


GL-4-150



BUTT WELD ENDS

GL-4-300

GL-4-600



RTJ ENDS

CLASS 150

													WEIGHT BAR / INCH
VALVE SIZE	in	2	2.5	3	4	6	8	10	12	14	16	18	2" - 21
	mm	50	65	80	100	150	200	250	300	350	400	450	2.5" - 32
A1&A3	in	8.0	8.5	9.5	11.5	16.0	19.5	24.5	27.5	31.0	36.0	38.5	3" - 38
	mm	203	216	241	292	406	495	622	699	787	914	978	4" - 57
H	in	15.3	15.2	17.1	19.8	23.0	28.3	31.4	39.8	53.1	56.7	78.0	6" - 98
	mm	388	387	434	503	585	718	798	1011	1349	1440	1980	8" - 145
W	in	7.9	8.8	8.8	9.8	14.0	14.0	17.7	19.7	28.0	28.0	28.0	10" - 272
	mm	200	224	224	250	355	355	450	500	710	710	710	12" - 414
L	–	–	–	–	–	–	–	–	–	16.0	16.0	16.0	14" - C/F
	–	–	–	–	–	–	–	–	–	407	407	407	16" - C/F

CLASS 300


												WEIGHT BAR / INCH
VALVE SIZE	in	2	2.5	3	4	6	8	10	12	14	16	2" - 30
	mm	50	65	80	100	150	200	250	300	350	400	2.5" - 45
A1&A3	in	10.5	11.5	12.5	14.0	17.5	22.0	24.5	28.0	33.0	36.0	3" - 52
	mm	267	292	318	356	444	559	622	711	838	914	4" - 79
A2	in	11.1	12.1	13.1	14.6	18.1	22.6	25.1	28.6	33.6	36.6	6" - 154
	mm	283	308	333	371	460	575	638	727	854	929	8" - 239
H	in	15.5	16.8	18.1	21.7	29.4	31.7	46.3	50.7	62.5	64.4	10" - 384
	mm	393	427	461	552	746	806	1176	1287	1588	1635	12" - 540
W	in	7.9	8.8	9.8	14.0	17.7	22.0	28.0	28.0	35.4	31.5	14" - C/F
	mm	200	224	250	355	450	560	710	710	900	800	16" - C/F

CLASS 600


												WEIGHT BAR / INCH
VALVE SIZE	in	2	2.5	3	4	6	8	10	12	14	16	C/F
	mm	50	65	80	100	150	200	250	300	350	400	C/F
A1&A3	in	11.5	13.0	14.0	17.0	22.0	26.0	31.0	33.0	35.0	39.0	C/F
	mm	292	330	356	432	559	660	787	838	889	991	C/F
A2	in	11.6	13.1	14.1	17.1	22.1	26.1	31.1	33.1	35.1	39.1	C/F
	mm	295	333	359	435	562	664	791	841	892	994	C/F
H	in	16.8	16.4	20.9	23.7	31.4	51.4	66.9	72.5	71.0	74.8	C/F
	mm	426	416	530	601	798	1306	1700	1842	1804	1900	C/F
W	in	8.8	8.8	11.0	14.0	17.7	31.5	39.4	39.4	39.4	39.4	C/F
	mm	224	224	280	355	450	800	1000	1000	1000	1000	C/F

GLOBE VALVES
BOLTED BONNET
ANSI 900/1500/2500 CLASS


CLASS 900

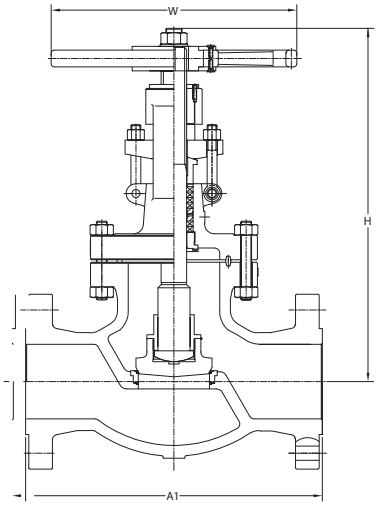


CLASS 1500

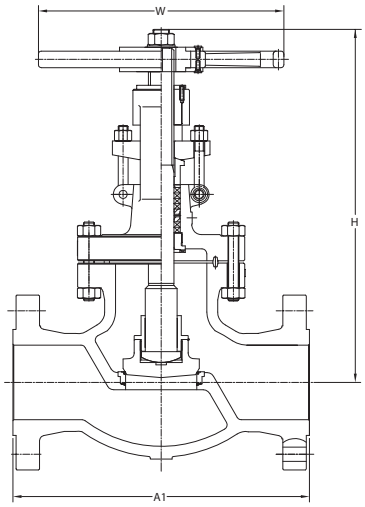

CLASS 2500

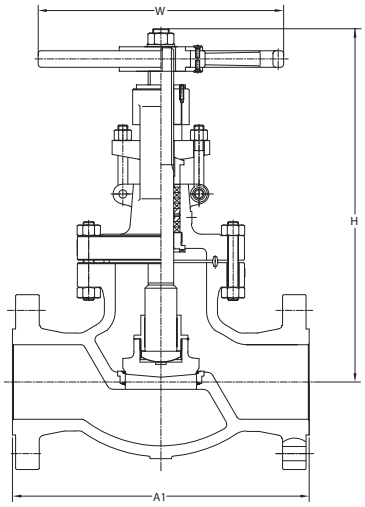


GL-4-900



BUTT WELD ENDS

GL-4-1500 GL-4-2500

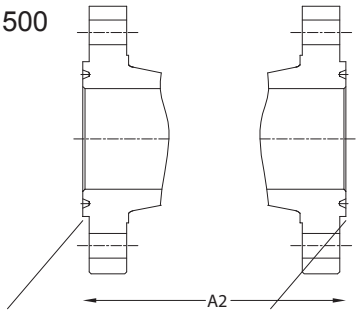

RTJ ENDS

CLASS 900

BAR / INCH

VALVE SIZE		2	2.5	3	4	6	8	10	12	14	16	C/F
	mm	50	65	80	100	150	200	250	300	350	400	C/F
A1&A3	in	14.5	16.5	15.0	18.0	24.0	29.0	33.0	38.0	40.5	44.5	C/F
	mm	368	419	381	457	610	737	838	965	1029	1130	C/F
A2	in	14.6	16.6	15.1	18.1	24.1	29.1	33.1	38.1	40.9	44.9	C/F
	mm	371	422	384	460	613	740	841	968	1038	1140	C/F
H	in	27.2	27.0	30.2	34.6	53.9	67.7	69.5	67.1	87.0	103.1	C/F
	mm	690	686	768	880	1370	1719	1765	1705	2210	2620	C/F
W	in	15.7	15.7	15.7	15.7	28.0	35.4	31.5	35.4	35.4	35.4	C/F
	mm	400	400	400	400	710	900	800	900	900	900	C/F

CLASS 1500

WEIGHT
BAR / INCH

VALVE SIZE		2	2.5	3	4	6	8	10	12	14	16	C/F
	mm	50	65	80	100	150	200	250	300	350	400	C/F
A1&A3	in	14.5	16.5	18.5	21.5	27.8	32.8	39.0	44.5	49.5	54.5	C/F
	mm	368	419	470	546	705	832	991	1130	1257	1384	C/F
A2	in	14.6	16.6	18.6	21.6	28.0	33.1	39.4	45.1	50.2	55.4	C/F
	mm	371	422	473	549	711	841	1000	1146	1276	1407	C/F
H	in	27.2	27.0	31.5	39.8	53.0	77.2	90.9	105.1	126.0	160.0	C/F
	mm	690	686	801	1012	1345	1960	2310	2670	3200	4064	C/F
W	in	15.7	15.7	19.7	19.7	35.4	28.0	29.9	29.9	29.9	29.9	C/F
	mm	400	400	500	500	900	710	760	760	760	760	C/F

CLASS 2500

WEIGHT
BAR / INCH

VALVE SIZE		2	2.5	3	4	6	8	10	12	C/F
	mm	50	65	80	100	150	200	250	300	C/F
A1&A3	in	17.8	20.0	22.8	26.5	36.0	40.3	50.0	56.0	C/F
	mm	451	508	578	673	914	1022	1270	1422	C/F
A2	in	17.9	20.2	23.0	26.9	36.5	40.9	50.9	56.9	C/F
	mm	454	514	584	682	927	1038	1292	1444	C/F
H	in	23.9	31.5	32.8	49.6	75.0	97.0	110.2	138.0	C/F
	mm	606	800	834	1260	1905	2465	2800	3505	C/F
W	in	15.7	19.7	19.7	24.0	24.0	29.9	29.9	29.9	C/F
	mm	400	500	500	610	610	760	760	760	C/F

CAST STEEL

SWING CHECK VALVES

MODEL CV-4

BOLTING

The body-cover bolting conforms with ANSI B.1.1
The nuts are manufactured to conform with ANSI B18.2.2

COVER


The cover material is identical to the body.
Depending on the valve size and pressure class, either a casting or a forging is used.

HINGE PIN

The hinge pin is inserted into the valve and held in position by plug.
The larger size valves are provided with bolted flanges instead of plugs.

ARM

The arm material is identical to the body.
Hinge bushing is provided in the larger valve sizes to minimize friction and eliminate seizing.

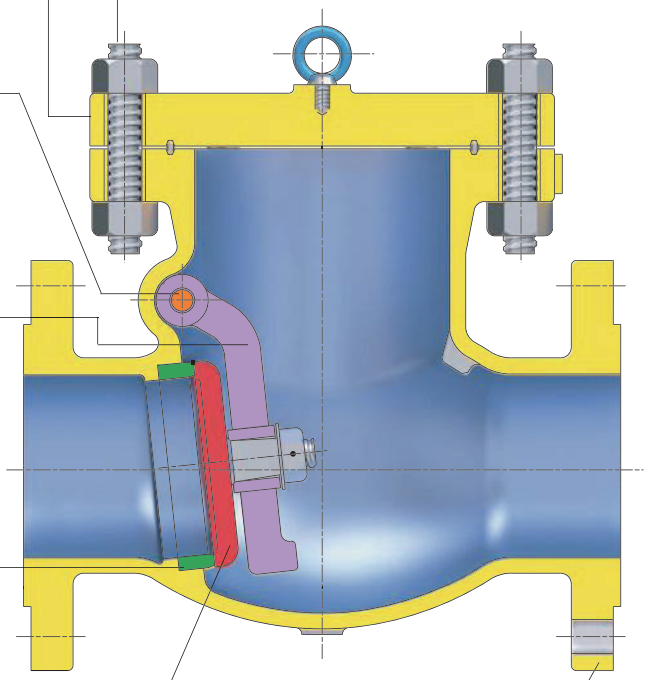

SEAT RING

The bottom seated type seat ring is welded or screwed into the body.
The seating surface is finished by lapping.
The forged seat ring is heat-treated to deliver the best mechanical properties and required hardness.

DISC

The disc has a sufficient seating surface area which is ground and lapped to a mirror finish.
It is of one-piece construction and is heat treated to deliver the required mechanical properties and hardness.

BODY


The cast steel body is designed with a wall thickness which is greater at any point than the minimum requirement provided by API Std. 600 or API 6D. Port and seat passage dimensions conform to ASME B16.34. The welded-in type seat ring is standard to allow interchangeability.
The standard body-bonnet joint is male-female, and the flange is round for all valves.


SWING CHECK VALVES


BOLTED COVER


MODEL CV-4

STANDARD TRIM OFFERED IS API TRIM 8 (SEE PAGE 19)

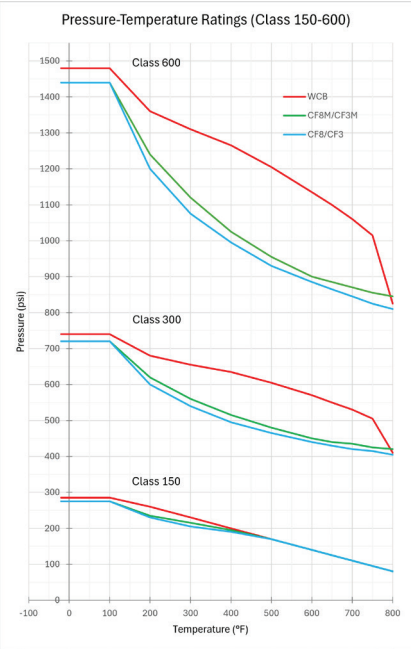

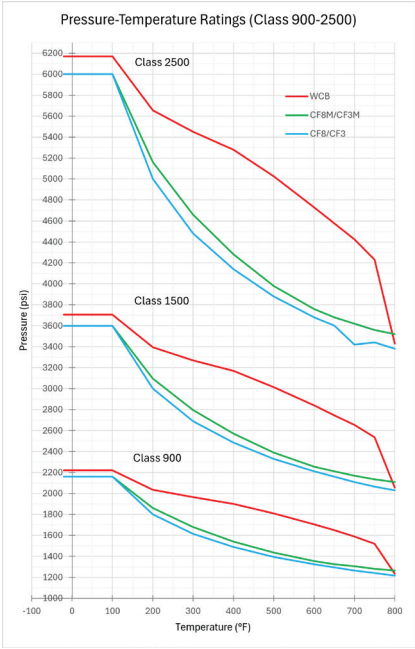

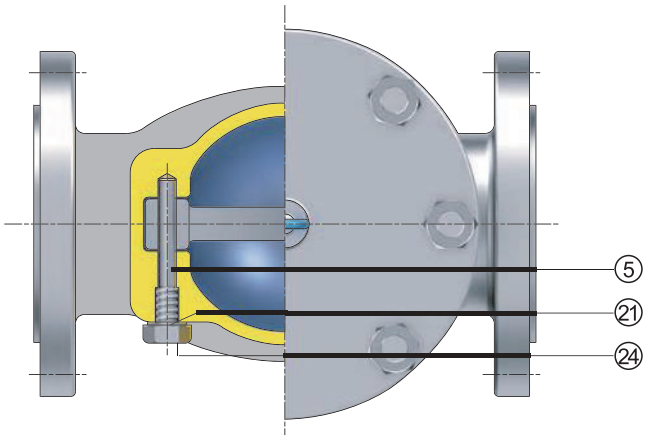

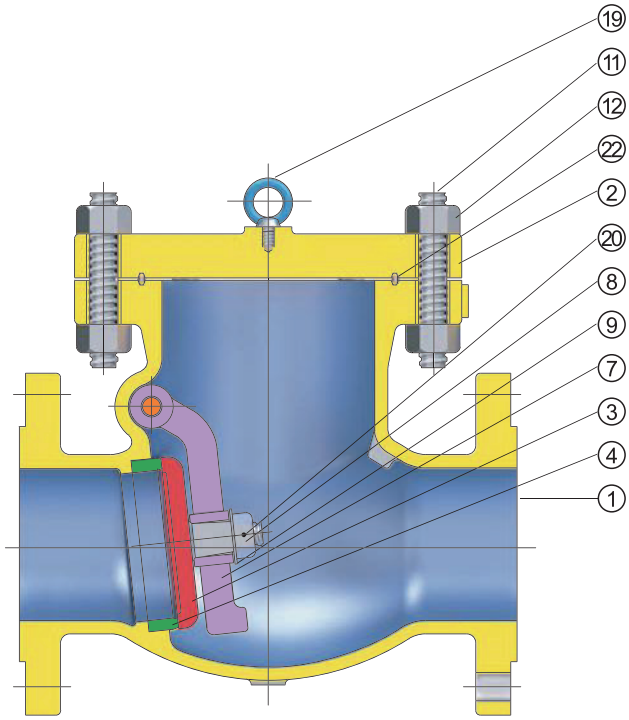

NO	NAME OF PART	ASTM SPECIFICATION
8	DISC NUT	A194-8
9	DISC WASHER	A240-304
19	EVE BOLT	A105
20	SPLIT PIN	A580-304
21	PLUG GASKET	GRAPHITE
22	GASKET	GRAPHITE
24	PLUG	A105

Swing check valves can be supplied with the following accessories.

- outside weight and lever
- slam retarders
- assisting springs
- position switches/indicators
- pneumatic safety control

NO	NAME OF PART	ASTM SPECIFICATION												
		STANDARD	HIGH TEMPERATURE SERVICE				LOW TEMPERATURE SERVICE		STAINLESS STEEL				ALLOY STEEL	
1	BODY	A216-WCB	A217-WC1	A217-WC6	A217-WC9	A217-C5	A352-LCB	352-LC1/LC2/LC3	A351-CF8	A351-CF8M	A351-CF3	A351-CF3M	A351-CN7M	A351-CK3MCUN
2	COVER	A216-WCB	A217-WC1	A217-WC6	A217-WC9	A217-C5	A352-LCB	352-LC1/LC2/LC3	A351-CF8	A351-CF8M	A351-CF3	A351-CF3M	A351-CN7M	A351-CK3MCUN
3	*DISC	A217-CA15	A217-CA15	A217-CA15	A217-CA15	A217-CA15	A351-CF8	A351-CF8	A351-CF8	A351-CF8M	A351-CF3	A351-CF3M	A351-CN7M	A351-CK3MCUN
4	BODY SEAT RING	A105+STL	A182-F1	A182-F11	A182-F22	A182-F5a	A350-LF2	A350-LF2	A240-304	A240-316	A240-304L	A240-316L	ALLOY 20	A182-F51
5	HINGE PIN	A479-304					A276-304		A276-304	A276-316	A276-304L	A276-316L	ALLOY 20	A182-F51
7	ARM	A216-WCB	A217-WC1	A217-WC6	A217-WC9	A217-C5	A352-LCB	352-LC1/LC2/LC3	A276-304	A276-316	A276-304L	A276-316L	ALLOY 20	A182-F51
11	BONNET BOLT	A193-B7	A193-B7	A193-B16	A193-B16	A193-B16	A320-L7	A320-L7	A193-B8	A193-B8	A193-B8	A193-B8	A193-B8	A193-B8
12	BONNET NUT	A194-2H	A194-2H	A194-4	A194-4	A194-4	A194-4L	A194-4L	A194-8	A194-8	A194-8	A194-8	A194-8	A194-8


*Note : In case of 12" and larger size, we'll use trim material overlayed one on the same or equivalent material of the Body.

SWING CHECK VALVES

BOLTED COVER


ANSI 150/300/600 CLASS

CLASS 150

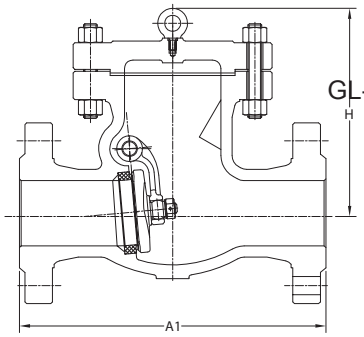


CV-4-150

CLASS 300

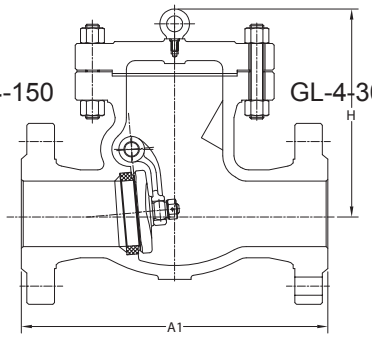


CV-4-300


CLASS 600

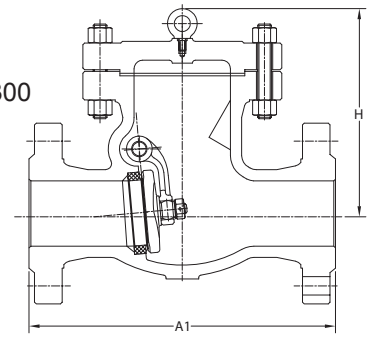

CV-4-600



BUTT WELD ENDS



RTJ ENDS

CLASS 150

																				WEIGHT BAR / INCH	
VALVE SIZE	in	2	2.5	3	4	6	8	10	12	14	16	18	20	24	26	28	30	32	36	2" - 16	10" - 179
	mm	50	65	80	100	150	200	250	300	350	400	450	500	600	650	700	750	800	900	2.5" - 23	12" - 313
A1 & A3	in	8.0	8.5	9.5	11.5	14.0	19.5	24.5	27.5	31.0	34.0	38.5	38.5	51.0	51.0	57.0	60.0	60.0	77.0	3" - 28	14" - C/F
	mm	203	216	241	292	356	495	622	698	787	864	978	978	1295	1295	1448	1524	1524	1956	4" - 41	16" - C/F
H	in	5.8	6.4	6.9	8.0	11.4	13.8	16.9	19.6	23.9	25.6	30.5	25.5	31.5	33.5	40.0	35.0	37.0	53.1	6" - 67	
	mm	147	163	176	204	290	350	428	499	606	650	781	647	800	852	1017	888	941	1349	8" - 121	

CLASS 300

																		WEIGHT BAR / INCH
VALVE SIZE	in	2	2.5	3	4	6	8	10	12	14	16	18	20	24	28	30	36	2" - 21
	mm	50	65	80	100	150	220	250	300	350	400	450	500	600	700	750	900	2.5" - 30
A1 & A3	in	10.5	11.5	12.5	14.0	17.5	21.0	24.5	28.0	33.0	34.0	38.5	40.0	53.0	59.0	62.8	82.0	3" - 40
	mm	267	292	318	356	444	533	622	711	838	864	978	1016	1346	1499	1594	2083	4" - 60
A2	in	11.1	12.1	13.1	14.6	18.1	21.6	25.1	28.6	33.6	34.6	39.1	40.7	53.9	60.0	63.7	83.1	6" - 115
	mm	283	308	333	371	460	549	638	727	845	880	994	1035	1368	1524	1619	2111	8" - 192
H	in	6.4	7.1	7.8	8.7	13.1	15.0	18.8	21.1	22.8	27.4	31.4	30.5	40.4	45.2	50.0	46.1	10" - 297
	mm	163	180	197	220	332	380	477	535	580	695	797	775	1025	1149	1270	1171	12" - 420

CLASS 600


																	WEIGHT BAR / INCH
VALVE SIZE	in	2	2.5	3	4	6	8	10	12	14	16	18	20	24	28	30	C/F
	mm	50	65	80	100	150	200	250	300	350	400	450	500	600	700	750	C/F
A1 & A3	in	11.5	13.0	14.0	17.0	22.0	26.0	21.0	33.0	35.0	39.0	43.0	47.0	55.0	63.0	65.0	C/F
	mm	292	330	356	432	559	660	787	838	889	991	1092	1194	1397	1600	1651	C/F
A2	in	11.6	13.1	14.1	17.1	22.1	26.1	31.1	33.1	35.1	39.1	43.1	47.2	55.4	63.5	65.5	C/F
	mm	295	333	359	435	562	664	791	841	892	994	1095	1200	1407	1613	1664	C/F
H	in	8.3	8.6	10.5	12.2	15.5	21.2	24.6	24.4	26.8	32.0	37.8	40.5	47.3	54.6	51.7	C/F
	mm	210	219	267	310	393	538	625	620	680	812	960	1029	1202	1388	1313	C/F

SWING CHECK VALVES

BOLTED COVER


ANSI 900/1500/2500 CLASS

CLASS 900

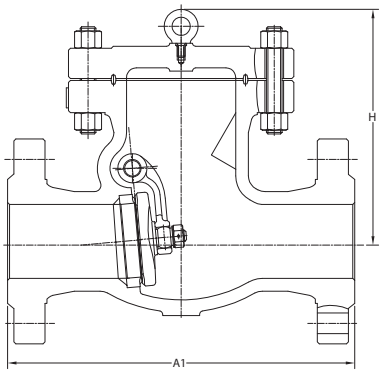


CV-4-900

CLASS 1500

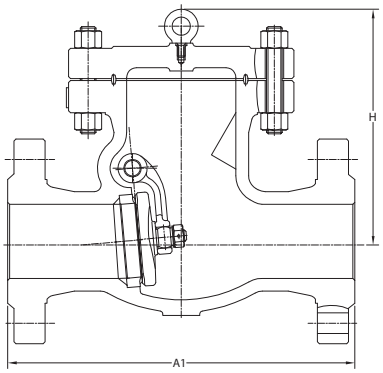


CV-4-1500


CLASS 2500

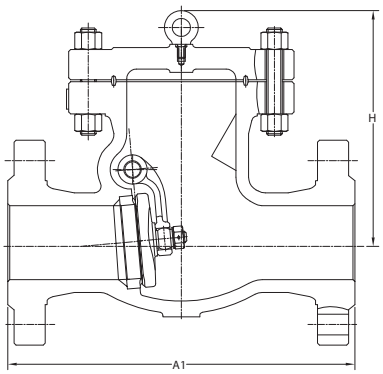

CV-4-2500



BUTT WELD ENDS



RTJ ENDS

CLASS 900

																	WEIGHT BAR / INCH
VALVE SIZE	in	2	2.5	3	4	6	8	10	12	14	16	18	20	24	28	30	C/F
	mm	50	65	80	100	150	220	250	300	350	400	450	500	600	700	750	C/F
A1 & A3	in	14.5	16.5	15.0	18.0	24.0	29.1	33.0	38.0	40.5	44.5	48.0	52.0	61.0	69.0	73.0	C/F
	mm	368	419	381	457	610	737	838	965	1029	1130	1219	1321	1549	1753	1854	C/F
A2	in	14.6	16.6	15.1	18.1	24.1	29.1	33.1	38.1	40.9	44.9	48.5	52.5	61.7	69.9	73.9	C/F
	mm	371	422	384	460	613	740	841	968	1038	1140	1232	1333	1568	1775	1876	C/F
H	in	12.2	13.0	8.1	15.3	17.9	22.2	28.7	30.7	29.8	34.3	36.3	41.4	47.2	55.1	61.8	C/F
	mm	309	331	207	389	454	565	729	781	756	870	921	1051	1200	1400	1568	C/F

CLASS 1500

															WEIGHT BAR / INCH
VALVE SIZE	in	2	2.5	3	4	6	8	10	12	14	16	18	20	24	C/F
	mm	50	65	80	100	150	200	250	300	350	400	450	500	600	C/F
A1 & A3	in	14.5	16.5	18.5	21.5	27.8	32.8	39.0	44.5	49.5	54.4	60.5	65.5	76.5	C/F
	mm	368	419	470	546	705	832	991	1130	1257	1383	1537	1664	1943	C/F
A2	in	14.6	16.6	18.6	21.6	28.0	33.1	39.4	45.1	50.2	55.3	61.4	66.4	77.6	C/F
	mm	371	422	473	549	711	841	1000	1146	1276	1405	1559	1686	1972	C/F
H	in	12.2	13.0	14.8	17.0	22.3	26.3	28.9	35.6	40.7	42.0	47.1	51.1	57.1	C/F
	mm	309	331	375	433	567	668	734	904	1035	1067	1197	1299	1451	C/F

CLASS 2500

												WEIGHT BAR / INCH
VALVE SIZE	in	2	2.5	3	4	6	8	10	12	14	16	C/F
	mm	50	65	80	100	150	200	250	300	350	400	C/F
A1 & A3	in	17.8	20.0	22.8	26.5	36.0	40.2	50.0	56.0	62.0	68.0	C/F
	mm	451	508	578	673	914	1022	1270	1422	1574.8	1727.2	C/F
A2	in	17.9	20.2	23.0	26.9	36.5	40.9	50.9	56.9	-	-	C/F
	mm	454	514	584	683	927	1038	1292	1444	-	-	C/F
H	in	16.4	16.5	17.4	21.3	28.9	28.4	33.5	39.4	47.2	51.1	C/F
	mm	416	419	441	541	733	722	851	1000	1200	1299	C/F

INTERNATIONAL VALVE TECHNOLOGIES

STAINLESS STEEL


GATE VALVES

MODEL GV-4

Features & Benefits


- Investment SS Cast Body
- Outside screw and yoke
- Welded seat ring to prevent leak paths

STANDARD TRIM OFFERED IS API TRIM 2 (SEE PAGE 19)

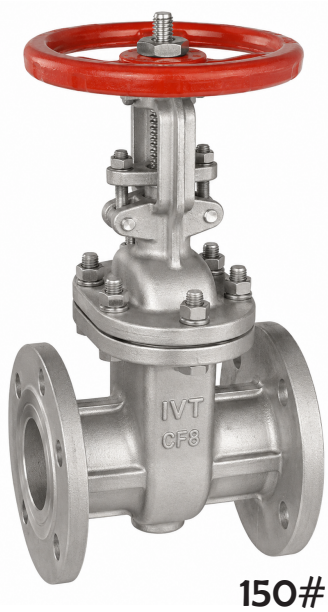

150# / 300#

Dimensional Drawing

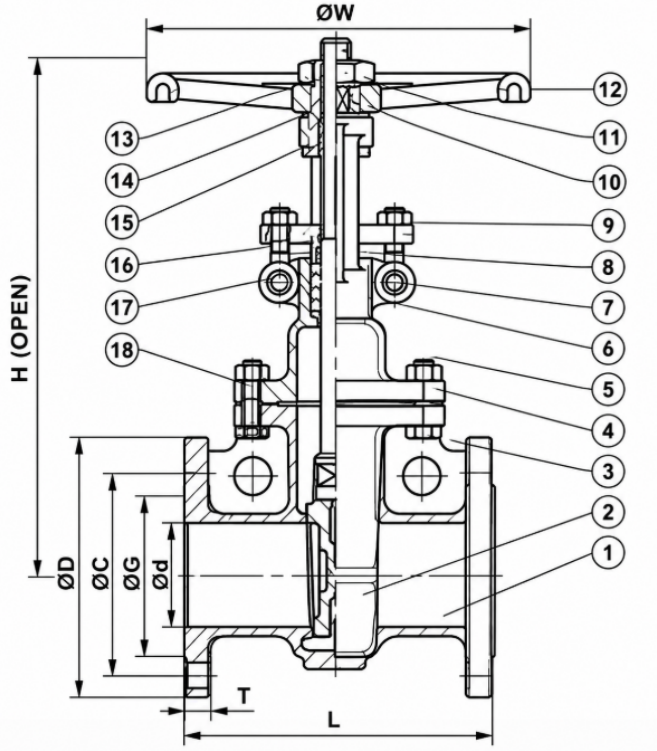

Materials

NO.	Part	Material
1	BODY	SCS13/CF8
2	DISC	SCS13/CF8
3	BONNET BOLT	ASTM 194-B8
4	BONNET NUT	ASTM 194-B8
5	BONNET	SCS13/CF8
6	HINGE PIN	SUS304
7	EYE BOLT	SUS304
8	GLAND	SCS13
9	EYE NUT	ASTM 194-B8
10	HANDWHEEL	FCD
11	NUT	BRONZE
12	STEM	SUS304
13	NAME PLATE	SUS304
15	SPRING	BRONZE
16	YOKE SLEEVE	BRONZE
17	GLAND PACKING	PTFE
18	PACKING	PTFE
19	GASKET	PTFE

Consult factory for Graphite packing in applications over 500F

Dimensions & Weights

SIZE	d	L	H	W	D (150)	C (150)	G (150)	T (150)
1/2"	0.591	0.591	4.252	7.205	3.504	2.382	1.378	0.437
3/4"	0.787	0.787	4.606	7.48	3.858	2.756	1.693	0.437
1"	0.984	0.984	5	8.268	4.252	3.13	2.008	0.437
1-1/4"	1.26	1.26	5.512	10.63	4.606	3.504	2.52	0.5
1-1/2"	1.575	1.575	6.496	10.63	5	3.878	2.874	0.563
2"	1.969	1.969	7.008	12.598	5.984	4.744	3.622	0.626
2-1/2"	2.559	2.559	7.48	14.764	7.008	5.492	4.134	0.689
3"	3.15	3.15	7.992	17.52	7.48	6.004	5	0.752
4"	3.937	3.937	9.016	20.591	9.016	7.5	6.181	0.941
5"	4.921	4.921	10	23.858	10	8.504	7.323	0.941
6"	5.906	5.906	10.512	27.953	10.984	9.508	8.504	1
8"	7.874	7.874	11.496	35.827	13.504	11.752	10.63	1.126
10"	9.843	9.843	12.992	43.976	15.984	14.252	12.756	1.189
12"	11.811	11.811	14.016	52.126	19.016	17.008	15	1.252

Industry Standards

END-TO-END	ANSI B16.10
FLANGE DIMENSIONS	ANSI B16.5
TESTING	API 598
DESIGN	ANSI B16.34

INTERNATIONAL VALVE TECHNOLOGIES

STAINLESS STEEL

SWING CHECK VALVES

MODEL CV-4

Features & Benefits


- Investment SS Cast Body
- Prevents reversal of flow through pipe
- Horizontal or vertical installation
- Welded seat ring to prevent leak paths

STANDARD TRIM OFFERED IS API TRIM 2 (SEE PAGE 19)



150# / 300#

Dimensional Drawing

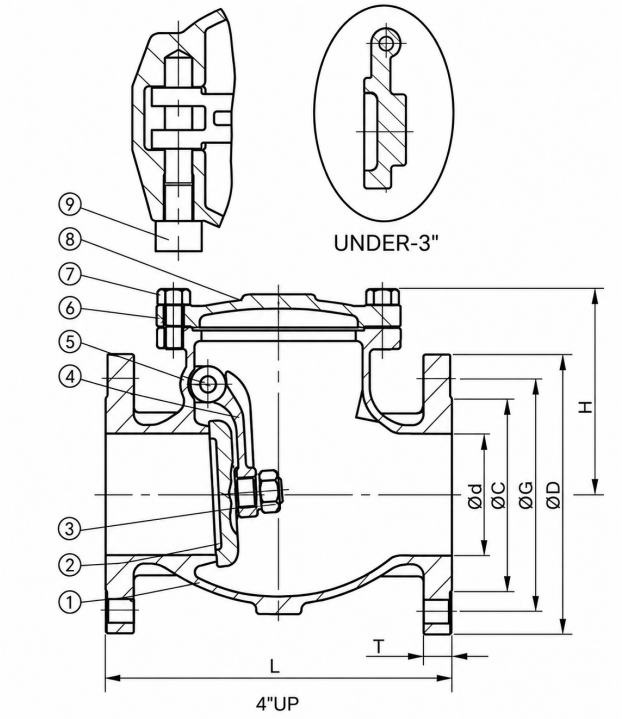

Materials

NO.	Part	Material
1	BODY	SCS13/CF8
2	DISC	SCS13/CF8
3	NUT	SS304
4	ARM HINGE	SCS13/CF8
5	HINGE PIN	SS304
6	GASKET	PTFE
7	BOLT	ASTM A194-B8/A194-2H
8	BONNET	SCS13/CF8
9	BOLT	SS304

Dimensions & Weights

SIZE	d	L	H	D (150)	C (150)	G (150)	T (150)
1/2"	0.591	4.409	2.559	3.504	2.382	1.378	0.437
3/4"	0.787	4.921	2.756	3.858	2.756	1.693	0.437
1"	0.984	5.315	2.953	4.252	3.13	2.008	0.437
1-1/2"	1.575	6.496	4.213	5	3.878	2.874	0.563
2"	1.969	7.992	4.724	5.984	4.744	3.622	0.626
2-1/2"	2.559	8.504	5.315	7.008	5.492	4.134	0.689
3"	3.15	9.488	5.787	7.48	6.004	5	0.752
4"	3.937	11.496	6.654	9.016	7.5	6.181	0.941
5"	4.921	12.992	7.48	10	8.504	7.323	0.941
6"	5.906	14.016	8.386	10.984	9.508	8.504	1
8"	7.874	19.488	9.961	13.504	11.752	10.63	1.126
10"	9.843	24.488	10.984	15.984	14.252	12.756	1.189
12"	11.811	27.48	12.283	19.016	17.008	15	1.252

Consult factory for Graphite gasket in applications over 500F

Industry Standards

END-TO-END	ANSI B16.10
FLANGE DIMENSIONS	ANSI B16.5
TESTING	API 589
DESIGN	ANSI B16.34

INTERNATIONAL VALVE TECHNOLOGIES

STAINLESS STEEL

GATE VALVES

MODEL GV-1

Features & Benefits


- Investment SS Cast steel body
- Red handwheel for increased visibility
- Lightweight & compact

Consult factory for Graphite packing in applications over 500F



600 PSI

Dimensional Drawing

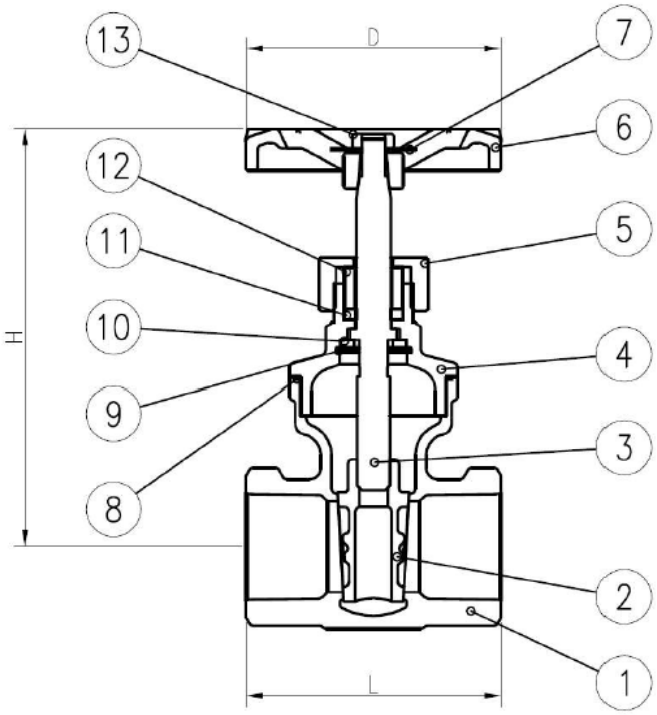

Materials

NO.	Part	Material
1	Body	CF8M
2	Disc	CF8M
3	Stem	316
4	Cap	CF8M
5	Cap Nut	304
6	Handwheel	Aluminum
7	Spin Washer	Aluminum
8	Gasket	Teflon
9	Snap Ring	316
10	Stem Washer	316
11	Stem Packing	Teflon
12	Gland Washer	304
13	Nut	304

Dimensions & Weights

SIZE	L	D	H	Wt.
3/8"	2.185	2.402	3.76	0.35
1/2"	2.283	2.402	3.898	0.42
3/4"	2.461	2.402	4.291	0.53
1"	2.776	3.031	4.488	0.72
1-1/4"	3.091	3.268	5.315	0.95
1-1/2"	3.268	3.268	5.984	1.26
2"	3.78	3.74	6.693	1.98
2-1/2"	4.508	4.409	8.465	3.43
3"	5.157	4.409	9.567	5.25

Specifications

SIZE RANGE	3/8"-3"
WORKING TEMPERATURE	600PSI
WORKING PRESSURE	14F - 320F
END CONNECTIONS	NPT/SW

INTERNATIONAL VALVE TECHNOLOGIES

STAINLESS STEEL

SWING CHECK VALVES

MODEL CV-1

Features & Benefits


- Investment SS Cast steel body
- Horizontal or vertical installation
- Lightweight & compact

Consult factory for Graphite gasket in applications over 500F



600 PSI

Dimensional Drawing

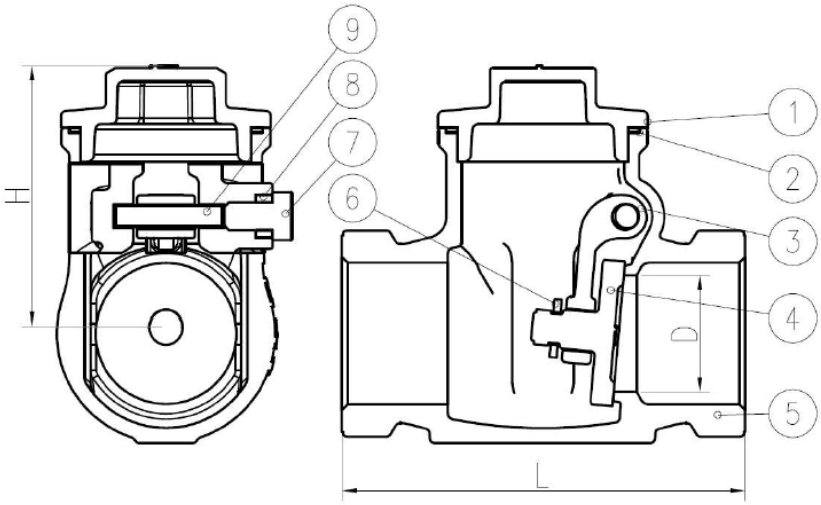

Materials

NO.	Part	Material
1	Cap	CF8M
2	Gasket	Teflon
3	Connecting Rod	CF8M
4	Disc	CF8M
5	Body	CF8M
6	Washer	316
7	Bolt	304
8	Bolt Washer	Teflon
9	Pin	316

Dimensions & Weights

SIZE	L	D	H	Wt.
1/4"	2.362	0.575	1.673	0.26
3/8"	2.362	0.575	1.673	0.26
1/2"	2.362	0.575	1.673	0.26
3/4"	3.071	0.74	1.909	0.39
1"	3.268	0.945	2.165	0.49
1-1/4"	3.72	1.189	2.323	0.78
1-1/2"	4.173	1.476	2.52	1.05
2"	4.862	1.85	2.835	1.57
2-1/2"	6.004	2.5	3.642	3.04
3"	6.87	3.051	4.134	4.89

Specifications

SIZE RANGE	1/4"-3"
WORKING TEMPERATURE	600PSI
WORKING PRESSURE	14F - 320F
END CONNECTIONS	NPT/SW

INTERNATIONAL VALVE TECHNOLOGIES

Product Series of MAX SEAL Valves & Controls

API Trim Number	Material	Seat	Disc	Backseat	Stem	Notes
1	410	410	410	410	410	
2	304	304	304	304	304	
3	F310	310	310	310	310	
4	Hard 410	Hard 410	410	410	410	Seas 750 BHN min.
5	Hardfaced	Stellite	Stellite	410	410	
5A	Hardfaced	Ni-Cr	Ni-Cr	410	410	
6	410 and Cu-Ni	Cu-Ni	Cu-Ni	410	410	
7	410 and Hard 410	Hard 410	Hard 410	410	410	Seats 750 BHN min.
8	410 and Hardfaced	Stellite	410	410	410	
8A	410 and Hardfaced	Ni-Cr	410	410	410	
9	Monel	Monel	Monel	Monel	Monel	
10	316	316	316	316	316	
11	Moneland	Stellite	Monel	Monel	Monel	
12	316 and Hardfaced	Stellite	316	316	316	
13	Alloy 20	Alloy 20	Alloy 20	Alloy 20	Alloy 20	
14	Alloy 20 and Hardfaced	Stellite	Alloy 20	Alloy 20	Alloy 20	
15	304 and Hardfaced	Stellite	Stellite	304	304	
16	316 and Hardfaced	Stellite	Stellite	316	316	
17	347 and Hardfaced	Stellite	Stellite	347	347	
18	Alloy 20 and Hardfaced	Stellite	Stellite	Alloy 20	Alloy 20	



Pressure Range: ANSI 150-2500

Size Range: 2"-24" (optional sizes through 48")

API 624 Low Emissions Certified Valves

Various Materials Available

Fabricated Automation Available

API 624 LOW EMISSIONS CERTIFIED

INTERNATIONAL VALVE TECHNOLOGIES

COMPANY PROFILE



International Valve Technologies is a globally recognized manufacturer of Cast Steel gate, globe, and check valves with manufacturing operation in India, Taiwan, and China supported by a worldwide distribution network. Stringent quality checks at every manufacturing stage, unmatchable performance, and prompt after sales service are some of the salient features of our business. IVT provides maximum safety, reliability and suitability virtually in all branches of industrial applications. We are a division of Flo-Tite Valves & Controls/ Max-Seal Valves & Controls. Our family of companies are all located in Lumberton, North Carolina and ready to serve our distribution network that spans all over the globe.

INDEPENDENTLY OWNED

air CON ACTUATORS & CONTROLS
Pneumatic Actuators
All Types & Designs

Resilient Seated & High Performance
Double and Triple Offsets
Actuators & Controls Sizes: 2" - 84"

MAX SEAL Valves & Controls

HI-TEK SERIES
Extreme Corrosion Alloys
All Design Valves

FLO-TITE valves & controls

All Types of Industrial Process
Ball Valves and Controls : 1/4" - 48"

INTERNATIONAL VALVE TECHNOLOGIES
Gate, Globe & Check
1/2" - 36" Forged & Cast Designs

IVC INTERNATIONAL VALVE CONTROL
Worldwide Valve Sales
All Types & Special Designs