INTERNATIONAL VALVE TECHNOLOGIES

STAINLESS STEEL

SWING CHECK VALVES

MODEL CV-4

Features & Benefits


- Investment SS Cast Body
- Prevents reversal of flow through pipe
- Horizontal or vertical installation
- Welded seat ring to prevent leak paths

STANDARD TRIM OFFERED IS API TRIM 2 (SEE PAGE 19)



150# / 300#

Dimensional Drawing

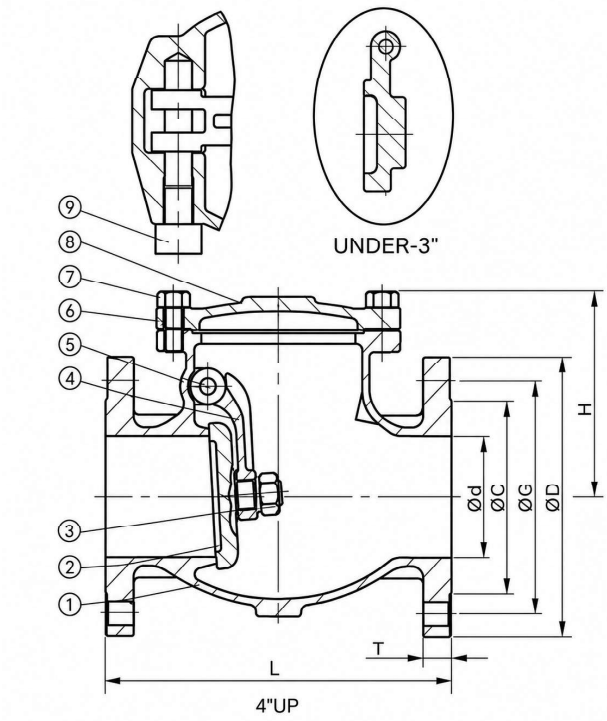

Materials

NO.	Part	Material
1	BODY	SCS13/CF8
2	DISC	SCS13/CF8
3	NUT	SS304
4	ARM HINGE	SCS13/CF8
5	HINGE PIN	SS304
6	GASKET	PTFE
7	BOLT	ASTM A194-B8/A194-2H
8	BONNET	SCS13/CF8
9	BOLT	SS304

Dimensions & Weights

SIZE	d	L	H	D (150)	C (150)	G (150)	T (150)
1/2"	0.591	4.409	2.559	3.504	2.382	1.378	0.437
3/4"	0.787	4.921	2.756	3.858	2.756	1.693	0.437
1"	0.984	5.315	2.953	4.252	3.13	2.008	0.437
1-1/2"	1.575	6.496	4.213	5	3.878	2.874	0.563
2"	1.969	7.992	4.724	5.984	4.744	3.622	0.626
2-1/2"	2.559	8.504	5.315	7.008	5.492	4.134	0.689
3"	3.15	9.488	5.787	7.48	6.004	5	0.752
4"	3.937	11.496	6.654	9.016	7.5	6.181	0.941
5"	4.921	12.992	7.48	10	8.504	7.323	0.941
6"	5.906	14.016	8.386	10.984	9.508	8.504	1
8"	7.874	19.488	9.961	13.504	11.752	10.63	1.126
10"	9.843	24.488	10.984	15.984	14.252	12.756	1.189
12"	11.811	27.48	12.283	19.016	17.008	15	1.252

Consult factory for Graphite gasket in applications over 500F

Industry Standards

END-TO-END	ANSI B16.10
FLANGE DIMENSIONS	ANSI B16.5
TESTING	API 589
DESIGN	ANSI B16.34