INTERNATIONAL VALVE TECHNOLOGIES

STAINLESS STEEL


GATE VALVES

MODEL GV-4

Features & Benefits


- Investment SS Cast Body
- Outside screw and yoke
- Welded seat ring to prevent leak paths

STANDARD TRIM OFFERED IS API TRIM 2 (SEE PAGE 19)

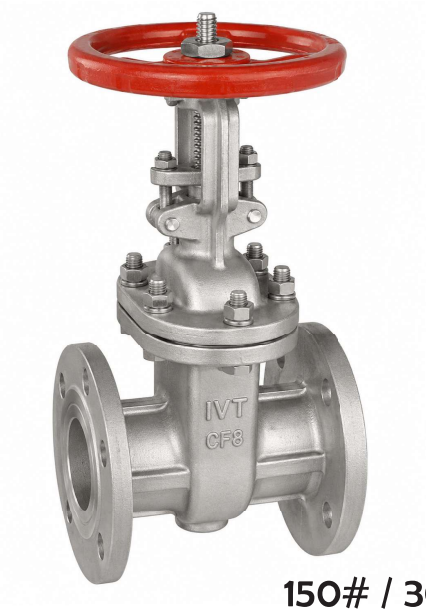

150# / 300#

Dimensional Drawing

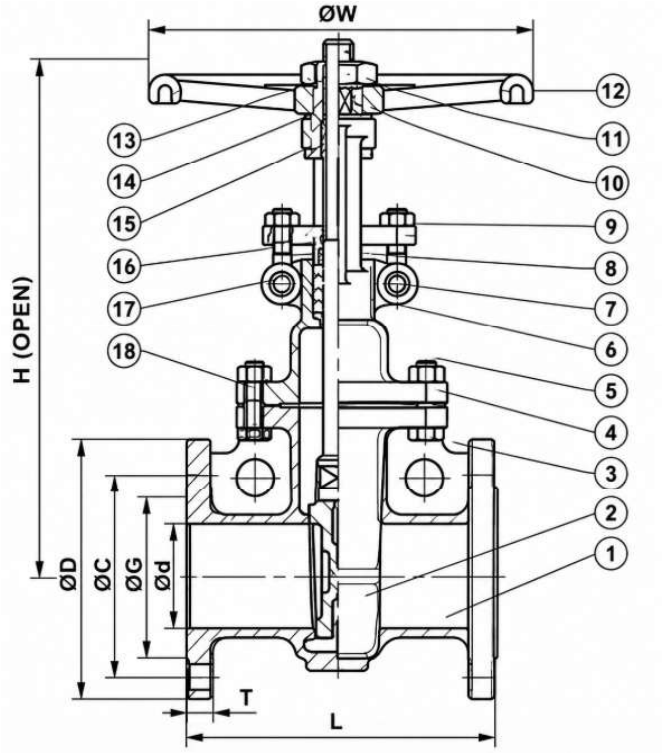

Materials

NO.	Part	Material
1	BODY	SCS13/CF8
2	DISC	SCS13/CF8
3	BONNET BOLT	ASTM 194-B8
4	BONNET NUT	ASTM 194-B8
5	BONNET	SCS13/CF8
6	HINGE PIN	SUS304
7	EYE BOLT	SUS304
8	GLAND	SCS13
9	EYE NUT	ASTM 194-B8
10	HANDWHEEL	FCD
11	NUT	BRONZE
12	STEM	SUS304
13	NAME PLATE	SUS304
15	SPRING	BRONZE
16	YOKE SLEEVE	BRONZE
17	GLAND PACKING	PTFE
18	PACKING	PTFE
19	GASKET	PTFE

Consult factory for Graphite packing in applications over 500F

Dimensions & Weights

SIZE	d	L	H	W	D (150)	C (150)	G (150)	T (150)
1/2"	0.591	0.591	4.252	7.205	3.504	2.382	1.378	0.437
3/4"	0.787	0.787	4.606	7.48	3.858	2.756	1.693	0.437
1"	0.984	0.984	5	8.268	4.252	3.13	2.008	0.437
1-1/4"	1.26	1.26	5.512	10.63	4.606	3.504	2.52	0.5
1-1/2"	1.575	1.575	6.496	10.63	5	3.878	2.874	0.563
2"	1.969	1.969	7.008	12.598	5.984	4.744	3.622	0.626
2-1/2"	2.559	2.559	7.48	14.764	7.008	5.492	4.134	0.689
3"	3.15	3.15	7.992	17.52	7.48	6.004	5	0.752
4"	3.937	3.937	9.016	20.591	9.016	7.5	6.181	0.941
5"	4.921	4.921	10	23.858	10	8.504	7.323	0.941
6"	5.906	5.906	10.512	27.953	10.984	9.508	8.504	1
8"	7.874	7.874	11.496	35.827	13.504	11.752	10.63	1.126
10"	9.843	9.843	12.992	43.976	15.984	14.252	12.756	1.189
12"	11.811	11.811	14.016	52.126	19.016	17.008	15	1.252

Industry Standards

END-TO-END	ANSI B16.10
FLANGE DIMENSIONS	ANSI B16.5
TESTING	API 598
DESIGN	ANSI B16.34