



2023 General Price List

Effective Date: January 2023

INDUSTRIAL PROCESS HIGH PERFORMANCE BALL VALVES AND VALVE AUTOMATION EQUIPMENT

Flo-Tite's General Price List includes most of our standard ball valves. In addition to all the listed items we offer many specials such as Metal Seated, V-Port Control Valves, Trunnion Design Valves of all sizes. Pressure class up to ANSI Class 2500. We welcome all your inquiries for Custom Design Ball Valves.

All Prices Are In US Dollars. Estimated Weights Are In lbs. ** = Item Number
C/F=Consult Factory. POA = Price On Application. N/A = Not Available

Flanged Valves

Full Flo Series Full Port ANSI Class 150 (2PC Body) Flanged End

Model / Size	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"
F150-SS	270	335	425	595	730	940	1640
F150-CS	235	275	340	445	530	715	1115
Est. Weight	4	5	7.5	9.5	15	21	34

Tech. Bulletin Page 58

Model / Size	3"	4"	5"	6"	8"	10"	12"
F150-SS	1760	2595	6010	6715	10010	17765	26235
F150-CS	1440	2260	3455	4560	7140	12825	20205
Est. Weight	42.5	64	C/F	142.5	298	441	717

Tech. Bulletin Page 58

Full Flo Series Full Port ANSI Class 300 (2PC Body) Flanged End

Model / Size	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"
F300-SS	340	440	585	835	940	1230	2400
F300-CS	270	340	435	645	705	1000	1650
Est. Weight	5	7	10	13	19	24	42

Tech. Bulletin Page 58

Model / Size	3"	4"	5"	6"	8"	10"	12"
F300-SS	2810	4040	7785	9230	15075	24310	40495
F300-CS	1990	2660	5855	6380	10575	16480	26410
Est. Weight	61.5	97	C/F	225.5	380	564	860

Tech. Bulletin Page 58

Petro Series ANSI Class 600 Flanged End Floating Ball Design

Model / Size	2"	3"	4"	6"	8"	10"	12"
F600-SS	4015	8260	13915	17755	24895	33825	57140
F600-CS	2415	5335	8375	10405	15975	21545	35295
Est. Weight	38	75	140	363	C/F	C/F	C/F

Tech. Bulletin Page 69

Gear Operator Adder For Flanged Valves, All Above Models

Size	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	6"	8"	10"	12"
Gear Only	660	660	660	660	660	660	700	700	700	1050	1050	1500	2270
Gear Mounted	885	885	885	885	885	885	1025	1025	1025	1550	1550	2250	3115

Tech. Bulletin Page 151-21

Graphoil Packing Adder for Fire Safe Valves, All Above Models

Size	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	6"	8"	10"	12"
List Adder	32	32	47	53	63	63	68	68	74	131	147	210	504

API 6D Certified

Add 5% to Standard 150, 300, 600 Floating Ball Valves

Standard Port 1PC Body Design/ANSI Class 150, Flanged End



Model / Size	1"	1 1/2"	2"	2 1/2"
SF150-SS	380	585	890	C/F
SF150-CS	310	465	685	C/F
Est. Weight	C/F	10.5	18	C/F

Tech. Bulletin Page 58

Model / Size	3"	4"	6"	8"	10"	12"
SF150-SS	1510	2335	5025	9115	13555	22195
SF150-CS	1315	1755	3095	5495	9755	16595
Est. Weight	33	53.5	84	170.5	262	370

Tech. Bulletin Page 58

KOMPACT SERIES Wafer Type with Full Port 150 Flange Connection



Model / Size	3/4"	1"	1 1/2"
W150-SS	325	405	545
W150-CS	190	245	355
Est. Weight	4	6	9.5

DMW-150



Model / Size	2"	3"	4"	6"
DMW150-SS	955	1725	2620	6325
DMW150-CS	695	1210	2010	4795
Est. Weight	11	27	46	83

Tech. Bulletin Page 111

EZ SERIES *Unique Product Innovation*

Reduced Port 2PC Bolted Body Design/ANSI Class 150 Flanged End



Model / Size	3"	4"	6"	8"	10"	12"
RF15-SS	1635	2395	4910	8880	15625	22195
RF15-CS	1275	1635	3155	5535	9725	16360
Est. Weight	33	53.5	82.5	186	279.5	426.5

RF15 Short Pattern

Tech. Bulletin Page 70

Reduced Port 2PC Bolted Body Design/ANSI Class 300 Flanged End



Model / Size	3"	4"	6"	8"	10"	12"
RF30-SS	2335	3505	6985	12005	C/F	C/F
RF30-CS	1635	2220	4440	6265	C/F	C/F
Est. Weight	53	83	140	C/F	C/F	C/F

RF30 Short Pattern

NEW! 300 lb

Tech. Bulletin Page 70



NEW!

-Sentinel Series - Segmented Ball Control Valves

3 & 4 Way Ball Valves

Multi-Port Trans-Flo Series

150LB Flanged End/Full Port, Prices are for T or L Ports



Model / Size	1/2"	3/4"	1"	1 1/2"	2"	2 1/2"
MPF15-SS	C/F	1060	1330	2015	2875	4530
MPF15-CS	C/F	965	1155	1805	2225	3365
Est. Weight	7	11.5	16	21	34.5	56

Tech. Bulletin Page 90

150LB Flanged End/Full Port, Prices are for T or L Ports



Model / Size	3"	4"	6"	8"	10"	12"
MPF15-SS	5385	6730	13100	24670	37955	67335
MPF15-CS	4325	6000	11060	20440	31855	56905
Est. Weight	69.5	125.5	238.5	389	639	809

Tech. Bulletin Page 90

Multi-Port Trans-Flo Series

300LB Flanged End/Full Port, Prices are for T or L Ports



Model / Size	3/4"	1"	1 1/2"	2"	3"	4"	6"	8"	10"	12"
MPF30-SS	1405	1965	2735	3905	6755	9305	18010	31285	48330	81615
MPF30-CS	1310	1795	2360	2940	5765	8175	14735	26915	36600	70835
Est. Weight	14.5	20.5	32	40.5	87.5	154.5	353	633	809	1098

C/F For Additional Sizes

Tech. Bulletin Page 90

Multi-Port Series Threaded End Standard Port / 800 WOG



Model / Size	1/4" 3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
MPT100SS - L	240	280	320	370	595	670	995
MPT100SS - T	265	300	335	410	625	715	1040
Est. Weight	2	3	4	6.5	7	9	15.5

**If end cap change out is required add 5% to the list adder.*

Tech. Bulletin Page 100

Bottom Entry Series 3-Way Bottom Entry Flanged End, Class 150 C/F 300/600



Model / Size	2"	3"	4"	6"	8"	10"	12"
MPF155-SS	3400	5545	8415	10485	C/F	C/F	C/F
MPF155-CS	2405	3930	5625	7310	C/F	C/F	C/F
Est. Weight	23	48	73	110	C/F	C/F	C/F

Tech. Bulletin Page 96

Tri-Pro Bottom Entry Series - 3PC Diverter Valve

Full Port, NPT, SW or BW / 2250 WOG



Model / Size	1/2"	3/4"	1"	1 1/2"	2"	2 1/2"
3W-HPF50-SS	720	855	1025	2025	3305	3745
3W-HPF40-CS	680	785	920	1835	2965	3490
Est. Weight	3.5	4.5	6	15	22	C/F

**If end cap change out is required add 5% to the list adder.*

Tech. Bulletin Page 90

3 Way NPT Brass Valves Are Available in Both L & T Ports, 1/4"-3", C/F

TRI-PRO Series - High Performance 3PC Valves

HPF TRI-PRO Series - Fire Safe-Full Port - 2250 WOG

Threaded End, Stainless Steel - HPF51-SS-1-FGG-L, Carbon HPF41-CS-1-FGG-L Socket Weld, Stainless - HPF52-SS-2-FGG-L, Carbon HPF42-CS-2-FGG-L Flanged ANSI 600, Stainless - HPF56-SS-6-FGG-L, Carbon HPF46-CS-6-FGG-L

**If end cap change out is required add 5% to the list adder.*



Model / Size	1/4" 3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
HPF51SS	260	300	365	430	590	810	1120	3020	4925	7125
HPF52SS	290	375	430	545	665	945	1305	3715	5245	7410
HPF41CS	245	250	345	390	510	665	1020	2830	3450	5855
HPF42CS	265	290	380	450	565	775	1070	3235	3660	5955

Tri-Pro 3PC ANSI Class 600 Flanged End

HPF56SS	C/F	1635	2100	2445	2660	3005	3550	6295	7250	12320
HPF46CS	C/F	1285	1375	1605	1720	1830	2145	4220	5180	8445

Weight Lbs - Tri-Pro, Full Bore

Tech. Bulletin Page 51

Model / Size	1/4" 3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
Threaded	2	2.5	3	5	7	11	16	32	59	116
Socket Weld	3	3	4	6	8	12	17	C/F	59	117
600 Flanged	N/A	5	9	12	C/F	24.5	31.5	C/F	92	132

HPS TRI-PRO Series - Reduced Port - 3000 / 2250

1/4" thru 1" Reduced Port Tri-Pro Series Valves are rated for 3000 WOG

Model / Size	1/4" 3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
HPS51SS	See HPF Full Port	275	340	415	495	680	970	1385	2950	4750
HPS52SS		325	355	470	585	900	1060	1460	3870	6020
HPS41CS		230	315	375	430	615	865	1210	3075	4225
HPS42CS		280	340	410	525	645	885	1325	2890	4465

**If end cap change out is required add 5% to the list adder.*

Tech. Bulletin Page 51

HPF-3000 Series

HPF-3000 is a variant of the standard Tri-Pro Series. The burst pressure of these valves is approx. 7000psi based on hydro-testing conducted in the past in our facility and a third party testing lab.

Model / Size	1/4" 3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"
HPF71SS	C/F	460	535	700	875	1235
HPF72SS		500	600	760	990	1365
HPF61CS		425	495	635	785	1090
HPF62CS		435	510	655	805	1110

**If end cap change out is required add 5% to the list adder.*

Tech. Bulletin Page 51A

3PC Titan Series - ANSI Class 900/1500, NPT&SW 5000 WOG

Size 1/2 - 1 1/2" Full Bore Size 2" Standard Bore - 316SS or LCC

Model / Size	1/2"	3/4"	1"	1 1/2"	2"
1551-SS-NPT/SW	530	640	800	2010	2115
1541-LC-NPT/SW	465	555	690	1675	1810
1558-SS-FLANGEND	1410	1785	2350	4805	6905
1548-LC-FLANGEND	1210	1500	1745	3580	4955

**If end cap change out is required add 5% to the list adder.*

Tech. Bulletin Page 53

Multi-Choice - Sanitary Type 3PC Valves

Model S350-SL/S370-SL - 316L Model S350-SS - 316SS

350 Clamp End
370 Extended Tube End

Model / Size	1/2"	3/4"	1"	1 1/2"	2"	2 1/2"	3"	4"
350 - SL	275	300	370	565	775	1935	2425	2840
370 - SL	310	320	415	600	875	2190	2840	3685
Est. Weight	2.4	3	4	7	10	20	30	55

Tech. Bulletin Page 55

API 607-7



3PC Ball Valve Designs

3PC Full Port Multi-Choice Series

300 / 200 Series - 1500 WOG



Model / Size	1/4" 3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
300 - SS	145	165	195	250	305	465	645	1035	1595	2620
200 - CS	135	140	175	215	265	375	520	910	1385	2100
Est. Weight	2	2	3	3.5	5.1	8	12	21.5	32	60.5

***If end cap change out is required add 5% to the list adder.**

Tech. Bulletin Page 45

300 / 200 Series - Weld-In-Place Design



Model / Size	1/4" 3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
325 / 335- SS	265	285	320	360	455	605	825	1380	2180	3605
225 / 235 - CS	240	255	275	340	400	500	670	1305	1870	2660
Est. Weight	2	2	3	4	6	9	12	22	37	61

Tech. Bulletin Page 46

***If end cap change out is required add 5% to the list adder.**

3PC Full Port Economy Type

Econo-Chem Series

***If end cap change out is required add 5% to the list adder.**

Model 110-SS NPT/316 110-CS NPT/WCB
1000 WOG 120-SS SW / 316 120-CS SW / WCB

Model / Size	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
110 - SS	80	110	155	200	270	395	1060	1305	2195
Est. Weight	1	2	3	5	8	15.5	26	27	49



Threaded Ball Valves

Fusion Series, S23

2000 WOG, Full Port, Fire Safe, Threaded Ends (Seal Weld Body)



Model / Size	1/4" 3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
S23 - SS	100	115	135	185	260	350	515	870	1260	2625
S23 - CS	90	95	120	155	215	265	395	690	1045	2045
Est. Weight	1	1	1	2	3	5	9	15	23	45

Tech. Bulletin Page 14

Fusion Series, T23

2000 WOG, Full Port, Threaded Ends - 2PC Body



Model / Size	1/4" 3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
T23 - SS	80	85	115	155	210	320	480	785	1105	2530
T23 - CS	75	80	110	135	195	240	340	610	830	1780
Fire Safe Adder	3	3	4	5	7	10	15	24	34	72

Tech. Bulletin Page 14

FloTron Series, S3000

Threaded Ends / 3000 PSI | Full Port 1/4"-1 1/2" (Seal Weld Body)



Model / Size	1/4" 3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"
S3000 - SS	160	195	255	430	540	835	925	C/F	3135
S3000 - CS	120	130	180	290	360	540	595	C/F	2300
Est. Weight	1	1	2	3.5	5.5	9	10	C/F	38

Tech. Bulletin Page 15

FloTron II Series, S6000

Threaded Ends / 6000 PSI | Full Port 1/4"-1 1/2" (Seal Weld Body)



Model / Size	1/2"	3/4"	1"	1 1/4"	1 1/2"	2" *
S6000 - SS	270	415	605	755	1230	1495
S6000 - CS	195	260	415	530	770	890
Est. Weight	1.5	2.76	3.9	7.4	9	10

Note:
Size 2"
standard
port

Tech. Bulletin Page 16

Economy Type Threaded End Ball Valves

1PC Econoflo Series, T45 Threaded Ends / 1000 WOG - Reduced Port

Model / Size	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
T45 - SS	40	45	50	60	75	110	130	170
T40-SS MxF	50	55	60	C/F	C/F	C/F	C/F	C/F

Tech. Bulletin Page 26

2PC Econoflo Series, T80 Threaded Ends / 1000 WOG - Full Port

Model / Size	1/4" 3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"
T80 - SS	50	55	70	95	135	210	255	700	815

Tech. Bulletin Page 28

ECONOFLO SERIES

Threaded Ends - 2PC Direct Mount Full Port / 1000/2000 WOG

Model / Size	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	3"
DM85-SS	75	95	130	165	230	340	C/F
DM2000-SS	135	135	180	POA	345	480	1125

Tech. Bulletin Page 34

Flanged Ends Class 150 - 2PC Direct Mount Full Port

Model / Size	1/2"	3/4"	1"	1 1/2"	2"
DM F15SS	220	300	320	490	690
Est. Weight	4	5	6	12	16

Tech. Bulletin Page 36

NPT/SW Ends - 3PC Direct Mount Full Port / 1000 WOG

Model / Size	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
DM310SS (NPT)	160	175	195	300	380	505	1100	1630	2455
DM320SS (SW/BW)	175	185	205	315	385	525	1160	1685	2555
Est. Weight	1.5	2	3	-	6	8	-	-	-

Tech. Bulletin Page 35

DM 110/120 SS Series

Model / Size	1/2"	3/4"	1"	1 1/2"	2"
DM110 SS	190	210	275	605	830
DM120 SS	190	210	275	605	830
Est. Weight	2.84	2.93	3.68	8.93	12.79

New 3-Way Multiport 304 Stainless Steel

NPT Ends - Direct Mount DM-MPT100 Competitor Series

Model / Size	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
DM-MPT100S4	190	255	285	585	690	910
Est. Weight	1.4	1.7	2.5	5.2	8.2	10.6

316 Stainless		
Model / Size	2 1/2"	3"
DM-MPT100SS	1325	2310
Est. Weight	23.1	38.4

Tech. Bulletin Page 102

DM 51/52 BZ Series

Model / Size	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
DM51 BZ	140	140	175	185	340	420	565	830	1300	2095	3705
DM52 BZ	165	165	165	200	260	370	525	800	C/F	2030	3075
Est. Weight	-	-	0.5	0.7	1.2	1.65	2.45	3.55	-	28.7	-

DMV2000/DMMPT200 SS Series

Model / Size	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
DM-MPT200 SS	205	215	305	455	665	930
DMV2000 SS	470	610	805	C/F	1050	1310
Est. Weight	2.0	2.0	2.7	-	7.4	10.7



Close Out Specials

Call for Discounted Pricing

While Supplies Last

While Supplies Last

Economical Design Full Bore WCB or LCB with 304 Trim, ANSI 150 & 300, Flanged End

EC SERIES

Model / Size	2"	2 1/2"	3"	4"	5"	6"	8"
F15-LC (LCB)	C/F	C/F	C/F	1103	C/F	2678	C/F
F30-LC (LCB)	C/F	C/F	1550	C/F	C/F	C/F	C/F
F15 Est. Weight	23	30	38	62	104	232	120
F30 Est. Weight	28	C/F	56	92	72	212	198


Tech. Bulletin Page 67

New Fire Safe / PRO-MAX Series

Standard Port - 2000 WOG 1/2"-1 1/4" / 1500 WOG 1 1/2" -

2" Model 361-SS NPT/316 361-CS NPT/WCB

362-SS SW / 316 362-CS SW / WCB



Model / Size	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
361/362SS	140	155	200	290	360	480
361/362CS	115	130	160	235	285	395
Est. Weight	2	3	3	5	6	9

Tech. Bulletin Page 48

3PC Tri-Star Series - Fire Safe Design / Full Port

Model 510-SS NPT/316 410-CS NPT/WCB
 1500 WOG 520-SS SW/316 420-CS SW / WCB



Model /Size	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
500 - SS	100	130	175	260	335	495
400 - CS	80	100	130	180	245	375
Est. Weight	1	2	3	6.5	10	10

Tech. Bulletin Page 43

Grooved End Type

Model 190-SS 316



Model / Size	1 1/2"	2"	2 1/2"	3"	4"	6"
190-SS-9-RTT-L	260	365	760	1190	2155	C/F
Est. Weight	8	9	16	29	48	50

*If end cap change out is required add 5% to the list adder.

Tech. Bulletin Page 56

Commercial Series, T70-SS Threaded End - Standard Port - 2PC - 2000WOG

Model / Size	1/4"-3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"
T70 - SS	75	85	100	130	155	225	315	POA	POA
Est. Weight	.68	.70	1.36	1.67	3.15 - 5.81				

Tech. Bulletin Page 30

Omni Series, T12 Threaded Ends - Fire Safe - Reduced Bore / 2000 PSI

Model /Size	1/4"-1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
T12 - SS	90	120	140	180	225	325
T12 - CS	75	85	105	140	180	250
Est. Weight	0.4	0.6	1	2	3	4

Tech. Bulletin Page 23

(RK) Repair Kits - Replacement Soft Parts

SIZE	Super-Tek TFM	S-Tek 50/50	UHMWPE	RPTFE PTFE	Super-Tek III	Installation List Adder
	Seat Codes					
	F	S	U	R T	Y	
1/4"–3/8"	65	85	70	70	70	75
1/2"	70	95	85	70	80	75
3/4"	70	120	90	75	85	75
1"	120	140	110	95	115	85
1 1/4"	150	210	125	110	185	85
1 1/2	200	290	155	125	265	90
2"	225	355	260	155	270	90
2 1/2"	385	500	285	255	490	150
3"	410	700	450	405	635	200
4"	535	815	575	525	765	200
6"	825	1255	855	815	2025	200
8"	965	1470	965	1015	2540	200
10"	1325	2300	1330	1345	3505	250
12"	3680	5335	2415	3745	5760	250

• This Price Includes:
Installed Repair Kits Soft Parts
Change-Outs
Includes Labor/
Testing Price
Adder to RK List

Repair Kits include
Applicable Seats,
Body Seals, Stem
Packing & Thrust
Washers as
Required for
Standard Valves.

Cavity Filler Adder for 3PC 300/200 Series

Consult Factory for Flanged Valve Cavity Filler

Size	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	6" - 10"
TFM (F)	280	280	280	C/F	400	910	C/F	1260	2100	C/F
PTFE (T)	280	280	280	C/F	400	910	C/F	1260	2100	C/F
50/50 (S)	325	325	325	C/F	625	1320	C/F	1710	2850	C/F



Flo-Tite Offers A Wide Selection
of Control Type Ball Valves



Valve Automation



All Automation Equipment pricing includes mounting hardware for all Flo-Tite valves and actuators. All units are assembled and tested. Note: Size 1/4"-2". Actuator mounting kits are 304 SS as standard. All actuators are supplied with 12 springs as standard.

Actuator Reverse Springs / Remove Springs

Actuator Size	Spring Removal	Reversing Pistons	Changing Seals
52 to 140	50	100	215
160 to 240	100	145	300
270 to 400	150	195	400



***Direct Mounted Valves - Subtract 5% from List Price**

Flo-Tite AirCon Rack and Pinion Pneumatic Actuators*

DOUBLE ACTING /MOUNTED									SPRING RETURN/MOUNTED								
MODEL	WEIGHT (LBS)	LIST	MODEL	WEIGHT (LBS)	LIST	MODEL	WEIGHT (LBS)	LIST	MODEL	WEIGHT (LBS)	LIST	MODEL	WEIGHT (LBS)	LIST	MODEL	WEIGHT (LBS)	LIST
DA32	1.2	285	DA105	12	945	DA240	104	4665	SR52	3	385	SR125	22	1325	SR300	275	10365
DA40	2	315	DA115	17	1065	DA270	168	6915	SR63	4	485	SR140	29	2145	SR350	440	15995
DA52	3	355	DA125	20	1160	DA300	214	8665	SR75	6	555	SR160	44	2535	SR400	637	24020
DA63	4.6	460	DA140	29	1505	DA350	332	14095	SR83	7	645	SR190	78	3835	Larger Sizes are available in our extended range series		
DA75	5.8	515	DA160	46	2115	DA400	540	20580	SR92	12	735	SR210	85	4685			
DA83	7.1	555	DA190	72	3395				SR105	14	990	SR240	135	6145			
DA92	9	675	DA210	86	3720				SR115	20	1220	SR270	216	7590			
DOUBLE ACTING ACTUATOR ONLY									SPRING RETURN ACTUATOR ONLY								
MODEL	WEIGHT (LBS)	LIST	MODEL	WEIGHT (LBS)	LIST	MODEL	WEIGHT (LBS)	LIST	MODEL	WEIGHT (LBS)	LIST	MODEL	WEIGHT (LBS)	LIST	MODEL	WEIGHT (LBS)	LIST
DA32	1.2	170	DA105	12	600	DA240	104	4030	SR52	3	255	SR125	22	975	SR300	275	9430
DA40	2	200	DA115	17	720	DA270	168	5980	SR63	4	315	SR140	29	1795	SR350	440	15060
DA52	3	225	DA125	20	810	DA300	214	7730	SR75	6	385	SR160	44	2025	SR400	637	20645
DA63	4.6	290	DA140	29	1155	DA350	332	13160	SR83	7	475	SR190	78	3200	Larger Sizes are available in our extended range series		
DA75	5.8	345	DA160	46	1605	DA400	540	17205	SR92	12	565	SR210	85	4050			
DA83	7.1	385	DA190	72	2760				SR105	14	645	SR240	135	5510			
DA92	9	505	DA210	86	3085				SR115	20	875	SR270	216	6655			

Integral Mounted Solenoid Valves

(Mounts directly to Actuator Air Inlet Manifold)

MODEL	PRICE	Weight
SVS4 (NEMA4)	180	0.9
SVS7 (NEMA7)	350	1.1



Limit Switches

Limit Switches

MODEL NUMBER	NOTE	PRICE Switch only	PRICE Mounted	Weight
FMYB-5120 NEMA 4	With Visual Indicator	555	685	3
AMYB-5120 NEMA 7	With Visual Indicator	790	915	4.6
FFNB-5120 NEMA 4	Without Visual Indicator	555	735	C/F
210 ALS COMPACT SERIES	NEMA-4/with Indicator	270	360	1.2
310 ALS-II (Standard Box)	NEMA-4/with	360	450	2.6
FMFB5120 NEMA 4	3-Way Visual Indicator T-Port	670	800	C/F
AMFB5120 NEMA 7	3-Way Visual Indicator T-Port	820	945	4.6
AMYB5T20 NEMA7	1A Non-Contact SW	1250	1380	4.6

	Price	Weight
Filter Regulator (Plastic)	230	0.8
Filter Regulator (Metal)	725	0.7
Air Set	300	C/F
Speed Control	60	0.2



Flo-Tite Positioners

MODEL	TYPE*	PRICE Position only	PRICE Mounted	Weight
VP700-G	Pneumatic 3-15 psi	1490	1850	3.6
VE700-G	Electro Pneumatic 4-20 mA	2965	3320	4.1
YT1000RDN535S00	Electro Pneumatic 4-20 mA	2075	2270	C/F
YT3300RSA5521S	Digital Positioner 4-20 mA	3410	3605	9.2
YT3400RDA5521S	Electro Pneumatic 4-20 mA	4000	4195	11.1
V200ED190AC1	Electro Pneumatic Nema 4	3555	3910	4.8
V200ED190ACFRGB	Electro Pneumatic Nema 4 with Filter Regulator/Gauge	3865	4060	5.6

* Stainless Steel tubing and connectors list adder \$425



PRO-tor electric actuators

H=AutoSw2

Industrial Process Electric Actuators

On - Off Models

Modulating Models

Model	Actuator Only List	Mounted List	Weight	Torque in-lbs
ELONC3H0	1105	1380	2.2	266

F=24vac/vdc

ELONA4F0	1,370	1645	6.6	310
ELONR6F0	1,795	2070	6.6	440
ELONA8F0	3155	3,900	24.5	880
ELONB9F0	3,775	4520	24.5	1770
ELONA10F0	4,935	5,655	49	3540
ELONC12F0	6,300	7,045	49	7080

K=120vac

ELONA4K0	925	1,200	6.6	310
ELONR6K0	1,600	1,870	6.6	440
ELONA8K0	2,795	3,540	24.5	880
ELONB9K0	3,475	4,220	24.5	1770
ELONA10K0	4,530	5,275	49	3540
ELONB11K0	5,050	5,795	49	5310
ELONC12K0	5,620	6,365	49	7080
ELOND13K0	6,295	7,040	49	8850
ELONE14K0	9,510	10,230	80	15045

L=230vac

ELONA4L0	980	1,250	6.6	310
----------	-----	-------	-----	-----



F=24vac/vdc

Positioners

Model	Actuator Only List	Mounted List	Weight	Torque in-lbs
ELONA4F8	2,730	3,005	13.8	310
ELONR6F8	3,530	3,805	13.8	440
ELONA8F8	4,970	5,720	24.5	880
ELONA10F8	7,180	7,650	49	3540

K=120vac

ELONA4K8	2,705	2,980	6.8	310
ELONR6K8	3,145	3,420	6.8	440
ELONS7K8	3,510	3,785	6.8	440
ELONA8K8	4,655	5,400	24.5	880
ELONB9K8	5,165	5,915	24.5	1770
ELONA10K8	6,760	7,230	49	3540
ELOND13K8	9,325	10,045	49	8850

Specifications: Nema4/4X Enclosure, Manual Override & Heater, 2 Auxiliary Switches, Direct Mount Capable On Our ISO5211 Valves 110 VAC / 220 VAC Or 24 VDC / 24 VAC All Electric Actuator Prices Include Actuator Mounting and Testing

- All Electric Actuators listed are 120 volt
 - Please consult factory for 220 VAC or 24 VDC/24 VAC
 - All Electric Actuator Prices Include Actuator Mounting and Testing
- Specifications:
- Nema 4/4x Enclosure
 - Manual Override & Heater
 - Direct Mount Capable on our ISO 5211 Valves

Modulating & Battery Back Up Available Please Consult Flo-Tite
(910) 738-8904

Eccentric Control Valves are also available.



PFA Lined Ball Valves

Model/Size	1/2"	3/4"	1"	1 1/2"	2"	2 1/2"	3"	4"	6"
F15-DI-FAA-L	1390	1500	1705	2275	2370	5075	6245	8520	19880
Est Weight	2.5	2.87	4.46	C/F	11.03	C/F	21.05	32.81	67.35

Lined Ball Valve DI



PFA Lined Ball Check Valves

Model/Size	1/2"	3/4"	1"	1 1/2"	2"	2 1/2"	3"	4"
BCV15-SS-TT	2605	2680	2895	4005	5555	8325	12235	19035
Est Weight	2.81	3.13	4.55	7.58	11.59	37.50	24.86	37.50

Lined Ball Check Valve SS



Couplers

Model	Square Size in/mm	DD Slot Size	Weight	List Price Open End	List Price Encapsulated
050A	0.43/11	0.25	0.17	46	50
050I	0.43/11	0.20	0.28	46	50
050II	0.43/11	0.24	0.27	46	50
063A	0.55/14	0.25	.20	46	50
063I	0.55/14	0.20	0.30	46	50
063II	0.55/14	0.24	0.29	46	50
050B	0.43/11	0.315	0.18	46	50
050BT	0.43/11	0.31	0.23	46	50
063B	0.55/14	0.315	0.20	46	50
063BT	0.55/14	0.31	0.25	46	50
063C	0.55/14	0.375	0.29	46	50
063MP-SQ	0.55/14 (MPT)	0.43	0.22	46	50
075A	0.67/17	0.25	0.29	51	85
075B	0.67/17	0.315	0.26	51	85
075C	0.67/17	0.375	0.35	55	85
075D	0.67/17	0.67	1.13	55	85
075DM	0.67/17	0.67	0.83	55	85
100C	0.86/22	0.375	0.53	55	146
100D	0.86/22	0.67	1.21	129	146
100D-SQ	0.86/22 (MPT)	0.67	0.85	129	146
100DH	0.86/22	0.67	1.67	129	146
100DM	0.86/22	0.67	0.91	129	146
100MP-SQ	0.86/22 (MPT)	0.55	0.52	129	146
125C	1.06/27	0.375	0.95	129	146
125D	1.06/27	0.67	1.37	129	146
125DH	1.06/27	0.67	1.85	129	146
125G	1.06/27	0.91	2.36	142	154
200D	1.417/36	0.67	2.19	154	175
210E	1.417/36	1.024	4.24	154	175
210G	1.417/36	0.91	2.73	154	175
270EL	1.81/46	1.024	6.6	176	200
270ES	1.81/46	1.024	4.9	176	200
270F	1.81/46	1.38	8.27	188	275

Brackets

Model	Size	Weight lb	List Price
BKO-SS	1/4"-1/2"	0.4	45
BK1-S4	1/2"-1 1/4"	0.7	50
BK2-S4	1 1/2"-2"	1.5	66
BK2-CS	1 1/2"-2"	1.4	62
BK2.5S4	1 1/2"-2"	2.0	98
BK3-S4	2 1/2"-6"	3.8	121
BK3-CS	2 1/2"-6"	C/F	101
BK3H-S4	6"-8"	C/F	166
BK3H-CS	6"-8"	4.2	130
BK4-CS	8"-12"	8.2	242
BK5-CS	3"-6" D/G	1.8	242
BK6-CS	FOR/B FV	5.5	235
BK7-CS	FOR 6"-10"	18.2	235
BK10-CS	FOR 8"-10"	C/F	235
LS5-CS	POS	0.5	46
LS4-A	1/2"-3/4"	0.8	268
LS4-B	1"-1 1/4"	0.8	296
LS4-C	1 1/2"-2"	C/F	318
LS7-M	2 1/2"-4"	1.8	342



AirCon Automator Series Diaphragm Actuators

Model	List Price	Weight	Model	List Price	Weight
SRD-2A-MI-FS-MN-T2	1682	46	SRD-3A-MI-FS-MN-T2	2080	73
SRD-2B1-MI-FS-MN-T2	1682	46	SRD-3B1-MI-FS-MN-T2	2196	73
SRB-2B2-MI-FS-MN-T2	1738	46	SRD-3B2-MI-FS-MN-T2	2262	73
SRB-2C-MI-FS-MN-T2	1738	46	SRD-3C-MI-FS-MN-T2	2300	73
SRD-2D-MI-FS-MN-T2	1868	46	SRD-3D-MI-FS-MN-T2	2352	73
Model	List Price	Weight	Model	List Price	Weight
SRD-4B1-MI-FS-MN-T2	3463	134	SRD-5B1-MI-FS-MN-T2	5604	236
SRD-4B2-MI-FS-MN-T2	3515	134	SRD-5B2-MI-FS-MN-T2	5687	236
SRD-4C-MI-FS-MN-T2	3568	134	SRD-5C-MI-FS-MN-T2	6000	236
SRD-4D-MI-FS-MN-T2	3687	134	SRD-5D-MI-FS-MN-T2	6404	236



AirCon Kompact Double Acting and Spring Return

Model Kompact-4 Double Acting	List Price	Weight	Model Kompact-4 Spring Return	List Price	Weight
15DA	325	2	15SR	366	2
20DA	394	3	20SR	456	4
25DA	518	6	25SR	624	8
30DA	726	10	30SR	818	11
35DA	1092	16	35SR	1240	20
45DA	1675	24	45SR	1898	33
60DA	2924	57	60SR	3576	77
75DA	5835	112	75SR	6820	141

Nickel Infused Pneumatic Actuators

Double Acting	List Price Actuator Only	List Price Mounted	Weight	Spring Return	List Price Actuator Only	List Price Mounted	Weight
DA052NI	370	465	3	SR052.12-NI	405	500	3
DA063NI	435	570	4.6	SR063.12-NI	475	610	4
DA075NI	545	680	5.8	SR075.12-NI	605	740	6
DA083NI	665	800	7.1	SR083.12-NI	710	845	7
DA092NI	720	855	9	SR092.12-NI	795	930	12
DA105NI	825	1105	12	SR105.12-NI	945	1225	14
DA125NI	1195	1480	20	SR125.12-NI	1375	1660	22
DA140NI	1635	1920	29	SR140.12-NI	1860	2145	29
DA160NI	2460	2845	46	SR160.12-NI	2785	3170	44
DA190NI	3640	4155	72	SR190.12-NI	4230	4745	78
DA210NI	4105	4620	86	SR210.12-NI	4735	5250	85
DA240NI	6400	6900	104	SR240.12-NI	7050	7550	135
DA270NI	7570	8230	168	SR270.12-NI	8695	9355	216

Flo-Tite also offers:
AirMax Cylinder Series



Series XB Extended Range Series

Power Stroke Scotch-Yoke Series





EZ Vane Actuator's Unique Solutions and Benefits

The Easytork Control Actuator line is a game-changing development for the pneumatic actuation and control valve markets. It replaces the rotary spring & diaphragm style actuator's reason for existence. **Compared to RS&D, the EZ has better accuracy and is more economical, 1/10th to 1/4th the weight, 1/6th to 2/3rd the size, and consumes 1/4th to 1/2 the air consumption.**

Predictive Maintenance

Using internal air reservoir for fail-safe

Air reservoirs in fail-safe systems are commonly used to replace π rings for large mission critical emergency shut down valves. Spring failure and its performance decay are common occurrences but are hard to detect. Unlike spring actuation, monitoring devices can be installed onto air reservoir fail-safe actuation systems to positively detect performance decay or failure.

Product Reliability

One moving piece – pure rotary-to-rotary movement


EVA's only have one moving part that creates pure rotary-to-rotary movement. Not only does the simplistic design contribute to better lifespan, the singular moving component simplifies predictive maintenance monitoring. Common off the shelf technology provides for validated automatic

Product Reliability

Ideal for dirty environments & poor instrument air

Environmental air never enters the actuator. Unlike springs, air reservoir fail-safe systems never pull in environmental air into actuators. While clean instrument air is important, Easytork's rugged vane handles poor air supply significantly better than traditional actuators.

Double Acting & Spring less Fail Safe Design

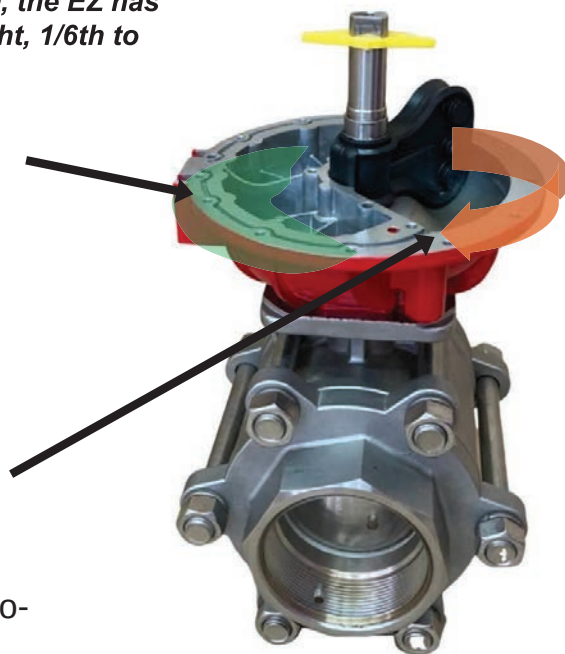

EZ Vane Actuators are significantly smaller, lighter, faster, and more cost efficient.


Torque Range: 30in-lbs to 57,854 in-lbs
Travel Stop Adjustment: +/- 5°

Actuator	List	Mounted List	Solenoid	List	Mounted List
EV04	495	665	ETSV24VDC	300	350
EV05	600	945	ETSV110VAC	300	350
EV07	1,000	1,350			
EV10	1,705	2,340			
EV12	3,270	3,905			
EV14	5,200	6,135	Trip Valve		
EV16	10,000	10,935	ETNTV	750	800
EV25	19,750	C/F			



FTSV Series

Flo-Tite's Thermal Shut Off Valves

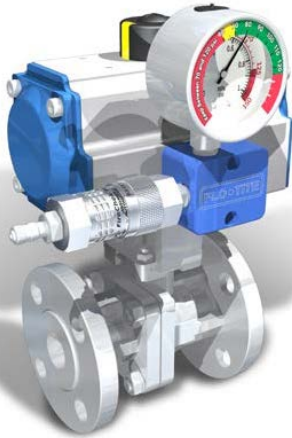

The **FTSV** series Thermal Shut-off valves combine a fire-safe ball or butterfly valve with a pneumatic actuator and the **FM approved FireChek®** valve to form a dedicated stand-alone thermal shut-off valve that will close (or open) at a given temperature (165° F standard). This alternative to fusible link valves can be tested and reset without the need to replace any hardware.

The valve is held open by charging the actuator through a Schrader (check) valve. There is a clearly labeled gauge to indicate the proper pressure range to maintain. **FTSV's** have passed both Mil-std-810G humidity vibration testing procedures through an independent third party. Each **FTSV** assembly is also individually tested by a qualified technician in our ISO certified facility after assembly.

The FTSV has passed the 13,000 mile vibration test and the 5 year humidity test.

All valves are Fire Safe Tested & certified to API 607
No air supply or electricity needed for the FTSV

CRITICAL COMPONENTS

1) Fire-Safe Valve

Tri-Pro HPF Series

High Performance Series



The Tri-Pro and HP Series are one example of Fire Safe Valves Flo-Tite offers. Choose a Fire Safe ball or butterfly valve. All valves are equipped with special seats and seals to attain the API 607 4, 5 or 7th edition Fire-Safe rating. All valves are available in carbon or stainless steel.

Ball Valves

NPT: 1/4" to 4"

Socket Weld: 1/4" to 4"

150# ANSI RF Flange: 1/2" to 8"

300# ANSI RF Flange: 1/2" to 10"

600# ANSI RF Flange:

Butterfly Valves

150#, 300#, 600#, 900# ANSI Flange for Lug & Wafer models: 2" to 24"

[visit flotite.com](http://www.flotite.com) web page for details

2) Spring Return Actuator Air-Con Actuator



Air-Con C Series

These actuators are sized by our engineers specifically for thermal shutoff functionality. Actuators accept 70-125 psi and springs have a generous safety factor included to ensure closure even if the break torque is increased due to the valve not being actuated for a long period of time. These actuators were selected because they are rugged and economical and they have the ISO 5211 and NAMUR mounting patterns. The FTSV thermal shutoff module directly mounts to the NAMUR pad.

[visit airconactuators.com](http://airconactuators.com) for details

Notes: FTSV Package Includes: FTSV Module, 165F FM approved FireChek thermal valve, Visual Liquid Filled Gauge, O-rings and Bolts for Namur mounting. Fully Assembled and Tested. Instruction manual for installation and operation. Weight: 1.00 lbs. each

3) FM Approved FireChek®



Inline 3-way Thermal Shut-off

The revolutionary FireChek valve is what provides the functionality of the FTSV module. It uses a patented shape memory spring that makes it expand at the designed trigger (165° F) temperature. Air can flow through the valve in one direction to enter the actuator during normal temperatures. After the valve is triggered by excessive heat, it self-actuates and vents the actuator allowing the springs to close the ball or butterfly valve.

Only FM approved using AirCon Actuators.

List Price: \$2,955

Mounted Price: \$3,150




FSCV Series Swing Check Emergency Shut-off for Gas, Liquid, or Vapor



Flo-Tite's FSCV series ANSI flanged swing-check valves with fusible links are designed to provide a simple yet effective method of closing in an emergency or hazardous situation.

The valves are designed with an external spring load and held in the open position with the fire-sensitive fusible link. The valve will automatically close when the link melts due to fire or high temperatures. The external lever rotates the hinge pin which drives the disc into the closed position, stopping the flow of the liquid, gas or vapor.

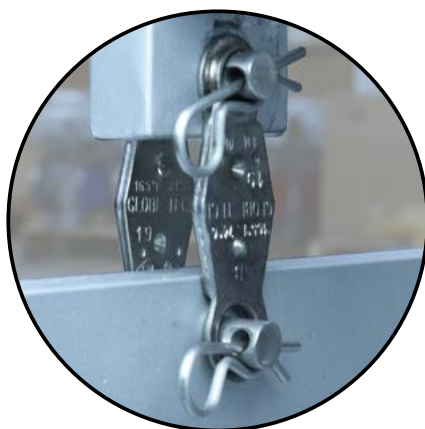

Dual Fusible Link

FEATURES

- Local and/or remote actuation
- Fire-Safe fusible link
- Economical solution for required safety
- Can be used in horizontal and vertical service
- All valves are factory tested to API 598
- Back pressure ensures a tight seal between the disc and seat
- Once closed, the valve can ONLY be reset manually as a safety feature

TYPICAL APPLICATIONS

- Refineries
- Petrochemical
- Off-shore oil rigs
- Chemical process equipment
- Water and Waste applications
- Superheated steam lines on ships

SIZES & END CONNECTIONS

150# ANSI Flanged: 2" to 16"
300# ANSI Flanged: 2" to 16"

PRESSURE RATING

150# ANSI Flanged: 275 PSIG
300# ANSI Flanged: 740 PSIG

TEMPERATURE RANGE

-20°F to 475°F

MATERIALS

Body: Carbon steel or Stainless Steel

Disc: Carbon steel or Stainless Steel

Hanger Arm: Carbon steel or Stainless Steel

Seat: API 598 Trim 8 or 12

Cover Seal: Graphite



FLOW CAPACITIES

Size	C _v (gpm)
2"	120
2 1/2"	190
3"	285
4"	520
5"	745
6"	1,245
8"	2,285
10"	3,570
12"	5,340
14"	6,500
16"	8,620



Documentation and Certification Charges (net)

Material Test Report (after the order ships)- \$25 ea

Positive Material Identification - \$35 per shot

Certificate of Compliance (after the fact)- \$25 ea

Certificate of Origin (after the fact)- \$25 ea

Hydrotest (2 min) - \$25 per Valve





Standard Terms & Conditions of Sale

1. GENERAL

- A. Written quotations are firm for a period of thirty days after date of quotation unless cancelled by Flo-Tite in writing prior to acceptance by the purchaser. Verbal quotations are subject to acceptance within 48 hours, unless within that period they are confirmed in writing by Flo-Tite. Stenographic and clerical errors are subject to correction.
- B. Contracts or orders having penalty clauses for failure to meet shipment are not acceptable unless specifically approved in writing by an authorized individual at our office in Lumberton, N.C.
- C. Shipment lead times are based on conditions at the time of quoting. Goods are subject to prior sales. Lead time may change for causes beyond Flo-Tite's control. Under no circumstance will the seller be liable for consequential or liquidated damages due to failure to fulfill estimated shipping lead times.
- D. Flo-Tite reserves the right to alter dimensions without notice. Please request certified drawings to confirm dimensions if necessary.

2. PRICES

List prices and discount schedules of all Flo-Tite products are subject to change without notice. All orders released for immediate shipment will be invoiced at the prices in effect at the time the order is received at Flo-Tite's Manufacturing Plant in Lumberton, N.C. Any order whose shipment is delayed per the customer's request in excess of 120 days will be invoiced at the published prices and discounts effective at shipment time or at the price agreed upon at time of order acceptance by Flo-Tite.

3. CHANGE ORDERS OR CANCELLATION:

Orders received and accepted by Flo-Tite may not be changed or cancelled except on terms satisfactory to Flo-Tite and which prevent Flo-Tite from incurring any loss. Changes or cancellations of products considered non-standard or special will not be accepted without full reimbursement of all related expenses incurred to date. All cancellations and change orders must be made in writing to and approved by Flo-Tite, subject to appropriate charges to Purchaser. Special terms may apply for orders requiring large quantities or valves of non-standard materials of construction. Buyers signed acceptance of these terms is required prior to Flo-Tite releasing the order. All shipments are F.O.B. Factory, Lumberton, NC USA

4. TERMS:

Net 30 day terms are for approved customers only. Others shall be specified by Flo-Tite. International customer terms shall be cash in advance, credit card or wire transfer upon notice of readiness to ship. Accounts past due 60 days or more are subject to 1% service charge per month with a maximum of 12% per annum. We gladly accept credit cards as a form of payment. However, a 3.5% processing fee will be charged.

5. FREIGHT:

All shipments are F.O.B. Factory, Lumberton, NC USA

6. RETURNS:

All requests for return must be made in writing within 10 days after receipt of goods. No materials may be returned to the factory without written permission being given by an authorized individual at Flo-Tite's office in Lumberton, N.C. A copy of the seller's authorization for return (RMA) must be attached to the returned material. Safety Data Sheets must accompany returns on products that were in service. Returns without an RMA and SDS sheets will be rejected.

7. MINIMUM BILLING

MINIMUM BILLING FOR ANY ORDER WILL BE \$50.00

8. Governing Law

Purchase orders accepted by Flo-Tite shall be governed and construed in accordance with the laws of the State of North Carolina and the parties hereby submit to the exclusive jurisdiction of the North Carolina courts.

WARRANTY

Flo-Tite provides the following warranty regarding products manufactured by it. THE WARRANTY STATED HEREIN IS EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES AND REPRESENTATIONS, EXPRESSED OR IMPLIED, OR STATUTORY, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTY OF MERCHANTABILITY OR THE IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE. Flo-Tite warrants its products to be free from defects in materials and workmanship when these products are used for the purpose for which they were designed and manufactured. Flo-Tite does not warrant its products against chemical or stress corrosion or against any other failure other than from defects in materials or workmanship. The warranty period is for twelve (12) months from installation date or eighteen (18) months from shipment date, whichever date comes first. Any claim regarding this warranty must be in writing and received by Flo-Tite before the last effective date of the warranty period.

Upon Flo-Tite's receipt of a warranty claim, Flo-Tite reserves the right to inspect the product(s) in question at either the field location or at Flo-Tite's Manufacturing Plant. If, after inspection of the product(s) in question, Flo-Tite determines that the purchaser's claim is covered by this warranty, Flo-Tite's sole liability and the purchaser's sole remedy under this warranty is limited to the repair or replacement thereof at Flo-Tite's option. Flo-Tite will not be liable for any repairs, labor, material or other expenses that are not specifically authorized in writing by Flo-Tite, and in no event shall Flo-Tite be liable for any direct liquidated or consequential damages arising out of any defect from any cause whatsoever. If any Flo-Tite product is modified or altered at any location other than Flo-Tite's Lumberton, N.C. Manufacturing Plant without the express written authorization of Flo-Tite, then this warranty is null and void. Any products sold by Flo-Tite but manufactured by companies other than Flo-Tite are not covered by this warranty. The warranty for such products shall be subject only to the warranty relief, if any, provided by the suppliers and/or manufacturers of such products.



Flo-Tite, Inc.
4815 West 5th St.
Lumberton, NC 28358

P. O. Box 1293 Lumberton, NC 28359

Tel: (910) 738-8904
Fax: (910) 738-9112