




Sameto AG Drive Pvt. Ltd.

Ointment and Cream Plant

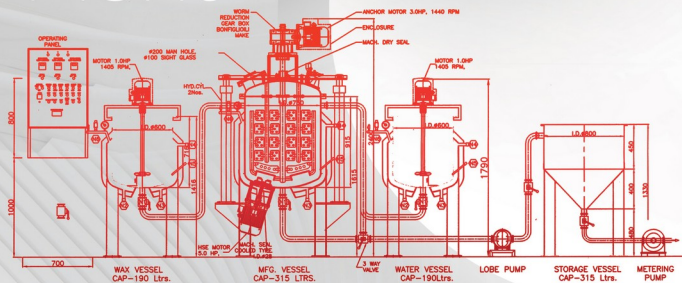

Ointment & Cream Plant

application

Pharmaceuticals

Creams

Gel

Ointment

Biotech

Cosmetics

Emulsions

Lotions

Gels

Shampoos, Toothpaste, etc



Concept

Basic ingredients for the ointment/ gel / tooth paste is glycol, water & wax. The calculated volume of glycol is heated in the jacketed Vessel & the required quantity of wax is melted in a jacketed Vessel. These ingredients are then transferred in to Manufacturing Vessel where the ACTIVE Ingredients are added to produce the ointment /gel or cream.

Features

- The water phase & wax phase have high shear mixers & the Manufacturing Vessel is installed with an Anchor agitator with an high shear homogenizer / emulsifier
- Heating / cooling and insulated jackets complete with temperature control and safety equipment
- Contra Rotary agitator for high viscose products
- Short loop product Re-Circulation for smaller batch sizes
- Hydraulic lifting on manufacturing vessel top dish to facilitate product recovery
- Process piping with transfer panel design for automated plants
- Cleaning in place cycle with validation protocols
- PLC based operations with automation , recipe administration & visualization
- Vacuum Line fully flushed for sanitation purposes

Output

- Highly efficient processing with significantly reduced batch times.
- Pre-stored process parameters give high batch-to-batch consistency.
- Capacity ranges from 20 kgs to 50000 kgs



application

For Liquid Oral Plant is also referred as Syrup Manufacturing Plant. Following are the applications
 ~ Syrups | Oral Liquids | Suspensions

Models range from : 50 L to 20000 Ltrs capacity in fully automatic untouched process or in semi-automatic models as per GMP / c-GMP manufacturing standards with validation documents.

The Plant include

- Sugar Melting Vessel
- Manufacturing Vessel
- Storage Vessel
- Online sugar Syrup pre Filter
- Vacuum system for transfer
- Zero hold up Filter
- Top & Bottom Entry Mixer
- Transfer Pumps
- PLC Control Panel


Salient features

- Three Tank Process : Sugar Melting Vessel – Manufacturing Vessel – Storage Vessel
- The Tank can be mounted on Legs or Lugs as required
- Stirrer/ impeller type high speed stirrers, paddle type slow speed stirrer for low viscous liquids & anchor type stirrer for high viscous liquids.

- Jacket or Limpet for steam heating. All Vessels are insulated
- Homogenizer for Homogenous Online / Inline Mixing of Products / Suspensions Bottom homogenizer / stirrer optional.
- Electro-polished interconnecting pipeline and TC fittings for Easy cleaning & Assembly
- Complete untouched process optional with auto transfer of products & ingredients.
- Optional vacuum arrangement provided on requirement
- In built CIP system for cleaning and washing of vessels from inside
- Load cell – level indicators can be integrated with system
- Optimised design & fully Automated PLC based operations ensure minimal manual handling
- Complete documentations & certificates to ensure compliance with regulatory bodies with DQ , OQ , IQ, FAT & SAT



Sameto AG Drive Pvt. Ltd.

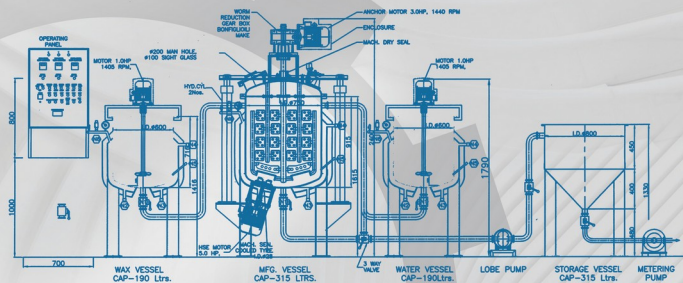

Corporate & Sales office: **SAMETO AG-DRIVE Pvt. Ltd.**

Unit No. 114, Guru Gobind Singh Ind. Estate, Near Jay Coach,
Western Express Highway, Goregaon (E), Mumbai - 400 063, INDIA.
Tel.: +91 22 26855626 / 26855205 | Website: www.chemiplantindia.com
E-mail: sameto@chemiplantindia.com | samerkalra@chemiplantindia.com
internationalsales@chemiplantindia.com

Manufacturing Unit:

Plot No. 4613 / 4614,
GIDC - Ankleshwar,
Dist - Bharuch - Gujarat - 393002.
INDIA