



SAMSUNG designs video door phone



Be secured with convenient feature
and decent design. **SHT-3006**

■ Features

- Applicable to single family homes and Apartments (200 households)
- Enhanced secured access control (Main entrance camera SHT-5080XL)
 - Access control through RF cards, PIN codes




RF card




PIN code

- Search household ID # by name (ie. #303)
- Scalability
 - One main monitor unit can be interlocked 3 sub monitors or 3 sub audio handsets

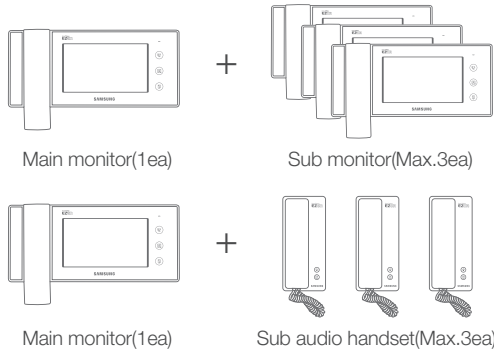

■ Configuration

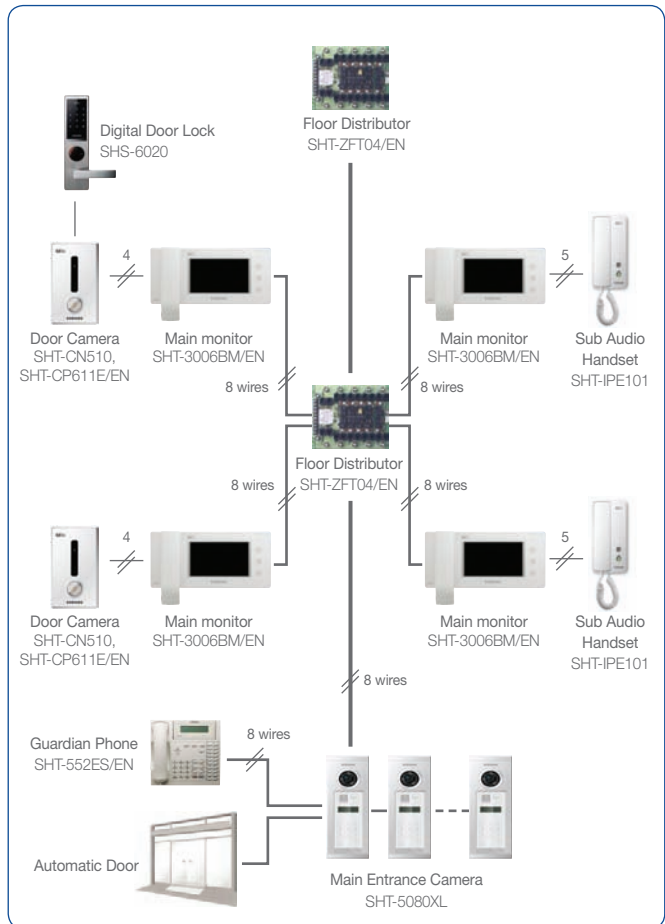

■ Function

- Video Door Monitoring & Answering
- Telephone call to guardroom
- Access control (Porch & main entrance door)
- Interlocking with security detectors (In case of any trespassing)
- Anti-burglary mode set-up while you are away
- Interlocking with sub monitors and sub audio Handset



Call to Sub units



Talk to Door/Guardroom



Door Open

■ Product Components

Main Monitor	SHT-3006BM/EN
Main Entrance Camera	SHT-5080XL (Max. 6)
Sub Audio Handset	SHT-IPE101
Door Camera	SHT-CN510, SHT-CP611E/EN
Guardian Phone	SHT-552ES/EN

■ Specifications

	Model	SHT-3006BM/EN
	Power	DC 16V ~ 24V
	Power consumption	Max. 20W
	Display	7" Color TFT LCD
	Wiring	Camera : 4 wires Sub Phone : 5 wires
	Video Signal	PAL/NTSC
	Weight	1.2kg
	Dimensions	275 x 125 x 40mm(W x H x D)
	Installation	Wall-mounted (Bus type)

	Model	SHT-5080XL
	Power	DC 16V ~ 24V
	CCD	122 x 32(W x H)
	Dimensions	124 x 347 x 18mm(W x H x D)
	Installation	Flush Mount

SEOUL COMMTECH CO., LTD.

Member of SAMSUNG

448-11, Seongnae3-Dong, Kangdong-Ku, Seoul, Korea 134-033

Tel +82-2-2225-6709 Fax +82-2-2225-6073

E-mail sales.ezon@samsung.com Homepage <http://www.scommtech.com/en>

* Photos and information in this products catalog would be subject to change without notice.