
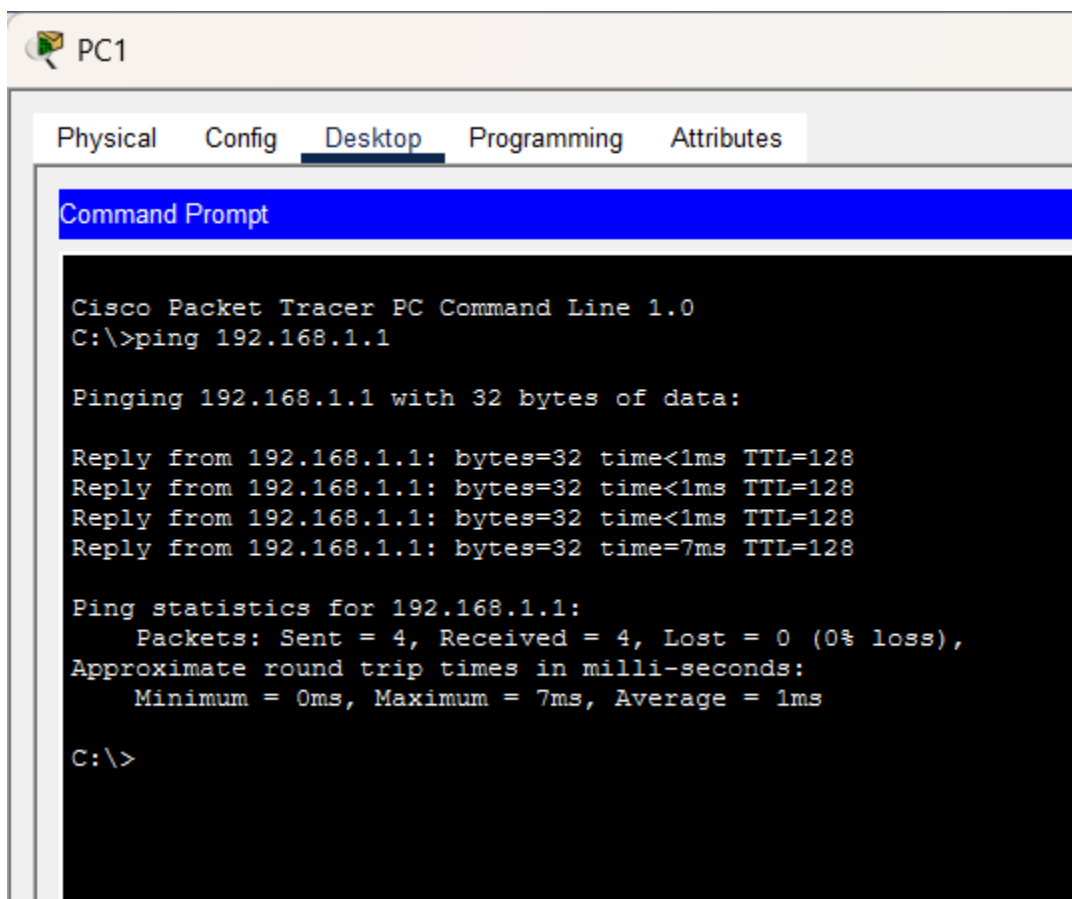



Cisco Packet Tracer

Assignment 3

1.

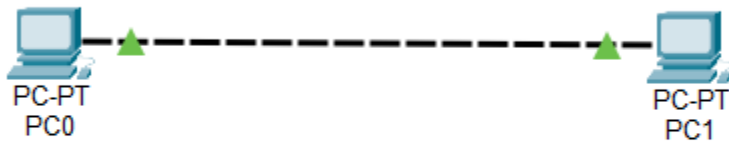

2.

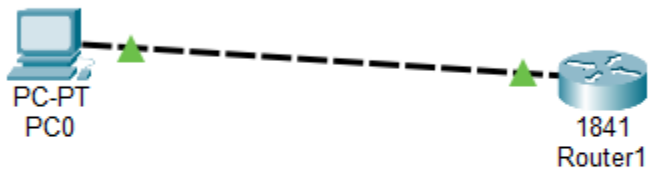

PC0

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 10.128.20.254


Pinging 10.128.20.254 with 32 bytes of data:

Reply from 10.128.20.254: bytes=32 time<1ms TTL=255
Reply from 10.128.20.254: bytes=32 time<1ms TTL=255
Reply from 10.128.20.254: bytes=32 time<1ms TTL=255
Reply from 10.128.20.254: bytes=32 time<1ms TTL=255

Ping statistics for 10.128.20.254:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

3.

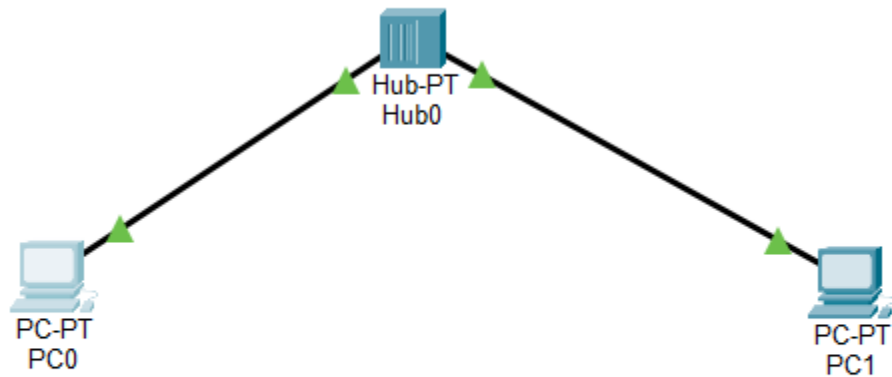

The screenshot shows a window titled "PC0" with a tabbed interface. The "Desktop" tab is selected, displaying a "Command Prompt" window. The command prompt shows the execution of a ping command to the IP address 192.168.1.2. The output indicates that four packets were sent and all were received successfully, with a 0% loss rate and a round trip time of 0ms.

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.2


Pinging 192.168.1.2 with 32 bytes of data:

Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>|
```

4.

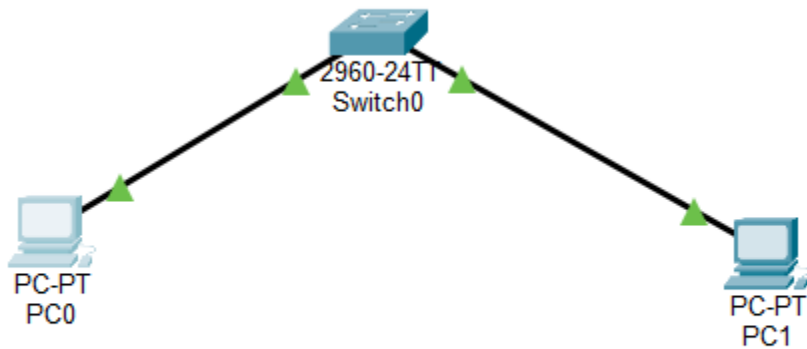

PC0

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping192.168.1.2
Invalid Command.

C:\>ping 192.168.1.2


Pinging 192.168.1.2 with 32 bytes of data:

Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>|
```

5.a

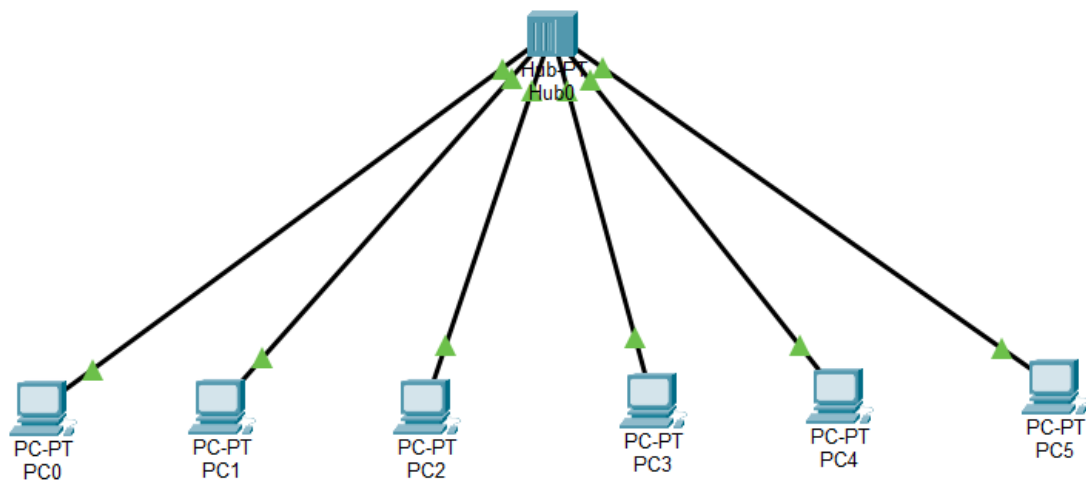

PC0

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.4


Pinging 192.168.1.4 with 32 bytes of data:

Reply from 192.168.1.4: bytes=32 time<1ms TTL=128
Reply from 192.168.1.4: bytes=32 time<1ms TTL=128
Reply from 192.168.1.4: bytes=32 time<1ms TTL=128
Reply from 192.168.1.4: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>|
```

5.b

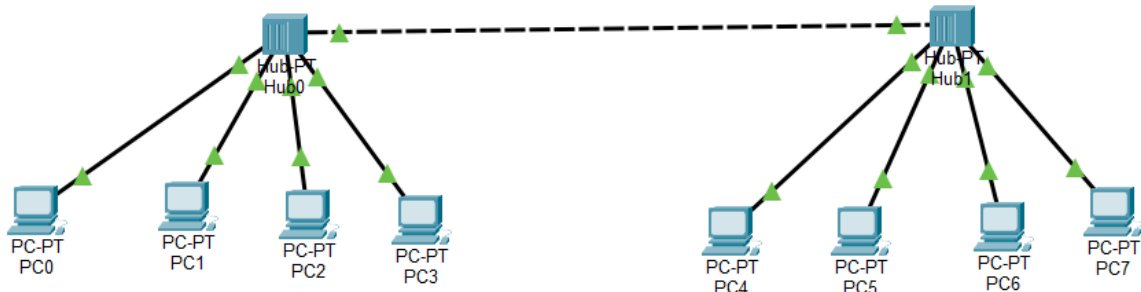

PC1

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.5


Pinging 192.168.1.5 with 32 bytes of data:

Reply from 192.168.1.5: bytes=32 time<1ms TTL=128
Reply from 192.168.1.5: bytes=32 time<1ms TTL=128
Reply from 192.168.1.5: bytes=32 time<1ms TTL=128
Reply from 192.168.1.5: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.5:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

6.

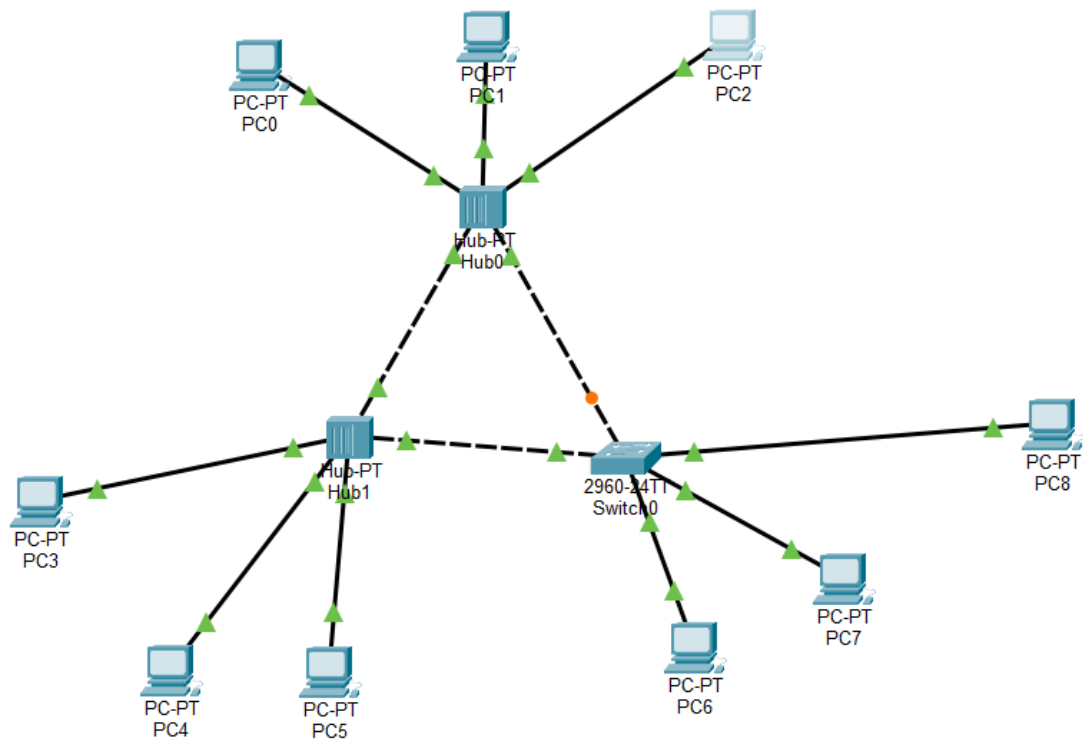

PC2

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.6


Pinging 192.168.1.6 with 32 bytes of data:

Reply from 192.168.1.6: bytes=32 time=1ms TTL=128
Reply from 192.168.1.6: bytes=32 time<1ms TTL=128
Reply from 192.168.1.6: bytes=32 time<1ms TTL=128
Reply from 192.168.1.6: bytes=32 time=2ms TTL=128

Ping statistics for 192.168.1.6:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 2ms, Average = 0ms

C:\>|
```

7.

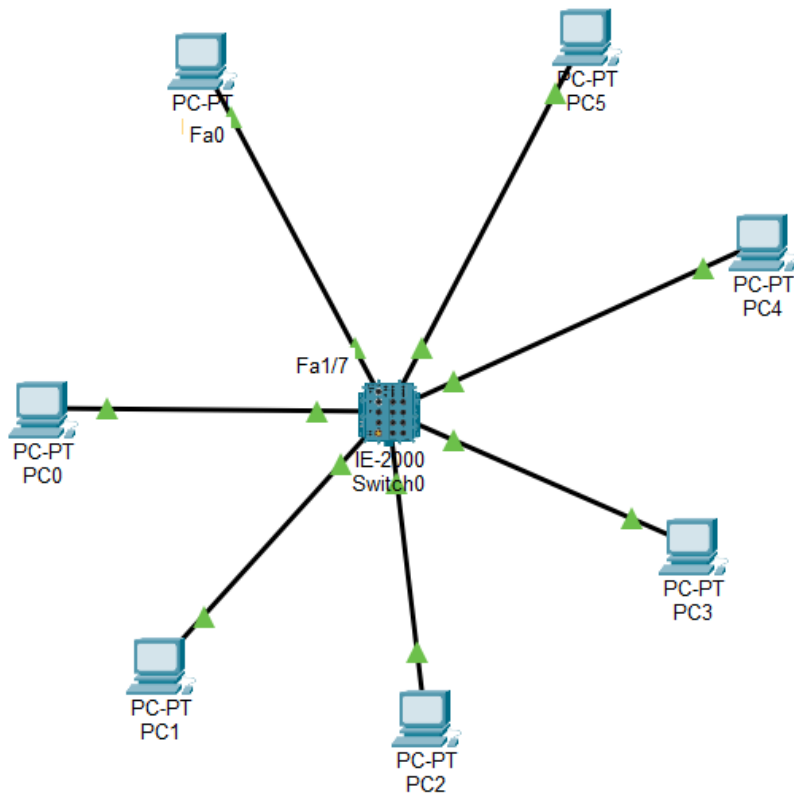

PC4

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.3


Pinging 192.168.1.3 with 32 bytes of data:

Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

8.

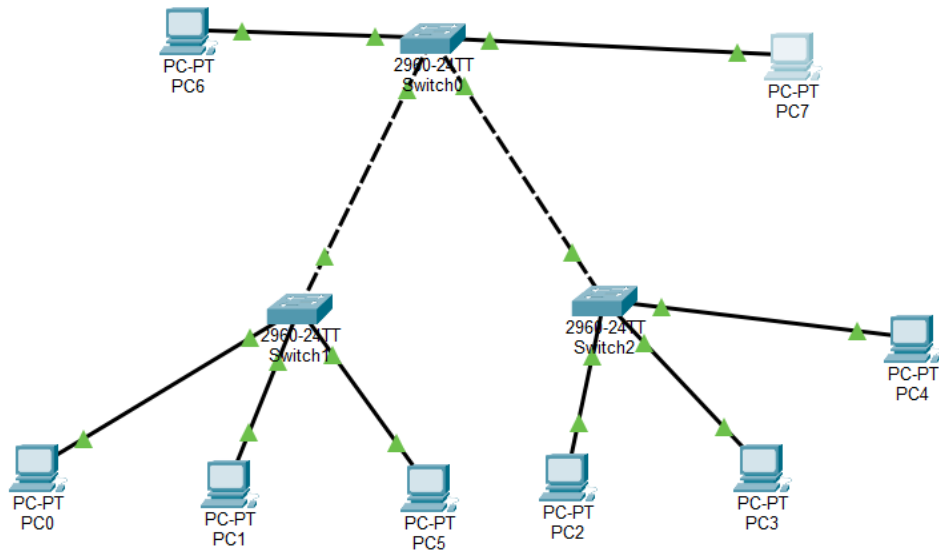

PC7

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.3


Pinging 192.168.1.3 with 32 bytes of data:

Request timed out.
Reply from 192.168.1.3: bytes=32 time=1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.3:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>
```

Assignment 4

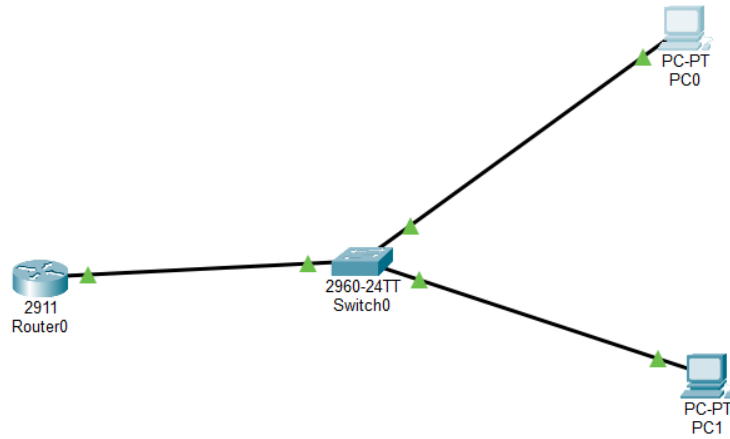

PC0

Physical Config Desktop Programming Attributes

IP Configuration X

Interface FastEthernet0

IP Configuration

☒ DHCP ☐ Static

IPv4 Address 192.168.10.2

Subnet Mask 255.255.255.0

Default Gateway 192.168.10.1

DNS Server 1.2.3.4

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address /

Link Local Address FE80::20A:F3FF:FE5E:1866

Default Gateway

DNS Server

802.1X

☐ Use 802.1X Security

Authentication MD5

Username

Password

Command Prompt

Cisco Packet Tracer PC Command Line 1.0

C:\>ping 192.168.10.3

Pinging 192.168.10.3 with 32 bytes of data:

Reply from 192.168.10.3: bytes=32 time<1ms TTL=128

Reply from 192.168.10.3: bytes=32 time<1ms TTL=128

Reply from 192.168.10.3: bytes=32 time<1ms TTL=128

Reply from 192.168.10.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.10.3:


Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),


Approximate round trip times in milli-seconds:

Minimum = 0ms, Maximum = 0ms, Average = 0ms


C:\>|


Assignment 5

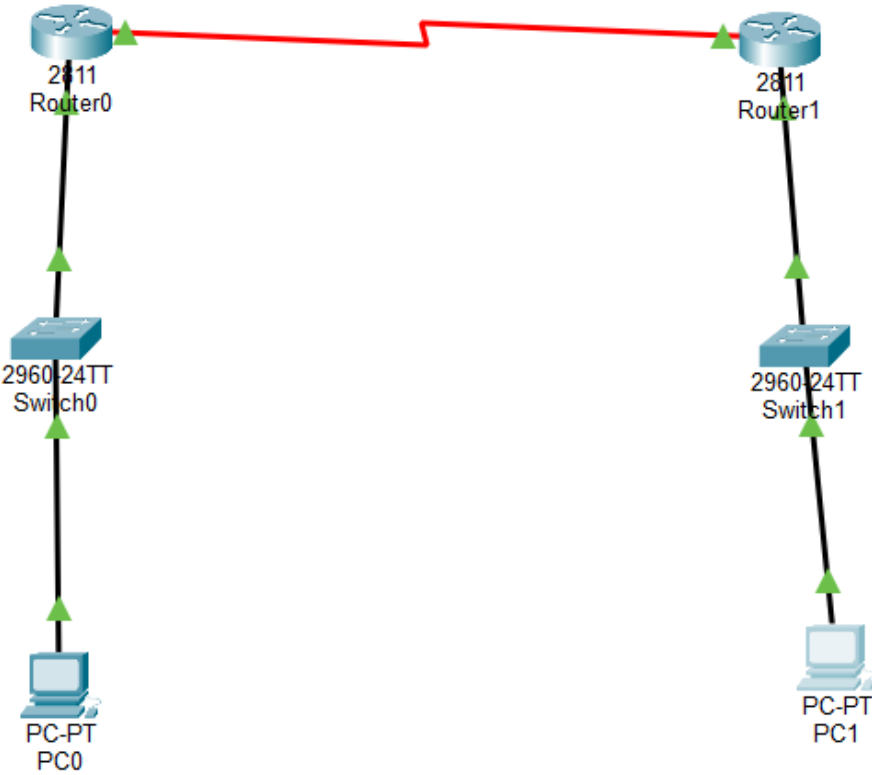

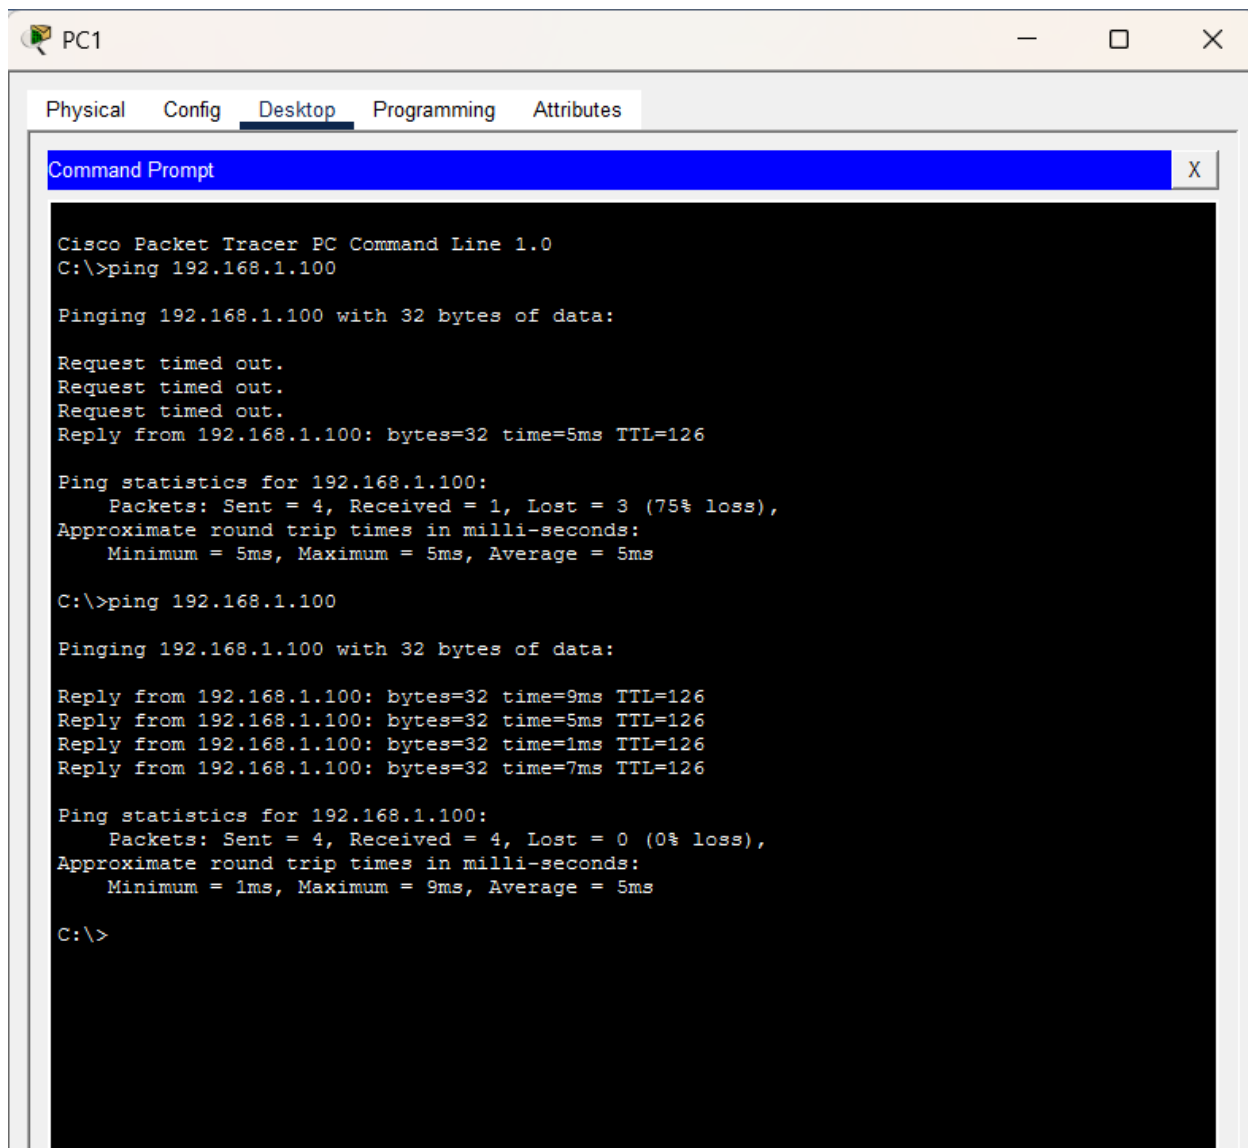


Assignment 6

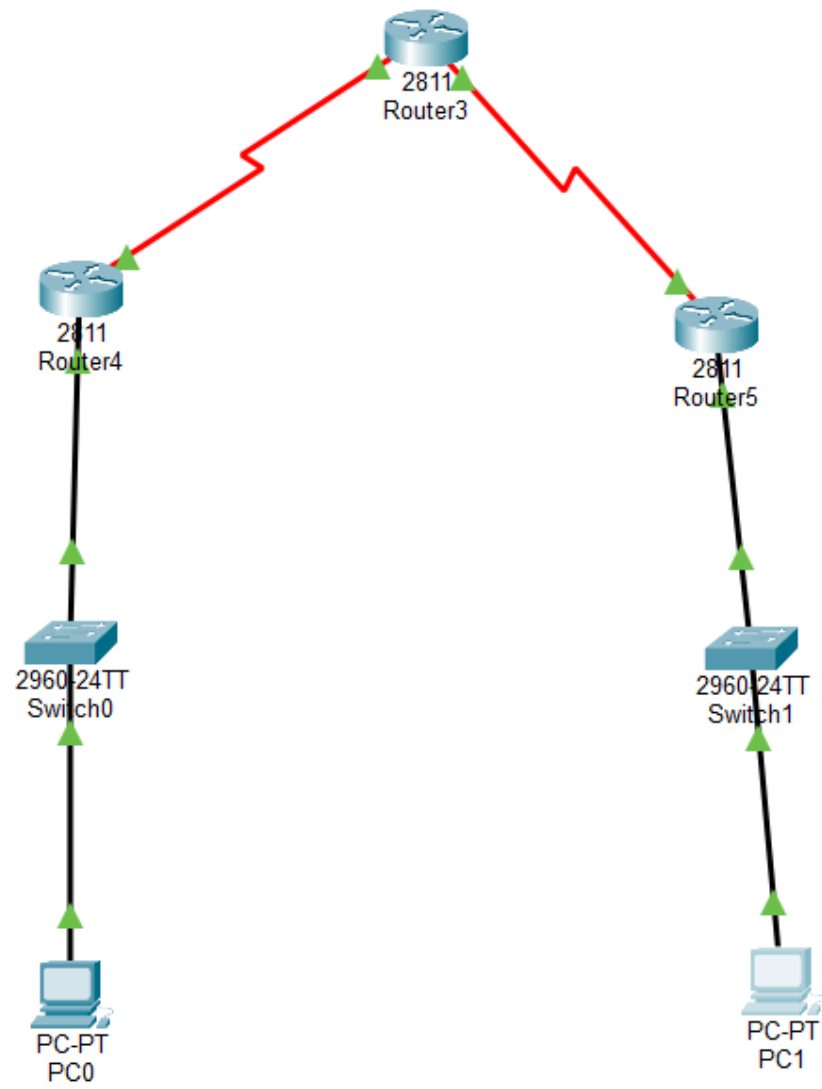

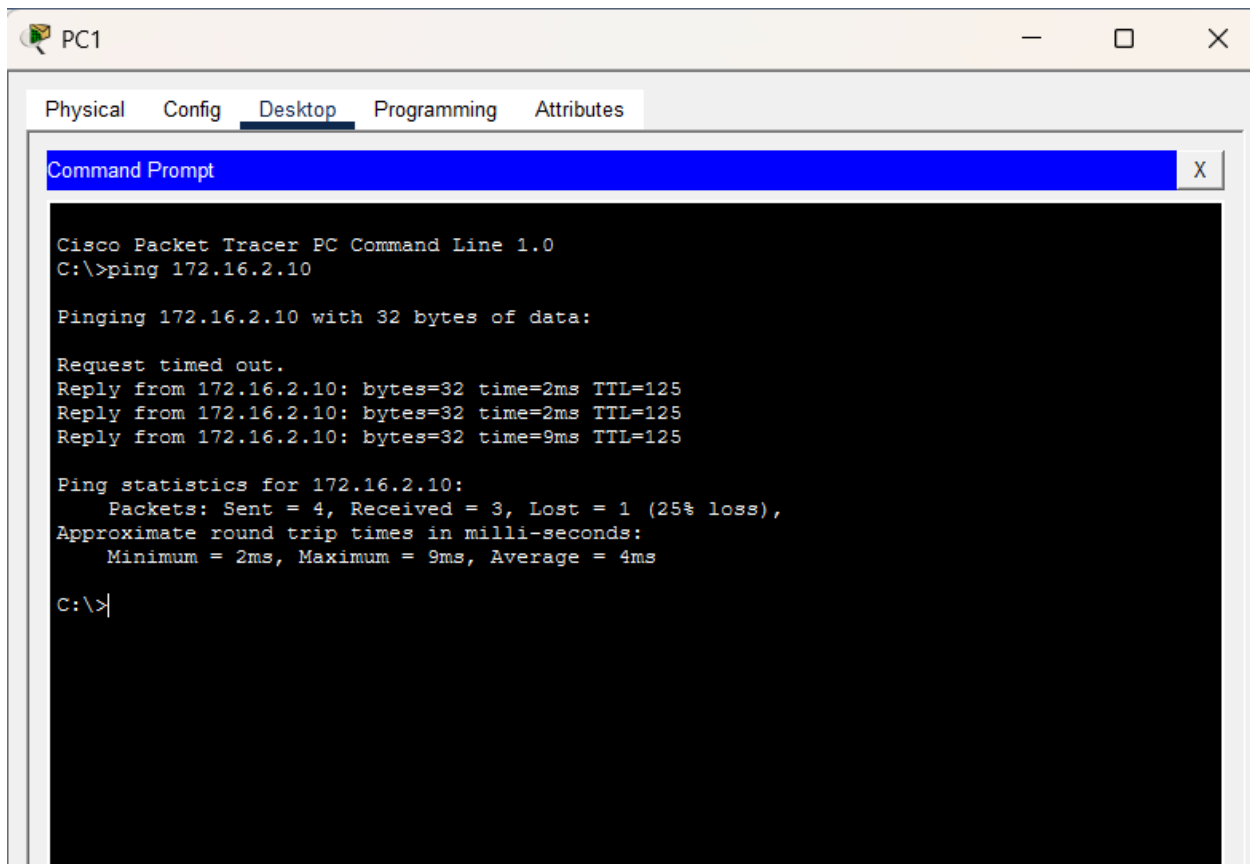

Assignment 7

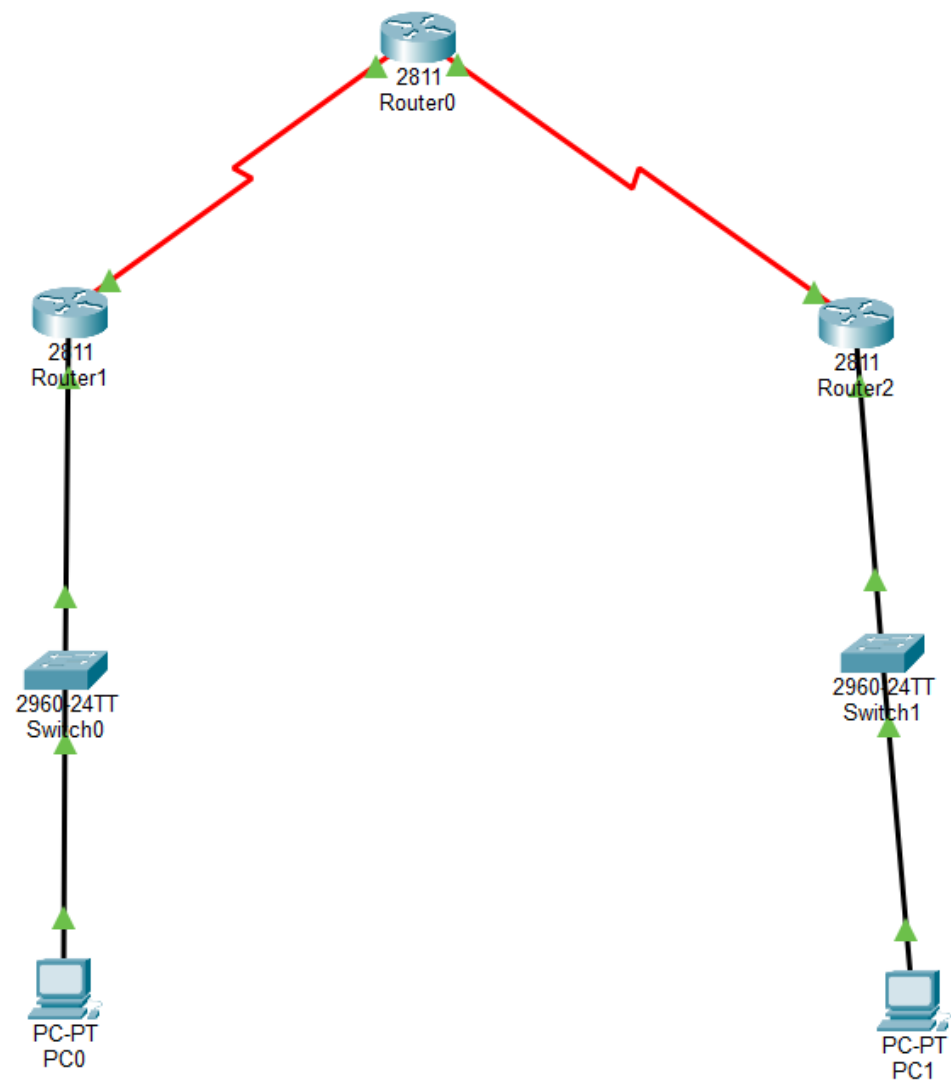

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 10.2.2.20

Pinging 10.2.2.20 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Reply from 10.2.2.20: bytes=32 time=2ms TTL=125

Ping statistics for 10.2.2.20:
    Packets: Sent = 4, Received = 1, Lost = 3 (75% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 2ms, Average = 2ms

C:\>ping 10.2.2.20


Pinging 10.2.2.20 with 32 bytes of data:

Reply from 10.2.2.20: bytes=32 time=2ms TTL=125
Reply from 10.2.2.20: bytes=32 time=2ms TTL=125
Reply from 10.2.2.20: bytes=32 time=2ms TTL=125
Reply from 10.2.2.20: bytes=32 time=2ms TTL=125

Ping statistics for 10.2.2.20:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 2ms, Average = 2ms

C:\>|
```

Assignment 8

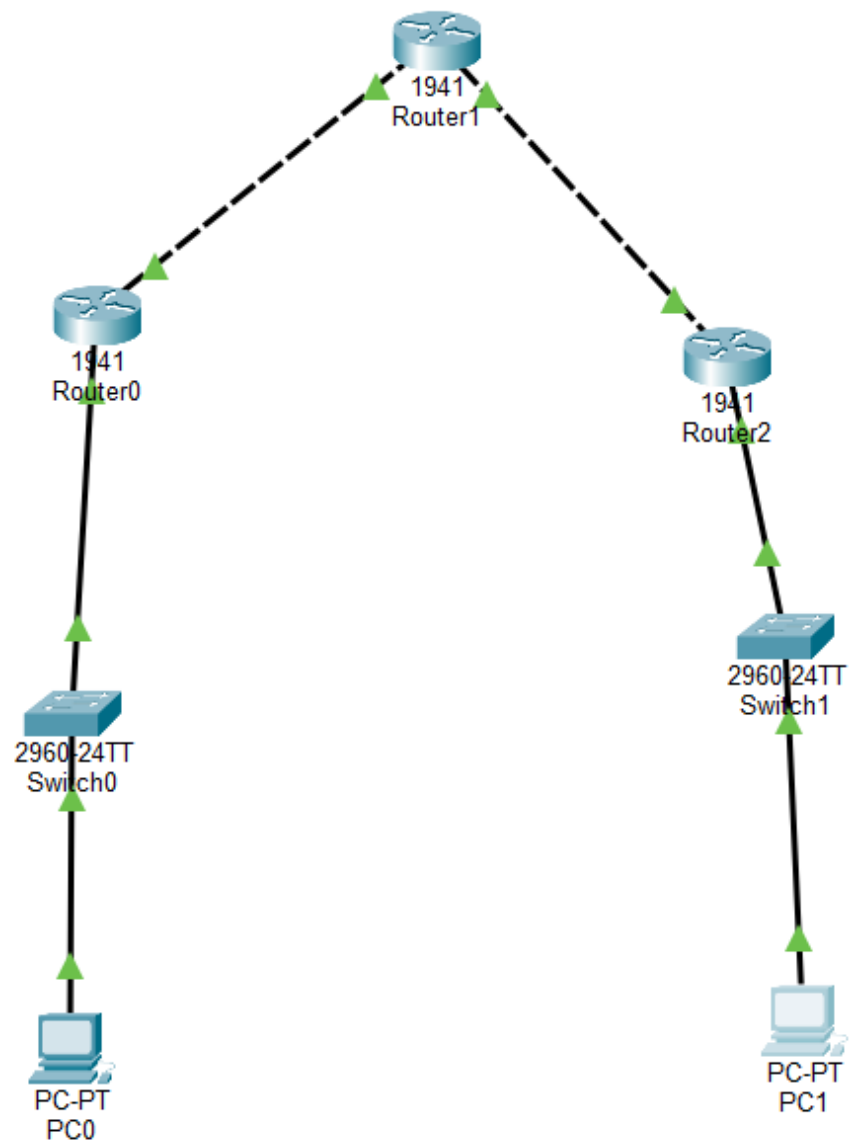



PC1

Physical Config Desktop Programming Attributes

Command Prompt

Cisco Packet Tracer PC Command Line 1.0

C:\>ping 192.168.1.10

Pinging 192.168.1.10 with 32 bytes of data:

Reply from 192.168.1.10: bytes=32 time<1ms TTL=125

Reply from 192.168.1.10: bytes=32 time<1ms TTL=125

Reply from 192.168.1.10: bytes=32 time<1ms TTL=125

Reply from 192.168.1.10: bytes=32 time=1ms TTL=125

Ping statistics for 192.168.1.10:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milli-seconds:

Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>