Model No: AI7INDSP

7-inch control panel for MDVR systems, featuring 18 buttons for easy configuration and operation. It allows drivers to control MDVR functions, view live and reversing video feeds, and access menus via RS232 connection. With built-in speakers, it supports SMS alerts, voice broadcasts, and intercom communication. Widely used in school bus systems, it offers a compact, powerful solution for video monitoring and control.

Features

- Control Panel
  - The AI7INDSP communicates with MDVR via RS232. Drivers can easily configure MDVR settings directly from the panel, similar to using a remote control.
- Live View
  - Supports menu navigation and video transmission in pass-through mode. Drivers can control recording, playback, and other MDVR functions.
- Reversing Live View
  - Includes an AV aviation-din port to connect a reversing camera for real-time viewing (not for recording). I/O sensor integration allows automatic camera switching.
- SMS and Voice Broadcast
  - Built-in dual speakers (16Ω, 2W) enable voice prompts and broadcast important messages directly to the driver.
- Intercom
  - Supports microphone connection for IP-based communication and hands-free calling through the MDVR system.

Specifications	
Model Name	AI0404PRO
Function	MDVR Control, Live View, Reversing Camera, SMS, Voice Broadcast, Intercom
Display Size	7 Inches
Resolution	800 x 480
Aspect Ratio	16:9
Panel Material	70% PC + 30% ABS Engineering Plastics
Button Material	Silicone
Built-in RFID Module	13.56 MHz RFID Card Module
Speakers	2 × 2W (16Ω) speakers
MDVR Interface	Black 10-PIN aviation-din male connector
Reversing Camera Interface	Yellow 4-PIN aviation-din connector
Microphone Interface	Standard MIC port
Sensor Port	Yellow hanging line, high-level effective
Buttons	Menu, Arrow Keys, Confirm, Exit, 0-9 Number Buttons
Installation Type	Tile, Bracket (Flat, Curved, Hanging)
Dimensions (mm)	185 × 128 × 34.9
Operating Voltage	12V
Operating Current	200mA
Power Consumption	2.4W

Specifications	
Operating Temperature	-40°C ~ +70°C
Operating Humidity	8% to 90%
Screen Type	LCD
Touch Type	4-wire resistive
Luminance	360 cd/m²
Contrast Ratio	500:1
Response Time (Tr/Td)	10/15 ms
Viewing Angles (L/R/U/D)	70/70/50/70 (typical)
Display Colors	262K / 16.7M (6bit + Dithering)
Screen Scale	16:9
Back-light Type	White LED
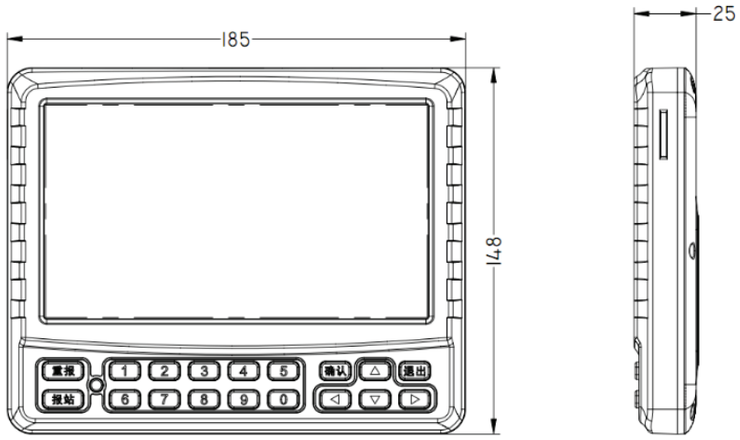
Product structure