

2007-AE

EE24BTECH11042- srujana

35) The lateral-directional characteristic equation for an airplane gave the following set of roots: $\lambda_1 = -0.6$, $\lambda_2 = -0.002$ $\lambda_{3,4} = -0.06 \pm j1.5$ where $f = \sqrt{-1}$. The damping ratio corresponding to the Dutch-roll mode will be

- a) 0.04 b) 0.66 c) 0.35 d) 0.18

36) An airplane is flying at an altitude of 10Km above the sea level. Outside air temperature and density at 10Km altitude are 223K and 0.413 Kg/m^3 respectively. The airspeed indicator of the airplane indicates a speed of 60 m/s . Density of air at sea level is 1.225 Kg/m^3 and value of the gas constant R is 288 J/Kg/K . The stagnation pressure (P_0) measured by the pitot tube mounted on the wing tip of the airplane will be of magnitude

- a) $3.5 \times 10^4 \text{ N/m}^2$ b) $2.0 \times 10^4 \text{ N/m}^2$ c) $2.87 \times 10^4 \text{ N/m}^2$ d) $0.6 \times 10^4 \text{ N/m}^2$

37) If the center of gravity of an airplane is moved forward towards the nose of the airplane, the C_{Lmax} (maximum value of the lift coefficient) value for which the airplane can be trimmed ($C_m = 0$) will

- a) decrease c) remains same
b) increase d) depend upon rudder deflection

38) If the contribution of only the horizontal tail of an airplane was considered for estimating $\frac{\partial C_m}{\partial \alpha}$, and if the tail moment arm l_1 was doubled, then how many times the original value would the new $\frac{\partial C_m}{\partial \alpha}$ become ?

- a) two times b) three times c) 1.414 times d) 1.732 times

39) If the vertical tail of an airplane is inverted and put below the horizontal tail, then the contribution to roll derivative $\frac{\partial C_l}{\partial \beta}$, will be


- a) negative c) Zero
b) positive d) imaginary

40) Let a system of linear equations be as follows:

$$\begin{aligned} x - y + 2z &= 0 \\ 2x + 3y - z &= 0 \\ 2x - 2y + 4z &= 0 \end{aligned}$$

The system of equations has

- a) No non-trivial solution c) An unique non-trivial solution
b) Infinite number of non-trivial solutions d) Two non trivial solutions
- 41) A turbulent boundary layer remains attached over a longer distance on the upper surface of an airfoil than does a laminar boundary layer, because
- the turbulent boundary layer is more energetic and hence can overcome the adverse pressure gradient better
 - the laminar boundary layer develops more skin friction and hence slows down more rapidly
 - turbulence causes the effective coefficient of viscosity to reduce, resulting in less loss of momentum in the boundary layer
 - the turbulent boundary is thicker, hence the velocity gradients in it are smaller, therefore viscous losses are less
- 42) The laminar boundary layer over a large flat plate held parallel to the freestream is 5 mm thick at a point 0.2 m downstream of the leading edge. The thickness of the boundary layer at a point 0.8 m downstream of the leading edge will be
- 20 mm
 - 10 mm
 - 5 mm
 - 2.5 mm
- 43) If the horizontal tail area is increased while the elevator to horizontal tail area ratio is kept same, then
- both longitudinal static stability and elevator control power will increase
 - only longitudinal static stability will increase
 - only elevator control power will increase
 - neither stability nor control power changes
- 44) A circular shaft is made-up two materials A and B. The inner core is made-up of material A with diameter d_A , torsion constant J_A , and shear modulus G_A . The outer sleeve is made-up of material B with diameter d_B , torsion constant J_B , and shear modulus G_B . The composite shaft is of length L and is subjected to pure torsion moment T . The torsional stiffness, $\frac{T}{\phi}$, where ϕ is the angle of twist, of this composite shaft is then

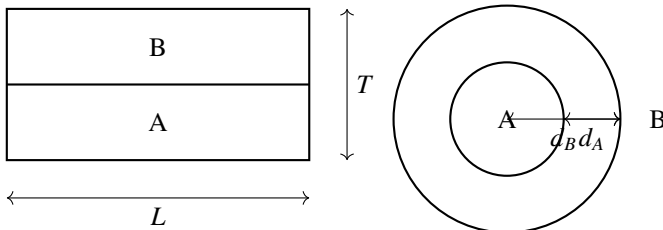

- $\frac{G_A J_A G_B J_B}{G_A J_A + G_B J_B} \frac{TL}{L}$
- $\frac{G_A J_A^L + G_B J_B^L}{(G_A + G_B)(J_A + J_B)}$
- $\frac{G_A J_B + G_B J_A}{L}$
- $\frac{G_A J_A G_B J_B}{G_A J_A + G_B J_B} \frac{TL}{L}$

- 45) Air enters through the eye of a centrifugal compressor with a stagnation temperature 300K and exists the compressor with a stagnation temperature 424K. If the isentropic efficiency of the compressor is 0.81 and the ratio of specific heats of the following gas (assumed as constant) is 1.4, then the pressure ratio across the compressor is

a) 2.75 b) 5.60 c) 65.00 d) 228.00

- 46) The boundary conditions for an Euler-Bernoulli column are given in column X and the critical buckling loads are given in column Y. Match the boundary condition of the column to its corresponding buckling load, P_σ is the critical buckling load, E is the Young's modulus of the column material, I is the sectional moment of area, and L is the length of the column.

X. Boundary condition	Y. Critical buckling load
X1. Pinned-pinned column	$Y1. P_\sigma = \frac{4\pi^2 EI}{L^2}$
X2. Fixed-free (cantilevered) column	$Y2. P_\sigma = \frac{2.046\pi^2 EI}{L^2}$
X3. Fixed-fixed column	$Y3. P_\sigma = \frac{\pi^2 EI}{4L^2}$
X4. Fixed-pinned column	$Y4. P_\sigma = \frac{\pi^2 EI}{L^2}$

- a) X1-Y4, X2-Y3, X3-Y1, X4-Y2
 b) X1-Y4, X2-Y2, X3-Y3, X4-Y1
 c) X1-Y4, X2-Y1, X3-Y2, X4-Y3
 d) X1-Y4, X2-Y3, X3-Y2, X4-Y1
- 47) For an impulse turbine with identical stages, the hot gas from the stator blades at the mean height at an absolute angle of 70 degrees with the axis of the turbine. If the absolute inlet blade angle with the axis of the turbine at the mean blade height for the rotor blades is 37 degrees, then the absolute exit blade angle with the axis of the turbine at the mean blade height of the rotor blade angle with the axis of the turbine at the mean blade height of the rotor blades is

a) 33 degrees b) 37 degrees c) 53 degrees d) 53.5 degrees

- 48) which of the following materials should be selected to design an axial flow turbine operating at high temperatures ?

a) Steel alloy c) Nickel alloy
 b) Titanium alloy d) Aluminum alloy

- 49) which one of the following statements is true?

a) The isentropic efficiency of a compressor is constant throughout the compressor
 b) Flow separation problems are more critical for the axial compressors than for the centrifugal compressors
 c) The pressure ratio of a centrifugal compressor approaches zero as the compressor mass flow rate approaches zero
 d) Centrifugal compressors are always designed with multiple stages

- 50) An athlete starts running with a speed V_B , subsequently, his speed decreased by an amount that is proportional to the distance that he has already covered. The distance covered will be
- a) Linear in time
 - b) Quadratic in time
 - c) Exponential in time
 - d) Logarithmic in time
- 51) The on-board rocket motor of a satellite of initial mass 2000 kg provides a specific impulse of 280 seconds, If this motor is fired to give a speed incremented of 500 m/s along the direction of motion, the mass of propellant consumed is:
- a) 685 kg
 - b) 333 kg
 - c) 1666 kg
 - d) 167 kg