

Modeling and Control of a Rotary Inverted Pendulum Using Various Methods, Comparative Assessment and Result Analysis

Md. Akhtaruzzaman and A. A. Shafie

Abstract— Inverted pendulum control is one of the fundamental but interesting problems in the field of control theory. This paper describes the steps to design various controllers for a rotary motion inverted pendulum which is operated by a rotary servo plant, SRV 02 Series. In this paper some classical and modern control techniques are analyzed to design the control systems. Firstly, the most popular Single Input Single Output (SISO) system, is applied including 2DOF Proportional-Integral-Derivative (PID) compensator design. Here the common Root Locus Method is described step by step to design the two compensators of PID controller. Designing the control system using 2DOF PID is quite challenging task for the rotary inverted pendulum because of its highly nonlinear and open-loop unstable characteristics. Secondly, the paper describes the two Modern Control techniques that include Full State Feedback (FSF) and Linear Quadratic Regulator (LQR). Here FSF and LQR control systems are tested both for the Upright and Swing-Up mode of the Pendulum. Finally, experimental and MATLAB based simulation results are described and compared based on the three control systems which are designed to control the Rotary Inverted Pendulum.

I. INTRODUCTION

TO verify a modern control theory the inverted pendulum control can be considered as a very good example in control engineering. It is a very good model for the attitude control of a space booster rocket and a satellite, an automatic aircraft landing system, aircraft stabilization in the turbulent air-flow, stabilization of a cabin in a ship etc. This model also can be an initial step in stabilizing androids. The inverted pendulum is highly nonlinear and open-loop unstable system that makes control more challenging. It is an intriguing subject from the control point of view due to its intrinsic nonlinearity. Common control approaches such as 2DOF PID controller, FSF control and LQR requires a good knowledge of the system and accurate tuning in order to obtain desired performances. However, an accurate mathematical model of the process is often extremely complex to describe using differential equations. Moreover, application of these control techniques to a humanoid platform, more than one stage system, may result a very

critical design of control parameters and stabilization difficulty.

PID controller is a common control loop feedback mechanism which is generally used in industrial control system. It depends on three separate parameters, Proportional, Integral and Derivative, values where the Proportional indicates the response of the current error, the Integral value determines the response based on the sum of the recent errors and the Derivative value determines the response based on the rate of the changing errors. Finally the weighted sum of the three parameters is used to control the process or plant. Because of the simple structure, it is not an easy task to tune the PID controller to achieve the expected overshoot, settling time, steady state error etc. of the system behavior. Based on this issue several PID control techniques such as I-PD control system, 2 DOF PID control system are introduced [1][3]. The number of closed-loop transfer functions determines the degree of freedom of a control system where the transfer functions can be adjusted independently.

The analysis and design of feedback control system are carried out using transfer functions along with various tools such as root-locus plots, Bode plots, Niquist plots, Nichol's chart etc. These are the techniques in classical control theory where the classical design methods suffer from certain limitations because; the transfer function model is applicable only for linear time-invariant system and generally restricted to SISO system [4]. The transfer function technique reveals only the system output for a given input and it does not provide any information of internal behavior of the system. These limitations of the classical method have led to the development of state variable approach, direct time domain approach, which provides a basis of modern control theory. It is a powerful technique for the analysis and design of linear and nonlinear, time-invariant or time-varying multi-input, multi-output (MIMO) system.

FSF control also known as Pole Placement, is a method which is employed in state feedback control theory to place the closed-loop poles of a plant in pre-determined locations in the s-plan. Placing poles is desirable because the location of the poles determines the eigenvalues of the system, which controls the characteristics of the system response. The FSF algorithm is actually an automated technique to find an appropriate state-feedback controller. Another alternative technique, LQR is also a powerful method to find a controller over the use of the FSF algorithm.

The rotary motion inverted pendulum, which is shown in Figure 1, is driven by a rotary servo motor system (SRV-02).

Manuscript received March 8, 2010. This work was supported by Ministry of Higher Education (MOHE), Malaysia, in funding the project through Fundamental Research Grant Scheme (FRGS).

Akhtaruzzaman is continuing his MSc. in the Department of Mechatronics Engineering, Kulliyah of Engineering, International Islamic University Malaysia, 53100 Kuala Lumpur, Malaysia. (phone: +60 196192814; e-mail: akhter900@yahoo.com).

A. A. Shafie is with the Department of Mechatronics Engineering, Kulliyah of Engineering, International Islamic University Malaysia, 53100 Kuala Lumpur, Malaysia. (phone: +60 192351007; e-mail: aashafie@gmail.com).

The servo motor drives an independent output gear whose angular position is measured by an encoder. The rotary pendulum arm is mounted on the output gear. The pendulum is attached to a hinge instrumented with another encoder at the end of the pendulum arm. This second encoder measures the angular position of the pendulum. The system is interfaced by means of a data acquisition card and driven by Matlab / Simulink based real time software. The pendulum has two equilibrium points, stable and unstable. At the stable equilibrium point the rod is vertical and pointing down while an unstable equilibrium at the point where the rod is vertical and pointing up. In this paper the three methods, 2DOF PID, FSF and LQR, are applied to design the controller of the rotary inverted pendulum.




Fig. 1. Rotary inverted pendulum model SRV-2.

II. MATHEMATICAL MODELING OF ROTARY MOTION INVERTED PENDULUM

Figure 2 (a) shows the rotational direction of rotary inverted pendulum arm. Figure 2 (b) depicts the pendulum as a lump mass at half of the pendulum length. The pendulum is displaced with an angle α while the direction of θ is in the x-direction of this illustration. So, mathematical model can be derived by examining the velocity of the pendulum center of mass.

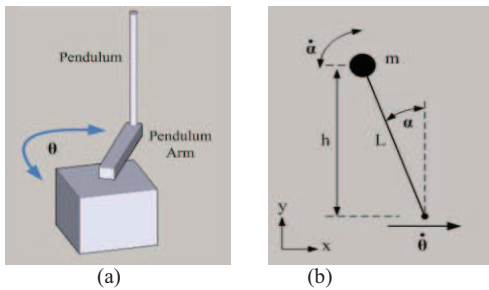


Fig. 2. Pendulum motion and lump mass.

The following assumptions are important in modeling of the system:

- 1) The system starts in a state of equilibrium meaning that the initial conditions are therefore assumed to be zero.
- 2) The pendulum does not move more than a few degrees away from the vertical to satisfy a linear model.
- 3) A small disturbance can be applied on the pendulum.

As the requirements of the design, the settling time, T_s , is to be less than 0.5 seconds, i.e. $T_s < 0.5\text{secs}$. The system overshoot value is to be at most 10%, i.e. $T_s = 10\%$. The

following table is the list of the terminology used in the derivations of system model.

TABLE I
SYMBOLS TO DESCRIBE EQUATION PARAMETERS

Symbol	Description
L	Length to Pendulum's Center of Mass
m	Mass of Pendulum Arm
r	Rotating Arm Length V_x Velocity
θ	Servo load gear angle (radians)
α	Pendulum Arm Deflection (radians)
h	Distance of Pendulum Center of mass from ground
J_{cm}	Pendulum Inertia about its center of mass
V_x	Velocity of Pendulum Center of mass in the x-direction
V_y	Velocity of Pendulum Center of mass in the y-direction

There are two components for the velocity of the Pendulum lumped mass. So,

$$V_{Pen. \text{ center of mass}} = -L \cos \alpha (\dot{\alpha}) \hat{x} - L \sin \alpha (\dot{\alpha}) \hat{y} \quad (1)$$

The pendulum arm also moves with the rotating arm at a rate of:

$$V_{arm} = r \dot{\theta} \quad (2)$$

The equations (1) and (2) can solve the x and y velocity components as,

$$V_x = r \dot{\theta} - L \cos \alpha (\dot{\alpha}) \quad (3)$$

$$V_y = -L \sin \alpha (\dot{\alpha}) \quad (4)$$

A. Deriving the system dynamic equations

Having the velocities of the pendulum, the system dynamic equations can be obtained using the Euler-Lagrange formulation.

1) *Potential Energy*: The only potential energy in the system is gravity. So,

$$V = P.E_{pendulum} = mgh = mgL \cos \alpha \quad (5)$$

2) *Kinetic Energy*: The Kinetic Energies in the system arise from the moving hub, the velocity of the point mass in the x-direction, the velocity of the point mass in the y-direction and the rotating pendulum about its center of mass.

$$T = K.E_{Hub} + K.E_{V_x} + K.E_{V_y} + K.E_{Pendulum} \quad (6)$$

Since the modeling of the pendulum as a point at its center of mass, the total kinetic energy of the pendulum is the kinetic energy of the point mass plus the kinetic energy of the pendulum rotating about its center of mass. The moment of inertia of a rod about its center of mass is,

$$J_{cm} = (1/12)MR^2 \quad (7)$$

Since L is defined as the half of the pendulum length, R in this case would be equal to $2L$. Therefore the moment of inertia of the pendulum about its center of mass is,

$$J_{cm} = (1/12)MR^2 = (1/12)M(2L)^2 = (1/3)ML^2 \quad (8)$$

So, the complete kinetic energy, T , can be written as,

$$T = (1/2)J_{eq} \dot{\theta}^2 + (1/2)m \left(r\dot{\theta} - L\cos\alpha(\dot{\alpha}) \right)^2 + (1/2)m(-L\sin\alpha(\dot{\alpha}))^2 + (1/2)J_{cm} \dot{\alpha}^2 \quad (9)$$

After expanding the equation and collecting terms, the Lagrangian can be formulated as,

$$L = T - V = (1/2)J_{eq} \dot{\theta}^2 + (2/3)mL^2\dot{\alpha}^2 - mLr \cos\alpha(\dot{\theta}) + (1/2)mr^2\dot{\theta}^2 - mgL\cos\alpha \quad (10)$$

The two generalized co-ordinates are θ and α . So, another two equations are,

$$\frac{\delta}{\delta t} \left(\frac{\delta L}{\delta \dot{\theta}} \right) - \frac{\delta L}{\delta \theta} = T_{output} - B_{eq} \dot{\theta} \quad (11)$$

$$\frac{\delta}{\delta t} \left(\frac{\delta L}{\delta \dot{\alpha}} \right) - \frac{\delta L}{\delta \alpha} = 0 \quad (12)$$

Solving the equations and linearizing about $\alpha = 0$, equations become,

$$(J_{eq} + mr^2)\ddot{\theta} - mLr\ddot{\alpha} = T_{output} - B_{eq}\dot{\theta} \quad (13)$$

$$\frac{4}{3}mL^2\ddot{\alpha} - mLr\ddot{\theta} - mgL\alpha = 0 \quad (14)$$

The output Torque of the motor which act on the load is defined as,

$$T_{output} = \frac{\eta_m \eta_g K_t K_g (V_m - K_g K_m \dot{\theta})}{R_m} \quad (15)$$

Finally, by combining the above equations, the following state-space representation of the complete system is obtained.

$$\begin{bmatrix} \dot{\theta} \\ \dot{\alpha} \\ \ddot{\theta} \\ \ddot{\alpha} \end{bmatrix} = \begin{bmatrix} 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \\ 0 & \frac{bd}{E} & \frac{-cG}{E} & 0 \\ 0 & \frac{qd}{E} & \frac{-bG}{E} & 0 \end{bmatrix} \begin{bmatrix} \theta \\ \alpha \\ \dot{\theta} \\ \dot{\alpha} \end{bmatrix} + \begin{bmatrix} 0 \\ 0 \\ c \frac{\eta_m \eta_g K_t K_g}{R_m E} \\ b \frac{\eta_m \eta_g K_t K_g}{R_m E} \end{bmatrix} V_m \quad (16)$$

Here, $a = J_{eq} + mr^2$, $b = mLr$, $c = 4/3mL^2$, $d = mgL$, $E = ac - b^2$, $G = \frac{\eta_m \eta_g K_t K_m K_g^2 - B_{eq} R_m}{R_m}$. The following table shows the typical configuration of the system.

TABLE II
TYPICAL CONFIGURATION OF THE SYSTEM

Symbol	Description	Value
K_t	Motor Torque Constant	0.00767
K_m	Back EMF Constant	0.0767
R_m	Armature Resistance	2.6
K_g	SRV02 system gear ratio (motor->load)	14 (14x1)
η_m	Motor efficiency	0.69
η_g	Gearbox efficiency	0.9
B_{eq}	Equivalent viscous damping coefficient	1.5 e-3
J_{eq}	Equivalent moment of inertia at the load	9.31 e-4

Based on the typical configuration of the SRV02 & the Pendulum system, the above state space representation of the system is,

$$\begin{bmatrix} \dot{\theta} \\ \dot{\alpha} \\ \ddot{\theta} \\ \ddot{\alpha} \end{bmatrix} = \begin{bmatrix} 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \\ 0 & 39.32 & -14.52 & 0 \\ 0 & 81.78 & -13.98 & 0 \end{bmatrix} \begin{bmatrix} \theta \\ \alpha \\ \dot{\theta} \\ \dot{\alpha} \end{bmatrix} + \begin{bmatrix} 0 \\ 0 \\ 25.54 \\ 24.59 \end{bmatrix} V_m \quad (17)$$

$$Y = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \end{bmatrix} \begin{bmatrix} \theta \\ \alpha \end{bmatrix} + \begin{bmatrix} 0 \\ 0 \end{bmatrix} V_m \quad (18)$$

III. CONTROLLER DESIGN

A. Design of a 2DOF PID controller

Based on the above state space equation it is possible to derive the following two transfer functions.

$$\frac{\theta_s}{V_m} = \frac{25.54 s^2 - 4.537e-014 s - 1122}{s^4 + 14.52 s^3 - 81.78 s^2 - 638 s} \quad (19)$$

$$\frac{\alpha_s}{V_m} = \frac{25.54 s^2 - 4.537e-014 s - 1122}{s^4 + 14.52 s^3 - 81.78 s^2 - 638 s} \quad (20)$$

From these two transfer functions it is easy to derive another new transfer function which describes the behavior of α depending on the behavior of θ .

$$\frac{\alpha_s}{\theta_s} = \frac{24.59 s + 0.00231}{25.54 s^2 - 4.537e-014 s - 1122} \quad (21)$$

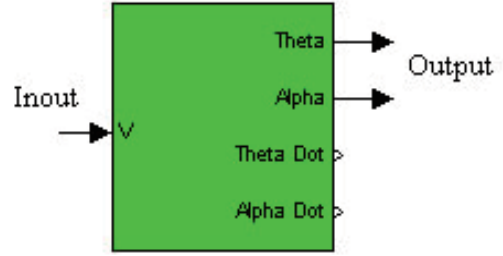


Fig. 3. MatLab Plant model of SRV 02 series.

Figure 3 shows the rotary inverted pendulum plant model where the pendulum arm position θ , is regulated by the input voltage V . The main target is to maintain pendulum angle α , as zero so that the inverted pendulum remains stable. Here the output θ has the responsibility to do this job. So it is necessary to design two PID compensators where one will maintain the speed and position of θ while the other controller will function based on the feedback of α . The overall controller block diagram becomes as follows where $G(\theta)$ and $G(\alpha)$ indicates the plant model of θ and α output while $C(\theta)$ and $C(\alpha)$ are the two PID compensators respectively.

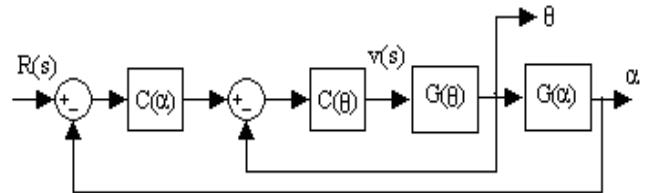


Fig. 4. 2DOF PID controller block diagram.

$$S^4 + 21S^3 + 340S^2 + 2700S + 10000 = 0 \quad (28)$$

The controller matrix gain can be calculated using the following MATLAB code,

```
A = [0 0 1 0; 0 0 0 1; 0 39.32 -14.52 0; 0 81.78 -13.98 0];
B = [0; 0; 25.54; 24.59];
a = [1 21 340 2700 10000];
P = roots(a);
K = ACKER(A, B, P);
```

So the gain matrix becomes,

$$K = (-8.9144 \quad 26.4116 \quad -2.9755 \quad 3.3539) \quad (29)$$

Using this K and the control law $u = -Kx$, the system is stabilized around the linearized point (pendulum upright). The state feedback optimal controller is only effective when the pendulum is near the upright position. In the plant model of the rotary inverted pendulum, the output theta (θ) is regulated by the input voltage (V). Here theta has the responsibility to keep the inverted pendulum vertically upright where alpha (α) will be zero. Figure 10 shows the controller block diagram to control the pendulum from the upright position.

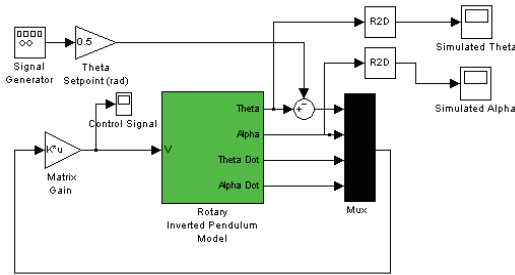


Fig. 10. Controller Block Diagram (Upright mode).

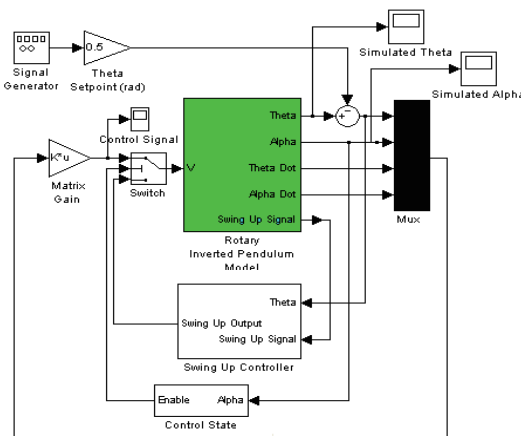


Fig. 11. Controller Block Diagram (swing-up mode).

Figure 11 shows the block diagram of the controller for the swing up mode. The pendulum starts from down words position and whenever it comes to the upright mode the full state feedback controller will maintain the pendulum in that position and make it stable.




Fig. 12. Step response of alpha in FSF controller.

C. Controller design using LQR technique

Linear Quadratic Regulator (LQR) is design using the linearized system. In a LQR design process, the gain matrix K, for a linear state feedback control law $u = -Kx$, is found by minimizing a quadratic cost function of the form as,

$$j = \int_0^\infty x(t)^T Q x(t) + u(t)^T R u(t) dt \quad (30)$$

Here Q and R are weighting parameters that penalize certain states or control inputs. In the design the weighting parameters of the optimal state feedback controller are chosen as,

$$Q = \begin{pmatrix} 6 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 \end{pmatrix} \quad (31)$$

$$R = 1 \quad (32)$$

In this design, the controller gain matrix, K, of the linearized system is calculated using MATLAB function. Basically this method is another powerful technique to calculate the gain matrix which is applied in the same model using in FSF controller design.

$$K = (-2.4495 \quad 27.5843 \quad -2.5505 \quad 3.9200) \quad (33)$$

Here the selected diagonal matrix, Q is chosen where the values of q_{11} , q_{22} , q_{33} and q_{44} are 6, 1, 1 and 0 respectively. The diagonal values are selected based on iterative method. It is found that the diagonal values for q_{11} and q_{22} are more sensitive than others. Output performances are tested based on four different values of the matrix Q. The test cases are as follows,

$$Q_1 = \begin{pmatrix} 6 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 \end{pmatrix} \quad Q_2 = \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{pmatrix}$$

$$Q_3 = \begin{pmatrix} 6 & 0 & 0 & 0 \\ 0 & 10 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 \end{pmatrix} \quad Q_4 = \begin{pmatrix} 5 & 0 & 0 & 0 \\ 0 & 20 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \end{pmatrix}$$

Figure 13(a) and 13(b) show the simulated output of theta and alpha based on the Q_1 matrix where diagonal values are 6, 1, 1 and 0 (test 1). From the results of other test cases, it is clearly identified that the settling time of theta for test Q_1 is less. Though the alpha overshoot and settling time for test Q_2 is smaller to test Q_1 , still the performance of the test Q_1 is better than other because of the settling time. In practical case the test Q_1 result also shows the better performance

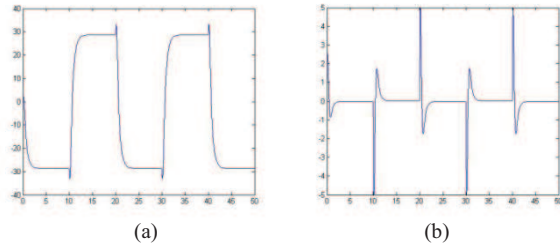


Fig. 13. Unit step response of (a) theta and (b) alpha for LQR controller

IV. COMPARATIVE ASSESSMENT AND ANALYSIS OF THE RESULTS

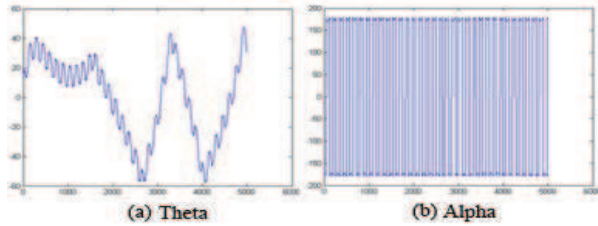


Fig. 14. Experimental result of 2DOF PID controller

Figure 14 shows the experimental result of theta and alpha while 2DOF PID controller tries to maintain the system stability. In the practical case the controller is capable to maintain the pendulum vertically up but it is not robust. The other two controllers (FSF and LQR) can be considered as robust. For both of the controllers, FSF and LQR, comparative simulated results of theta and alpha are shown in the figure 15 (a) and 15 (b) respectively.

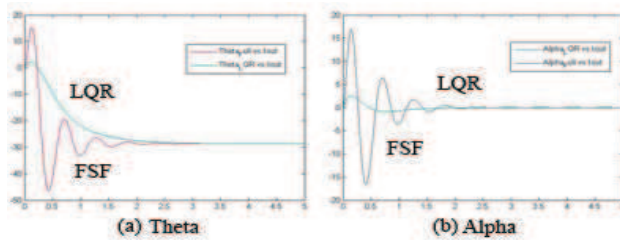


Fig. 15. Comparative result of theta for both FSF and LQR controller

From the figure 15 it is clearly seen that for both of the outputs, theta and alpha, LQR controller shows the better result where rising time, settling time, overshoot and steady state error are more acceptable than FSF controller. Figure 16 shows the experimental result of LQR controller.

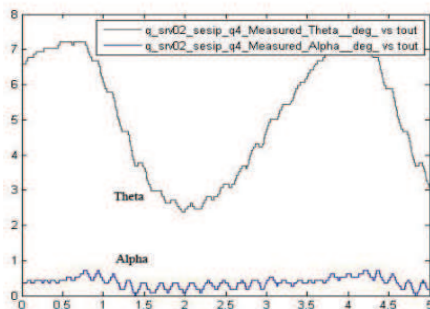


Fig. 16. Experimental result of LQR controller

Based on the unit step response of alpha for all the three

controllers, 2DOF PID, FSF and LQR, a comparison table (Table III) can be drawn to represent the characteristics of output through which a better controller can be identified.

TABLE III
COMPARISON OF UNIT STEP RESPONSE FOR PENDULUM ANGLE, ALPHA.

	Rising time	Settling time	Overshoot range	Steady-state error
2DOF PID	0.1	0.23	0.15 to -0.13	0.02
FSF	0.16	1.24	16.8 to -16.6	-0.004
LQR	0.14	0.39	2.5 to 0.86	-0.0003

V. CONCLUSION

Based on the result, shown in Table III, the classical control method, 2DOF PID, is capable to control the nonlinear system especially the rotary inverted pendulum. The simulated unit response characteristics of 2DOF PID controller are satisfactory but in practical it is not robust. The performance of 2DOF PID can be improved by tuning the controller parameters. Simulation and experimental studies determine the efficiency, reliability and accuracy of other two controllers, FSF and LQR. The controllers not only meet the design requirements but also are robust to the parameter variations. The LQR controller is more robust and reliable than the FSF controller in successfully swinging the pendulum to the upright position. As the data indicates, the LQR controller is also faster than the FSF controller. Overall, it is seen that the LQR controller is more convenient to swing up the pendulum to its upright mode and maintain stability on the unstable equilibrium point. From the experimental results, however, that both controllers (FSF and LQR) can be effective in maintaining the rotary inverted pendulum stable.

ACKNOWLEDGMENT

The authors will like to express their appreciation to Ministry of Higher Education (MOHE), Malaysia, in funding the project through Fundamental Research Grant Scheme (FRGS).

REFERENCES

- [1] Masanori Yukitomo, Takashi Shigemasa, Yasushi Baba, Fumia Kojima, "A Two Degrees of Freedom PID Control System, its Features and Applications", 2004 5th Asian Control Conference.
- [2] Purtojo, R. Akmeliawati and Wahyudi, "Two-parameter Compensator Design for Point-to-point (PTP) Positioning System Using Algebraic Method", The Second International Conference on Control, Instrumentation and Mechatronic Engineering (CIM09), Malacca, Malaysia, June 2-3, 2009.
- [3] Mitsuhiro Araki and Hidefumi Taguchi, "Two-Degree-of-Freedom PID Controllers", International Journal of Control, Automation, and Systems Vol. 1, No. 4, December 2003.
- [4] M Gopal, Digital Control and State Variable methods Conventional and Neural-Fuzzy Control System, 2nd edition, International Edition 2004, Mc Graw Hill, ISBN 0-07-048302-7, Printed in Singapore.
- [5] Md. Akhtaruzzaman, Dr. Rini Akmeliawati and Teh Wai Yee. "Modeling and Control of a Multi degree of Freedom Flexible Joint Manipulator". 2009 Second International Conference on Computer and Electrical Engineering (ICCEE '09), DUBAI, UAE, 28 – 30 Dec. 2009. p. 249 – 254.

