




TIGER CLAW™ SURFACE MOUNT SOCKET

(2.54 mm) .100" PITCH • A-SSM SERIES

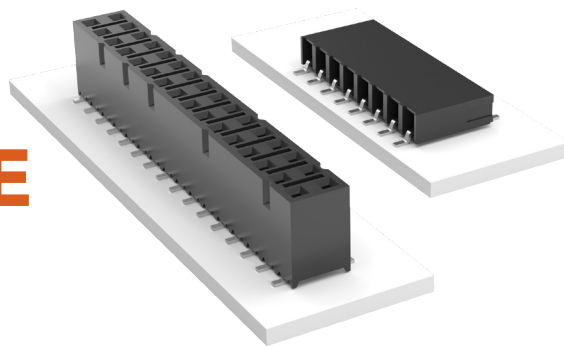

A-SSM

Mates:

A-TSW, A-MTSW,
A-TSS, A-ZSS, A-DW,
A-ZW, A-TSM, A-HMTSW,
A-HTSW, A-HTSS, A-MTLW



SPECIFICATIONS

Insulator Material:

Black Liquid Crystal Polymer

Contact Material:

Phosphor Bronze

Plating:

Au or Sn over

50 μ " (1.27 μ m) Ni

Current Rating (A-SSM/A-TSW):

5.2 A per pin

(2 pins powered)

Current Rating (A-SSM/A-TSM):

5.6 A per pin

(2 pins powered)

Voltage Rating:

405 VAC / 573 VDC

Operating Temp Range:

-55 °C to +125 °C with Gold

-55 °C to +105 °C with Tin

Insertion Depth:

-SV/-DV = (4.34 mm) .171" to

(7.24 mm) .285" or pass-through

from top; (5.56 mm) .219"

plus board thickness minimum

from bottom;

-SH/-DH = (4.34 mm) .171" to

(6.35 mm) .250"

Normal Force:

125 grams (1.21 N) average

PROCESSING

Lead-Free Solderable:

Yes

-DH Coplanarity:

Less than 28 positions

(0.15 mm) .006" max*

More than 27 positions

(0.20 mm) .008" max*

-SH, -SV, -DV Coplanarity:

(0.15 mm) .006" max*

*(.004" stencil solution

may be available; contact

ipg@samtec.com)

A-SSM	1	NO. PINS PER ROW	PLATING OPTION	ROW OPTION	OTHER OPTION
-------	---	------------------	----------------	------------	--------------

02 thru 36

(-SV, -SH, -DH)

02 thru 40

(-DV)

-L

= 10 μ " (0.25 μ m)

Gold on contact,
Matte Tin on tail

-SV

= Single Row
Vertical Pin

-DV

= Double Row
Vertical Pin

-SH

= Single Row
Horizontal Pin

-DH

= Double Row
Horizontal Pin

-A

= Alignment Pin
(-DV only)
(4 positions min.)

-BE

= Bottom Entry
(-DV & -SV only)

-P












= Plastic Pick & Place Pad
(-DV & -SV only)
(6 positions min.;
Contact Samtec
on availability of
other positions)

-K

= (6.50 mm) .256" DIA
Polyimide film
Pick & Place Pad
(-DV & -SV only)
(2 positions min.)

-TR

= Tape & Reel
(29 positions max.)



-DV



Note:

Some lengths, styles and
options are non-standard,
non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

samtec.com/Automotive

A-225 (Rev 16MAY25)

Samtec shall only comply with IATF-16949 on products it certifies as Automotive Custom Design "ACD" or on those designated with "A-" Samtec part # prefix.
"A-" products are designed to Samtec's specifications not customers' specifications. Contact autosalesgroup@samtec.com with questions.