AA 274
Principles of Robotic Autonomy

The Robot Operating System (ROS)

Stanford University

Autonomous Systems Lab

ROS – Robot Operating System

2007-Today

- Stanford AI Robot (STAIR)
- Willow Garage founded by Scott Hassan (eGroups, Google, Stanford Digital Libraries)
- Willow awards 11 $400k PR2 robots to Universities
- OSRF (Open Source Robotics Foundation) created to maintain ROS and Gazebo
- ROS is everywhere!

ROS Integrates Existing Projects

- OpenCV (computer vision)
- Stage, Gazebo (simulation)
- OpenSLAM (navigation)
- Orocos KDL (arm navigation)
- Many ROS “wrappers” to existing software

Writing Software for Robotics

- Robotics requires very complex software
- **Modularity**: a powerful way to handle that complexity
- **Pub/Sub**: a design pattern that enables modularity

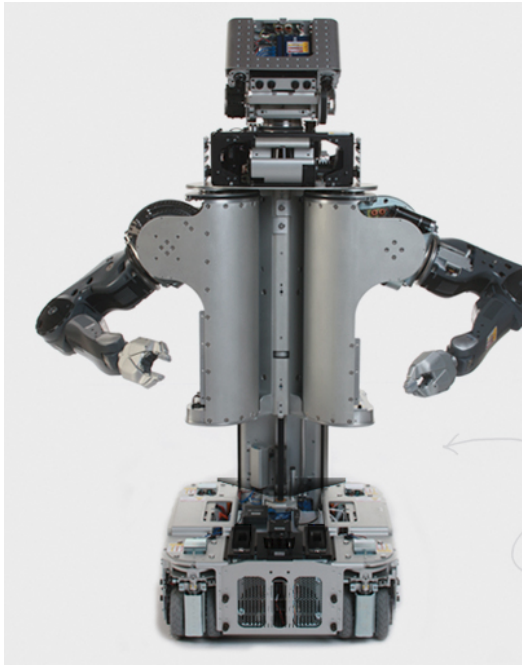

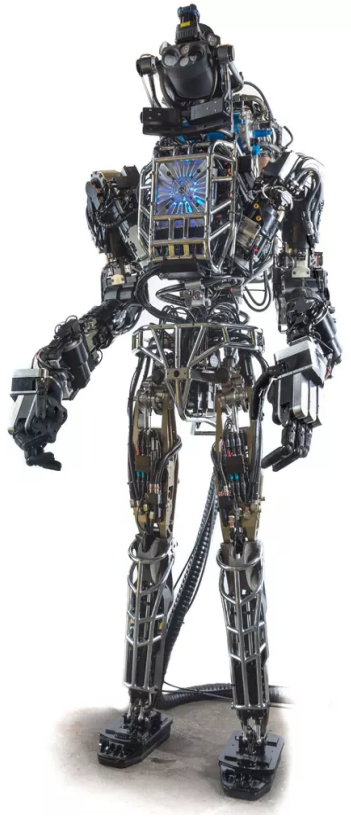

Modularity

Sensors and actuators are wrapped in self-contained, reusable software containers called “nodes”

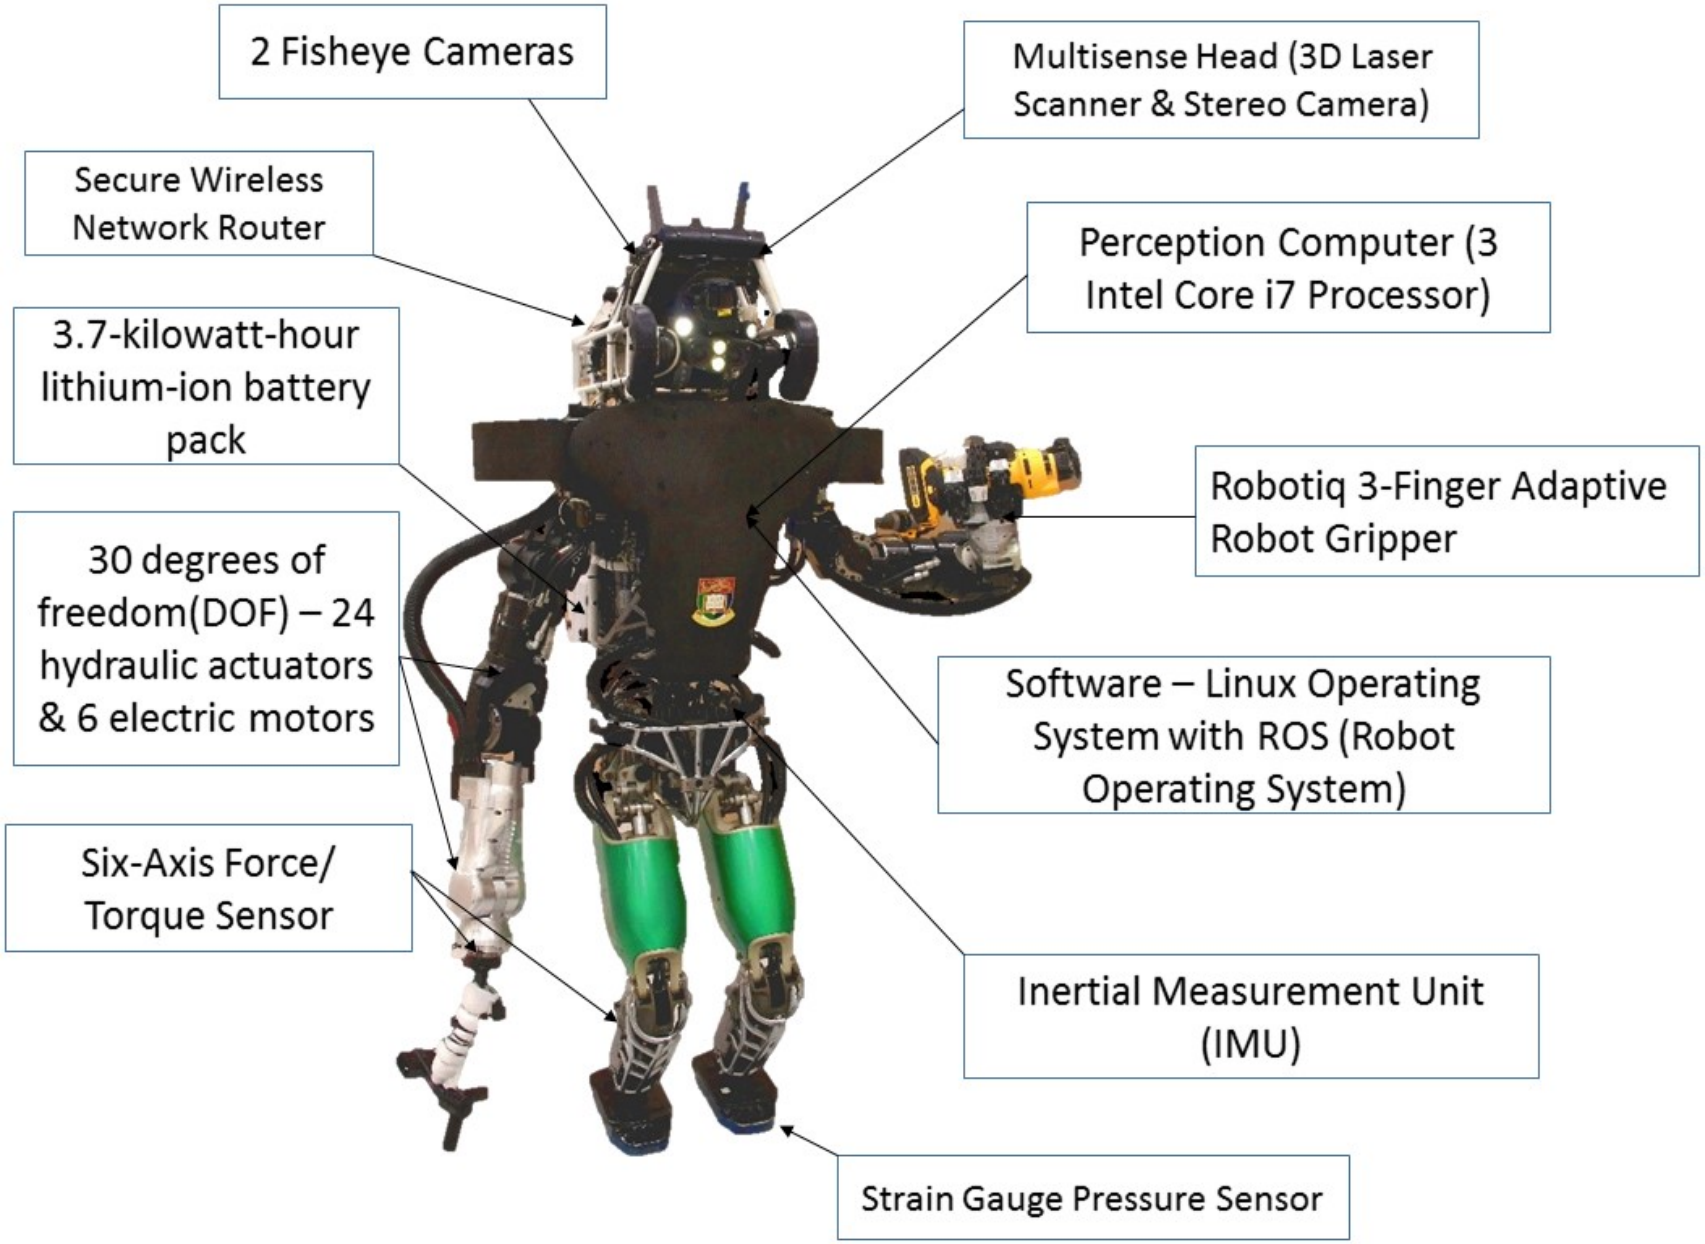

Modularity

Higher level operations also become nodes in the ROS computational architecture

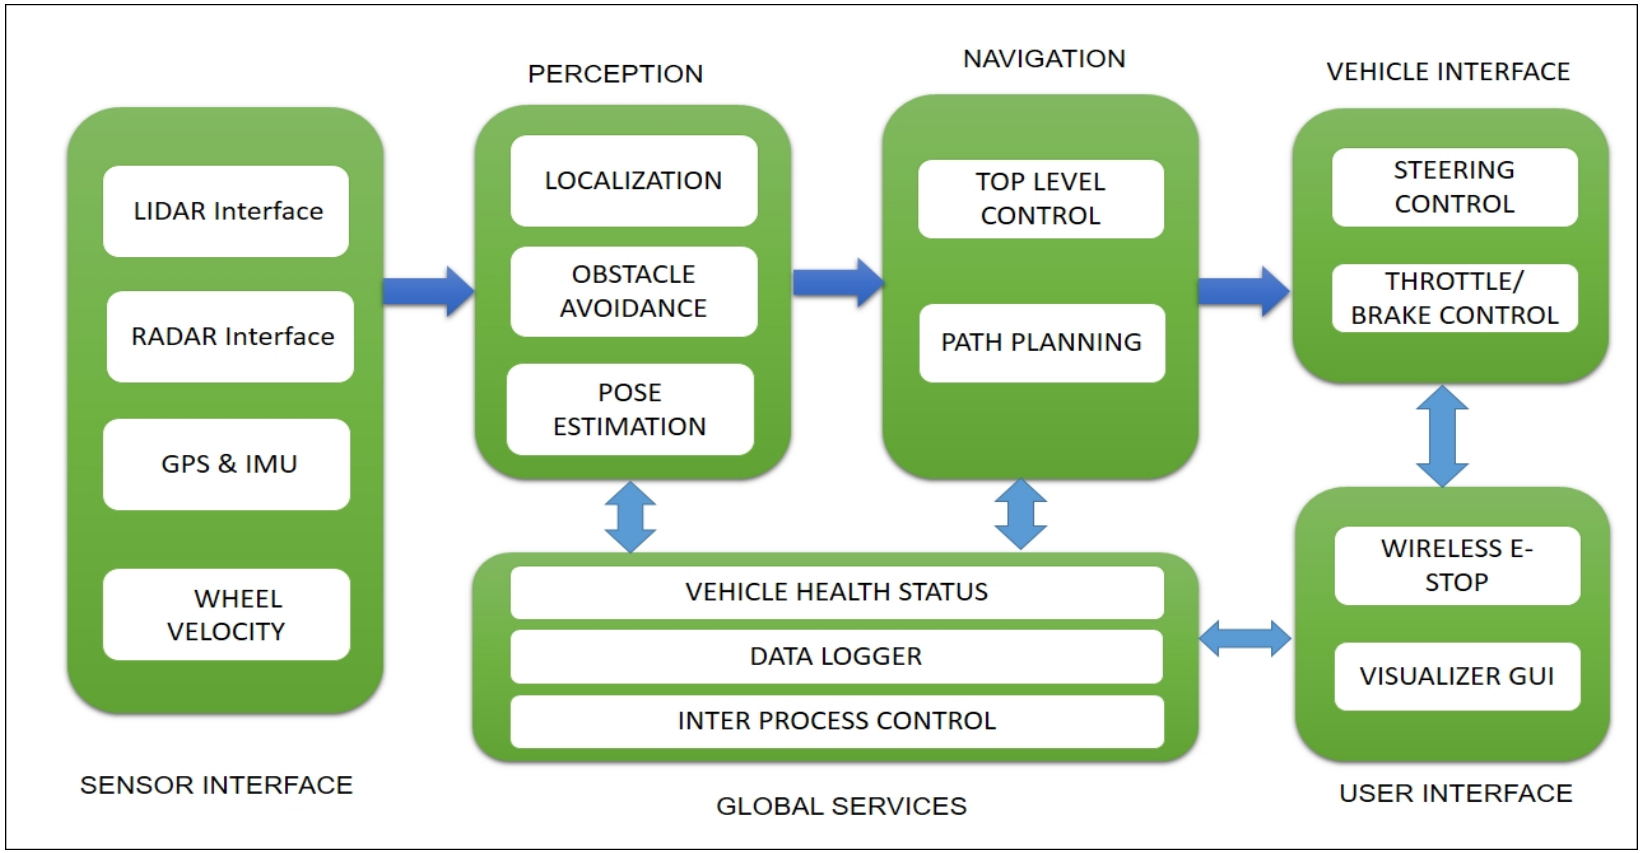

The Pub/Sub Design Pattern

- Stands for Publish-Subscribe
- A way for the different parts of a system to communicate with each other
- Each component (i.e. node) can:
  - *Publish*: send messages regardless of whether someone is listening
  - *Subscribe*: receive messages if anyone is sending them regardless of who

The Pub/Sub Design Pattern

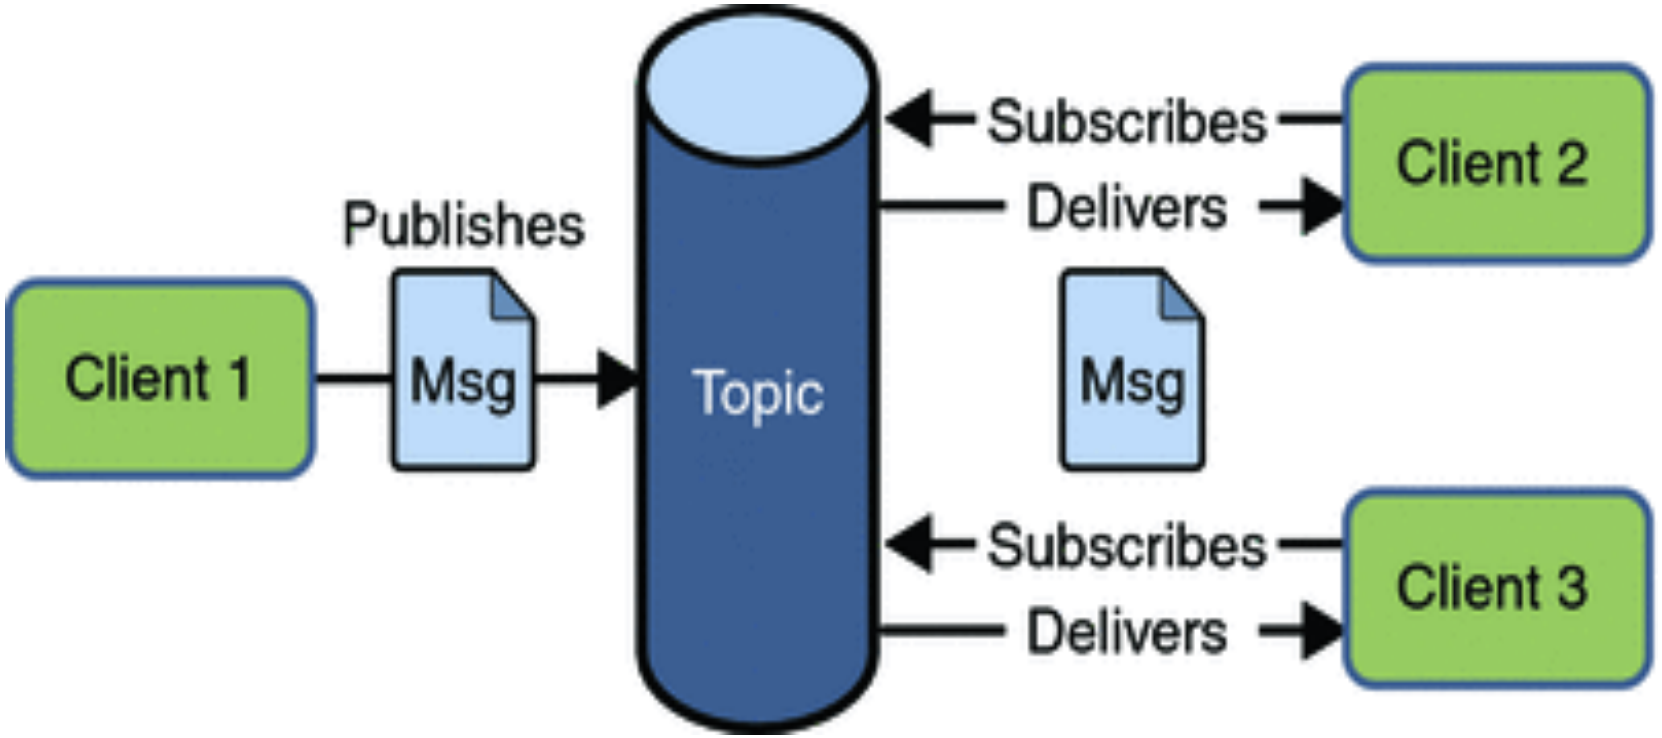

Note: there are countless ways to IMPLEMENT pub/sub!

Examples

- LiDAR node publishes laser scan arrays
- Camera node publishes RGB images (+depth if RGBD) and camera info (resolution, distortion coefficients)
- Mobile robot controller publishes odometry values (e.g. x-y coordinates and velocities, +z for UAVs or underwater vehicles)
- Navigation node subscribes to LiDAR and odometry messages, publishes motion control messages

Alternatives to Pub/Sub

- Request/Reply (RPC)
- Push/Pull
- Data binding (e.g. shared data members)
- Observers

What is ROS?

Depending on who you are talking to…

- An implementation of a network-aware pub/sub* geared towards robotic applications
- Lots of open-source software shared by the community:
  - SLAM (gmapping, amcl)
  - Vision (OpenCV, PCL, OpenNI)
  - Arm Navigation (MoveIt)
  - Simulation (Gazebo)

Why ROS in Industry?

- Not reinventing the wheel is generally good
- Robotics is hard! It's great to offload some of the work to smart people
- ROS is now 10 years old and still going strong

Why ROS in AA274?

- The closest thing we have to an “industry standard”
- It’s an insurance policy for you (stability, online teaching resources)

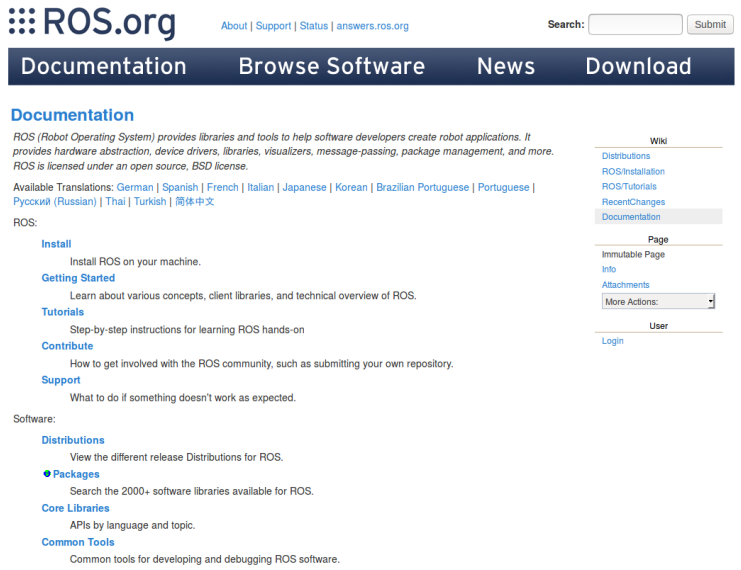

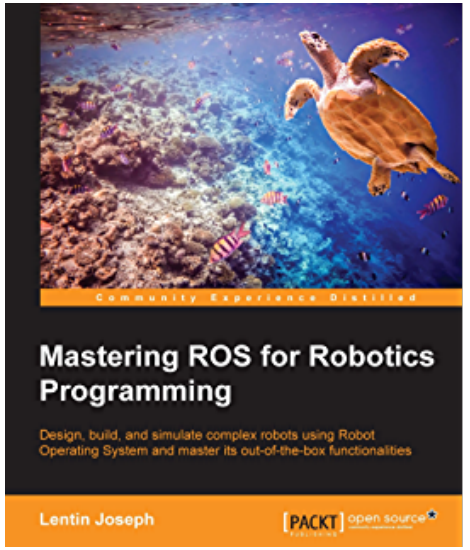

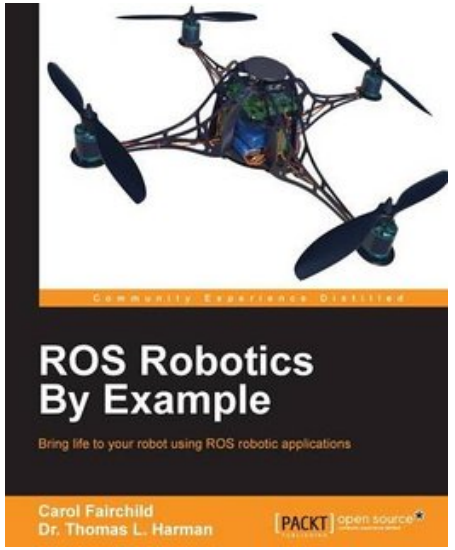

Are there “Alternatives” to ROS?

- LCM
- Drake
- Player
- YARP
- Orocos
- MRPT
- And many others!

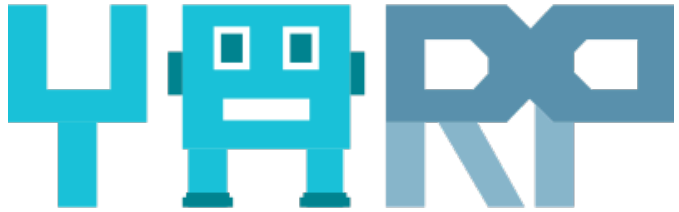

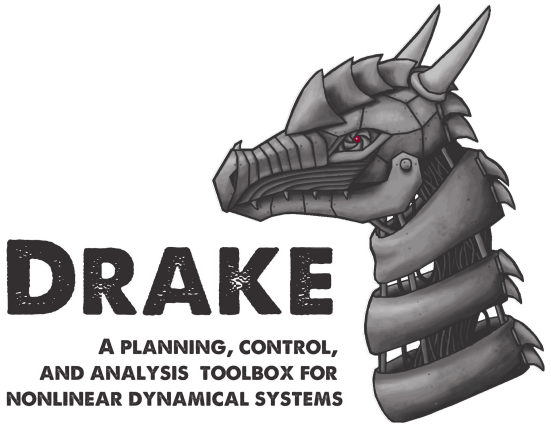

The Main Components

- Master
- Nodes
- Nodes talk to each other over topics (think chat rooms). Master coordinates the whole thing
- Message types: abstraction away from specific hardware
  - Camera image
  - Laser scan data
  - Motion control

ROS Node

- A process (typically Python or C++) that runs some computation
- The “fundamental” building block
- Can act as a subscriber, publisher or both
- Nodes talk to each other over “topics”
- Run them using rosrun <package> <node>
- Initialize using rospy.init_node()
-

Note: nodelets are different. They are not individual processes, they share memory

ROS Master

- A process that is in charge of coordinating nodes, publishers and subscribers
- Exactly one of them running at any time
- Messages do NOT go through Master (i.e. peer-to-peer)
- Nodes will not be able to find each other without Master

Sending Messages

- `pub = rospy.Publisher()`
- `msg = ...`
- `pub.publish(msg)`

ROS Node - Publisher

```python
#!/usr/bin/env python
import rospy
from std_msgs.msg import String

def talker():
    rospy.init_node('talker', anonymous=True)

    pub = rospy.Publisher('chatter', String, queue_size=10)

    rate = rospy.get_param('~rate', 1)
    ros_rate = rospy.Rate(rate)

    rospy.loginfo("Starting ROS node talker...")

    while not rospy.is_shutdown():
        msg = "Greetings humans!"

        pub.publish(msg)
        ros_rate.sleep()

if __name__ == '__main__':
    try:
        talker()
    except rospy.ROSInterruptException:
        pass
```

Monitoring Messages

- You can check if you are sending messages using the *rostopic* command line tool:

- `rostopic list` – lists all the active topics
- `rostopic echo <topic>` – prints messages received on <topic>
- `rostopic hz <topic>` – measures topic publishing rate

Receiving Messages

- `rospy.Subscriber("chatter", String, callback)`
- `def callback(msg): …`

(in C++ need to call `spinOnce()`, not in Python)

ROS Node - Subscriber

```python
#!/usr/bin/env python
import rospy
from std_msgs.msg import String

def callback(msg):
    rospy.loginfo("Received: %s", msg.data)

def listener():
    rospy.init_node('listener', anonymous=True)

    rospy.Subscriber("chatter", String, callback)

    rospy.loginfo("Listening on the chatter topic...")

    rospy.spin()

if __name__ == '__main__':
    listener()
```

ROS Launch Files

- Simple XML files that allow you to
  - Launch multiple nodes at once
  - Set parameters for those nodes
  - Start Master

- `roslaunch <package> <file>.launch`

ROS Launch File Example

```
<launch>
  <!-- Start the talker node -->
  <node name="talker" pkg="aa274" type="talker.py" output="screen">
     <param name="rate" value="5"/>
  </node>
</launch>
```

A Case Study

- Edge detection in camera images

Node 1 – Camera Driver
Subscribes to: Nothing
Publishes: Camera images

Node 2 – Edge Detection
Subscribes to: Camera images
Publishes: Image with edges

Node 3 – image_view
Subscribes to: Camera images
Publishes: Nothing

Node 4 – image_view
Subscribes to: Image with edges
Publishes: Nothing

A Case Study

- Edge detection in camera image
- rqt_graph

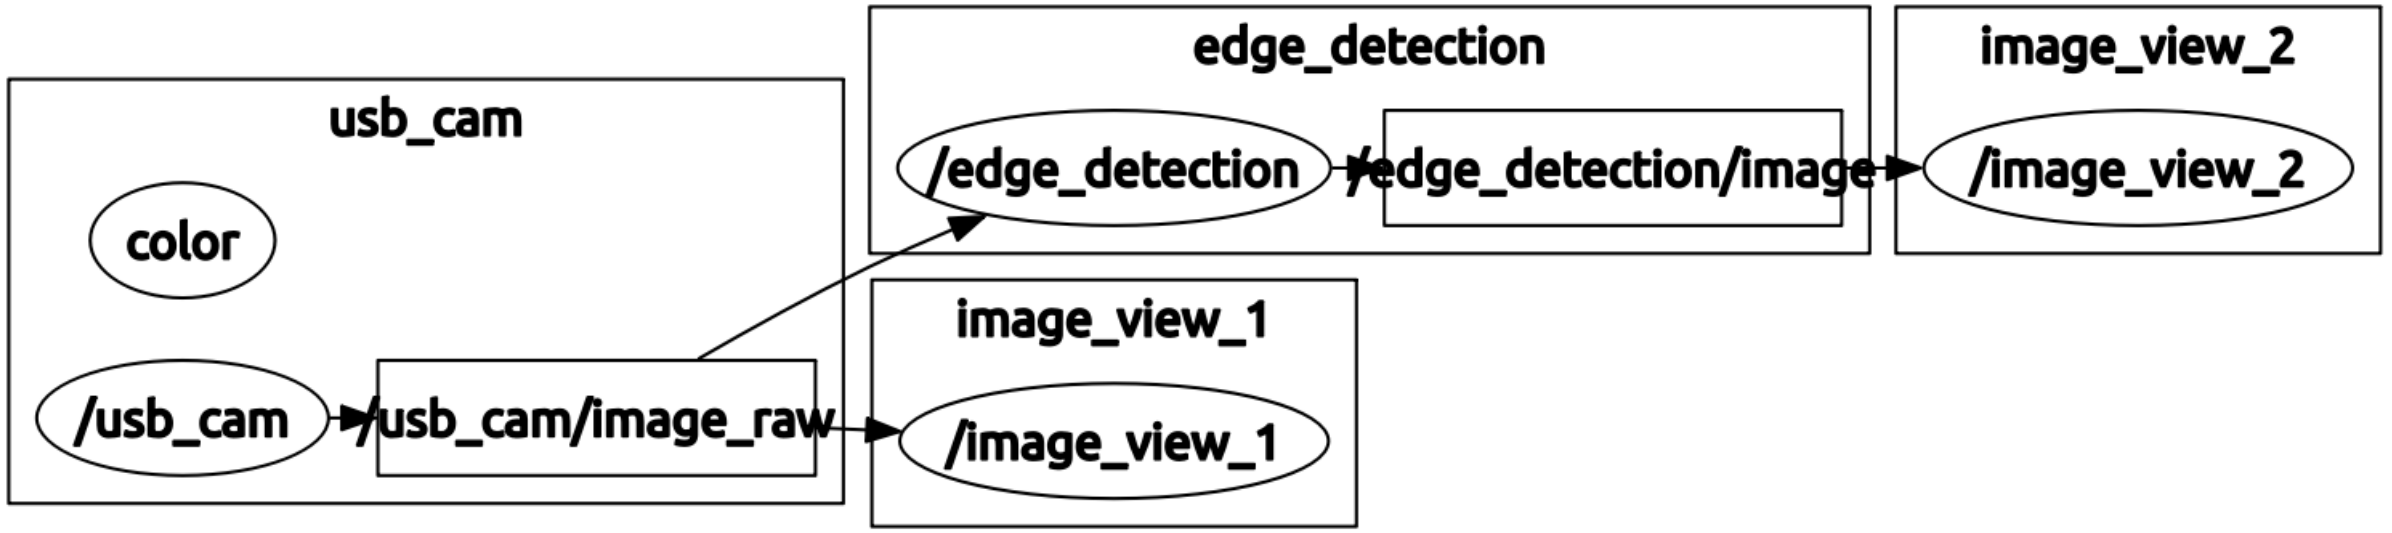

ROS Launch File for Edge Detection

```
<launch>
  <arg name="video_device" default="/dev/video0" />

  <include file="$(find aa274)/launch/usbcam_driver.launch">
     <arg name="video_device" value="$(arg video_device)" />
  </include>

  <node name="image_view_1" pkg="image_view" type="image_view">
     <remap from="image" to="/camera/image_color" />
     <param name="autosize" value="true"/>
  </node>

  <node name="image_view_2" pkg="image_view" type="image_view">
     <remap from="image" to="/edge_detection/image" />
     <param name="autosize" value="true" />
  </node>

  <node name="edge_detection" pkg="opencv_apps" type="edge_detection">
     <remap from="image" to="/camera/image_color" />
     <param name="debug_view" value="false" />
  </node>
</launch>
```

Developing with ROS

- **Catkin workspace**: a directory that contains all your ROS development
- It sets the right environment variables
- It knows how to compile your nodes (using *cmake which in turn uses a compiler*)

The commands you need to know:

- `mkdir -p ~/catkin_ws/src`
- `cd ~/catkin_ws`
- `catkin_make`

ROS Packages

- The basic organization structure for your nodes
- Usually corresponds to a “functionality” (e.g. a SLAM package)
- Can contain code for multiple nodes
- Directory structure:

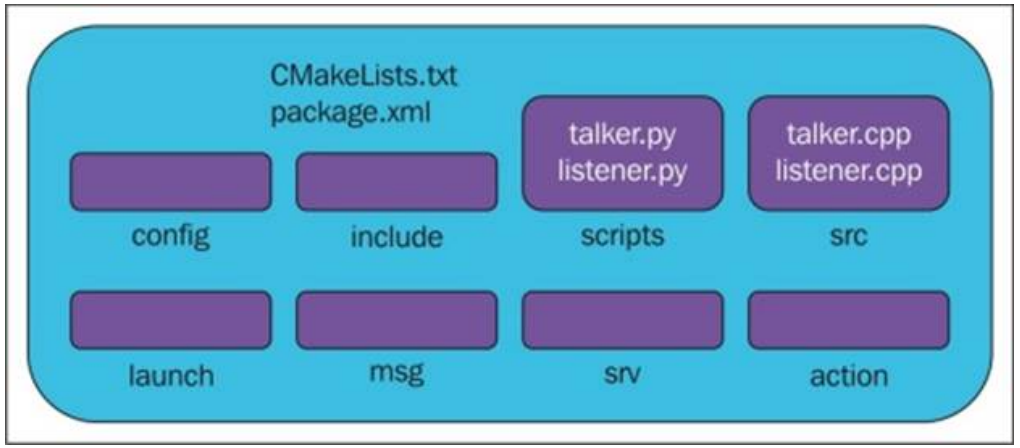

The command you need to know:

```
catkin_create_pkg <name> roscpp rospy std_msgs
```

Debugging

- `rospy.loginfo()`
- `rqt_console`
- `rosbag record <topic>`
- `rosbag play file.bag`

- **pdb – Python Debugger**
  - `import pdb`
  - `pdb.set_trace()`

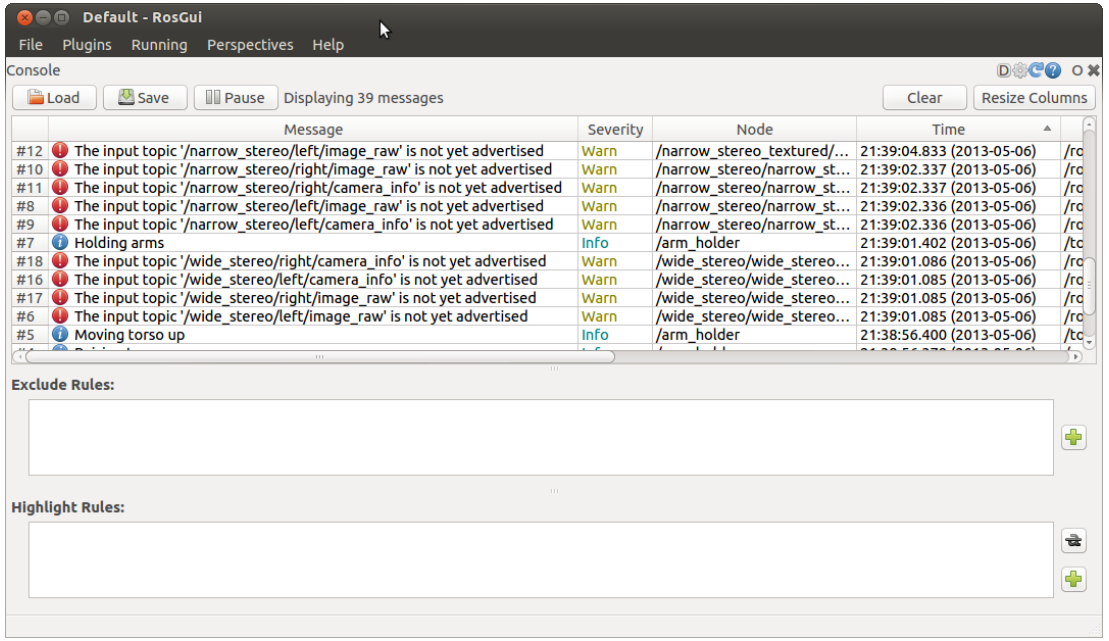

Creating Custom Messages

- Write message definitions (.msg) that are language agnostic
- ROS generates the right files so that roscpp and rospy can use your message
- `rosmsg show student`

```
[aa274/Student]:
string name_first
string name_last
uint8 age
uint32 grade
```

Primitive Type	Serialization	C++	Python
bool (1)	unsigned 8-bit int	`uint8_t` (2)	`bool`
int8	signed 8-bit int	`int8_t`	`int`
uint8	unsigned 8-bit int	`uint8_t`	`int` (3)
int16	signed 16-bit int	`int16_t`	`int`
uint16	unsigned 16-bit int	`uint16_t`	`int`
int32	signed 32-bit int	`int32_t`	`int`
uint32	unsigned 32-bit int	`uint32_t`	`int`
int64	signed 64-bit int	`int64_t`	`long`
uint64	unsigned 64-bit int	`uint64_t`	`long`
float32	32-bit IEEE float	`float`	`float`
float64	64-bit IEEE float	`double`	`float`
string	ascii string (4)	`std::string`	`str`
time	secs/nsecs unsigned 32-bit ints	ros::Time	rospy.Time
duration	secs/nsecs signed 32-bit ints	ros::Duration	rospy.Duration

ROS Services

- A different way for nodes to pass messages to each other
- Request/Response scheme (not Pub/Sub!)
- Examples:
  - Turn a light or LED on or off
  - Assign a name to a face and retrain face recognizer
  - Spawn a new model in the Gazebo simulator

The Parameter Server

- Parameters are stored under namespaces; e.g.
  - `/move_base/local_costmap/height`
  - `/usb_cam/framerate`
  - `/gazebo/time_step`
- Setting and getting parameters:
  - `rosparam set param_name param_value`
  - `param_value = rospy.get_param("param_name")`
- NOTE: Setting a parameter does not affect a running node!

Dynamic Reconfigure

- Some nodes provide dynamically changeable parameters
  - `rosrun rqt_reconfigure rqt_reconfigure`

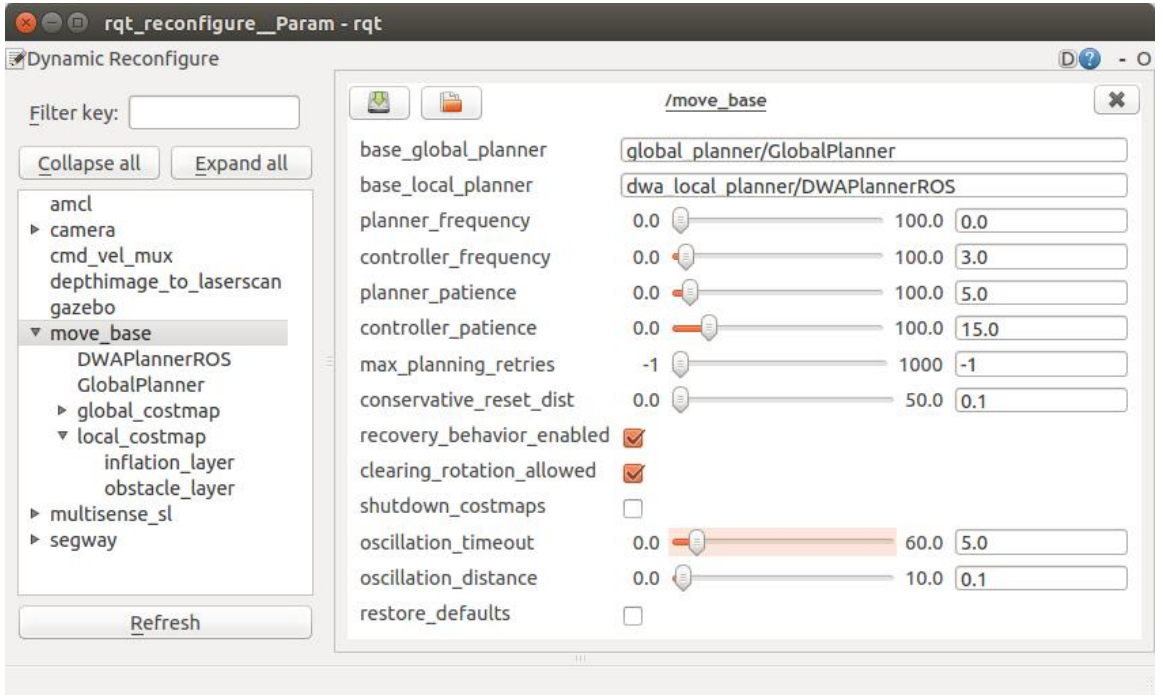

URDF

- Universal Robot Description Format
- An XML file that describes the kinematic chain of your robot

```
<link name="base_link">
  <visual>
    <geometry>
      <cylinder length="0.6" radius="0.2"/>
    </geometry>
    <material name="blue">
      <color rgba="0 0 .8 1"/>
    </material>
  </visual>
  <collision>
    <geometry>
      <cylinder length="0.6" radius="0.2"/>
    </geometry>
  </collision>
  <inertial>
    <mass value="10"/>
    <inertia ixx="0.4" ixy="0.0" ixz="0.0" iyy="0.4" iyz="0.0" izz="0.2"/>
  </inertial>
</link>
```

```
<joint name="head_swivel" type="continuous">
  <parent link="base_link"/>
  <child link="head"/>
  <axis xyz="0 0 1"/>
  <origin xyz="0 0 0.3"/>
</joint>
```

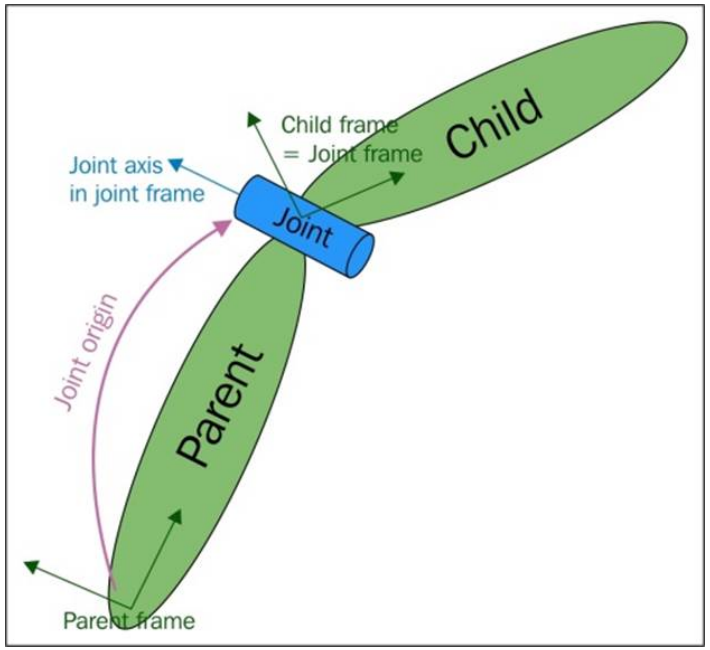

Gazebo

- Same code that will run in production
- Physics is mostly accurate

Some more libraries you will hear about…

- TF: coordinate frame transform library
- Actionlib: processes with goals and feedback
- dynamic_reconfigure: making nodes configurable on the fly

Getting help

- ROS wiki (http://wiki.ros.org/)
- Github
- Stack Overflow
- The Construct / Robot Ignite Academy
- Google :)

Homework 1

1) Install VMWare on your computer (or dual-boot)
2) Download the VM on canvas and open it
3) Make sure you can run the simulation
4) Get the simple publisher/subscriber working
5) Finish implementing the controller provided