Model and source geometry

Grid: 401 × 321 points, Δx = Δz = 5 m | Δt = 0.0005 s | Source: (1000, 450) m

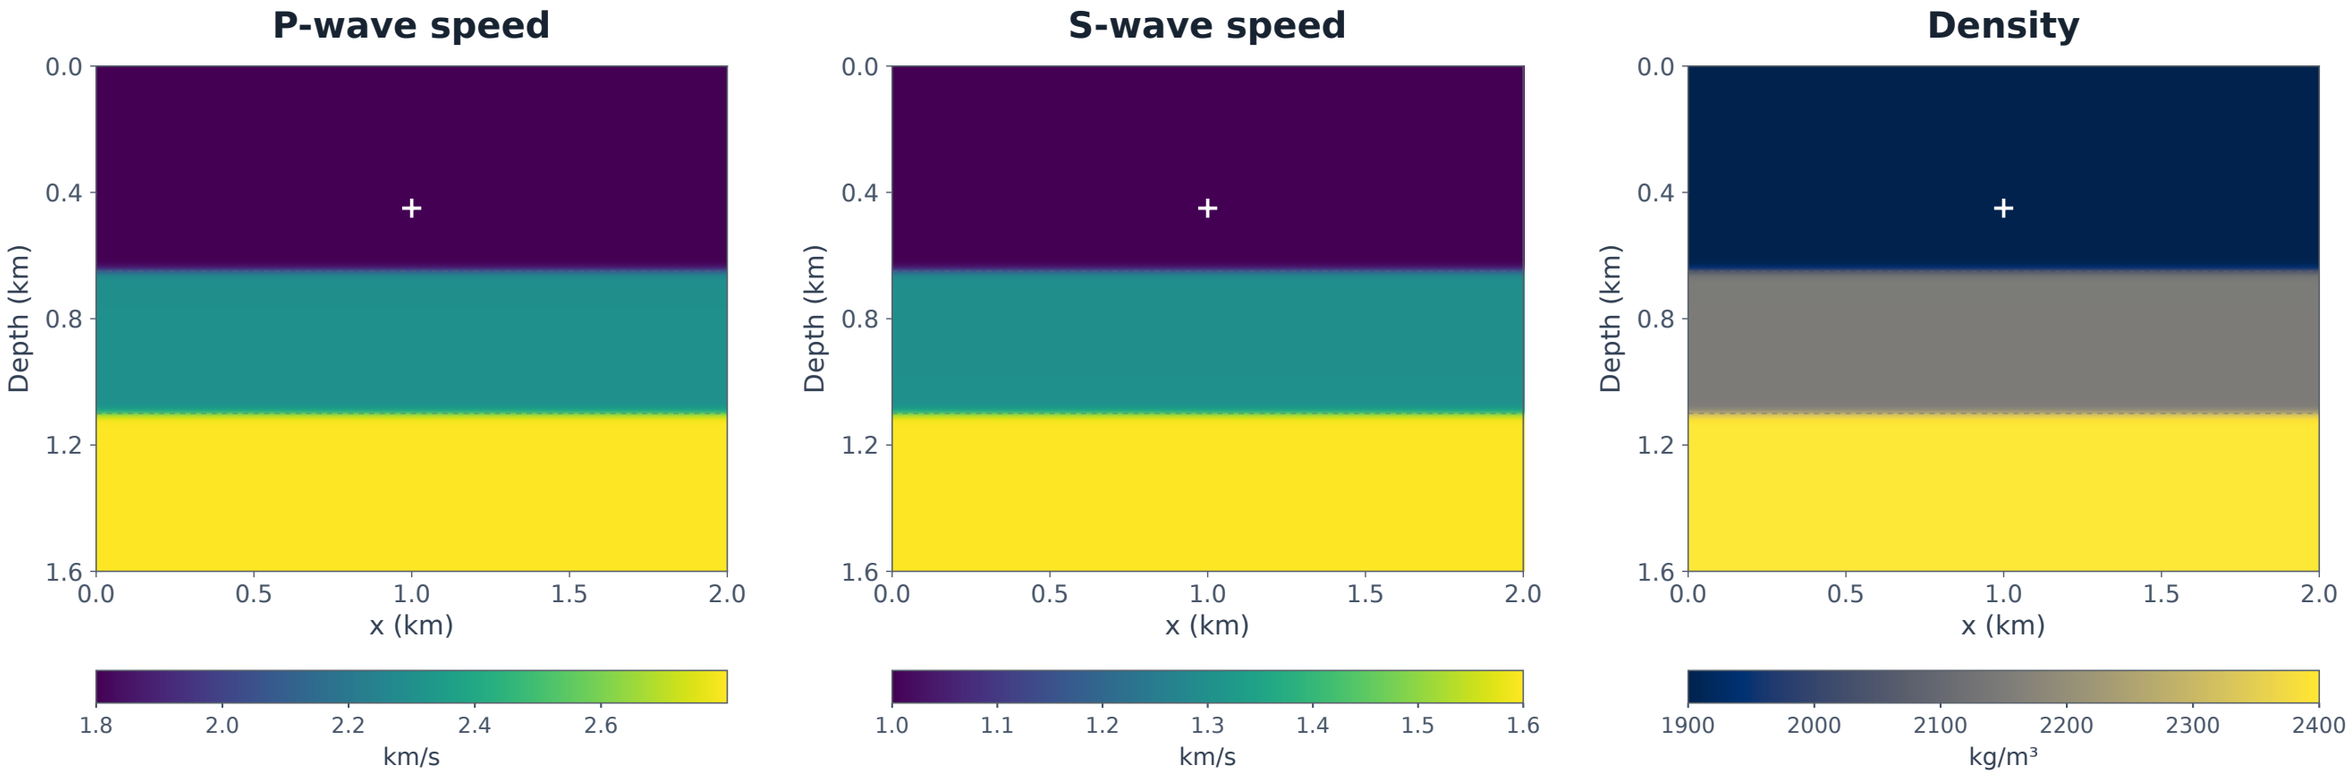

Interfaces: 650, 1100 m; tanh transition half-width: 15 m.

VTI ε by layer: 0.18, 0.22, 0.26 | δ: 0.06, 0.08, 0.1

GSLS nominal Q_0 by layer: 30, 30, 30 | hao1, 5 mechanisms, design band 1–200 Hz

Ricker peak frequency: 12 Hz; peak time: 0.1 s. Source marker: +. PML: 30 cells.

Parameters shown where relevant to each equation family. Source type and amplitude units differ across families.