
Assembly Documentation

Beacon


Staznik Systems

Revision v1.1

Top View

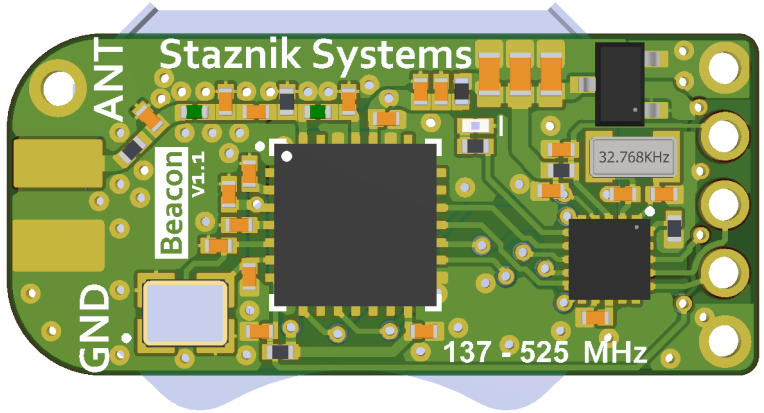

Bottom View

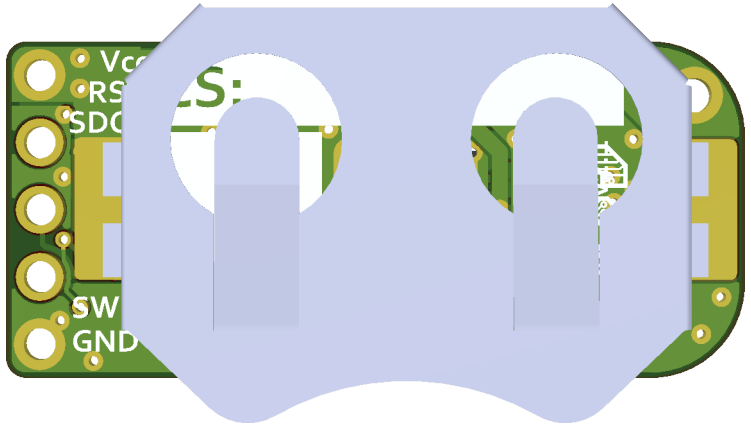

DISCLAIMER & LICENSING

Copyright © Goran Staznik. All rights reserved except as expressly licensed below.

Unless otherwise stated, the hardware design files, schematics, PCB layouts, firmware, and associated documentation for this project are made available under the **Creative Commons Attribution-NonCommercial-ShareAlike 4.0 International (CC BY-NC-SA 4.0)** license. Individuals, hobbyists, makers, and educational teams may study, build, modify, and share these materials for non-commercial purposes, subject to the terms of the license.


Commercial production, distribution, sale, or other commercial use of these designs or derivative works requires separate written authorization from Goran Staznik, operating under the Staznik Systems name. Commercial licensing inquiries may be directed to Staznik Systems.

These designs are provided "as-is," without warranties regarding their reliability, functionality, or fitness for a particular purpose, to the extent permitted by law. Users are responsible for validating designs and implementing appropriate safety measures before use.


Title	Rev
Cover Page Sheet 1 of 5	1.1
GitHub/YouTube: @StaznikSystems	
© Goran Staznik	

[2] Isometric Views

View from Front side (Scale 5:1)

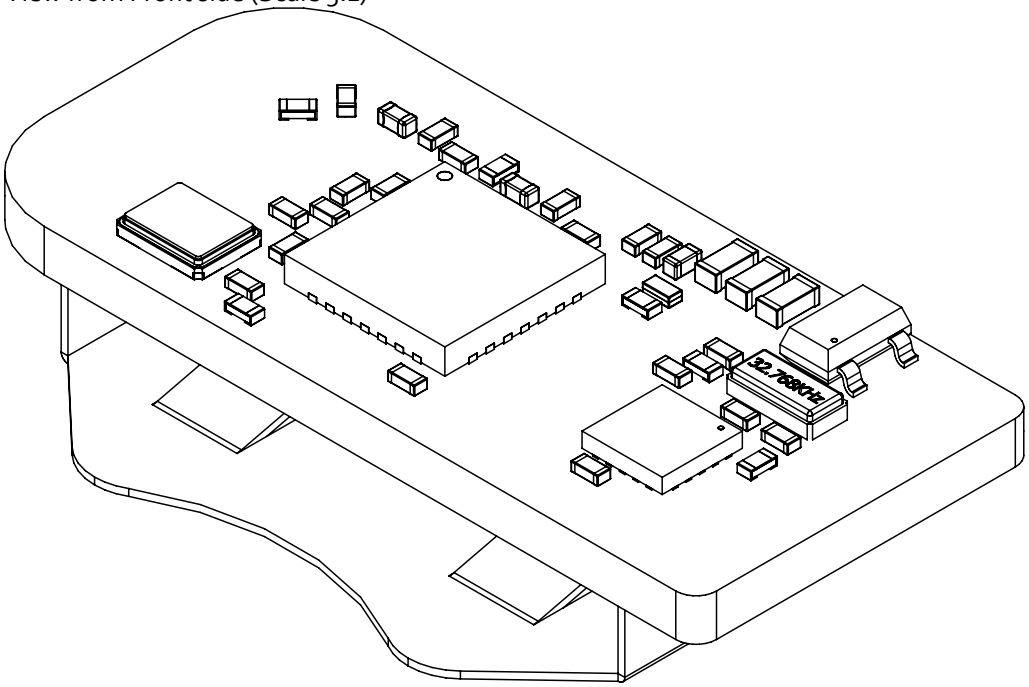


View from Back side (Scale 5:1)

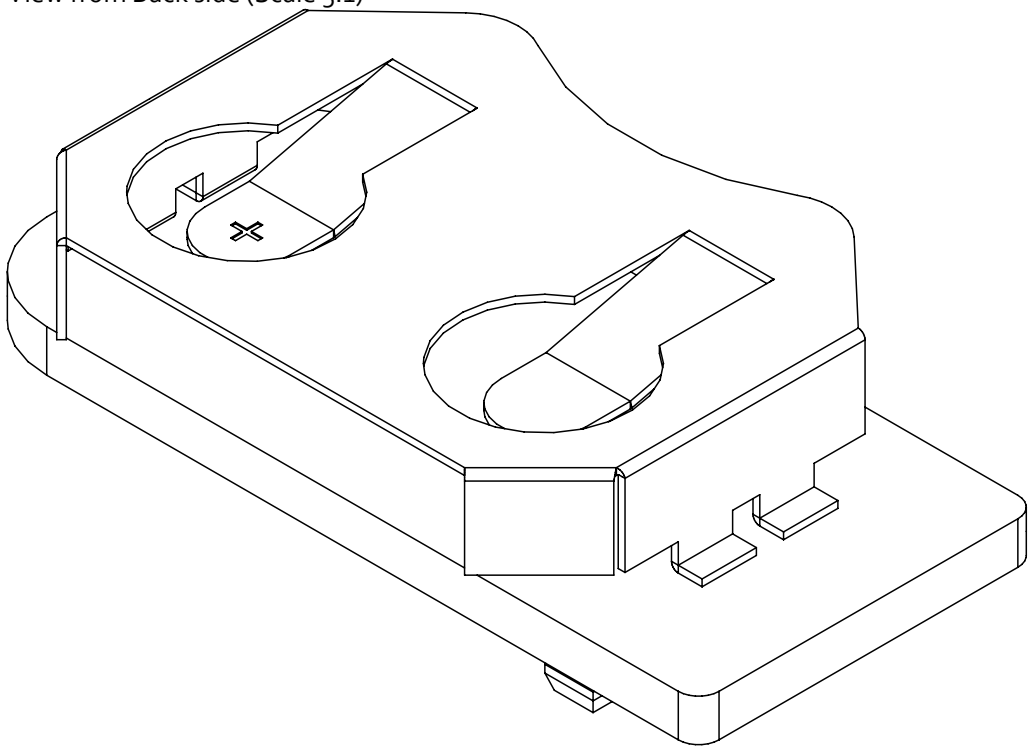

	Title Isometric Views Sheet 2 of 5	Rev 1.1
	GitHub/YouTube: @StaznikSystems	
	© Goran Staznik	

[3] Notes

Realistic View

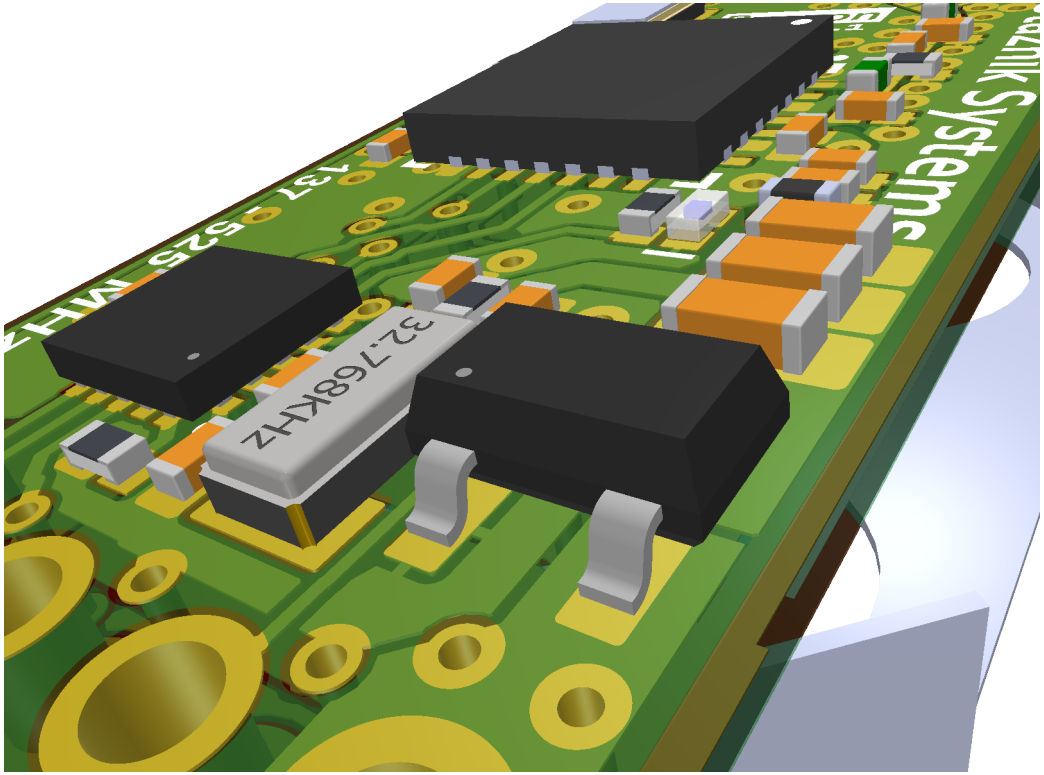

NOTES: UNLESS OTHERWISE SPECIFIED.

1. MANUFACTURE, ASSEMBLE, AND INSPECT ALL WORKMANSHIP IN ACCORDANCE WITH IPC-A-610, CLASS 2.

2. USE LEAD-FREE SAC305 OR SAC307 SOLDER PASTE PER J-STD-004 AND J-STD-006. ALL PROCESSES MUST BE ROHS COMPLIANT.

3. COMPONENT PLACEMENT, POLARITY, AND PIN 1 ALIGNMENT MUST STRICTLY MATCH CAD OVERLAY SILKSCREEN AND ASSEMBLY DRAWING VIEWS.

4. COMPONENTS MARKED AS "DNP" (DO NOT POPULATE), "NF" (NOT FITTED), OR CROSS-HATCHED IN DRAWING VIEWS ARE NOT TO BE INSTALLED.

5. HANDLE ALL COMPONENTS AND ASSEMBLIES IN ACCORDANCE WITH ESD CONTROL STANDARD ANSI/ESD S20.20. MOISTURE SENSITIVE DEVICES MUST BE HANDLED PER IPC/JEDEC J-STD-033.

6. ASSEMBLED BOARDS MUST BE CLEANED TO REMOVE ALL SOLDER FLUX RESIDUES PER IPC-CH-65B. NO VISIBLE RESIDUE PERMITTED.


7. TORQUE ALL MOUNTING FASTENERS AND MECHANICAL HARDWARE TO MANUFACTURER-RECOMMENDED SPECIFICATIONS. THREADLOCKER IS NOT PERMITTED UNLESS SPECIFIED.

8. NO CUT TRACES, JUMPER WIRES, SOLDER BRIDGES, OR PCB MODIFICATIONS ARE PERMITTED WITHOUT PRIOR WRITTEN AUTHORIZATION.

	Title: Notes Sheet 3 of 5	Rev 1.1
	GitHub/YouTube: @StaznikSystems	
	© Goran Staznik	

[4] Top Assembly

View from Top side (Scale 8:1)

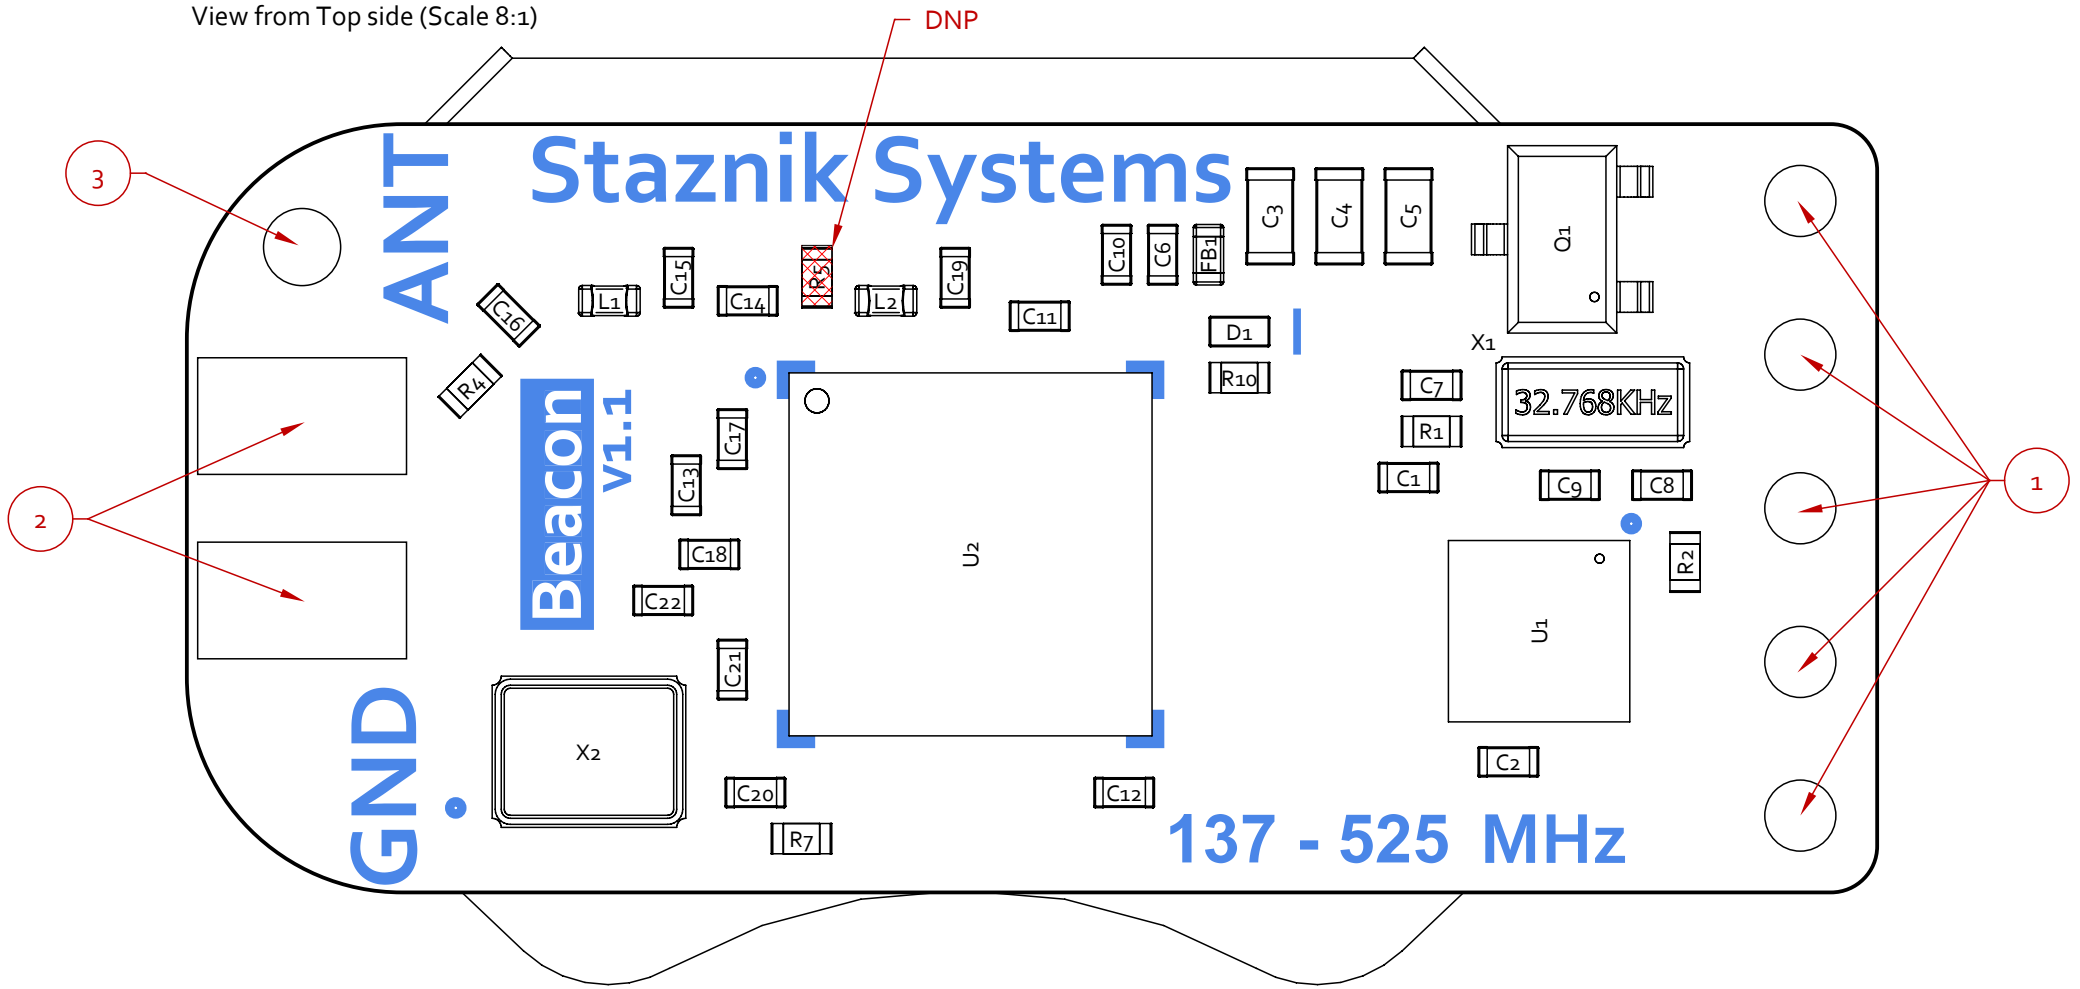


Notes:

1. Mounting Hole
2. Raw pads, leave unsoldered
3. Mounting Holes

	Title: Top Assembly Sheet 4 of 5	Rev 1.1
	GitHub/YouTube: @StaznikSystems	
	© Goran Staznik	

[5] Bottom Assembly

View from Bottom side (Scale 8:1)

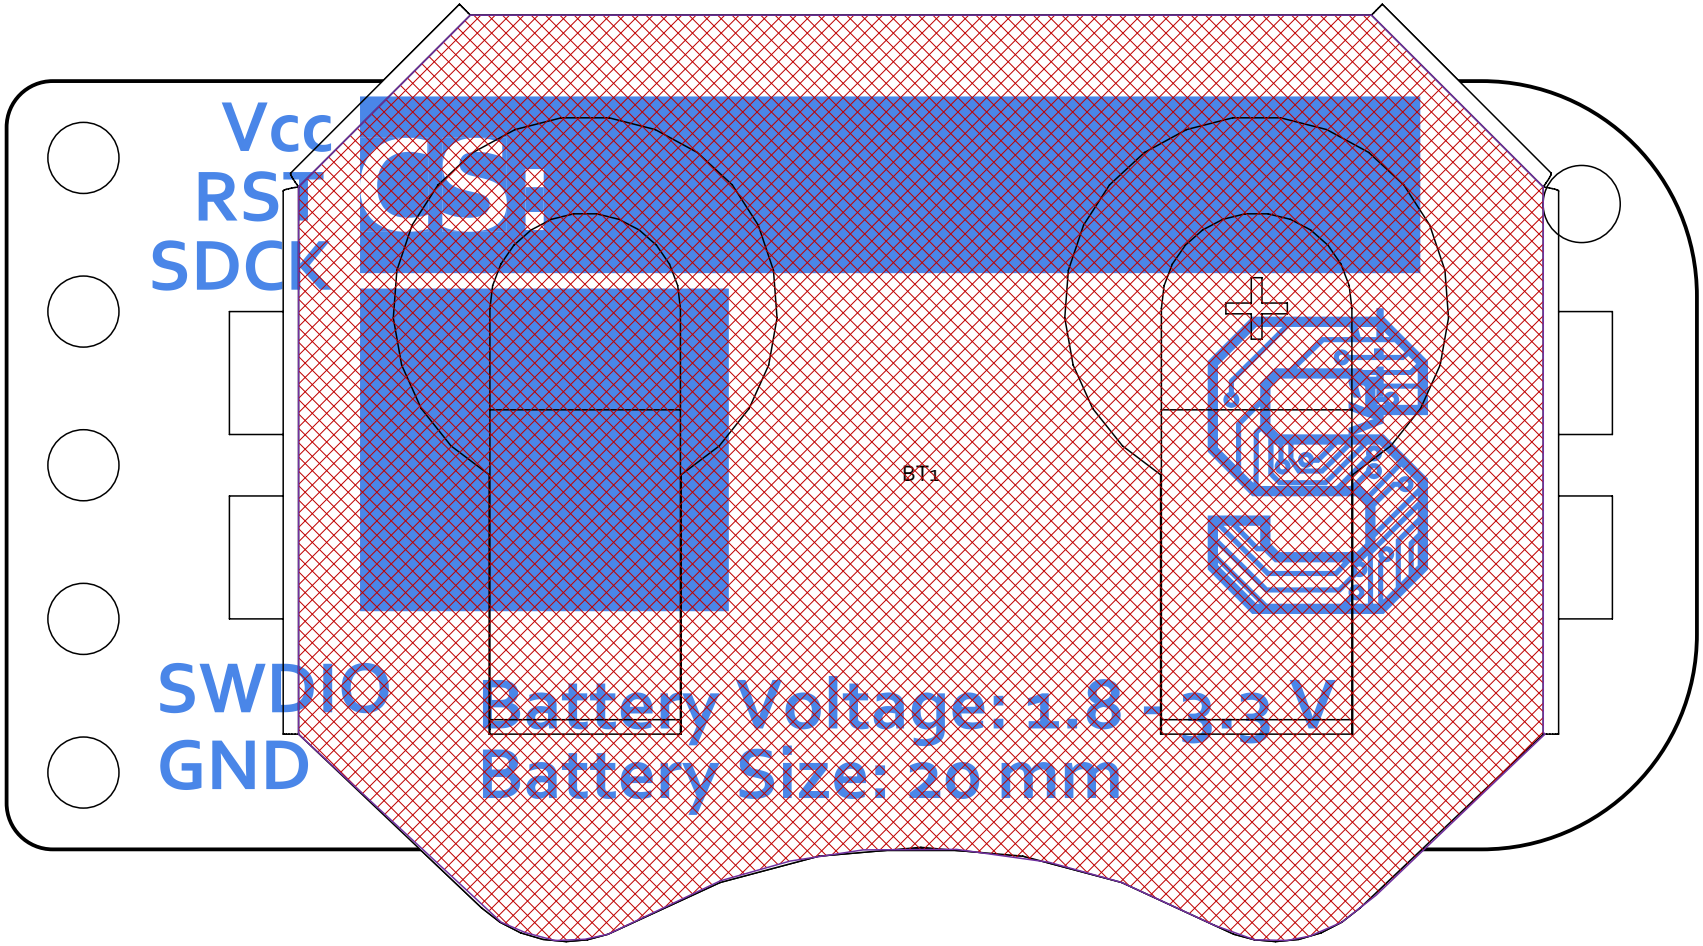

No bottom assembly

	Title Bottom Assembly Sheet 5 of 5	Rev 1.1
	GitHub/YouTube: @StaznikSystems	
	© Goran Staznik	