


Preamble and Special Conditions


S. No.	Description
a	All SS sections shall be 304 grade with brushed finish as per the Design Consultants and Site in charge approval.
b	The Contractor to submit the shop drawing of the same including the fabrication details, calculations and stability report.
c	The work to start only on written approval of the same by the design consultant.
d	Contractor may consider the toughened glass panel size in square pattern between 750 mm to 850 mm as per the suitability.
e	Contractor shall take the prior approval of the materials and accessories to be used during the course of work from Engineer-in-charge/ Architect
f	It is also to be noted that the railing shall go from end to end between vertical structural members as there is no parapet in brick work available (refer the floor plans).
g	The also includes necessary scaffolding /centering and lead lift as per the site conditions.

Please read attached Tender Documents Carefully to submit your Priced Offer Accordingly.


Approved SSL Railing Fixing Details	
-------------------------------------	--

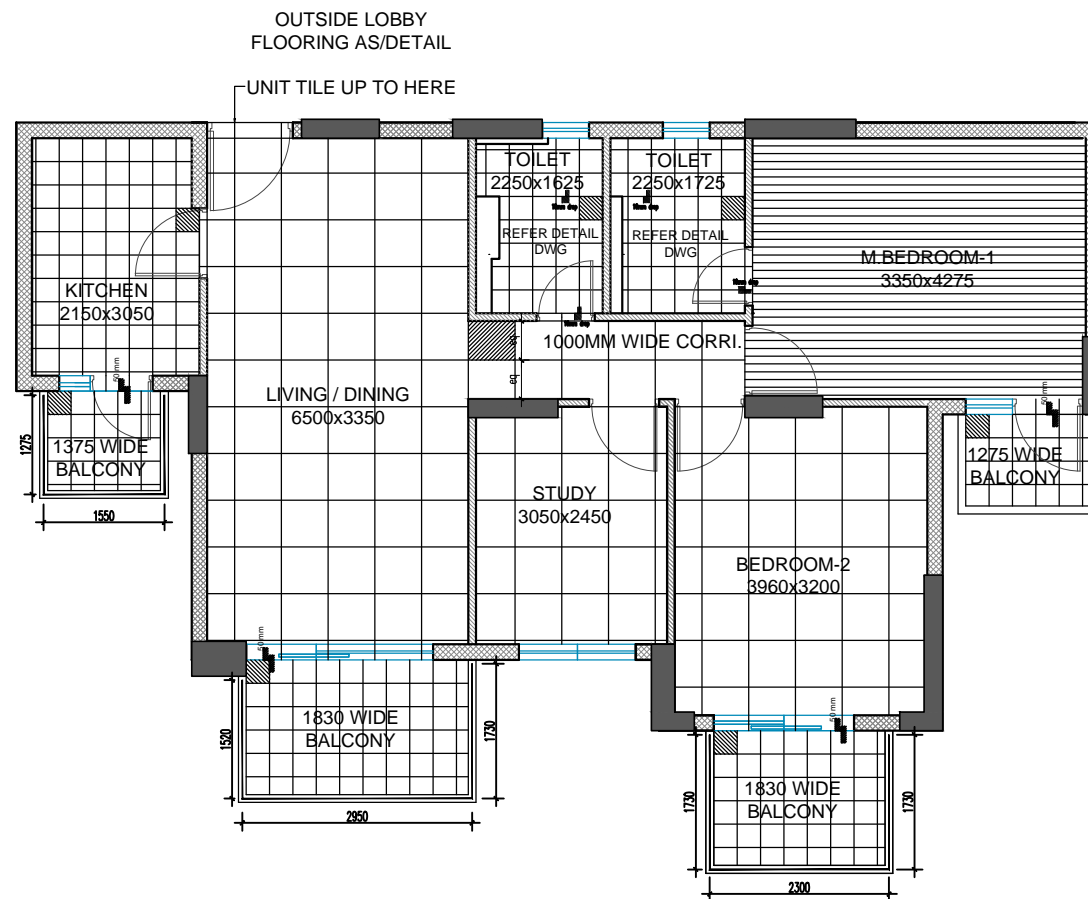

2.5 BHK(T3,7 & 8)

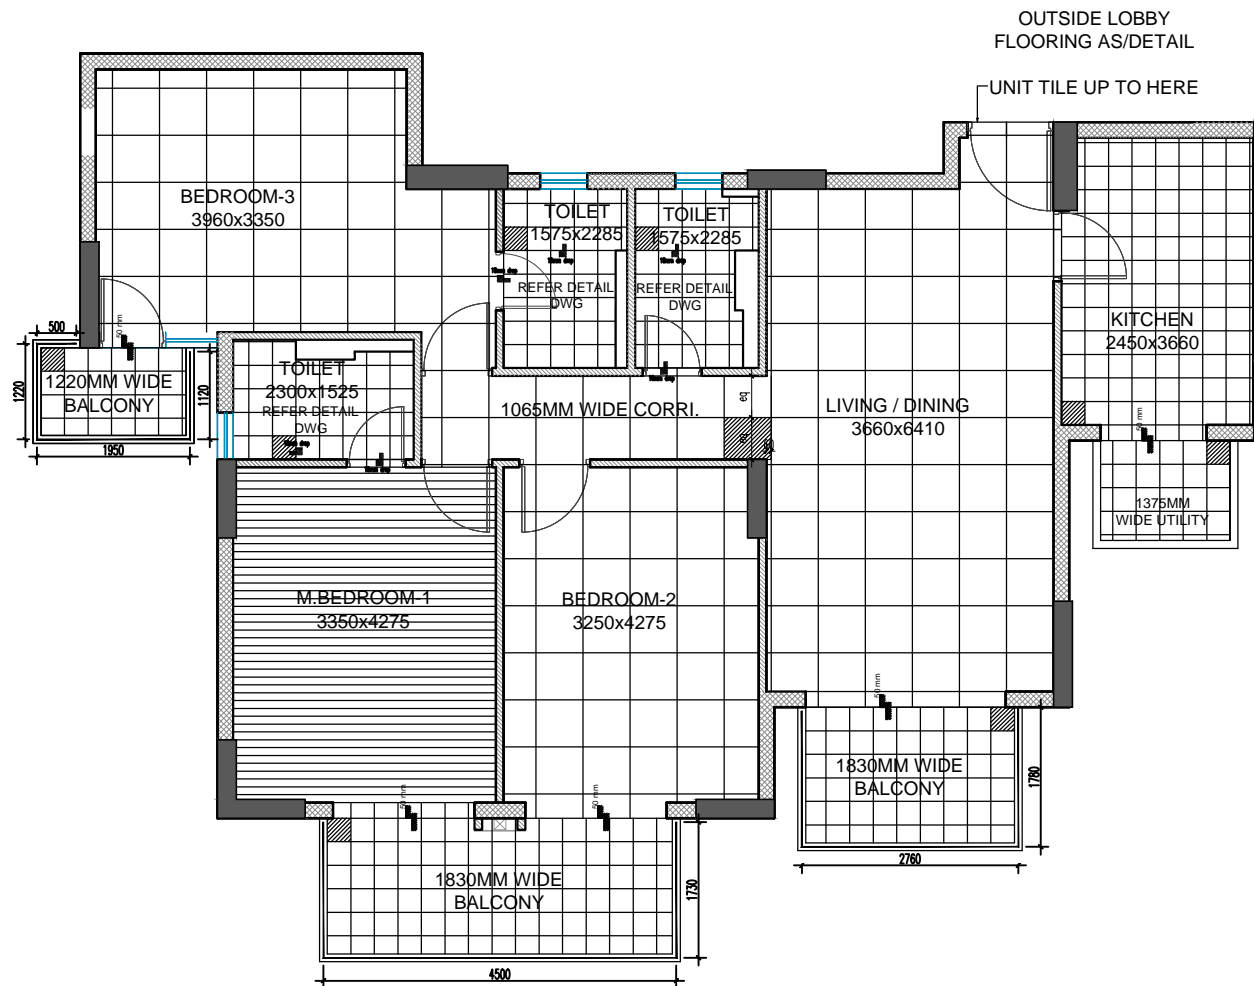

3BHK(T3,7 & 8)

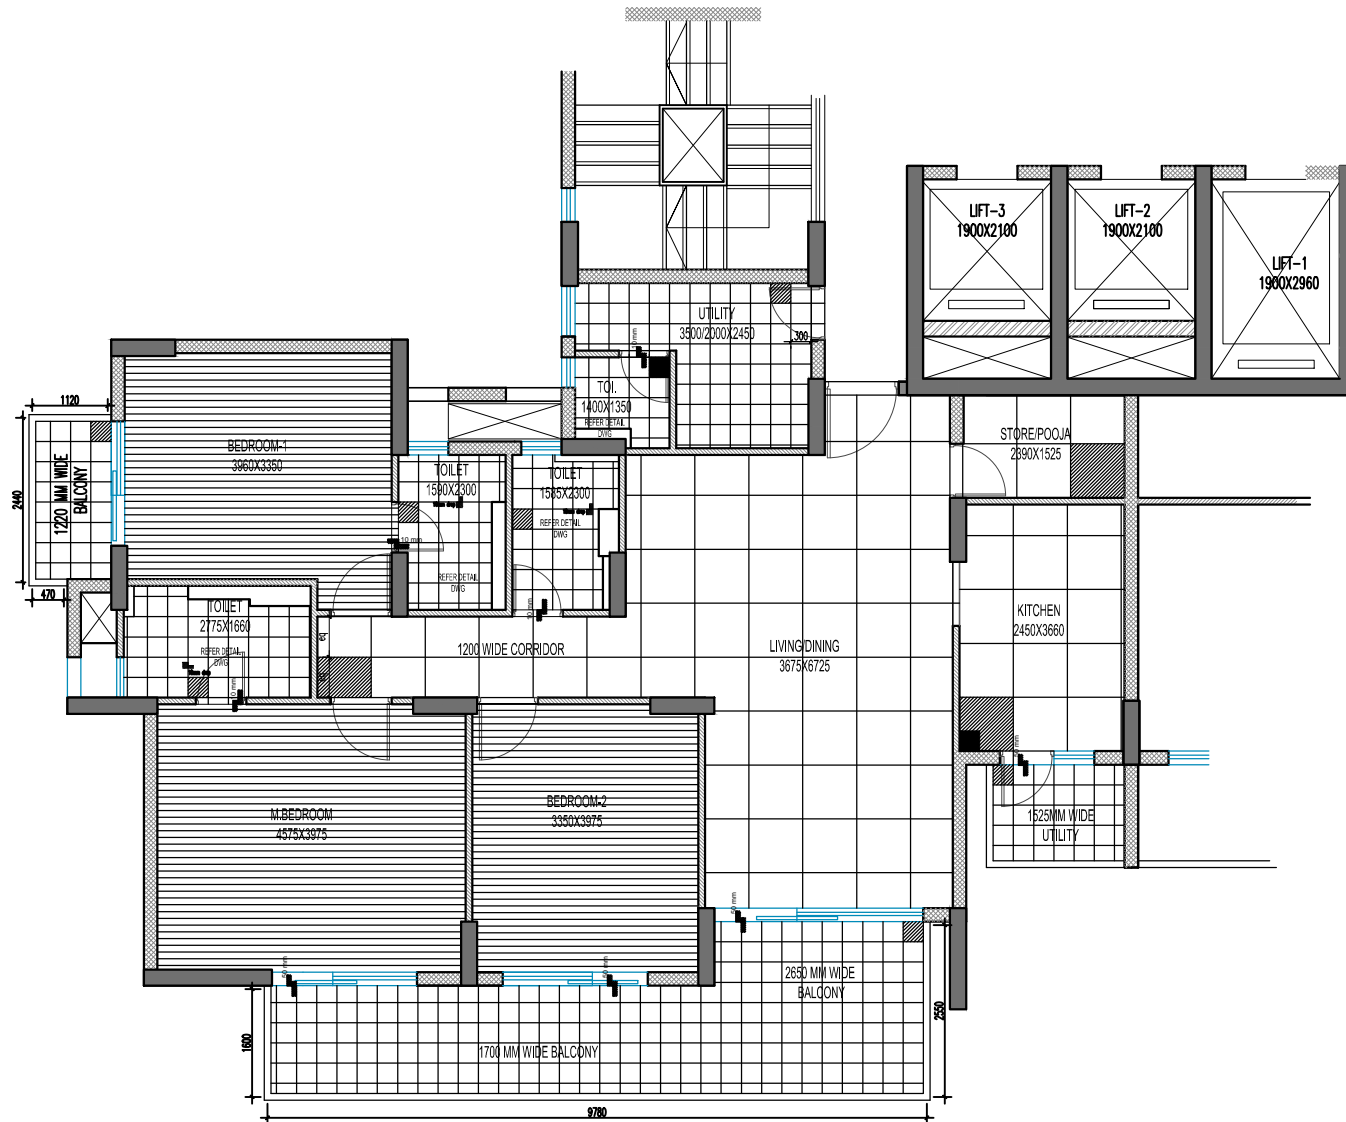

3.5BHK(T2)

