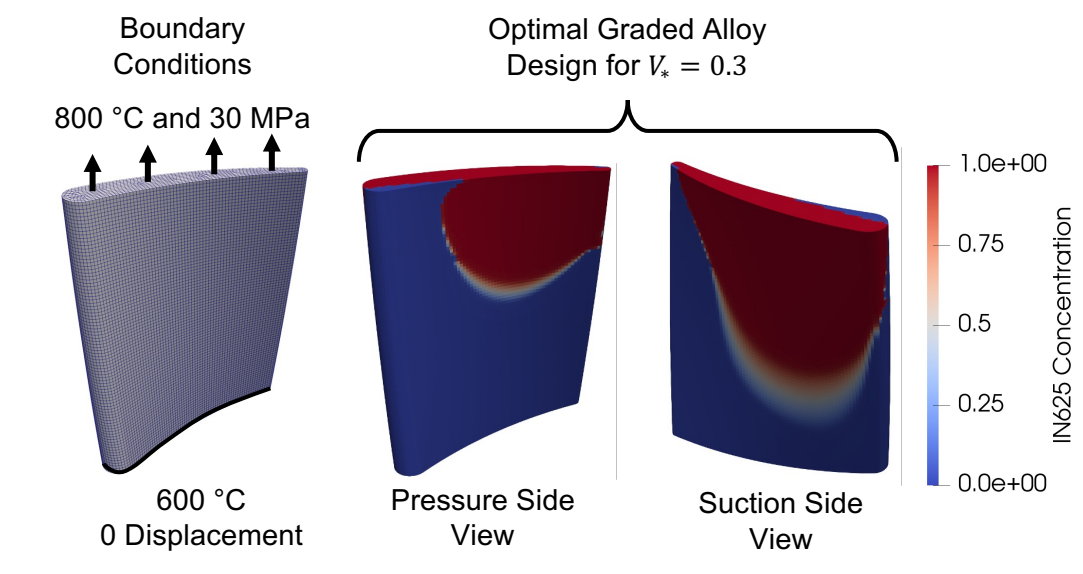

Boundary Conditions
800 °C and 30 MPa
600 °C
0 Displacement
Optimal Graded Alloy Design for $V_* = 0.3$
Pressure Side View
Suction Side View
1.0e+00
0.75
0.5
0.25
0.0e+00
IN625 Concentration