TRITONLED

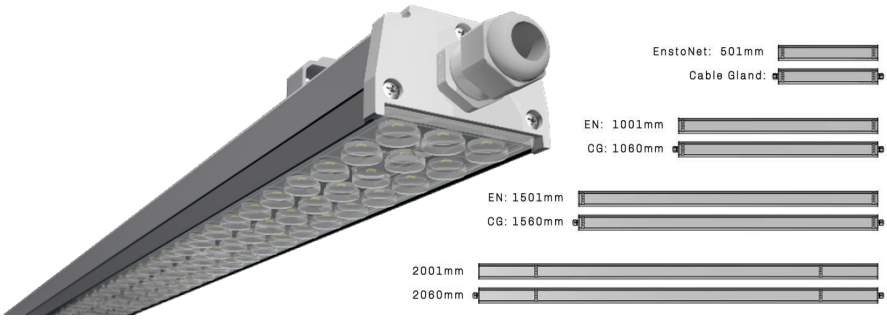



Triton MAX, TM-series IP43, IP20 / IK06

500 - 2000 mm

Triton MAX - 201 Lm ledmodules													
Art.nr Lenght	LENGHT (mm)	Info Lenght	Width (mm)	Height (mm)	Weight (Kg)	Effect wattage	Amp (mA)	Lm/W Ra80	Led module Lumen	Fixture LUMEN (230V)	Lm/W Ra90	Led module	Fixture Efficiency (Lm)(230V)
A	500	0,5m	62	36	0,7	14W	250	195	2652	2510Lm	167	2272	2150
A	500	0,5m	62	36	0,7	20W	350	188	3685	3500Lm	165	3234	3070
A	500	0,5m	62	36	0,7	29W	500	178	5180	4920Lm	150	4365	4140
B	1000	1m	62	36	1,3	27W	250	195	5304	5030Lm	167	4543	4310
B	1000	1m	62	36	1,3	39W	300	188	7370	7000Lm	165	6468	6140
B	1000	1m	62	36	1,3	58W	500	178	10360	9840Lm	150	8730	8290
C	1500	1,5m	62	36	1,9	27W	150	199	5413	5140Lm	171	4652	4410
C	1500	1,5m	62	36	1,9	33W	200	198	6416	6090Lm	169	5476	5200
C	1500	1,5m	62	36	1,9	41W	250	195	7956	7550Lm	167	6814	6470
C	1500	1,5m	62	36	1,9	59W	300	188	11055	10500Lm	165	9702	9210
C	1500	1,5m	62	36	1,9	87W	500	178	15540	14760Lm	150	13095	12440
D	2000	2m	62	36	2,4	43W	200	198	8554	8120Lm	169	7301	6930
D	2000	2m	62	36	2,4	55W	250	195	10608	10070Lm	167	9085	8630
D	2000	2m	62	36	2,4	78W	300	188	14740	14000Lm	165	12936	12280
D	2000	2m	62	36	2,4	118W	500	178	20720	19680Lm	150	17460	16580

TM series - Cable Gland (CG) OnOff (ON) IP43 IK06

M1A29K0(x)8C3A	0,5m	TM05 - 0,5m 29W 4920Lm 4K ON Ra80 CG IP43 IK06
M1B58K0(x)8C3A	1,0m	TM10 - 1,0m 58W 9840Lm 4K ON Ra80 CG IP43 IK06
M1C87K0(x)8C3A	1,5m	TM15 - 1,5m 87W 14760Lm 4K ON Ra80 CG IP43 IK06
M1D11K0(x)8C3A	2,0m	TM20 - 2,0m 118W 19680Lm 4K ON Ra80 CG IP43 IK06

TM series - Qick connector Wago (W2) Dali2 (D2) IP20 IK06

M1A29K2(x)8B1A	0,5m	TM05 - 0,5m 29W 4920Lm 4K D2 Ra80 W2 IP20 IK06
M1B58K2(x)8B1A	1,0m	TM10 - 1m 58W 9840Lm 4K D2 Ra80 W2 IP20 IK06
M1C87K2(x)8B1A	1,5m	TM15 - 1,5m 87W 14760Lm 4K D2 Ra80 W2 IP20 IK06
M1D11K2(x)8B1A	2,0m	TM20 - 2m 118W 19680Lm 4K D2 Ra80 W2 IP20 IK06

Sensor and Bluetooth controllers, B2L info. presented in a separate document.

OPTICS (x)

Art.nr Optic	Info Optic
O	30° HighRack
P	60° Medium
T	90° Wide
W	110° Wide
D	110° Diffuse
Y	Retail Sym1



Extra Wide 110°



Wide 90°



Retail SYM 1



Medium 60°



High Rack



Diffuse 110°

TRITONLED

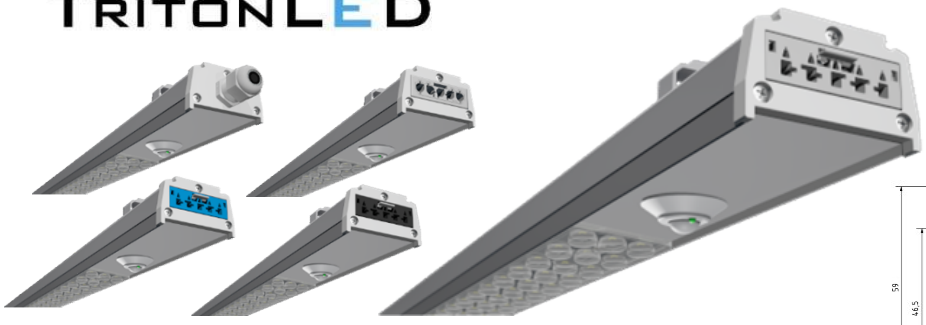



Triton MAX Sensor integrated, TMS-series

1200 - 2200 mm - All Sensor fixtures must use DALI drivers

Triton TMS (Sensor) - 201 Lm ledmodules													
Art.nr Lenght	LENGHT (mm)	Info Lenght	Width (mm)	Height (mm)	Weight (Kg)	Effect wattage	Amp (mA)	Lm/W Ra80	Led module Lumen	Fixture LUMEN (230V)	Lm/W Ra90	Led module	Fixture Efficiency (Lm)(230V)
G	1200	1,2m	62	36	1,4	39W	300	188	7370	7000Lm	165	6468	6140
G	1200	1,2m	62	36	1,4	58W	500	178	10360	9840Lm	150	8730	8290
H	1700	1,7m	62	36	2,0	41W	250	195	7956	7550Lm	167	6814	6470
H	1700	1,7m	62	36	2,0	87W	500	178	15540	14760Lm	150	13095	12440
I	2200	2,2m	62	36	2,6	55W	250	195	10608	10070Lm	167	9085	8630
I	2200	2,2m	62	36	2,6	118W	500	178	20720	19680Lm	150	17460	16580

MS - Integrated Sensor, Cable Gland (CG) DALI2 IP43 IK06

MSG58K3(x)8C3A	1.2m	MS12, 1,2m 58W 9840Lm 4K Dali2(B2L) Ra80 CG IP43 IK06
MSH87K3(x)8C3A	1.7m	MS17, 1,7m 87W 14760Lm 4K Dali2(B2L) Ra80 CG IP43 IK06
MSI11K3(x)8C3A	2.2m	MS22, 2,2m 118W 19680Lm 4K Dali2(B2L) Ra80 CG IP43 IK06

Sensor, Quick connector (WAGO (W2) / Ensto (E2)) / DALI2 driver - IP20 IK06

MSG58K3(x)8B/F1A	1.2m	MS12, 1,2m 58W 9840Lm 4K Dali2(B2L) Ra80 W2/EN IP20 IK06
MSH87K3(x)8B/F1A	1.7m	MS17, 1,7m 87W 14760Lm 4K Dali2(B2L) Ra80 W2/EN IP20 IK06
MSI11K3(x)8B/F1A	2.2m	MS22, 2,2m 118W 19680Lm 4K Dali2(B2L) Ra80 W2/EN IP20 IK06

SENSOR Options (x)

Art.nr Sensor	Sensor Code	Sensor IP-grade	Work heights	Sensor info
1	ME	IP20	4m	Connect ME
2	XFW	IP20	4-5m	MultiSensor XF-WH
3	XFB	IP20	4-5m	MultiSensor XF-BK
4	XS	IP20	4m	MultiSensor XS
5	XL	IP20	6-12m	MultiSensor XL
6	XXL	IP20	10-17m	MultiSensor XXL
7	IM65	IP65	4-5m	MultiSensor IP65
8	MC083SRC	IP20	8-12m	OnOff (AP) 12m
9	MC098S	IP20	3-6m	OnOff (AP) 6m
0	MSA	IP20	2-17m	Multisensor AIR

OPTICS (x)

Art.nr Optic	Info Optic
O	30° HighRack
P	60° Medium
T	90° Wide
W	110° Wide
D	110° Diffuse
Y	Retail Sym1



Extra Wide 110°



High Rack



Retail SYM 1



Medium 60°



Wide 90°



Diffuse 110°

TRITONLED

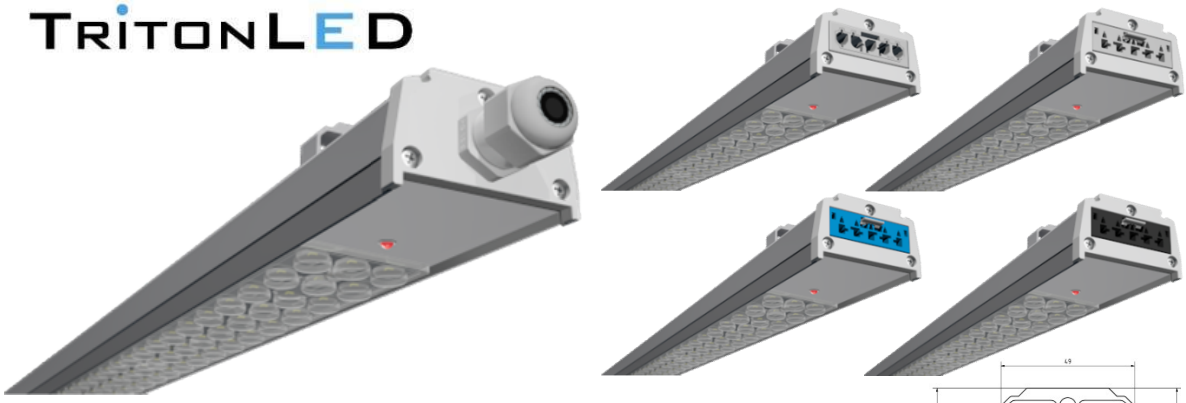



Triton MAX Emergency - ME-series

3 tim emergency light

700mm - 201 Lm ledmodules

Triton ME NDL - Emergency Only - 3h emergency light (C)											(C)		
Art.nr Lenght	LENGHT (mm)	Info Lenght	Width (mm)	Height (mm)	Weight (Kg)	Effect wattage	Amp (mA)	Lm/W Ra80	Led module Lumen	Fixture LUMEN (230V)	Lm/W Ra90	Led module	Fixture Efficiency (Lm)(230V)
A	700	0,7m	62	36	0,6	3W	250	142	426	400Lm	133	399	370Lm

Triton ME+DL - Emergency (3h) + Daylight Option (B C)											Lm/W Ra90	Led module	Fixture Efficiency (Lm)(230V)
A	700	0,7m	62	36	0,8	3W	250	142	426	400Lm	133	-	-
A	700	0,7m	62	36	0,8	14W	250	195	2652	2510Lm	167	2272	2150
A	700	0,7m	62	36	0,8	20W	350	188	3685	3500Lm	165	3234	3070
A	700	0,7m	62	36	0,8	29W	500	178	5180	4920Lm	150	4365	4140

ME - Emergency light Only; OnOff (ON), Cable Gland (CG), IP43

ME1A03K0(x)8C3A	0,7m	ME, 0,7m 3W 400Lm -1tim - 4K Ra80 ON CG IP43 IK06

ME - Emergency light Only; Dali2 (D2), WAGO Dali (W2). Alt. Ensto (EN), IP20

ME1A03K0(x)8B1A	0,7m	ME, 0,7m 3W 400Lm -1tim - 4K Ra80 D2-B2L W2 IP20 IK06
ME1A03K0(x)8E1A	0,7m	ME, 0,7m 3W 400Lm -1tim - 4K Ra80 D2-B2L EN IP20 IK06

ME - Emergency + Daylight; OnOff (ON), Cable Gland (CG), IP43

ME1A14K0(x)8C3A	0,7m	ME, 0,7m 3W 400Lm-1tim / 14W 2510Lm 4K Ra80 ON CG IP43 IK06
ME1A20K0(x)8C3A	0,7m	ME, 0,7m 3W 400Lm-1tim / 20W 3500Lm 4K Ra80 ON CG IP43 IK06
ME1A29K0(x)8C3A	0,7m	ME, 0,7m 3W 400Lm-1tim / 29W 4920Lm 4K Ra80 ON CG IP43 IK06

ME - Emergency + Daylight; Dali2 (D2) Driver, WAGO Dali (W2). Alt. Ensto (EN)

ME1A29K0(x)8B1A	0,7m	ME, 0,7m 3W 400Lm-1tim / 29W 4920Lm 4K Ra80 D2 W2 IP43 IK06
ME1A29K0(x)8E1A	0,7m	ME, 0,7m 3W 400Lm-1tim / 29W 4920Lm 4K Ra80 D2 EN IP43 IK06

OPTICS (x)

Art.nr Optic	Info Optic
O	30° HighRack
P	60° Medium
T	90° Wide
W	110° Wide
D	110° Diffuse
Y	Retail Sym1



Extra Wide 110°



High Rack



Retail SYM 1



Medium 60°



Wide 90°



Diffuse 110°