TRITONLED

S-ROW Series

Efficiency and Sustainability

IP54

IK08

600 - 1740 mm

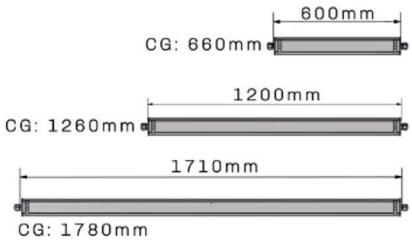



5 YEARS GUARANTEE

Triton **TS-series** - 211Lm ledmodules

B C

C A G

Art.nr Lenght	**LENGHT (mm)**	Info Lenght	Width (mm)	Height (mm)	Weight (Kg)	**Effect** wattage	Amp (mA)	**Lm/W Ra80**	Led module Lumen	Fixture LUMEN (230V)	**Lm/W Ra90**	Led module	Fixture Efficiency (Lm)(230V)
A	**600**	0,6m	62	36	0,8	**16W**	250	205	3300,5	3130Lm	**158**	2544	**2410**
A	**600**	0,6m	62	36	0,8	**23W**	350	200	4560	4330Lm	**154**	3511	**3330**
A	**600**	0,6m	62	36	0,8	**33W**	**500**	**193**	6369	6050Lm	**149**	4917	**4670**
B	**1200**	1.2m	62	36	1,6	**33W**	250	205	6601	6270Lm	**158**	5088	**4830**
B	**1200**	1.2m	62	36	1,6	**46W**	350	200	9120	8660Lm	**154**	7022	**6670**
B	**1200**	1.2m	62	36	1,6	**66W**	**500**	**193**	12738	12100Lm	**149**	9834	**9340**
C	**1740**	1.74m	62	36	2,4	**29W**	150	210	5985	5680Lm	**162**	4617	**4380**
C	**1740**	1.74m	62	36	2,4	**38W**	200	207	7948,8	7550Lm	**160**	6144	**5830**
C	**1740**	1.74m	62	36	2,4	**48W**	250	205	9901,5	9400Lm	**158**	7631	**7240**
C	**1740**	1.74m	62	36	2,4	**68W**	350	200	13680	12990Lm	**154**	10534	**10000**
C	**1740**	1.74m	62	36	2,4	**99W**	**500**	**193**	19107	18150Lm	**149**	14751	**14010**

TS series OnOff Driver (ON), Cablegland (CG) IP54

S1A33K0(x)8C3A	0,5m	TS06 60cm 33W 6060Lm 4K Ra80 ON CG IP54 IK08
S1B66K0(x)8C3A	1,2m	TS12 1,2M 66W 12120Lm 4K Ra80 ON CG IP54 IK08
S1C99K0(x)8C3A	1,7m	TS17 1,7M 99W 18180Lm 4K Ra80 ON CG IP54 IK08

TS series DALI2 (D2), Cablegland (CG) IP54

S1A33K2(x)8C3A	0,5m	TS06 60cm 33W 6060Lm 4K Ra80 D2 CG IP54 IK08
S1B66K2(x)8C3A	1,2m	TS12 1,2M 66W 12120Lm 4K Ra80 D2 CG IP54 IK08
S1C99K2(x)8C3A	1,7m	TS17 1,7M 99W 18180Lm 4K Ra80 D2 CG IP54 IK08

OPTICS (x)

Art.nr Optic	Optic degree	Info Optic
T	60	Medium 60°
W	90	Wide 90°
E	145	Batwing 145°

Medium 60°



Wide 90°



Batwing 145°



SROW - Emergency Light 1 tim, 3W, 400Lm
Ensto, Wago, W2, W3, CG (CableGland)

SROW - Sensor Integrated
CableGland (CG), Ensto (EN), Wago (W1, W2, W3)

TRITONLED

SROW Sensor integrated, SS-series IP20/54/65

600 - 1740 mm **IP54 / IK08** - All Sensor fixtures must use DALI drivers

Triton TS-series - 211Lm ledmodules

Art.nr Lenght	LENGHT (mm)	Info Lenght	Width (mm)	Height (mm)	Weight (Kg)	Effect wattage	Amp (mA)	Lm/W Ra80	Led module Lumen	Fixture LUMEN (230V)	Lm/W Ra90	Led module	Fixture Efficiency (Lm)(230V)
D	**800**	0,8m	62	36		16W	250	205	3300,5	3130Lm	**158**	2544	**2410**
D	800	0,8m	62	36		23W	350	200	4560	4330Lm	**154**	3511	**3330**
D	800	0,8m	62	36		33W	**500**	**193**	6369	6050Lm	**149**	4917	**4670**
E	**1400**	1,4m	62	36		33W	250	205	6601	6270Lm	**158**	5088	**4830**
E	1400	1,4m	62	36		46W	350	200	9120	8660Lm	**154**	7022	**6670**
E	1400	1,4m	62	36		66W	**500**	**193**	12738	12100Lm	**149**	9834	**9340**
F	1900	1,9m	62	36		48W	250	205	9901,5	9400Lm	**158**	7631	**7240**
F	1900	1,9m	62	36		68W	350	200	13680	12990Lm	**154**	10534	**10000**
F	1900	1,9m	62	36		99W	**500**	**193**	19107	18150Lm	**149**	14751	**14010**

SS series Dali Driver (D2), Cablegland (CG) IP54 / IK06-10

SS1D33K2(x)8C3A(x)	0,8m	SS08 80cm (Sensor) 33W 6050Lm 4K Ra80 D2 CG IP54 IKxx
SS1E66K2(x)8C3A(x)	1,4m	SS14 1,4M (Sensor) 66W 12100Lm 4K Ra80 D2 CG IP54
SS1F99K2(x)8C3A(x)	1,9m	SS19 1,9M (Sensor) 99W 18150Lm 4K Ra80 D2 CG IP54

SS series DALI2 (D2), WAGO (W2) IP20 / IK02-06-10

SS1D33K2(x)8B1A(x)	0,8m	SS08 80cm (Sensor) 33W 6050Lm 4K Ra80 D2 W2 IP20
SS1E66K2(x)8B1A(x)	1,4m	SS14 1,4M (Sensor) 66W 12100Lm 4K Ra80 D2 W2 IP20
SS1F99K2(x)8B1A(x)	1,9m	SS19 1,9M (Sensor) 99W 18150Lm 4K Ra80 D2 W2 IP20

WAGO (W2)
(DALI Driver)

SENSOR options (x)

Art.nr Sensor	Sensor Code	Sensor IP-grade	Work heights	Sensor info
1	ME	IP20	4m	Connect ME
2	XFW	IP20	4-5m	MultiSensor XF-WH
3	XFB	IP20	4-5m	MultiSensor XF-BK
4	XS	IP20	4m	MultiSensor XS
5	XL	IP20	6-12m	MultiSensor XL
6	XXL	IP20	10-17m	MultiSensor XXL
7	IM65	IP65	4-5m	MultiSensor IP65
8	MC083SRC	IP20	8-12m	OnOff (AP) 12m
9	MC098S	IP20	3-6m	OnOff (AP) 6m
0	MSA	IP20	2-17m	Multisensor AIR

OPTICS (x)

Art.nr Optic	Optic degree	Info Optic
T	60	Medium 60°
W	90	Wide 90°
E	145	Batwing 145°

Medium 60°



Wide 90°



Batwing 145°





ENSTO (EN)

WAGO (W1)

TRITONLED

SROW - Emergency

SE-series IP20/54

Emergency light, integrated

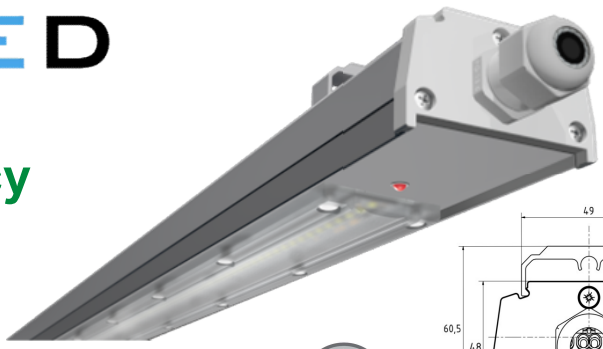



3h emergency **IP20-54 / IK06**

Triton SE - Emergency Only - 3h emergency light										C	C A↑G		
Art.nr Lenght	LENGHT (mm)	Info Lenght	Width (mm)	Height (mm)	Weight (Kg)	Effect wattage	Amp (mA)	Lm/W Ra80	Led module Lumen	Fixture LUMEN (230V)	Lm/W Ra90	Led module	Fixture Efficiency (Lm)(230V)
D	800	0,8m	62	36		3W	250	142	426	400Lm			

Triton SE+DL - Emergency (3h) + Daylight Option										B C	Lm/W Ra90	Led module	Fixture Efficiency (Lm)(230V)
D	800	0,8m	62	36		3W	250	142	426	400Lm			
D	800	0,8m	62	36		16W	250	205	3300,5	3130Lm	**158**	2544	**2410**
D	800	0,8m	62	36		23W	350	200	4560	4330Lm	**154**	3511	**3330**
D	800	0,8m	62	36		33W	**500**	**193**	6369	6050Lm	**149**	4917	**4670**

SE - Emergency light Only; OnOff (ON), Cable Gland (CG), IP43

SE1D03K0(x)8C3A	0,8m	SE, 0,8m 3W 400Lm -3tim - 4K Ra80 ON CG IP43 IK06

SE - Emergency Only; OnOff (ON) Driver, WAGO (W1. W3). Alt. Ensto (EN) IP20

SE1D03K0(x)8V1A	0,8m	SE, 0,8m 3W 400Lm -3tim - 4K Ra80 ON W1 IP20 IK06
SE1D03K0(x)8W1A	0,8m	SE, 0,8m 3W 400Lm -3tim - 4K Ra80 ON W3 IP20 IK06 (Infinity)
SE1D03K0(x)8E1A	0,8m	SE, 0,8m 3W 400Lm -3tim - 4K Ra80 ON EN IP20 IK06

SE - Emergency Only; Dali2 (D2), WAGO Dali (W2) / Ensto Dali (E2), IP20

SE1D03K2(x)8B1A	0,8m	SE, 0,8m 3W 400Lm -3tim - 4K Ra80 BL(Dali) W2 IP20 IK06
SE1D03K2(x)8W1A	0,8m	SE, 0,8m 3W 400Lm -3tim - 4K Ra80 BL(Dali) W3 IP20 IK06 (Infinity)
SE1D03K2(x)8F1A	0,8m	SE, 0,8m 3W 400Lm -3tim - 4K Ra80 BL(Dali) E2 IP20 IK06

SE - Emergency + Daylight; OnOff (ON), Cable Gland (CG), IP43

SE1D16K0(x)8C3A	0,8m	SE, 0,8m 3W 400Lm-3tim / 16W 3130Lm 4K Ra80 ON CG IP43 IK06
SE1D23K0(x)8C3A	0,8m	SE, 0,8m 3W 400Lm-3tim / 23W 4330Lm 4K Ra80 ON CG IP43 IK06
SE1D33K0(x)8C3A	0,8m	SE, 0,8m 3W 400Lm-3tim / 33W 6050Lm 4K Ra80 ON CG IP43 IK06

SE - Emergency + Daylight; B2L-Dali2 (BL) Driver, WAGO Dali (W2, W3) / Ensto Dali (E2) IP20

SE1D29K2(x)8B1A	0,8m	SE, 0,8m 3W 400Lm-3tim / 33W 6050Lm 4K Ra80 BL W2 IP20 IK06
SE1D29K2(x)8W1A	0,8m	SE, 0,8m 3W 400Lm-3tim / 33W 6050Lm 4K Ra80 BL W3 IP20 IK06 (Infinity)
SE1D29K0(x)8F1A	0,8m	SE, 0,8m 3W 400Lm-3tim / 33W 6050Lm 4K Ra80 BL E2 IP20 IK06

ENSTO Connector

WAGO (Dali) Connector

WAGO (Dali) infinity