


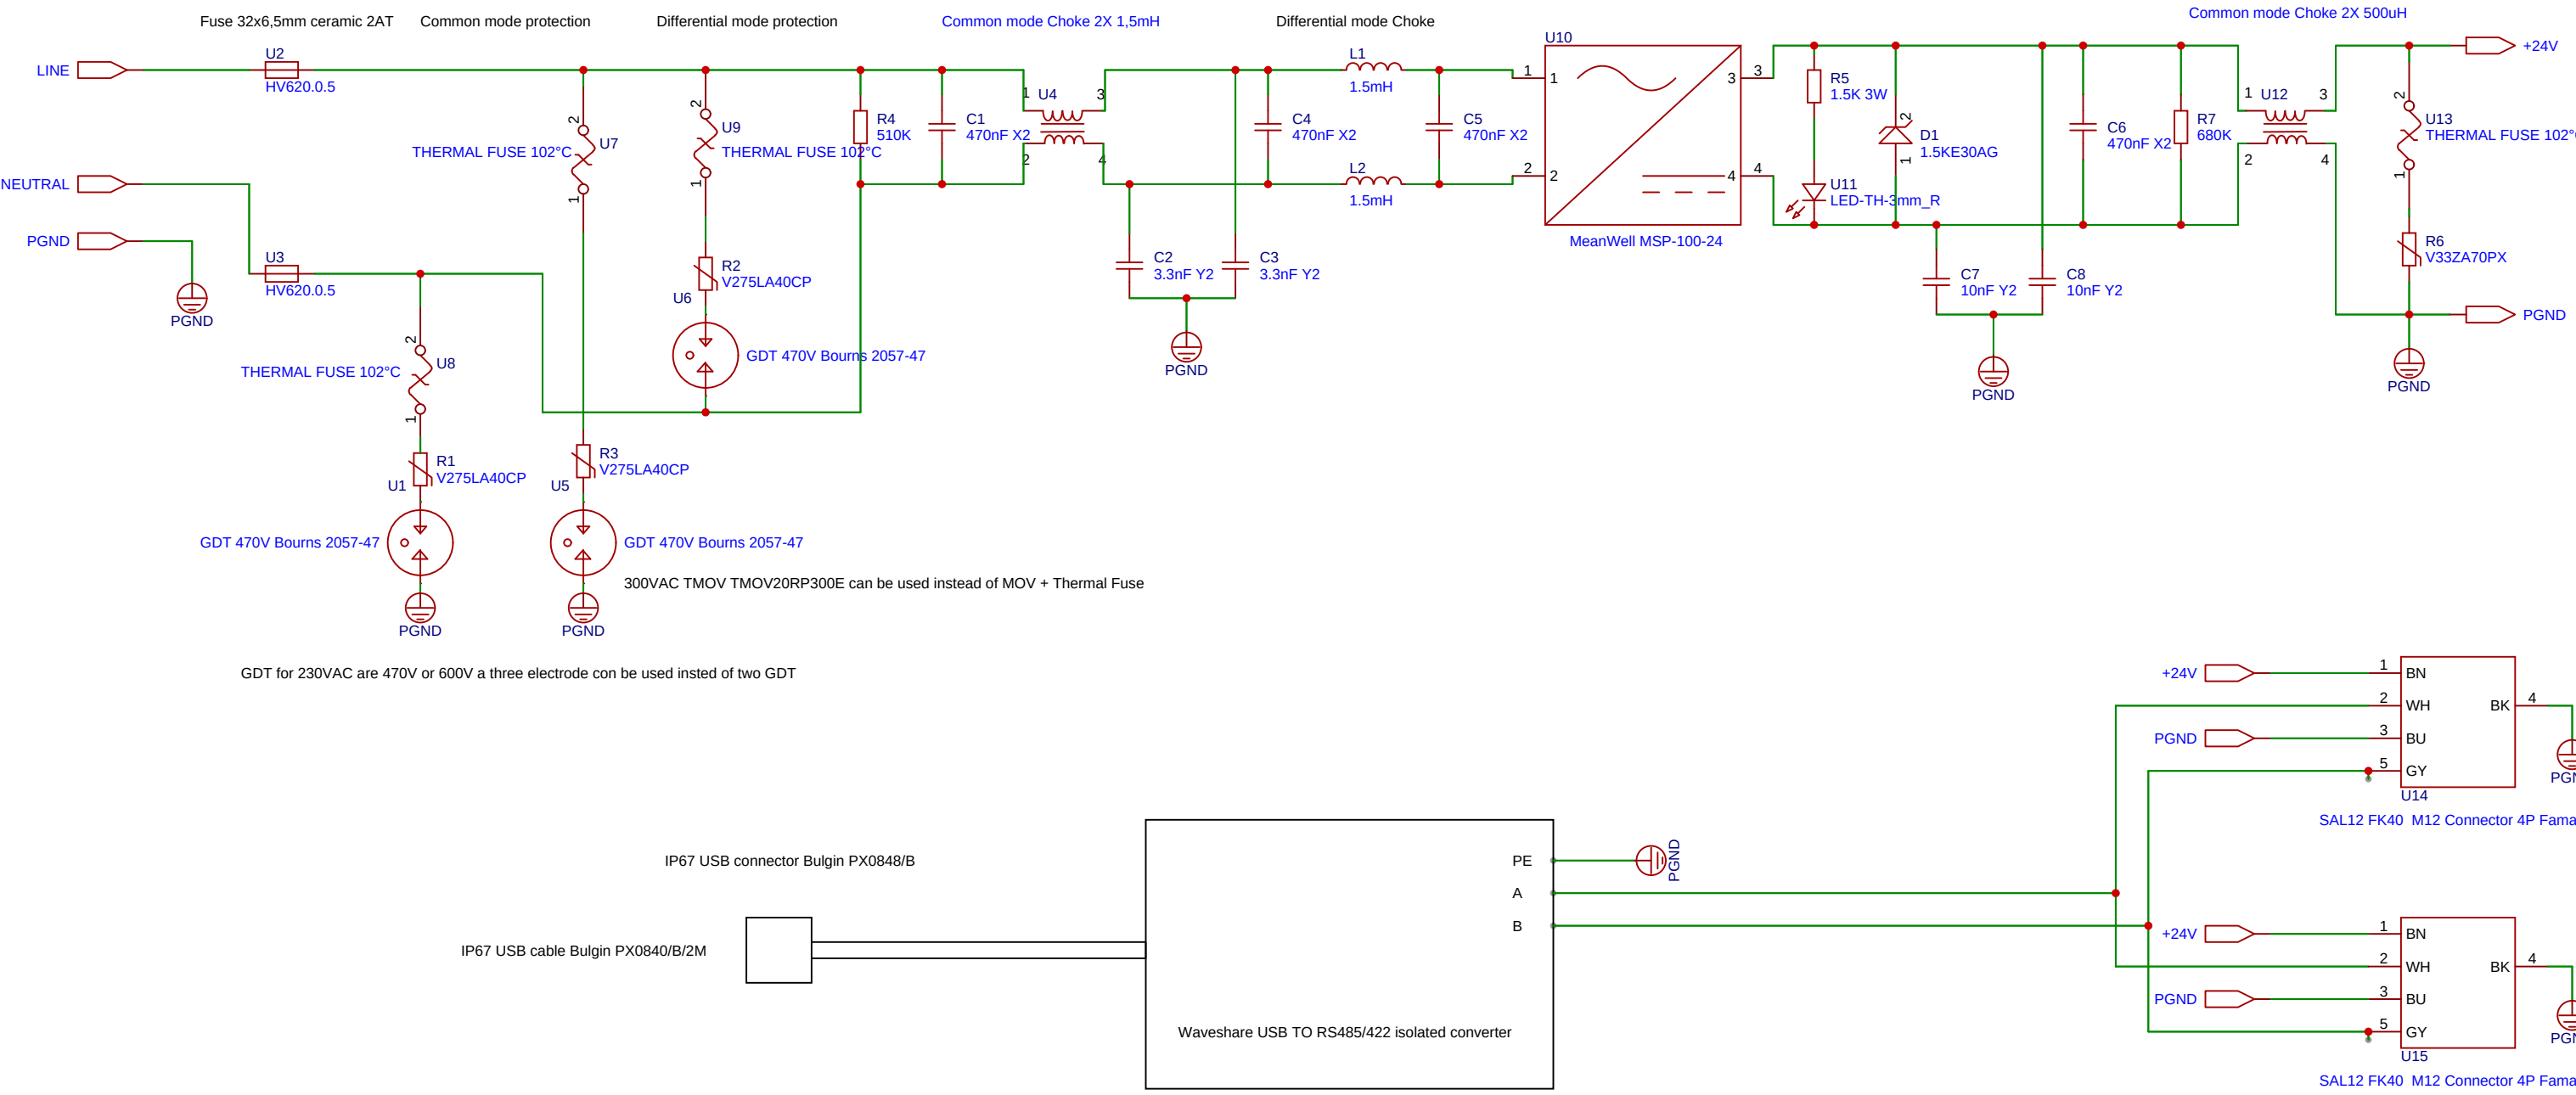

Both IEC 60950-1 and UL/IEC 62368-1 require that the rated voltage of the MOV be at least 125 % of the rated voltage of the equipment. So, for a 240 Vrms mains circuit, the rated voltage of the MOV must be at least 300 Vrms.

most AC mains applications will require an MOV with a minimum disc diameter of 14 mm

Schematic	Line_Surge_Protector			Create at	2025-03-12
				Update at	2025-03-17
Board	Line_Surge_Protector			Page	P1
Drawn	Line_Surge_Protector_2025-03-12_12-56-56				
Reviewed					
		Version	Size	Page 1 Total 1	
EasyEDA		V1.0	A4	EasyEDA.com	