

FORMULAS FOR LIFE

All formulas you'll ever need

Stefano Marton

A helpful tool for scientific studies

Contents

1	Statistics	3			
1.1	Mean	3		2.15.7	Capacitor capacity
1.1.1	Arithmetic mean	3		2.15.8	Dielectric Properties
1.1.2	Geometric mean	3		2.15.9	Electric Current
1.1.3	Harmonic mean	3		2.15.10	Ohm's Law
1.2	Standard Deviation	3		2.15.11	Power and Joule's effect
1.2.1	Absolute	3		2.16	Magnetism
1.2.2	Relative	3		2.16.1	Lorentz force
2	Pure Physics	4		2.16.2	La Place Law
2.1	Uniform Rectilinear Motion	4		2.16.3	Ampere teoreme
2.2	Uniform Accelerated Rectilinear Motion	4		2.16.4	Magnetic Flux
2.3	Parabolic motion	4		2.16.5	Electromagnetic induction
2.4	Uniform Circular Motion	4		2.16.6	Magnetic Energy
2.4.1	Angular velocity	4		2.16.7	LC Circuit
2.4.2	Angular acceleration	4		2.16.8	LR Circuit
2.4.3	Relation with linear variables	4		2.16.9	
2.5	Rotation with constant acceleration	4	3	Pure Chemistry	9
2.6	Kinetic of rotation	4	3.1	Concentration	9
2.6.1	Armonic Motion	4	3.1.1	Mole	9
2.6.2	Centripetal and Centrifugal acceleration	5	3.1.2	Molarity	9
2.6.3	Teorema dell'impulso	5	4	Thermodynamics	10
2.6.4	Newton Second Law's for rotation	5	4.1	Perfect gases	10
2.7	Angular momentum	5	4.1.1	State equation	10
2.8	Frictional Force	5	4.1.2	Properties	10
2.9	Centripetal Force	5	4.1.3	Compression factor	10
2.10	Rope's tension	5	4.2	Real gases	10
2.11	Gravitational Law	5	4.2.1	Virial equation	10
2.12	Pendulum Equation	5	4.2.2	van der Waals equation	10
2.13	Energy	5	4.2.3	Compression factor	10
2.13.1	Work	5	4.2.4	Boyle Temperature	10
2.13.2	Kinetic Energy	5	4.2.5	Critical and reduced variables	10
2.13.3	Elastic potential energy	5	4.3	Internal Energy	10
2.13.4	Gravitational Potential Energy	5	4.4	Enthalpy	11
2.13.5	Mechanical energy	5	4.4.1	Temperature dependence	11
2.13.6	Power	5	4.5	Entropy	11
2.14	Momentum	5	4.5.1	Trouton's Rules	11
2.15	Electrostatic	6	4.5.2	Temperature dependence	11
2.15.1	Coulomb force	6	4.5.3	Chemical reaction	11
2.15.2	Electric Field	6	4.6	Isothermal Transformations	11
2.15.3	Electric field flux	6	4.6.1	Free expansion	11
2.15.4	Gauss Law	6	4.6.2	Expansion vs. p_{ext}	11
2.15.5	Potential electric energy	6	4.6.3	Reversible expansion	11
2.15.6	Electrical Potential	6	4.7	Adiabatic Transformations	12
			4.7.1	Reversible process	12
			4.7.2	Irreversible	12
			4.7.3	Free expansion	12
			4.7.4	Expansion vs. p_{ext}	12

4.7.5	Reversible expansion	12	5.3	Second order reactions	15
4.8	Isobaric transformations	12	5.3.1	Unimolecular reaction	15
4.9	Thermodynamic cycles	12	5.3.2	Bimolecular reaction	15
4.9.1	Carnot cycle	12	5.4	Zero order reactions	15
4.10	Helmholtz's Energy	13	5.4.1	Half-life time	15
4.11	Gibbs's Energy	13	5.5	nth order reactions	15
4.11.1	Gibbs-Helmholtz's equation	13	5.5.1	Half-life time	15
4.11.2	Pressure dependence	13	5.6	Parallel reactions	16
4.12	Chemical potential	13	5.7	Consecutive reactions	16
4.12.1	Gibbs-Duhem equation	13	5.8	Opposite reactions	16
4.12.2	Natural variables	13	5.9	Arrhenius's equation	16
4.12.3	Perfect gas chemical potential	13	6	Electrochemistry	17
4.13	Chemical equilibrium	13	7	Wave Phenomena	18
4.13.1	Pressure dependence	14	7.1	Bragg Equation	18
4.13.2	Temperature dependence	14	7.2	Waves equation	18
4.14	Clausius-Clapeyron equation	14	7.3	Waves electric and magnetic field	18
4.14.1	Solid-liquid equilibrium	14	7.4	Waves variables	18
4.14.2	Liquid-vapor equilibrium	14	7.4.1	Wave length	18
4.14.3	Solid-vapor equilibrium	14	7.4.2	Frequency	18
5	Chemical Kinetics	15	7.4.3	Pulsazione	18
5.1	Reaction rate	15	7.4.4	Period	18
5.2	First order reactions	15	7.5	Electromagnetic waves	18
5.2.1	Half-life time	15	7.5.1	Power	18
5.2.2	Life time	15	7.5.2	Intensity	18

1 Statistics

1.1 Mean

1.1.1 Arithmetic mean

$$\bar{x} = \sum_{i=1}^n \frac{x_i}{N}$$

1.1.2 Geometric mean

$$\bar{x} = \left(\prod_{i=1}^n x_i \right)^{\frac{1}{n}}$$

1.1.3 Harmonic mean

$$\bar{x} = n \left(\sum_{i=1}^n \frac{1}{x_i} \right)^{-1}$$

1.2 Standard Deviation

1.2.1 Absolute

$$s = \sqrt{\frac{\sum_{i=1}^n (x_i - \bar{x})^2}{N - 1}}$$

1.2.2 Relative

$$RSD = \frac{s}{\bar{x}}$$

2 Pure Physics

2.1 Uniform Rectilinear Motion

$$\begin{aligned}x(t) &= x_0 + v_0 t \\v &= v_0\end{aligned}$$

2.2 Uniform Accelerated Rectilinear Motion

$$\begin{aligned}x(t) &= x_0 + v_0 t + \frac{1}{2}at^2 \Rightarrow x - x_0 = \frac{v^2 - v_0^2}{2a_0} \\v(t) &= v_0 + at \\a(t) &= a_0\end{aligned}$$

2.3 Parabolic motion

On the x axis:

$$\begin{cases} a_x = 0 \\ v_x = v_{0x} \\ x(t) = x_0 + v_{0x}t \end{cases}$$

On the y axis:

$$\begin{cases} a_y = a_{0y} = g \\ v_y = v_{0y} + gt \\ y(t) = y_0 + v_{0y}t + \frac{1}{2}gt^2 \end{cases}$$

The range can be calculated as:

$$R = \frac{2v_{0x}v_{0y}}{g} = \frac{v_0^2 \sin 2\alpha}{g}$$

The maximum height can be calculated as:

$$h_{\max} = \frac{v_0^2 \sin^2 \alpha}{2g}$$

2.4 Uniform Circular Motion

2.4.1 Angular velocity

$$\omega_{\text{avg}} = \frac{\theta_2 - \theta_1}{t_2 - t_1} = \frac{\Delta\theta}{\Delta t}$$

2.4.2 Angular acceleration

$$\alpha_{\text{avg}} = \frac{\omega_2 - \omega_1}{t_2 - t_1}$$

2.4.3 Relation with linear variables

Linear velocity

$$v = \omega r \quad (\text{radian measure})$$

Linear acceleration

$$\begin{aligned}a_{\text{tangential}} &= \alpha r \quad (\text{radian measure}) \\a_{\text{radial}} &= \frac{v^2}{r} = \omega^2 r\end{aligned}$$

Period

If the point moves in uniform circular motion :

$$T = \frac{2\pi r}{v} = \frac{2\pi}{\omega}$$

2.5 Rotation with constant acceleration

$$\begin{aligned}\omega &= \omega_0 + \alpha t \\ \theta - \theta_0 &= \omega_0 t + \frac{1}{2}\alpha t^2\end{aligned}$$

2.6 Kinetic of rotation

$$E_k = \frac{1}{2}I\omega^2$$

I is the rotational inertia of the body; for a system of discrete particles it is defines as:

$$I = \sum m_i r_i^2$$

It has different formulas for different shapes

2.6.1 Armonic Motion

$$x(t) = A \sin(\omega * t + \phi)$$

It can be also calculated as:

$$\omega = \sqrt{\frac{k}{m}}$$

2.6.2 Centripetal and Centrifugal acceleration

$$a_c = \omega^2 r = \frac{v^2}{r}$$

2.6.3 Teorema dell'impulso

$$I = \Delta p = m\Delta v = F\delta t$$

2.6.4 Newton Second Law's for rotation

$$\tau = I\alpha$$

2.7 Angular momentum

$$L = I\omega = r \text{prodvetm} \vec{v}$$

$$\Delta L = \tau \quad \Delta l = I \text{vectr}$$

2.8 Frictional Force

$$\vec{F}_a = -\mu N$$

2.9 Centripetal Force

$$F_c = m \frac{v^2}{r} = n\omega^2 r$$

2.10 Rope's tension

$$I \propto T R$$

2.11 Gravitational Law

$$F = G \frac{m_1 m_2}{r^2} \quad 6.6743 \cdot 10^{11} \text{m}^3 \text{kg s}^2$$

Is also possible to calculate the Gravitational Acceleration

$$g = \frac{GM}{r^2}$$

2.12 Pendulum Equation

$$m \frac{d^2 x}{dt^2} + mg \sin \theta = 0$$

$$\frac{d^2}{dt^2} + \frac{g}{L} \sin \theta = 0 \quad \Rightarrow \quad \frac{g}{L} = \omega^2$$

If $\theta \approx 0$ then:

$$T = \frac{2\pi}{\omega} = \sqrt{\frac{L}{g}} \quad \theta(t) = \theta_0 + \cos(\omega t + \phi)$$

2.13 Energy

2.13.1 Work

$$\vec{L} = \vec{F} \cdot \Delta \mathbf{r} = F \Delta r \cos \theta$$

2.13.2 Kinetic Energy

$$E_c = \frac{1}{2} m v^2$$

$$L = \Delta E_c = \frac{1}{2} m v_f^2 - \frac{1}{2} m v_i^2$$

2.13.3 Elastic potential energy

$$U_{el} = \frac{1}{2} k x^2$$

2.13.4 Gravitational Potential Energy

$$U_g = mgh$$

2.13.5 Mechanical energy

$$E_m = E_c + U$$

2.13.6 Power

$$P = \frac{W}{\Delta t}$$

2.14 Momentum

$$\vec{p} = m\vec{v}$$

2.15 Electrostatic

2.15.1 Coulomb force

$$F = \frac{1}{4\pi\epsilon_0} \frac{q_1 q_2}{r^2}$$

2.15.2 Electric Field

$$E = \frac{F}{q_0}$$

Point-like charge

$$E = \frac{1}{4\pi\epsilon_0} \frac{q}{r^2} \hat{r}$$

Continuos distribution

$$E = \frac{1}{4\pi\epsilon_0} \int \frac{dq}{r^2} \hat{r}$$

Plates electric field

$$E = \frac{\sigma}{2\epsilon_0}$$

Capacitor or conductor electric field

$$E = \frac{\sigma}{\epsilon_0}$$

Dipole electric field

$$E(P) = -\frac{1}{4\pi\epsilon_0} \frac{p}{R^3}$$

Where p is called dipole momentum and is equal to:

$$p = 2qa\hat{e}_z$$

Cable electric field

$$E = \frac{\Delta V}{L}$$

2.15.3 Electric field flux

$$\Phi = \int E \cdot dS$$

2.15.4 Gauss Law

$$\Phi(E) = \frac{\sum_{k=1}^N q_{k \text{ int}}}{\epsilon_0}$$

2.15.5 Potential electric energy

$$L_{AB} = q_0 \int_A^B E \cdot dl = U(B) - U(A)$$

$$L_{AB} = \sum_{k=1}^N [U_k(B) - U_k(A)] \quad U_k = k \frac{q_0 q_k}{r}$$

Displacement along a plates

$$L_{AB} = qE(r_B - r_A)$$

2.15.6 Electrical Potential

$$V_k = k \frac{q_k}{r} \quad U = q_0 V$$

2.15.7 Capacitor capacity

$$C = \frac{q}{V} \quad [C] = \frac{C}{V} = \text{Farad}$$

$$C = \epsilon_0 \frac{A}{d}$$

Capacitors in series

$$\frac{1}{C_{eq}} = \frac{1}{C_1} + \frac{1}{C_2}$$

Capacitors in parallel

$$C_{eq} = \sum_{i=1}^N C_i$$

Stored energy

$$\Delta U = \frac{1}{2} CV^2$$

$$\Delta U = \frac{1}{2} \epsilon_0 A E^2 d$$

2.15.8 Dielectric Properties

The relative Dielectric constant is calculated as:

$$\epsilon = \frac{V_0}{V}$$

Where V_0 is the Potential measured in empty space. It can be useful to calculate capacitor capacity, considering different material between the two plates.

$$C = C_0 \epsilon_r$$

2.15.9 Electric Current

$$I = \frac{dq}{dt} \quad [I] = \frac{C}{s} = \text{Ampere}$$

It can be expressed in function to the number of charge carriage

$$I = nqAv_d$$

Electric Density

$$j = nqv_d$$

$$I = \int J \cdot \hat{n} dS$$

$$\Phi(j) = I = \int J \cos \theta dS$$

2.15.10 Ohm's Law

The general expression can be written as:

$$j = \sigma E$$

Where σ is the conductivity. For a wire it can be written as follows:

$$\begin{cases} \Delta V = RI \\ R = \rho \frac{L}{A} \end{cases}$$

Where ρ is equal to $\frac{1}{\sigma}$ and it is called resistivity

Resistor in series

$$R_{eq} = \sum_{i=1}^N R_i$$

Resistor in parallel

$$\frac{1}{R_{eq}} = \sum_{i=1}^N \frac{1}{R_i}$$

Circuit fem

$$RI = \Delta V = \varepsilon - rI$$

Where r is the circuit resistance

2.15.11 Power and Joule's effect

$$P = \frac{dU}{dt} = \frac{dq}{dt} \Delta V = I \Delta V$$

Using Ohm's law it can be rewritten as:

$$P = RI^2$$

n The energy dissipated by a resistor is equal to:

$$E_d = \frac{1}{2} C \varepsilon^2$$

2.16 Magnetism

2.16.1 Lorentz force

A particle of charge q moving with a velocity v in an electric field E and a magnetic field B experiences a force equal to:

$$\vec{F} = q\vec{v} \times \vec{B}$$

For a wire it can be also calculated as:

$$\vec{F} = \vec{B}IL$$

seconda legge di Laplace

2.16.2 Laplace Law

$$d\vec{B} = \frac{\mu_0}{4\pi} \frac{I}{r^2} d\vec{l} \times \hat{r}$$

$$\vec{B}(P) = \int d\vec{B}$$

$$|d\vec{B}| = \frac{\mu_0}{4\pi} \frac{I}{r^2} d\vec{l} \sin \theta$$

2.16.3 Ampere teoreme

Solenoid

$$B = \mu_0 I \frac{N}{L}$$

Wire

$$B = \mu_0 \frac{I}{2\pi r}$$

2.16.4 Magnetic Flux

$$\Phi_B = N \int \vec{B} \cdot d\vec{\sigma} = NBS \cos \alpha$$

For a rotational motion dependence

$$\Psi = BS \cos \omega t$$

2.16.5 Electromagnetic induction

Is also known as Faraday-Newman-Lenz Law

$$\varepsilon = -\frac{d}{dt}$$

The inductive effect can also be expressed as

$$\varepsilon_L = -L = \frac{di}{dt}$$

For a solenoid is true that:

$$L = \mu_0 \left(\frac{N}{L} \right)^2 V$$

Where V is the volume included in the solenoid.

The relationship can be also written as:

$$\begin{aligned} \frac{d}{dt} &= L \frac{dI}{dt} \\ L &= \frac{d}{dI} \end{aligned}$$

For variable area

$$\varepsilon = \frac{d\Phi}{dt} = \frac{BdS}{dt} = B \frac{dx}{dt} = Blv$$

For a variable area dependent on circular motion

$$\varepsilon = \omega BS \sin \omega t$$

2.16.6 Magnetic Energy

$$U_m = \frac{1}{2} LI^2$$

2.16.7 LC Circuit

$$q(t) = q_0 \cos(\omega t + \phi) \quad \frac{1}{\sqrt{LC}}$$

2.16.8 LR Circuit

$$i(t) = -\frac{\varepsilon_0}{R} [1 - e^{-\frac{R}{L}t}]$$

2.16.9

3 Pure Chemistry

3.1 Concentration

3.1.1 Mole

$$n = \frac{m}{MW}$$

3.1.2 Molarity

$$M = \frac{n}{V}$$

4 Thermodynamics

4.1 Perfect gases

4.1.1 State equation

$$pV = nRT$$

$$pV_m = RT$$

4.1.2 Properties

Molar mass

$$d_{\text{gas}} \cdot V_m = MW$$

Boyle's law

$$p_1 V_1 = p_2 V_2 \quad T = \text{const}$$

Charle's law

$$\frac{V_1}{T_1} = \frac{V_2}{T_2} \quad p = \text{const}$$

Gay-Lussac's Law

$$\frac{p_1}{T_1} = \frac{p_2}{T_2} \quad V = \text{const}$$

4.1.3 Compression factor

$$Z = \frac{PV}{nRT}$$

$Z = 1$ for perfect gases

4.2 Real gases

4.2.1 Virial equation

$$pV_m = RT \left(1 + \frac{B}{V_m} + \frac{C}{V_m^2} + \dots \right)$$

4.2.2 van der Waals equation

$$p = \frac{nRT}{V - nb} - a \left(\frac{n}{V} \right)^2$$
$$p = \frac{nRT}{V_m - b} - \frac{a}{V_m^2}$$

4.2.3 Compression factor

$$Z = \frac{V_m}{V_m - b} - \frac{a}{RTV_m}$$
$$\text{if } y = \frac{1}{V_m} \Rightarrow \frac{1}{1 - by} - \frac{ay}{RT}$$

4.2.4 Boyle Temperature

$$\lim_{p \rightarrow 0} \frac{dZ}{dp} = 0 \quad p \rightarrow 0 \Rightarrow \frac{1}{V_m} \rightarrow 0$$
$$y = \frac{1}{V_m} \quad \lim_{y \rightarrow 0} \frac{1}{1 - by} - \frac{ay}{RT} =$$
$$T_b = \frac{a}{Rb}$$

4.2.5 Critical and reduced variables

$$T_c = \frac{8a}{27Rb} \quad p_c = \frac{a}{27b^2} \quad V_c = 3b \quad Z_c = \frac{p_c V_c}{RT_c}$$

The van der Waals equation can be rewritten :

$$p_r = \frac{8T_r}{3V_r - 1} - \frac{3}{V_r^2}$$

4.3 Internal Energy

$$\Delta U = q + w$$

$$dU = \delta w + \delta q$$

$$dU = TdS - pdV$$

$$dU = \left(\frac{\partial U}{\partial S} \right)_V dS + \left(\frac{\partial U}{\partial V} \right)_S dV$$

Is always true that:

$$dU = \int_{T_1}^{T_2} C_V dT$$

$$\Delta U = nC_{V,m} \Delta T$$

4.4 Enthalpy

$$\begin{aligned} H &= U + pV \\ \Delta H &= \Delta U + \Delta pV \\ dH &= -SdT + Vdp \end{aligned}$$

For the perfect gas is also true that:

$$\Delta H = \Delta U + \Delta(nRT)$$

4.4.1 Temperature dependence

Pure substance

$$\Delta H(T_2) = \Delta H(T_1) + \int_{T_1}^{T_2} C_p dT.$$

Chemical reaction or phase transition

$$\begin{aligned} \Delta H(T_2) &= \Delta H_r T_1 + \Delta C_p (T_2 - T_1) \\ \Delta C_p &= [cC_{p,C} + dC_{p,D}] - [aC_{p,A} + bC_{p,B}] \end{aligned}$$

4.5 Entropy

$$\begin{aligned} \Delta S_{TOT} &\geq 0 \\ \Delta S &= \frac{q}{T} \Rightarrow \Delta S = \int_i^f \frac{q_{rev}}{T} \end{aligned}$$

For an ideal gas it is always true that:

$$\Delta S = nC_m \ln \left(\frac{T_f}{T_i} \right) + nR \ln \left(\frac{V_f}{V_i} \right)$$

Only mixing two gases results in:

$$\Delta S_{mix} = -R \sum_{i=1}^N n_i \ln \chi_i$$

4.5.1 Trouton's Rules

$$\Delta S_{trs} = \frac{\Delta H_{trs}}{T_{trs}}$$

4.5.2 Temperature dependence

Constant pressure

$$\Delta S = S(T_f) - S(T_i) = C_p \int_i^f \frac{dT}{T} = C_p \ln \left(\frac{T_f}{T_i} \right)$$

Constant volume

$$\Delta S = S(T_f) - S(T_i) = C_v \int_i^f \frac{dT}{T} = C_v \ln \left(\frac{T_f}{T_i} \right)$$

4.5.3 Chemical reaction

$$\begin{aligned} aA + bB &\rightarrow cC + dD \\ \Delta_r S^0 &= (cS_C^0 + dS_D^0) - (aS_A^0 + bS_B^0) \\ \Delta_r S^0 &= \sum_{i=1}^N \nu_i S_{reagents}^0 - \sum_{i=1}^N \nu_i S_{products}^0 \end{aligned}$$

If calculating $T \neq 298K$:

$$\begin{aligned} \Delta_r S(T_2) &= \Delta_r S(T_1) + \Delta C_p \ln \frac{T_2}{T_1} \\ \Delta C_p &= (cC_{c,p} + dC_{d,p}) - (aC_{a,p} + bC_{b,p}) \end{aligned}$$

4.6 Isothermal Transformations

4.6.1 Free expansion

$$\begin{aligned} \Delta T = 0 &\Rightarrow \Delta U = 0 \Rightarrow q = w \\ w = q &= -p_{ext} \Delta V = 0 \\ \Delta H &= \Delta PV \text{ (0 for perfect gas)} \\ \Delta S &= nR \ln \left(\frac{V_f}{V_i} \right) \quad \Delta S' = 0 \quad \Delta S_{tot} = \Delta S \end{aligned}$$

4.6.2 Expansion vs. p_{ext}

$$\begin{aligned} \Delta T = 0 &\Rightarrow \Delta U = 0 \Rightarrow q = w \\ w = q &= -p_{ext} \Delta V \\ \Delta H &= \Delta PV \text{ (0 for perfect gas)} \\ \Delta S &= nR \ln \left(\frac{V_f}{V_i} \right) \quad \Delta S' = \frac{-q_{sistema}}{T} \\ \Delta S_{tot} &= \Delta S + \Delta S' \end{aligned}$$

4.6.3 Reversible expansion

$$\begin{aligned} \Delta T = 0 &\Rightarrow \Delta U = 0 \Rightarrow q = w \\ q = w &= -nRT \ln \left(\frac{V_f}{V_i} \right) \\ \Delta H &= \Delta PV \text{ (0 for perfect gas)} \\ \Delta S &= nR \ln \left(\frac{V_f}{V_i} \right) \quad \Delta S' = -nR \ln \left(\frac{V_f}{V_i} \right) \\ \Delta S_{tot} &= 0 \end{aligned}$$

4.7 Adiabatic Transformations

$$dU = dw$$

$$C_V dT = -pdV$$

$$w_{\text{Adiabatic}} = nC_{V,m}\Delta T$$

For an adiabatic process is also true that:

$$\gamma = \frac{C_{p,m}}{C_{V,m}} = \frac{C_p}{C_V} \quad P_1(V_1)^\gamma = P_2(V_2)^\gamma$$

4.7.1 Reversible process

$$C_V dT = \frac{-nRT}{V} dV$$

$$\int_{T_1}^{T_2} \frac{C_V dT}{T} = -nR \int_{V_1}^{V_2} \frac{dV}{V}$$

$$C_V \ln\left(\frac{T_2}{T_1}\right) = -nR \ln\frac{V_2}{V_1}$$

$$\frac{T_2}{T_1} = \left[\frac{V_2}{V_1}\right]^{-\frac{R}{C_V}}$$

4.7.2 Irreversible

Take P as constant

$$\int_{T_1}^{T_2} C_V dT = -p \int_{V_1}^{V_2} dV$$

Assuming $C_V = \text{const}$

$$C_V \Delta T = -p \Delta V$$

4.7.3 Free expansion

$$q = 0, \quad w = -p_{\text{ext}} \Delta V = 0 \implies \Delta U = 0$$

$$\Delta H =$$

$$\Delta S = nR \ln\left(\frac{V_f}{V_i}\right) \quad \Delta S' = 0 \quad \Delta S_{\text{tot}} = 0$$

4.7.4 Expansion vs. p_{ext}

$$q = 0 \implies \Delta U = w$$

$$\Delta U = nC_{V,m}\Delta T = w = -p_{\text{ext}}\Delta V$$

$$\Delta T = -\frac{p_{\text{ext}}\Delta V}{nC_{V,m}}$$

$$\Delta H = V\Delta p$$

$$\Delta S = nC_{V,m} \ln\left(\frac{T_f}{T_i}\right) + nR \ln\left(\frac{V_f}{V_i}\right)$$

$$\Delta S' = 0 \implies \Delta S_{\text{TOT}} = \Delta S$$

4.7.5 Reversible expansion

$$q = 0 \implies \Delta U = w$$

$$\Delta U = nC_{V,m}\Delta T$$

$$\Delta S = \Delta S' = \Delta_{\text{tot}} = 0$$

4.8 Isobaric transformations

$$dp = 0$$

$$q = \Delta H = nC_{p,m}\Delta T$$

$$w = -pdV$$

$$\Delta S = nC_{p,m} \ln\left(\frac{T_f}{T_i}\right) \quad \Delta S' = -nC_{p,m} \ln\frac{V_f}{V_i}$$

$$\implies \Delta S_{\text{TOT}} = 0$$

4.9 Thermodynamic cycles

$$\Delta U = 0, \quad \Delta S = 0, \quad \Delta H = 0.$$

4.9.1 Carnot cycle

There is 4 stage (ABCD):

AB Reversible Isothermal expansion

$$\Delta U = 0 \implies q_{AB} = -w_{AB}$$

$$w_{AB} = -q_{AB} = -nRT_h \ln\left(\frac{V_B}{V_A}\right)$$

BC Reversible Adiabatic Expansion

$$q_{BC} = 0 \implies \Delta U_{BC} = w_{BC}$$

$$w_{BC} = nC_{V,m}(T_C - T_h)$$

CD Reversible Isothermal compression

$$\Delta U = 0 \implies q_{CD} = -w_{CD}$$

$$w_{CD} = -q_{CD} = -nRT_h \ln\left(\frac{V_D}{V_C}\right)$$

DA Reversible Adiabatic compression

$$q_{DA} = 0 \implies \Delta U_{DA} = w_{DA}$$

$$w_{DA} = nC_{V,m}(T_C - T_h)$$

4.10 Helmholtz's Energy

$$A = U - ST$$

$$\Delta A_V = \Delta U_V - T\Delta S_V$$

ΔA is the maximum (more negative) work that can be done by the system if $dT=0$.

$$0 \geq w \geq \Delta A$$

It can also be expressed with natural variables:

$$dA = -SdT - pdV$$

$$dA = \left(\frac{\partial A}{\partial T}\right)_V dT + \left(\frac{\partial A}{\partial V}\right)_T dV$$

4.11 Gibbs's Energy

$$G = H - ST$$

$$\Delta G_p = \Delta H_p - T\Delta S_p$$

ΔG is the maximum (more negative) work that can be done by the system if $dT=0$.

$$0 \geq w_{ne} \geq \Delta G$$

It can also be expressed with natural variables:

$$dG = -SdT + Vdp$$

$$dG = \left(\frac{\partial G}{\partial T}\right)_p dT + \left(\frac{\partial G}{\partial p}\right)_T dp$$

4.11.1 Gibbs-Helmholtz's equation

$$\frac{\partial}{\partial T} \left(\frac{\Delta G}{T} \right)_p = -\frac{\Delta H}{T^2}$$

$$\frac{\Delta G(T_2)}{T_2} - \frac{\Delta G(T_1)}{T_1} = \Delta H \left(\frac{1}{T_2} - \frac{1}{T_1} \right)$$

4.11.2 Pressure dependence

$$\Delta G = G(p_2) - G(p_1) = nRT \ln \left(\frac{p_2}{p_1} \right)$$

It can be also used to find $G_m(T_2)$ for a reaction:

$$nA \rightarrow mB$$

$$nG(A, p_2) = nG^0 + nRT \ln p_2$$

$$nG(B, p_2) = mG^0 + mRT \ln p_2$$

$$\Delta G(p_2) = mG(B, p_2) - nG(A, p_2) =$$

$$\Delta G^0 + (m - n)RT \ln p_2$$

4.12 Chemical potential

G is an extensive variable, otherwise a p , T = cost it would be always true that $dG = 0$. G depends on the composition of the system: $G = G(p, T, n_1, n_2, \dots)$ The partial derivative of G is the chemical potential:

$$\mu = \left(\frac{\partial G}{\partial n_i} \right)_{p, T, n_j} \implies dG = \sum_{i=1}^N \mu_i dn_i$$

4.12.1 Gibbs-Duhem equation

$$\sum_{i=1}^N n_i d\mu_i = -SdT + Vdp$$

If temperature and pressure are constant:

$$\sum_{i=1}^N n_i d\mu_i = 0$$

4.12.2 Natural variables

$$\left(\frac{d}{dp} \right)_T = V_m \quad \left(\frac{d}{dT} \right)_p = -S_m$$

4.12.3 Perfect gas chemical potential

$$\left(\frac{d}{dp} \right)_T = \frac{V}{p}$$

$$\int_{p_0}^p \frac{V}{p} dp = \int_{p_0}^p \frac{RT}{p^2} dp = -RT \ln \left(\frac{p}{p_0} \right)$$

$$\mu(p, T) = \mu_0(p_0, T) + RT \ln \left(\frac{p}{p_0} \right)$$

4.13 Chemical equilibrium

$\Delta_r G$ is related to G variation at constant temperature and pressure

$$\Delta_r G = \left(\frac{\partial G}{\partial \xi} \right)_{p, T} = \sum_{i=1}^n \nu_i \mu_i$$

Is possible to relate $\Delta_r G^0$ and K :

$$K = e^{-\frac{\Delta_r G^0}{RT}}$$

Different K calculation are related easily:

$$K_c = K_n \left(\frac{1}{V} \right)^{\Delta\nu} \quad K_\chi = K_n \left(\frac{1}{n_{\text{tot}}} \right)^{\Delta\nu}$$

$$K_p = K_n \left(\frac{p_{\text{tot}}}{n_{\text{tot}}} \right)^{\Delta\nu}$$

4.13.1 Pressure dependence

$$\frac{\partial \ln K}{\partial p} = -\frac{1}{RT} \left(\frac{\partial \Delta_r G}{\partial p} \right)$$

$$\frac{\partial \ln K}{\partial p} = -\frac{\Delta_r V}{RT}$$

$$\Delta_r V \approx 0 \Rightarrow \left(\frac{\partial K}{\partial p} \right)_T = 0$$

Still, the equilibrium's composition is not independent of the pressure.

4.13.2 Temperature dependence

$$\frac{\partial \ln K}{\partial \frac{1}{T}} = -\frac{\Delta_r H^0}{R}$$

$$\ln \left(\frac{K_2}{K_1} \right) = -\frac{\Delta_r H^0}{R} \left(\frac{1}{T_2} - \frac{1}{T_1} \right)$$

$$K_2 = e^{\left(-\frac{\Delta_r H^0}{R} \left(\frac{1}{T_2} - \frac{1}{T_1} \right) \right)} \cdot K_1$$

4.14 Clausius-Clapeyron equation

Clausius' equation $\frac{dp}{dT} = \frac{\Delta S_m}{\Delta V_m}$

Clausius-Clapeyron $\frac{dp}{dT} = \frac{\Delta H_m}{T \Delta V_m}$

4.14.1 Solid-liquid equilibrium

$$\frac{dp}{dT} = \frac{\Delta_{\text{fus}} H_m}{\Delta V_{\text{fus}} T}$$

$$p_2 = p_1 + \frac{\Delta_{\text{fus}} H_m}{\Delta_{\text{fus}} V_m} \ln \left(\frac{T_2}{T_1} \right)$$

4.14.2 Liquid-vapor equilibrium

Temperature dependence

$$\frac{dp}{dT} = \frac{\Delta_{\text{vap}} H_m}{T \Delta_{\text{vap}} V_m}$$

$$d \ln p = \frac{\Delta_{\text{vap}} H_m}{RT^2} dT$$

$$p_2 = p_1 \cdot e^{\frac{\Delta_{\text{vap}} H_m}{RT^2} \left(\frac{1}{T_2} - \frac{1}{T_1} \right)}$$

Pressure dependence

$$p = p^* \cdot e^{\left(\frac{V_{m,\text{liq}}}{RT} \Delta p \right)}$$

4.14.3 Solid-vapor equilibrium

$$\frac{dp}{dT} = \frac{\Delta_{\text{sub}} H_m}{T \Delta_{\text{sub}} V_m}$$

$$d \ln p = \frac{\Delta_{\text{sub}} H_m}{RT^2} dT$$

$$p_2 = p_1 \cdot e^{\frac{\Delta_{\text{sub}} H_m}{RT^2} \left(\frac{1}{T_2} - \frac{1}{T_1} \right)}$$


5 Chemical Kinetics

5.1 Reaction rate

Is always true that:

$$r = \frac{dx}{dt} = \frac{1}{\nu_B} \frac{dC_B}{dt}$$

5.2 First order reactions

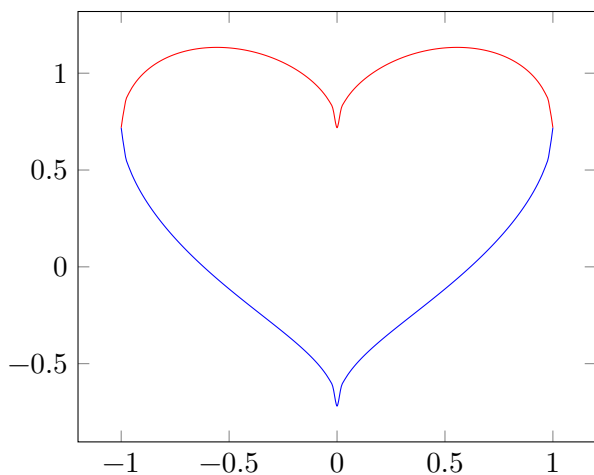

$$r = -\frac{dC_A}{dt} = k[A]$$
$$-\ln C_A + \ln C_{0A} = kt$$
$$\frac{C_A}{C_A^0} = e^{-kt}$$

5.2.1 Half-life time

$$t_{\frac{1}{2}} = \frac{\ln 2}{k} \quad [s^-]$$

5.2.2 Life time

5.3 Second order reactions

5.3.1 Unimolecular reaction

$$r = \frac{dC_A}{dt} = k[A]^2$$
$$\frac{1}{C_A} - \frac{1}{C_A^0} = kt$$

Half-life time

$$t_{\frac{1}{2}} = \frac{1}{C_A^0 k}$$

5.3.2 Bimolecular reaction

$$r = -\frac{dC_A}{dt} = -\frac{dC_B}{dt} = \frac{dx}{dt} = k[A][B]$$
$$\frac{1}{C_A^0 - C_B^0} \ln \left[\frac{(C_A^0 - x)C_B^0}{(C_B^0 - x)C_A^0} \right] = kt$$
$$\frac{C_B}{C_A} = \frac{C_B^0}{C_A^0} e^{(C_A^0 - C_B^0)kt}$$

Half-life time

$$t_{\frac{1}{2}} = \frac{1}{C_A^0 - C_B^0 k} \ln \left(\frac{2C_A^0 - C_B^0}{C_A^0} \right)$$

5.4 Zero order reactions

$$r = k$$
$$C = C^0 - kt$$

5.4.1 Half-life time

$$t_{\frac{1}{2}} = \frac{1}{2} t_f$$

5.5 nth order reactions




$$r = k[A]^n$$
$$\frac{1}{C^{n-1}} - \frac{1}{C^{0(n-1)}} = (n-1)kt$$

5.5.1 Half-life time

$$t_{\frac{1}{2}} = \frac{2^{n-1} - 1}{(C^0)^{n-1} k (n-1)}$$

5.6 Parallel reactions

In this condition A react with different velocity constant towards different products W,V and U.



$$r = -\frac{dC_A}{dt} = k_1 C_A + k_2 C_A + k_3 C_A = k C_A$$

Equation for the products can be written as:

$$C_U - C_U^0 = \frac{k_1 C_A^0}{k} (1 - e^{-kt})$$


$$C_V - C_V^0 = \frac{k_2 C_A^0}{k} (1 - e^{-kt})$$

$$C_W - C_W^0 = \frac{k_3 C_A^0}{k} (1 - e^{-kt})$$

k can be determined sperimentally from the relation between C_A and time, in this case it would be a first order relation. Concentration of the products can be determined with sperimental methods. At this point the following system can be used:

$$\begin{cases} k_1 + k_2 + k_3 = k \\ \frac{C_U}{C_W} = \frac{k_1}{k_2} \\ \frac{C_U}{C_V} = \frac{k_2}{k_3} \end{cases}$$

5.7 Consecutive reactions



This is the simplest case, with all first order reactions

$$r = -\frac{dC_A}{dt} = k_1 C_A$$

$$r = \frac{dC_B}{dt} = k_1 C_A - k_2 C_B$$

$$r = \frac{dC_C}{dt} = k_2 C_B$$

The C_C value in relation to time, in this case would be:

$$C_C = C_A^0 \left[1 - \frac{k_2 e^{-k_1 t} - k_1 e^{-k_2 t}}{k_2 - k_1} \right] + C_B^0 (1 - e^{-k_2 t}) + C_C^0$$

In case that $C_B^0 = 0, C_C^0 = 0$ then:

$$C_C = C_A^0 \left[1 - \frac{k_2 e^{-k_1 t} - k_1 e^{-k_2 t}}{k_2 - k_1} \right]$$

5.8 Opposite reactions

5.9 Arrhenius's equation

$$k = A \exp \left(-\frac{E_a}{RT} \right)$$

$$\ln k = \ln A - \frac{E_a}{RT}$$

6 Electrochemistry

7 Wave Phenomena

7.1 Bragg Equation

$$n\lambda = 2d_{hkl} \sin \theta$$

7.2 Waves equation

$$\frac{\partial^2 \Psi}{\partial x^2} - \frac{1}{v^2} \frac{\partial^2 \Psi}{\partial t^2} = 0$$

The solution must be in the form:

$$\Psi(x, t) = g(x \pm vt)$$

7.3 Waves electric and magnetic field

$$B_0 = \frac{E_0}{c}$$

7.4 Waves variables

7.4.1 Wave lenght

$$\lambda = \frac{2\pi}{K}$$

7.4.2 Frequency

$$\nu = \frac{1}{T}$$

7.4.3 Pulsazione

$$\omega = \frac{2\pi}{T} = 2\pi\nu$$

7.4.4 Period

$$T = \frac{2\pi}{\omega}$$

7.5 Electromagnetic waves

$$\begin{aligned} E_x &= B_x = \\ E_z^2 + E_y^2 &= c^2(B_z^2 + B_y^2) \\ E &= cB \end{aligned}$$

Also you can calculate:

$$E_0 = Bv = B \frac{\omega}{k}$$

7.5.1 Power

$$S = \frac{1}{\mu_0} E \text{vec} B$$

7.5.2 Intensity

Planar wave

Sferic wave