INSAR_G2S

An automatic script to export interferograms generated by GMTSAR into StaMPS/MTI

(suitable for Sentinel1A/B SLC dataset)

Noorlaila Isya email: noorlaila@geodesy.its.ac.id 23.10.2019

Institute für Geodäsie und Photogrammetrie





INSAR_G2S is automatic GMTSAR bundled scripts acted as InSAR Processor before running the InSAR time series analyis using StaMPS.

Required Softwares

- GMT
- GMTSAR
- StaMPS/MTI

- When using this program please reference Isya et al., 2020:
 - Hayati, N.; Niemeier, W.; Sadarviana, V. Ground Deformation in The Ciloto Landslides Area Revealed by Multi-Temporal InSAR. Geosciences 2020, 10, 156. https://doi.org/10.3390/geosciences10050156
- Related Publication:
 - Isya, N. H.; Riedel, A.; Riedel, B. & Niemeier, W. Comparison of Power Law Tropospheric Correction for Time Series InSAR Application Wissenschaftlich-Technische Jahrestagung der DGPF und PFGK18 Tagung in München, Deutschen Gesellschaft für Photogrammetrie, Fernerkundung und Geoinformation e.V., 2018, 483 50

How to use INSAR_G2S

Set INSAR_G2S scripts to your shell environment

```
cd ~ pico .bashrc
```

Add these commands on your bashrc and save it

```
export INSAR_G2S=/home/go_to_your_INSAR_G2S_path export PATH=$INSAR_G2S:"$PATH"
```

- Replace or add files from gmtsar_matlab to StaMPS/matlab directory
 - stamps.m (replace the old file)
 - ps_load_initial_gmtsar.m (add file)
 - sb_load_initial_gmtsar.m (add file)
- Make sure awk has been installed properly \$ sudo apt-get install gawk

INSAR_G2S overview

```
isya@hermes:~$ INSAR G2S.sh
Usage: INSAR G2S.sh [step] [parameter with path directory]
  Script to pre-process SAR data and export to STAMPS format
  example : INSAR G2S.sh 1 /home/isya/3d disp/param INSAR G2S.txt
  Step: Data Preparation -->
       1 Prepare the directory arrangement
       2 Prepare the POE data
       3 Prepare the EAP data
       4 Preprocess SAR data: Compute Baseline and Alignment
        5 Create a configuration of master-slave for SM or SB network
       Interferogram Generation -->
        6 Project DEM to radar coordinates
       7 Generate Interferogram (Real and Imaginary format) [SM | SB]
        8 Overview the sample of amplitude and phase file on Google Earth (optional)
        9 Cut the interferograms based on ROI (optional) [SM | SB]
        GMTSAR2STAMPS (PS Method) -->
        10 Create Amplitude Dispersion Index
        11 Convert GMTSAR result to be able processed by STAMPS PS
        12 Fix the result of PS Candidates (PS)
        GMTSAR2STAMPS (Small Baseline [SB] Method) -->
        13 Create Amplitude Difference Dispersion Index
        14 Convert GMTSAR result to be able processed by STAMPS SB
        15 Fix the result of PS Candidates (SB)
```

Step 0

 Create a main folder which all of the processing will be run.

\$ mkdir yourproject

 Copy a template of param_INSAR_G2S.txt in the "yourproject" folder

Explanation of param_INSAR_G2S.txt

```
dataorbit = the orbit direction (could be ascending / desecending)
raw path = the full path directory of your SLC SAR data (ZIP files)
sen POE = the full path directory of POE Sentinel-1 files, inside this directory S1A and S1B has to be splitted into two
            folders (S1A and S1B folder)
temp bl = the maximum limit of temporal baseline
spatial bl = the maximum limit of spatial baseline
region = the region of interest (radar coodinates)
reg II = the region of interest (geographic coodinates)
n range = number of patches in range
n azimuth = number of patches in azimuth
ov range = overlapping pixels between patches in range
ov azimuth = overlapping pixels patches in azimuth
threshold = threshold of amplitude (difference) dispersion (0.4-0.6 is reasonable)
heading = heading angle or azimuth direction for Sentinel-1, see metadata super master file ( default=auto or e.g., Asc
            = -12.00707218611660e; Dsc = -1.6799e+02)
master date = date of super master
                                                                 Use tiff id from single polarization, if your type data is "mix"
master PRM = the name of master PRM
suffix
      = sub-swath number (e.g F1, F2, F3)
tiff id = number of tiff (e.g 001, 002, ...)
type data = type of polarization (could be single | dual | mix)
```

param_INSAR_G2S.txt example -->

Note:

For Step 1-7, region and region_II can be let empty "-" region_II will be used on step 8 region will be used on step 9

Step 1 – 5 → a process of "Data Preparation"

(For the data preparation steps, they are suitable for Sentinel-1 dataset. If you want to process other sensors (e.g., ALOS, ERS, etc), You need to manually modify the scripts.)

Step 1; Prepare the directory arrangement

Run Step 1 on "yourproject" folder

\$ INSAR_G2S.sh 1 /home/isya/yourproject/param_INSAR_G2S.txt

It will create batch_asc or batch_dsc folder (depends on your orbit direction data)

Step 2 ; Prepare the POE data

Run Step 2 on "yourproject" folder

\$ INSAR_G2S.sh 2 /home/isya/yourproject/param_INSAR_G2S.txt

Just in case, install \$ sudo apt-get install unzip

If POE files are located on your local storage, type \$ yes

If you don't have POE files, the program will automatically download them, type \$ no

Step 3; Prepare the EAP data

The aux file is only needed for Elevation Antenna Pattern correction. Please check on the manifest.safe file from your downloaded data. If the processing version is after 2.36 (some early data after March 2015), there is no need to cat the aux file to the xmls.

If you want to add EAP, type type \$ yes and save s1a-aux-cal.xml and s1b-aux-cal.xml in raw_orig directory.

If you do not need EAP correction, type \$ no

Run Step 3 on "yourproject" folder

\$ INSAR_G2S.sh 3 /home/isya/yourproject/param_INSAR_G2S.txt

It will create "topo" directory inside batch_"orbit" directory. Please save **dem.grd** file in topo directroy.

dem.grd could be downloaded from https://topex.ucsd.edu/gmtsar/demgen/

Step 4; Preprocess SAR data: Compute Baseline and Alignment
Run Step 4 on "yourproject" folder
 \$ INSAR_G2S.sh 4 /home/isya/yourproject/param_INSAR_G2S.txt
 PRM, LED and SLC files will be generated in raw directory

Step 5 ; Create a configuration of master-slave for SM or SB network
 Run Step 5 on batch_"orbit" folder


\$ INSAR_G2S.sh 5 /home/isya/yourproject/param_INSAR_G2S.txt

There are two network options: Single Master (SM) or Small Baseline (SB)

If you want to work with PS method, type \$ SM


If you want to work with SB method, type \$ SB

baseline_pair_SM.ps

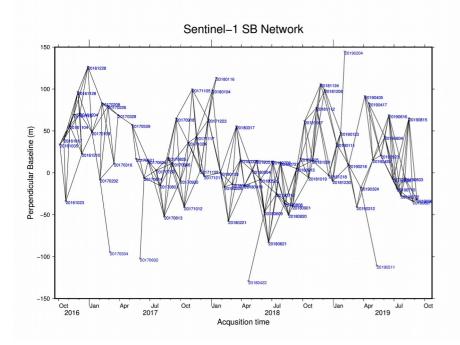


baseline_pair_50_100.ps

Example for the generated files from Step 5

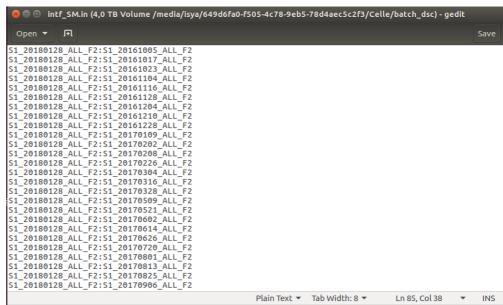

intf_SM.in

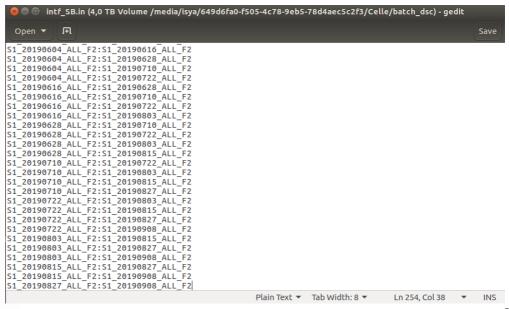

intf_SB.in

Step 6 – 9 → a process of "Interferogram Generation"

Step 6 ; Project DEM to radar coordinates

Run Step 6 on **batch_"orbit"** folder

\$ INSAR_G2S.sh 6 /home/isya/yourproject/param_INSAR_G2S.txt

Step 7 ; Generate Interferogram (Real and Imaginary format)

Run Step 7 on **batch_"orbit"** folder

\$ INSAR_G2S.sh 7 /home/isya/yourproject/param_INSAR_G2S.txt

There are two network options: Single Master (SM) or Small Baseline (SB), based on your option on Step 5

If you want to work with PS method, type \$ SM

If you want to work with SB method, type \$ SB

Step 8 ; Overview the sample of amplitude and phase file on Google Earth (optional)

Create one pair interferogram and save as **intf_tes.in** in stack directory (An example can be seen in intf_SB.in or intf_SM.in). Run Step 8 on **batch_"orbit"/stack** folder

\$ INSAR G2S.sh 8 /home/isya/yourproject/param INSAR G2S.txt

Step 9 ; Cut the interferograms based on ROI (optional) [SM | SB]

Run Step 9 on batch_"orbit"/stack folder

\$ INSAR_G2S.sh 9 /home/isya/yourproject/param_INSAR_G2S.txt

There are two network options: Single Master (SM) or Small Baseline (SB), based on your option on Step 5

If you want to work with PS method, type \$ SM

If you want to work with SB method, type \$ SB

Step 8 and 9 are optional.

If you want to save your computer storage, run step 8 to define your ROI on radar coordinates and step 9 to cut real and image files based on a certain region. You could delete imag* and real* files in stack directory after Step 9.

You can set **region_II** before running step 8 or let it empty if you want to plot a whole scene.

- After you could define radar coordinates based on the KML overview, set **region** before running step 9, 10,
- If you skip step 8 and 9, you still need to define **region** manually, you can get the information of radar coordinate for a whole scene from imag_xxx_xxx.grd or real_xxx_xxx.grd in stack folder. Use command \$ gmt grdinfo imag_xxx_xxx.grd. See the values of x min x max y min y max.

If on Step 5 you choose SM option, then run step 10 - 12

Step 10 – 12 → a process of "GMTSAR to STAMPS for PS method"

Step 10 ; Create Amplitude Dispersion (AD) Index

Run Step 10 on batch_"orbit"/stack folder

\$ INSAR G2S.sh 10 /home/isya/yourproject/param INSAR G2S.txt

In raw folder, scatter_SM.grd (Amplitude Dispersion) is generated.

Threshold of AD is taken from param_INSAR_G2S.txt (e.g 0.4).

Step 11; Convert GMTSAR result to be able processed by STAMPS PS

Run Step 11 on batch_"orbit"/stack folder

\$ INSAR_G2S.sh 11 /home/isya/yourproject/param_INSAR_G2S.txt

It will create PS directory and generate interferograms result based on StaMPS format.


Step 12; Fix the result of PS Candidates (PS)

Run Step 12 on batch_"orbit"/stack/PS folder

\$ INSAR G2S.sh 12 /home/isya/yourproject/param INSAR G2S.txt

This step is to rewrite pscands1.ll and pscands.hgt to have the same size matrix.

GMTSAR to StaMPS result [PS Method]

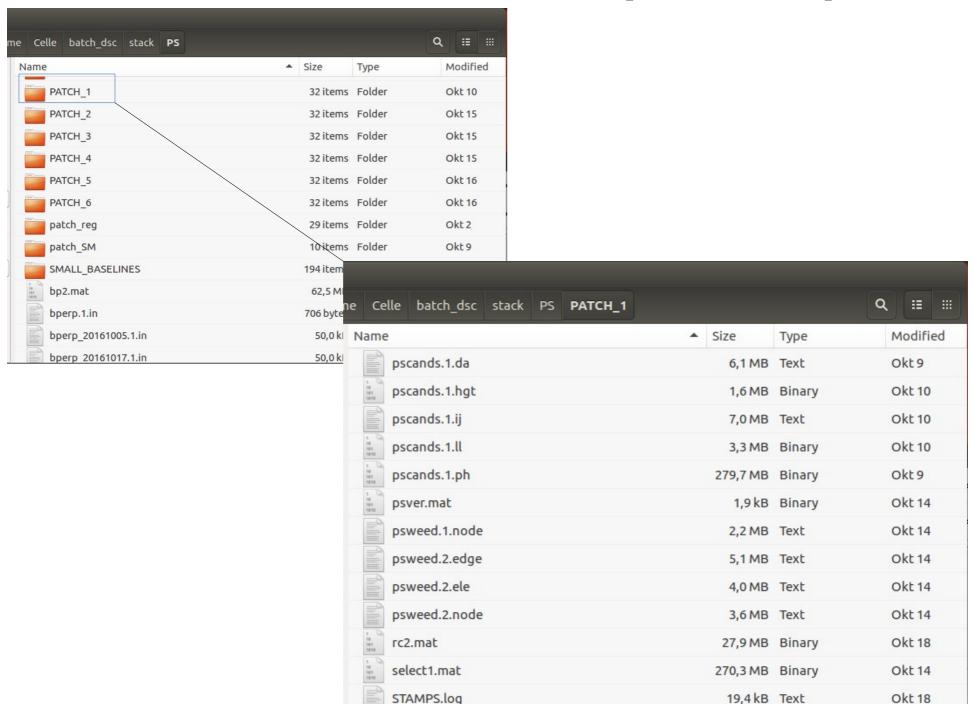

If on Step 5 you choose SB option, then run step 13 – 15

Step 13 – 15 → a process of "GMTSAR to STAMPS/MTI for SB method"

Step 13 ; Create Amplitude Difference Dispersion (ADD) Index

Run Step 13 on batch_"orbit"/stack folder

\$ INSAR_G2S.sh 13 /home/isya/yourproject/param_INSAR_G2S.txt

In raw folder, scatter_SB.grd (Amplitude Difference Dispersion) is generated.

Threshold of ADD is taken from param_INSAR_G2S.txt (e.g 0.6).

Step 14; Convert GMTSAR result to be able processed by STAMPS SB

Run Step 14 on batch_"orbit"/stack folder

\$ INSAR G2S.sh 14 /home/isya/yourproject/param INSAR G2S.txt

It will create PS/SMALL_BASELINES directory and generate interferograms result based on StaMPS format.


Step 15; Fix the result of PS Candidates (SB)

Run Step 15 on batch_"orbit"/stack/PS/SMALL_BASELINES folder

\$ INSAR G2S.sh 15 /home/isya/yourproject/param INSAR G2S.txt

This step is to rewrite pscands1.ll and pscands.hgt to have the same size matrix.

GMTSAR to StaMPS result [SB Method]

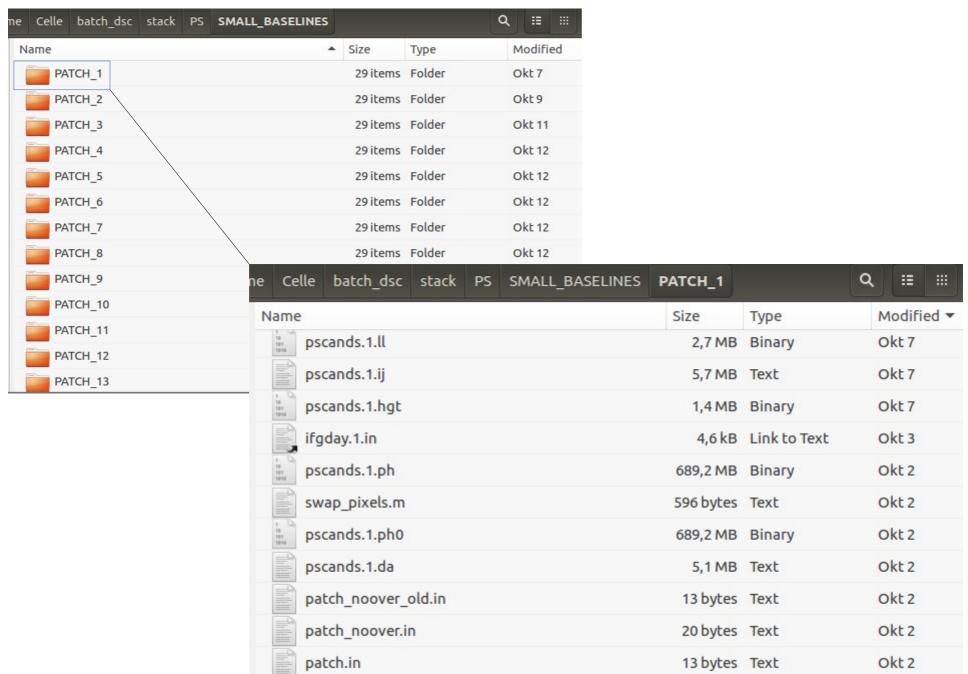

StaMPS Processing

- After you sucessfully convert all of files from GMTSAR to StaMPS format, now you can run the PS/SB InSAR processing on Matlab.
- Run StaMPS step by step

```
>> stamps(1,1)
>> stamps(1,2) etc
```

- Or all steps
 - >> stamps(1,5)
 - >> stamps(6,7) etc

