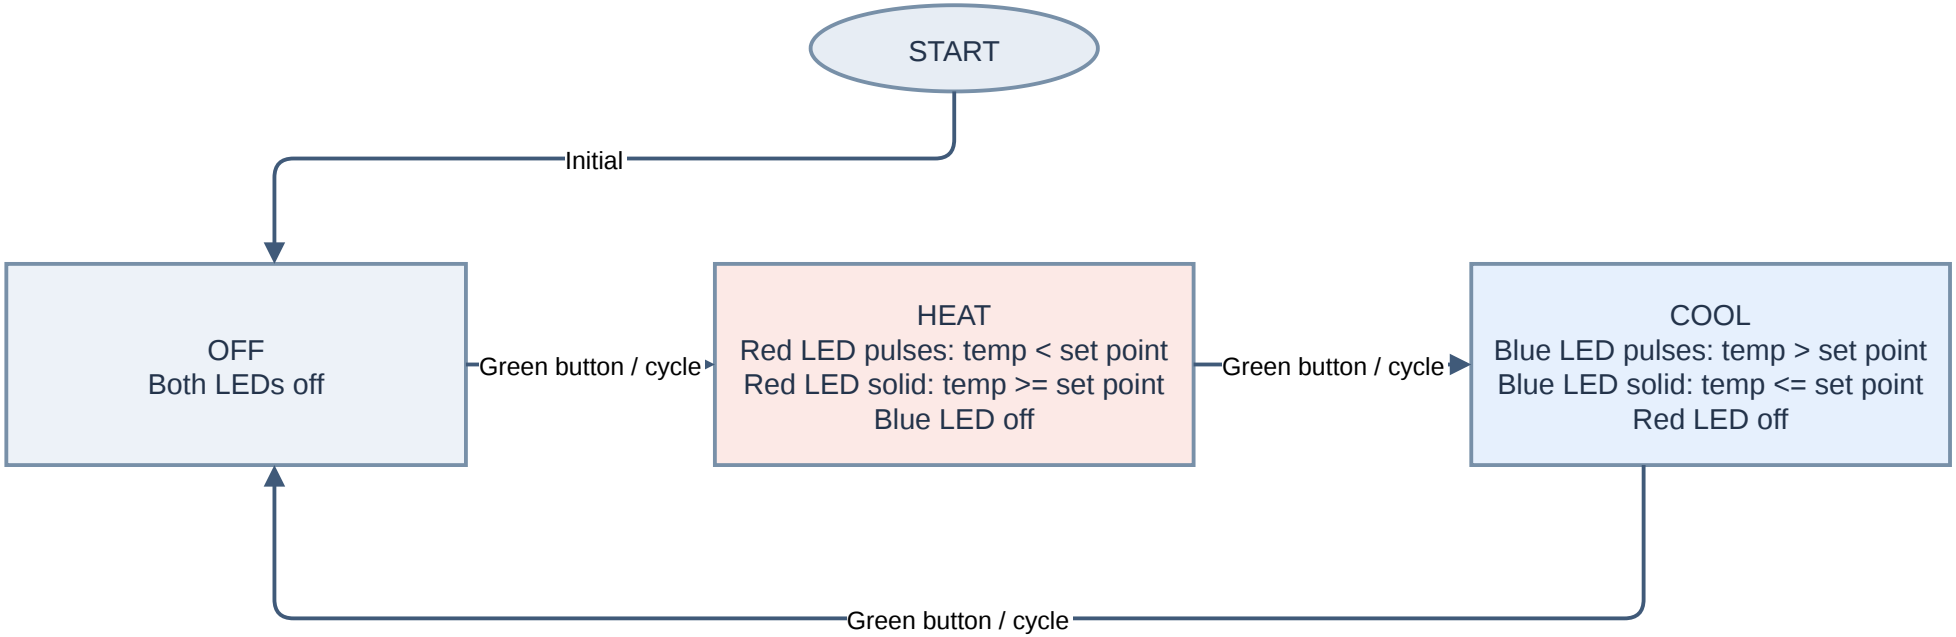

SET POINT BUTTONS (any mode)
Red / GPIO 25: +1°F
Blue / GPIO 12: -1°F
Update LED behavior; mode unchanged

CONTINUOUS OPERATIONS
AHT20: read temperature over I2C
LCD: date/time + alternate temp and mode/set point
Reevaluate LEDs about every 10 seconds
UART: state,temp,set point every 30 seconds

Initial set point: 72°F | Green mode button: GPIO 24 | State cycle: OFF → HEAT → COOL → OFF