

AluLight® 70 S-Double railing





540

With fewer components to stock or to lose, this versatile frame scaffold with double railings can be used to construct free-standing mobile towers. The double railings enable quick, trouble free assembly while providing a very rigid structure.

730

820







630

ARTICLE NO.	L04-00-2507-SD-0	L05-00-2507-SD-0	L06-00-2507-SD-0	L07-00-2507-SD-0	L08-00-2507-SD-0
WORKING HEIGHT	4,1 m	5,2 m	6,1 m	7,3 m	8,0 m
SCAFFOLD HEIGHT	3,1 m	4,2 m	5,1 m	6,2 m	7,0 m
STAND HEIGHT	2,1 m	3,1 m	4,0 m	5,1 m	5,9 m
WEIGHT	119 kg	141 kg	148 kg	187 kg	194 kg
PRICE	1.927 €	2.404 €	2.465 €	3.170 €	3.231 €

TOWER TYPE

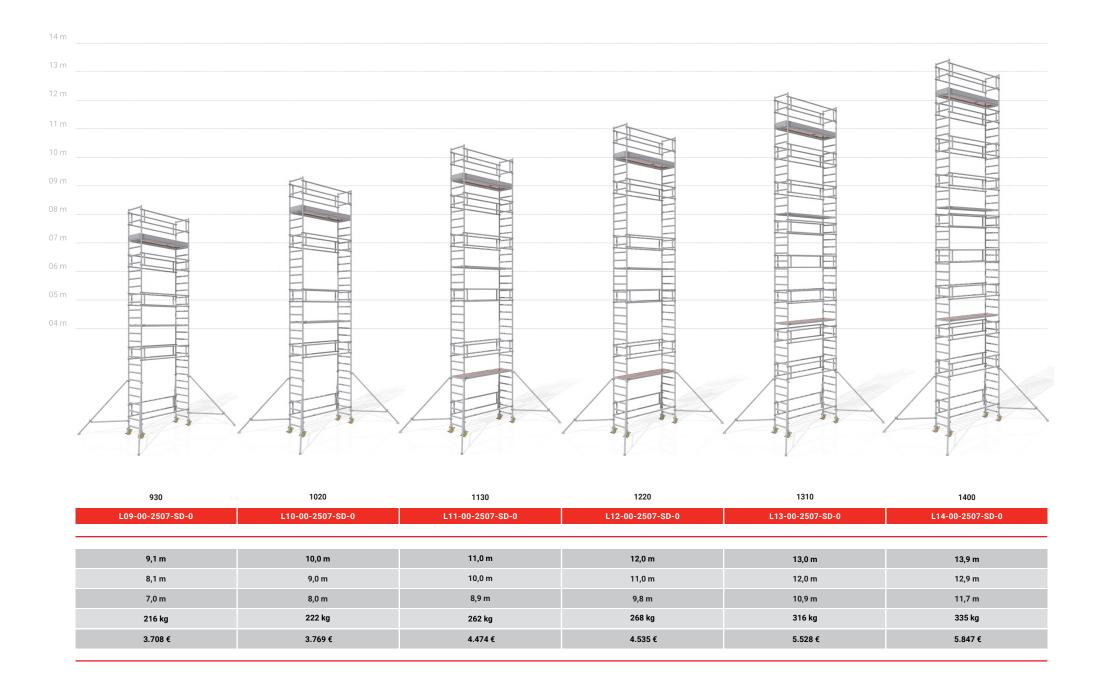

AluLight® 135 S-Double railing



540

Width: 1,35 m The maximum working height for interior and exterior is 14 m Maximum load per platform 200 kg/m²		Length:	2,5 m
Nucleon land a polar on 200 lands	<u> </u>	Width:	1,35 m
Maximum load per platform 200 kg/m²	I H	The maxir	num working height for interior and exterior is 14 m
	kg	Maximum	n load per platform 200 kg/m²

440



730

14 m

12 m

11 m

09 m

08 m

820

ARTICLE NO.	E04-00-2313-3D-0	E03-00-2313-3D-0	L00-00-2313-3D-0	L07-00-2313-3D-0	L00-00-2313-3D-0
WORKING HEIGHT	4,0 m	5,1 m	6,0 m	7,1 m	7,9 m
SCAFFOLD HEIGHT	3,1 m	4,2 m	5,1 m	6,2 m	7,0 m
STAND HEIGHT	2,0 m	3,1 m	4,0 m	5,1 m	5,9 m
WEIGHT	124 kg	150 kg	160 kg	244 kg	254 kg
PRICE	1.951 €	2.472 €	2.594 €	3.932 €	4.054 €

TOWER TYPE

