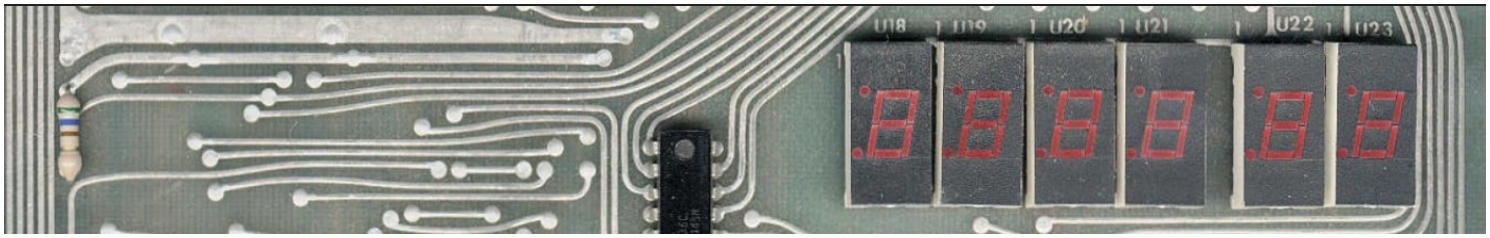

TALKING ELECTRONICS MICROCOMP

A second Z80 system, with a minimum on parts: the Microcomp. Published in issue 13 and 14.

This is a 3-chip computer capable of input and displaying data on a display. Z80 CPU, 2732 EPROM, latch 74LS273, 2 seven segment displays, 24 LED’s, DIP switch mini speaker. No RAM!

Search …

ALL PAGES

Home
News
Contact
My sites
6502
6501
The Digital Group 6501 CPU board
65XX IC’s
65XX Datasheets Manuals
6530-6532
6530 Commodore
6530 KIM-1 clone
Gottlieb sound board
KIM-1 6530 Replacement
6502 Microprocessor Kit
Apple 1
Beta
Cepac-65
Elektuur Junior
Emma by L.J. Technical Systems
EMUF 6504
John Bell Engineering SBC’s

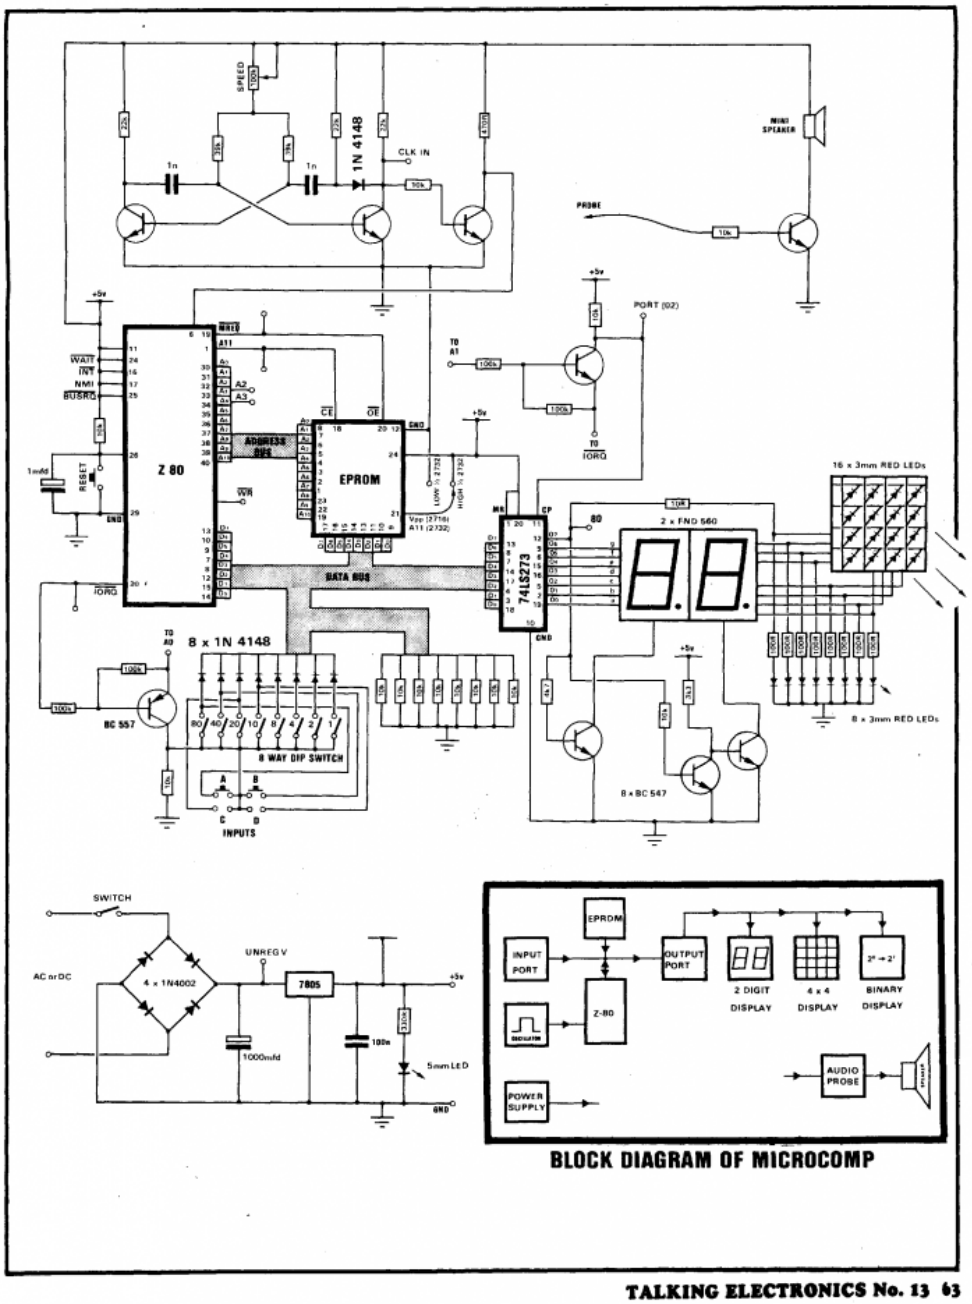

Check the operation of the switch with a multimeter before inserting it onto the board and solder it in position when it is correct.

Fit 4 rubber feet to the underside of the board, insert the chips and you are ready for testing.

TESTING

Insert the power plug into the 3.5mm socket and switch the Microcomp ON. The power LED should come on. Make sure all the input switches are OFF. Push button B. The number 99 should appear on the displays. Press button A and the numbers will increment. Push button B and they will decrement. This is a fairly good indication that everything is working perfectly and you can go on to learning about programming.

If you do not get 99 on the displays you may have a fault in the system. This will require you going through a trouble-shooting procedure as covered on P. 66.

Consider yourself lucky that the computer doesn't work. You will gain a lot by trouble-shooting it yourself and gain experience in finding the fault.

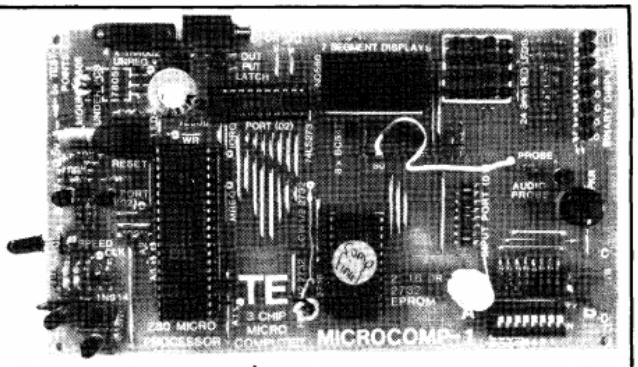

Note the LED used as a knob for the SPEED control. SGS transistors don't work very well in the clock circuit. They freeze at high speed. To prevent this, use 47k base resistors.

The MORSE TRAINER is our first add-on and will be presented as soon as the programs in the lower half of the 2732 have been covered.



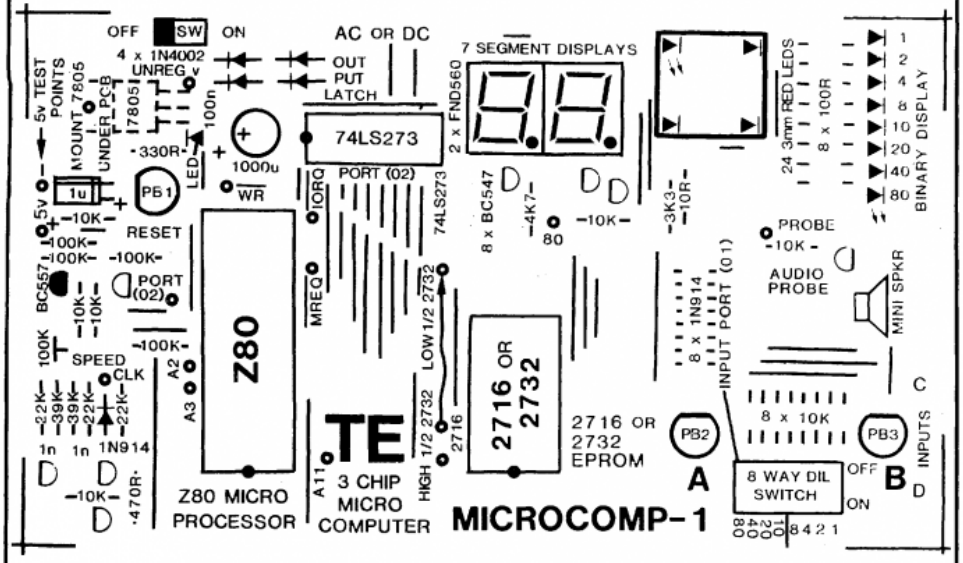

The overlay for the Microcomp shows all the component locations and link positions. The large donuts indicate the positions for the matrix pins. A wander lead selects HIGH/LOW 2732, while another is taken from the AUDIO PROBE input pin.

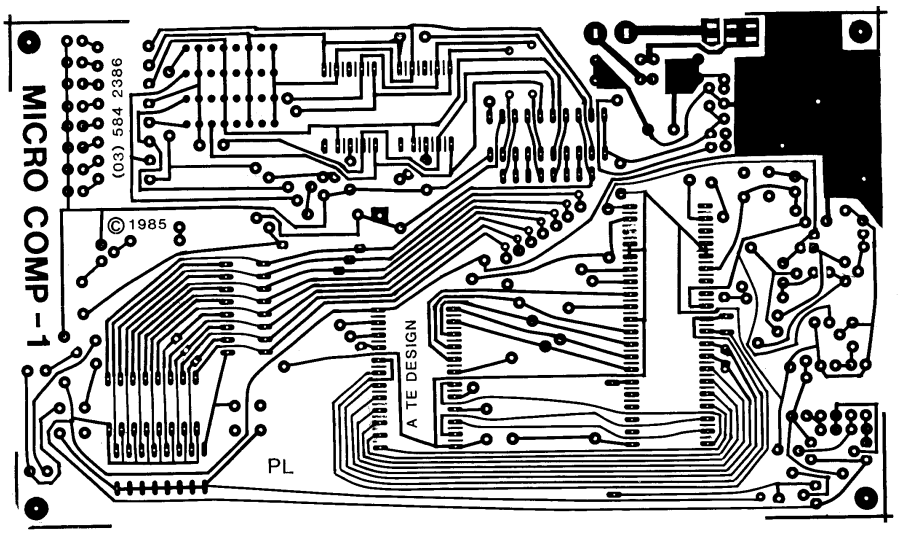

ARCHIVES

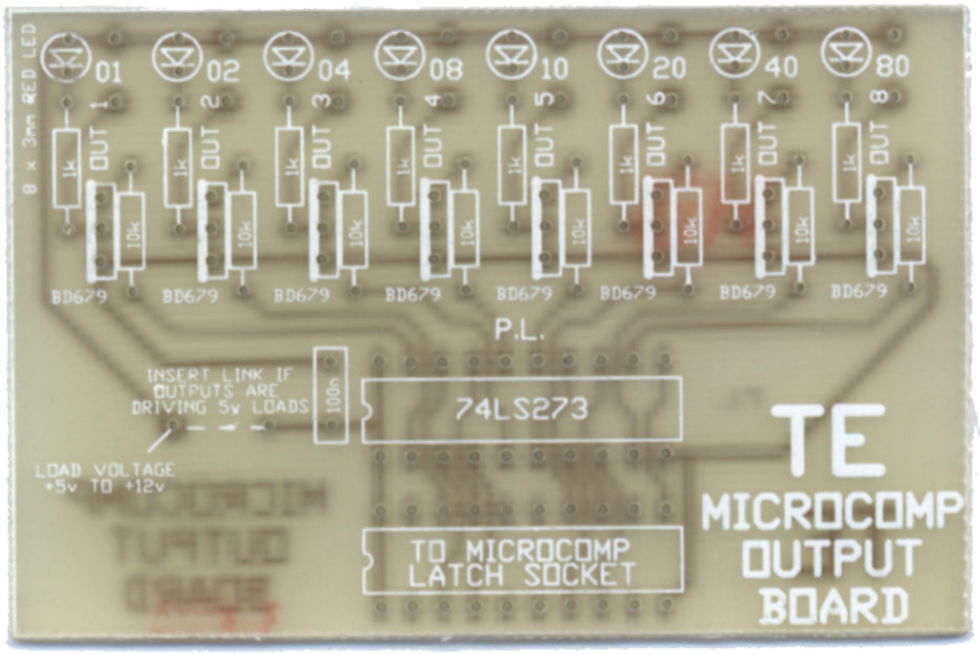

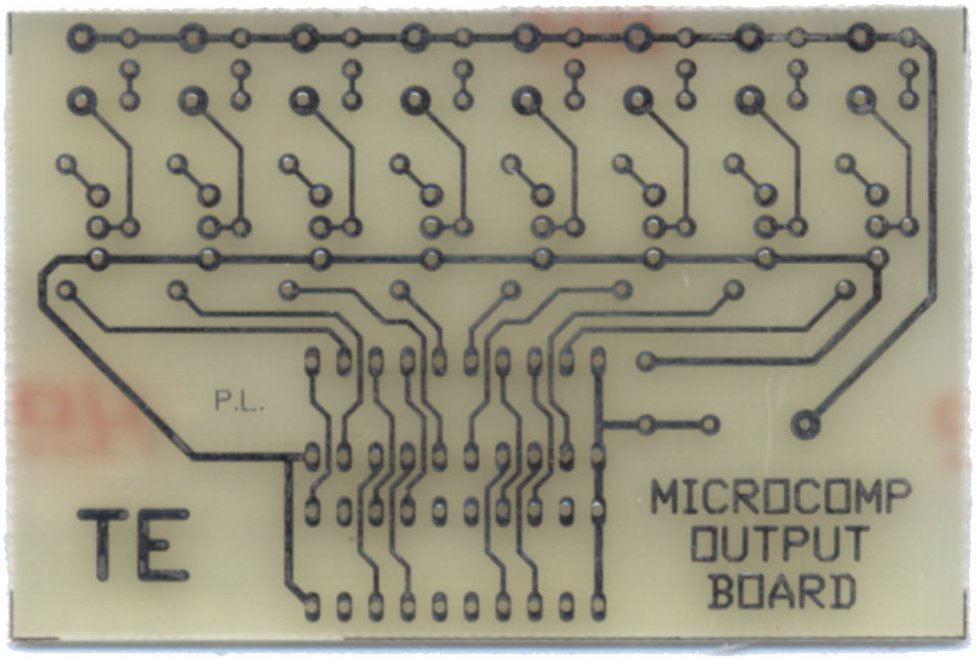

TE Microcomp master ROM binary

TE Microcomp 1 ROM binary

All the pages of the Talking Electronics issue 13 and 14 in PDF format

Related Posts:

January 2019
November 2018
September 2018
August 2018
May 2018
April 2018
March 2018
December 2017
November 2017
October 2017
July 2017
June 2017
May 2017
March 2017
February 2017
January 2017
December 2016
September 2016
August 2016
May 2016
April 2016
March 2016
September 2015
August 2015
June 2015
May 2015

CATEGORIES

6502
kim-1
tec-1
TIM
website
Z80

Jolt and Super Jolt

SYM-1 6502 mini sbc



EhBASIC language reference

Emma by L.J. Technical Systems

ARCHIVES

- January 2019
- November 2018
- September 2018
- August 2018
- May 2018
- April 2018
- March 2018
- December 2017
- November 2017
- October 2017
- July 2017
- June 2017
- May 2017
- March 2017
- February 2017
- January 2017
- December 2016
- September 2016
- August 2016
- May 2016

LICENSE

RELATED POSTS



Jolt and Super Jolt

SYM-1 6502 mini sbc



EhBASIC language reference

April 2016

March 2016

September 2015

August 2015

June 2015

May 2015


Emma by L.J. Technical Systems