
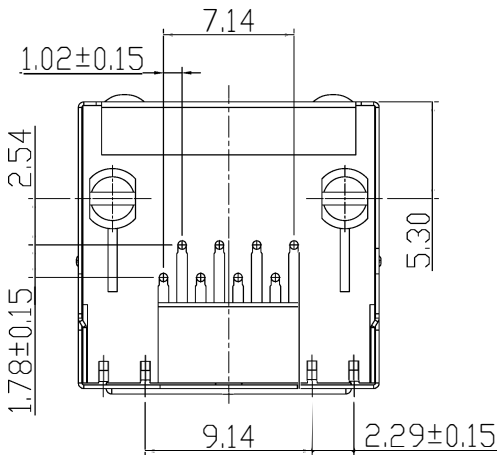
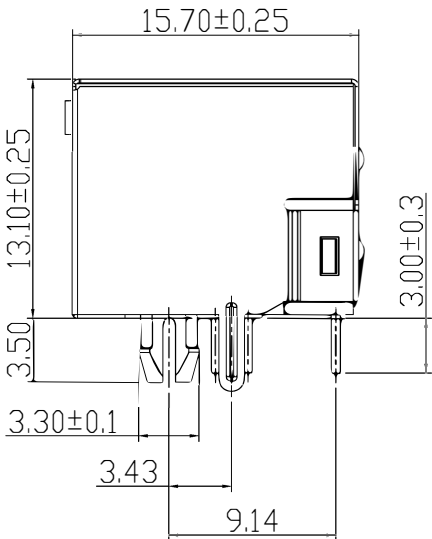


4	3	2
CATEGORY	DESCRIPTION	P/N #
CONNECTOR	RJ45 8P8C 带灯带壳	MJ5688-XX11-GRLX

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01	_____	New Release	XSY	2015.01.09
A02	_____	修正PCB LAYOUT	XSY	2015.07.09
A03	_____	新增颜色选项	XSY	2016.03.09

- SPECIFICATION
1. VOLTAGE RATING: 150 VAC RMS.
2. CURRENT RATING: 1.5 AMP
3. CONTACT RESISTANCE: 40 mΩ MAX
4. INSULATION RESISTANCE: 500MΩ MIN.
5. WITHSTAND VOLTAGE: AC1000V RMS 60s.
6. OPERATING TEMPERATURE: -40°C~+80°C

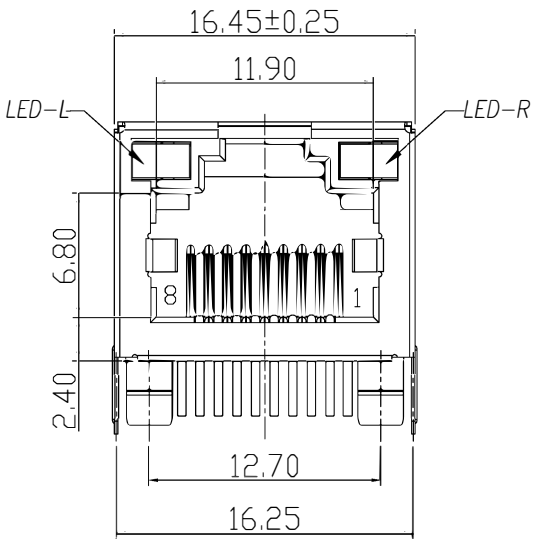

MJ5688-XX11-GRLX

TABLE 1



X	COLOUR
B	BLACK
Y	YELLOW
U	BLUE
O	ORANGE

TABLE 2

X	Terminal Plating
0	Au 1u" Plating
1	Au 3u" Plating
2	Au 6u" Plating
3	Au 15u" Plating


TABLE 3

X	LED-L	LED-R
1	G	Y
2	Y	G
A	G	G/O

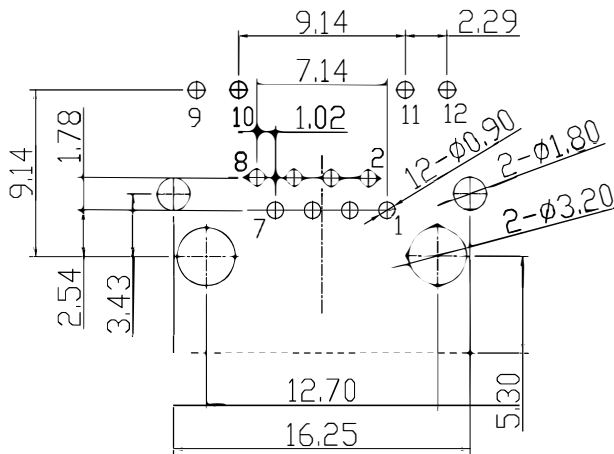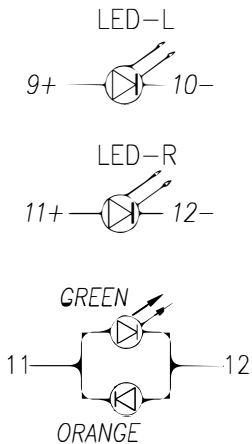

Recommend PCB Layout
(Jack Top View)
Tolerance: ±0.05mm
Recommend PCB Thickness: 1.6mm

e	LED-R	1	SEE TABLE 1	Tin PALTING	
d	LED-L	1	SEE TABLE 1	Tin PALTING	
c	SHELL	1	BRASS T=0.2mm	Ni PALTING	
b	TERMINAL	8	PHOSPHOR BRONZE ø0.46mm	SEE TABLE 2	
a	HOUSING	1	PBT UL94V-0	BLACK	
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR	Remark

UNLESS OTHERWISE SPECIFIED TOLERANCES	SCALE:1/1	UNIT: mm		DWG.NO:	
	SIZE: A3	PAGE:1 OF 1		REV:A03	WI-061-061
DECIMALS:	ANGLES:	APPROVED BY		CHECKED BY	PREPARED BY
X :±0.5	X :±2°	DICK		XSY	XSY
X.X :±0.3	X.X :±1°				
X.XX :±0.2					
CUSTOMER COPY					



東莞市合陵電子有限公司
DongGuan HeLing Electronic Co.,LTD