



NOTES:

- MATERIAL:  
HOUSING : BLACK POLYPROPYLENE  
FLAMMABILITY RATING- UL94-HB, UL FILE NO. E216959  
RIVETS: BRASS, NICKEL PLATED.  
SPRING: SPRING STEEL, NICKEL PLATED.  
PC PINS: SPRING STEEL, NICKEL PLATED.  
TEMPERATURE RANGE: -10°C TO +110°C  
CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER EIA-540J000  
ROHS 2 COMPLIANT

MOUNTING INSTRUCTION:  
USE 2-56 MACHINE SCREWS OR EYELETS 0.089" OD BY 0.15" FLANGE STIMPSON GS-3 SERIES OR EQUIVALENT. ALSO ADHESIVES AND DOUBLE SIDED TAPES WORK WELL.

Date	SYM	REVISION RECORD	AUTH	DR.	CK.
03/22/13	A	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
06/14/13	B	UPDATED TITLE	T.B.	B.S.	
07/07/17	C	ADDED DIM. Ø2.74	T.B.	B.S.	
07/22/17	D	DIM. 0.050 WAS 0.051, DIM. 0.85 WAS 1.02	T.B.	B.S.	

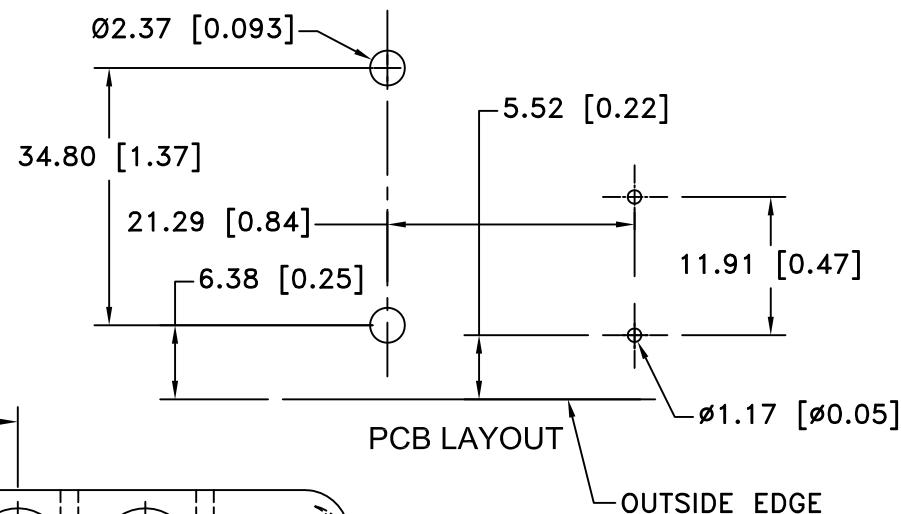

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)			Scale Drawn By B.S. Approved By T.B.
Fractional ± .8 (.030)	Title FOUR "AAA" CELL HOLDER WITH PC PINS		
Angular ± 3°	Date 07/22/17	Drawing Number BC4AAAPC	