



WyreStorm Product Line Receiver Compatibility Chart



CUSTOM HDBASET MATRICES

MX-1616-SCL



TX-SCL-HDBT



Recommended Receiver - RX-70-4K

PoH (powers from matrix), 1-way IR (TX > RX), Routed RS-232 passthrough (TX > RX), 70M 4K A/V

HYBRID MATRICES

MX-1007-HYB



Recommended Receiver - RX3-100

PoH (powers from matrix), 1-way IR (TX > RX), RS-232 passthrough (TX > RX), 100M 4K 18Gbps A/V

1U HDBASET MATRICES

MXV-0808-H2L



Option 1 - RXV-35-4K

PoC, Bidirectional IR, Routable RS-232, 35M 4K 18Gbps A/V



Option 2 - RXV-35-SCL

PoC, Bidirectional IR, Routable RS-232, 35M 4K 18Gbps A/V, HDMI Scaler, Audio De-embed

MXV-0x0x-H2A



Recommended Receiver - RXV-35-4K

PoC, Bidirectional IR, Routable RS-232, 35M 4K 18Gbps A/V

MXV-0x0x-H2A-70



Recommended Receiver - RXV-70-4K-G2

PoC, Bidirectional IR, Routable RS-232, 70M 4K 18Gbps A/V

STAND-ALONE TRANSMITTERS

TX-35-IW




Recommended Receiver - RX-35-POH
PoH (power to TX), 1-way IR (TX > RX), RS-232 passthrough (TX > RX), 35M 4K A/V

TX-35-IW-KVM



Recommended Receiver - RX-500
PoH, (powers TX), USB passthrough, RS-232 passthrough (TX > RX), 100M 4K 18Gbps A/V

TX-70-4K



Option 1 - RX-70-4K
PoH (powers from matrix), 1-way IR (TX > RX), Routed RS-232 passthrough (TX > RX), 70M 4K A/V



Option 2 - TX-H2X-HDBT
PoH (powers TX), 1-way IR (TX > RX), RS-232 passthrough (TX > RX), 70M 4K A/V



SW-120-TX3



Recommended Receiver - RX3-100

PoH (powers from matrix), 1-way IR (TX > RX), RS-232 passthrough (TX > RX), 100M 4K 18Gbps A/V

SW-120-TX3-Ux

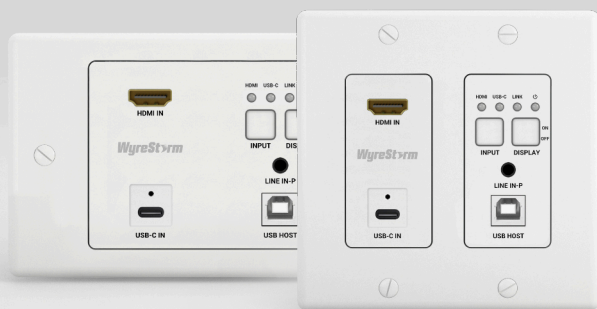

Recommended Receiver - RX3-100


PoH (powers from matrix), 1-way IR (TX > RX), RS-232 passthrough (TX > RX), 100M 4K 18Gbps A/V

SW-130-TX-Ux




Recommended Receiver - RX-700

PoH, (powers TX), USB passthrough, RS-232 passthrough (TX > RX), 100M 4K 18Gbps A/V



Option 2 - RX-70-4K

PoH (powers TX), RS-232 passthrough (TX > RX), 70M 4K A/V



Option 3 - TX-H2X-HDBT

PoH (powers TX), 70M 4K A/V



Option 4 - SW-515-RX

RS-232 passthrough (TX > RX), USB passthrough, 100M 4K A/V

PRESENTATION SWITCHERS

SW-510-TX




Recommended Receiver - SW-515-RX

1-way IR (TX > RX), RS-232 passthrough (TX > RX), Ethernet passthrough, USB passthrough, 100M 4K A/V



Option 2 - RX-700

1-way IR (TX > RX), RS-232 passthrough (TX > RX), USB passthrough, 100M 4K A/V



Option 3 - TX-H2X-HDBT

1-way IR (TX > RX), RS-232 passthrough (TX > RX), 70M 4K A/V

SW-515-RX




Recommended Transmitter - SW-510-TX

1-way IR (TX > RX), RS-232 passthrough (TX > RX), Ethernet passthrough, USB passthrough, 100M 4K A/V

Option 2 - SW-130-TX

PoH (powers from switcher)
70M 4K A/V



Option 3 - TX-35-IW

PoH (powers from matrix)
1-way IR (TX > RX),
RS-232 passthrough (TX > RX)
35M 4K A/V

