

Product Guide

SYN-CTL-HUB

A Compact and Versatile Protocol Converter
(Specifically used with Controllers)



**Award-Winning Audio-Visual
Solutions Manufacturer**

Contents

Product Overview

Interface & Specifications

Typical Connection & Applications

Competitor Analysis

Q & A Session


Product Overview




A Compact & Versatile Protocol Converter

SYN-CTL-HUB is a compact, cost-effective protocol converter that converts IP signals into RS232, Infrared, and Relay protocols. Designed for seamless integration in space-constrained environments, it supports PoE, flexible mounting, and essential control protocols with external trigger detection. Its scalability ensures compatibility with third-party control platforms like Crestron and AMX, making it ideal for AV and automation applications.

Interface of the Product

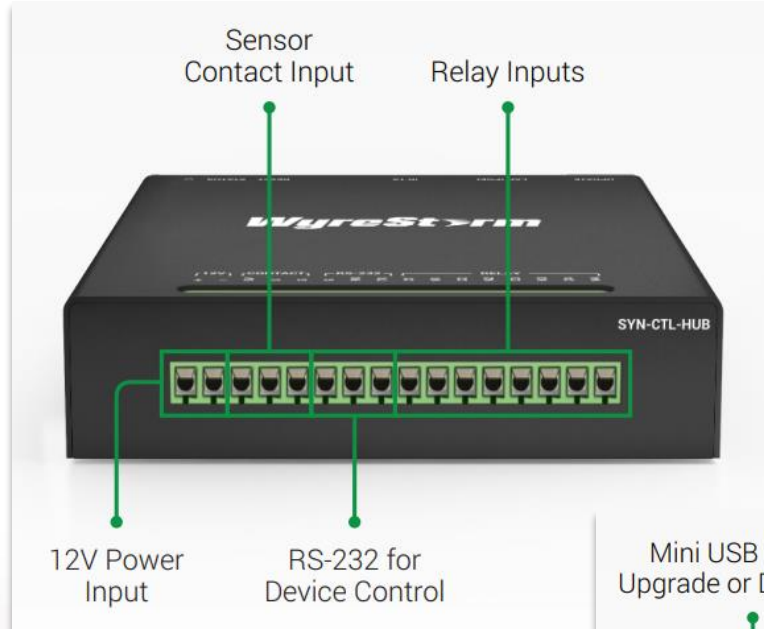

Front Panel

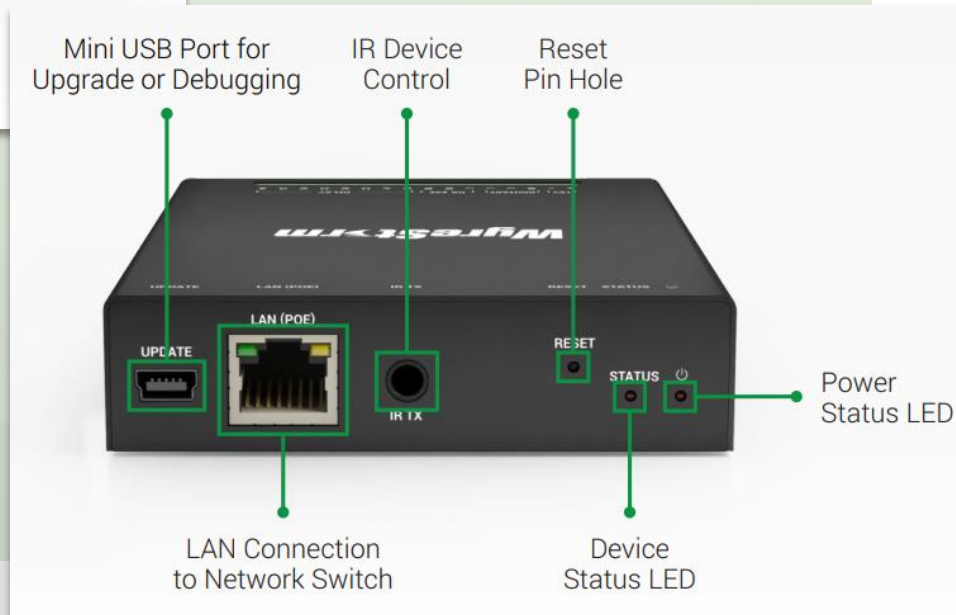

Rear Panel

Featuring:

DC 12V Power Input:

Simple power connection for easy setup.

RS-232 Ports for Device Control:

Reliable control interface for seamless device integration.

Ethernet Port with PoE:

Single cable for power and data transfer, simplifying installation.

IR Emitter:

Enables infrared control for compatible devices.

WyreStorm®

Powerful · Reliable · Simple

Specifications & Packing List


Main Specifications		
	Wyrestorm SYN-CTL-HUB	Notes
Dimension (W x H x D)	82mm x 20mm x 91mm	
Power	DC 12V & PoE	DC 12V or PoE 802.3af & 802.3at
LAN	x 1 (PoE)	10/100 Mbps
RS232	x 1 (RS232)	115200
IR	x 1	
Relay	x 4	30 VAC/VDC, 2 A
CONTACT IN	x 1	

What's in the Box?

- 1x SYN-CTL-HUB
- 2x Mounting Brackets (with Screws)
- 1x IR Emitter
- 1x Quick Start Guide

Typical Connection & Applications

Basic control and equipment connection network diagram:

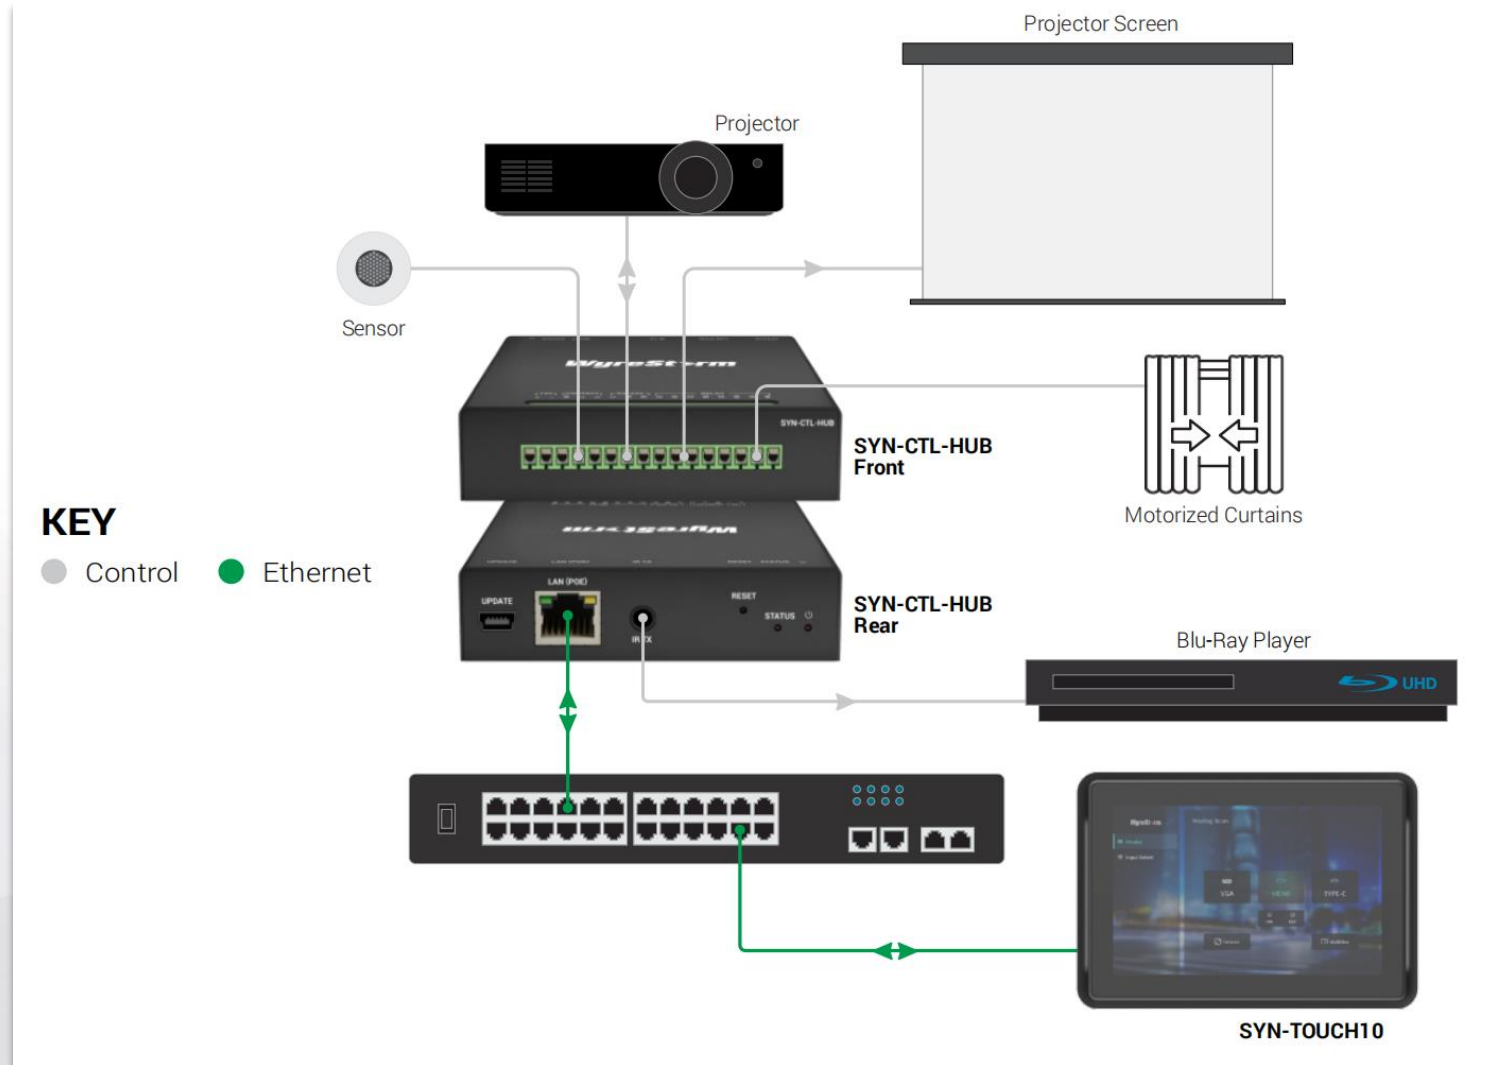


Typical Connection & Applications

Key Benefits Include:

As a controller, SYN-CTL-HUB cooperates with Touch10 to control external devices through RS232, IR, Relay, etc.

Expand the range of control devices of SYN-TOUCH10.

Power over POE simplifies installation by combining power and data in a single cable. Reduces the need for additional power supplies.

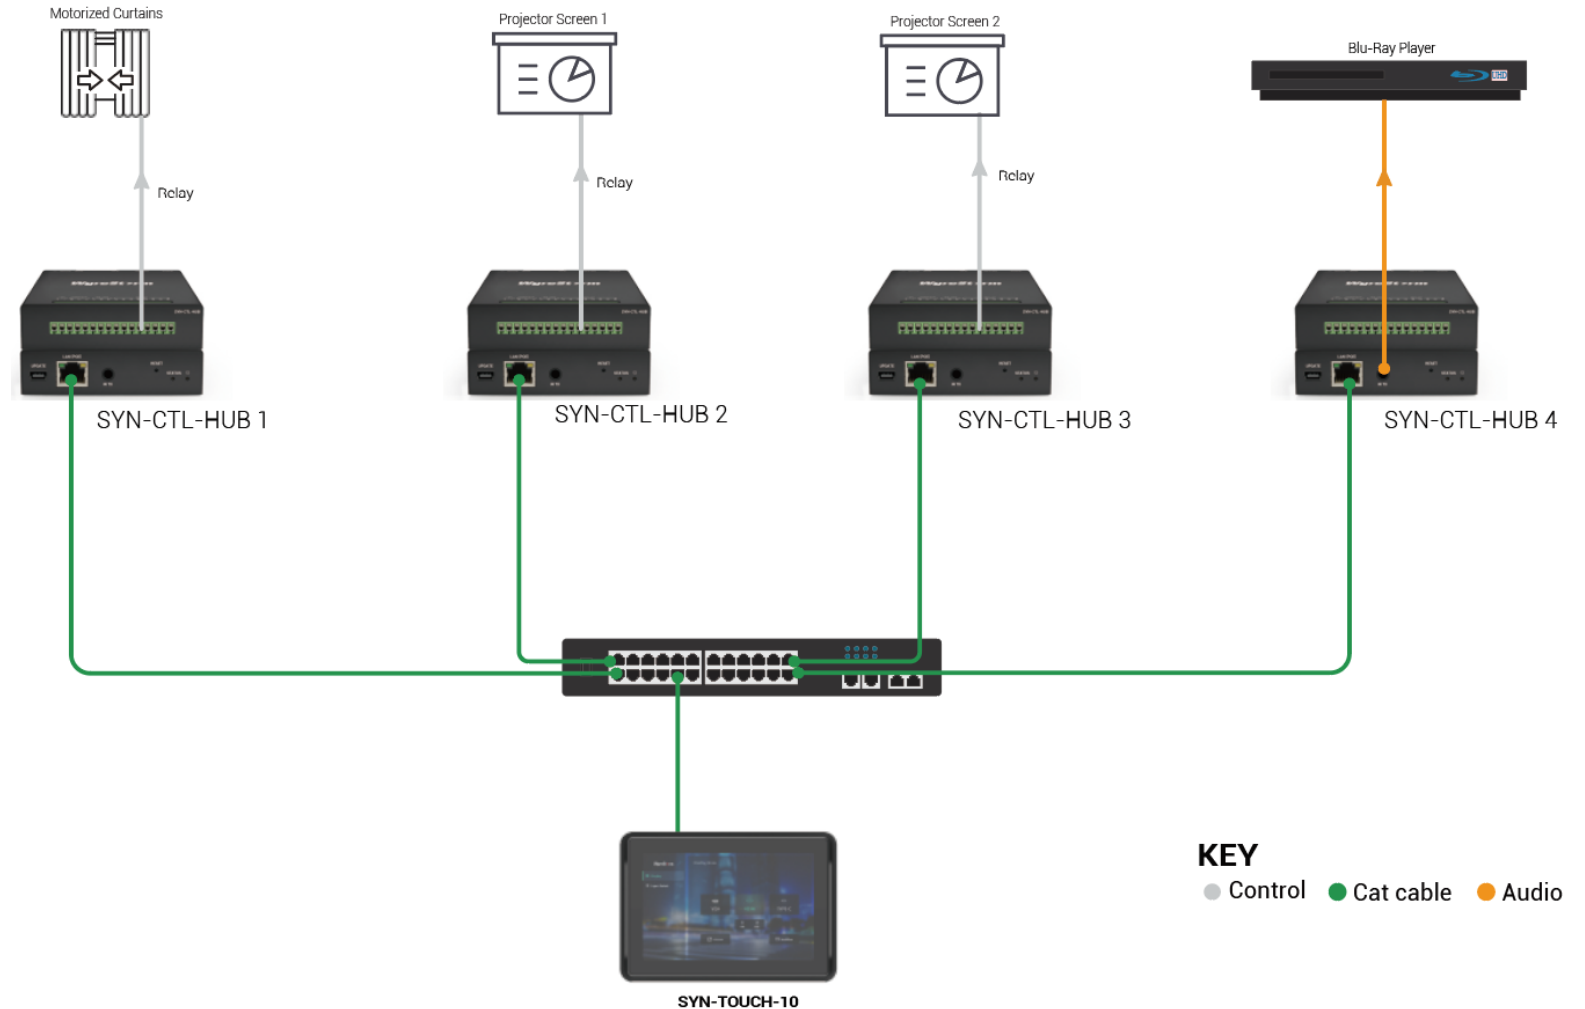

Comparison with Other Competitors

	Wyrestorm SYN-CTL-HUB	Crestron CP4	Extron IPCP Pro 550
Dimension (W x H x D)	82mm x 20mm x 91mm	439mm x 44mm x 167mm 1 RU 19-in.	221mm x 43mm x 267mm 1 RU 19/2-in
Power	DC 12V & PoE	DC 24V	AC 100~240V
LAN	x 1 (PoE)	x 1	x 1
RS232	x 1 (RS232)	x 3 (RS232/422/485)	x 6 (RS232) x 2 (RS232/422/485)
IR	x 1	x 8	x 8
Relay	30 VAC/VDC, 2 A x 4	30 VAC/VDC, 1 A x 8	24 VDC, 1 A x 8
I/O	x 1 CONTACT IN	x 4	x 4
DC power output	x 0	x 0	x 4
MSRP	\$195.00	/	/

Our Advantages

Our Key Advantages Include:

Compact Design:

- Space-saving form factor ideal for limited installation spaces.
- Affordable and user-friendly, perfect for small-scale applications.

Power over Ethernet (PoE):

- Simplifies installation by delivering power and data through a single cable.
- Reduces the need for additional power adapters, enhancing deployment efficiency.

Comprehensive Control Protocols:

- Supports key control standards for broad device compatibility.
- CONTACT IN functionality enables external triggers from sensors or switches.

Scalability and Integration:

- Seamlessly integrates with SYN-TOUCH10 for enhanced control.
- Compatible with third-party systems like Crestron and AMX for scalable deployment.



Final Thoughts

Q & A Session

Got questions? Don't hesitate to ask away.

