

Product Guide

APO-VX20-UC v2

4K All-In-One Conference Video Bar & Switcher



WyreStorm®

***Award-Winning Audio-Visual
Solutions Manufacturer***

Contents

Product Overview & Key Features

Why Choose Us?

Interface & Specifications

Typical Connection & Applications

Comparison with Previous Products

Competitor Analysis

Quick Installation Guide & Web UI Introduction

Q & A Session

Product Overview



Apollo Series 4K All-In-One Conference Video Bar & Switcher

The APO-VX20-UC v2 is a next-generation premium conference video bar featuring an upgraded larger image sensor, enhanced AI tracking, a newly added wireless casting function, and dual 4K HDMI outputs for a professional video, audio, and wireless collaboration experience.

Built with WyreStorm's professional AV technology, the APO-VX20-UC v2 offers AI-powered tracking and noise suppression to ensure everyone is seen and heard clearly. Its plug-and-play USB-C interface supports simultaneous audio, video, and power delivery, while HDMI port enables flexible connectivity. Expandable with the APO-SKY-MIC, it adapts to rooms of various sizes while maintaining optimal performance and minimal setup complexity.


This video bar is ideal for small to medium-sized meeting rooms, effortlessly meeting diverse needs and enhancing overall efficiency.

Main Features



Comprehensive Input & Output Options

Equipped with both wired (HDMI, USB-C) and wireless (Dongle, AirPlay, Miracast) casting across dual 4K outputs, the APO-VX20-UC v2 ensures flexible connectivity for various devices — ideal for conference rooms, classrooms, and hybrid meeting environments.



USB-C All-in-One Connectivity

The USB-C port provides 60W power delivery, video, and USB data transmission through a single cable, simplifying cabling and maintaining a clean, tidy workspace.



4K Camera with Advanced AI Features

The built-in 4K UHD camera delivers crystal-clear images and features advanced AI capabilities, including Auto Framing, Presenter Tracking, Speaker Tracking, and Individuals Gallery.



Wireless Casting Support

With the APO-DG2 or APO-DG2-PRO, users can easily enable wireless conferencing using the video bar's camera with a single button press.



Premium Audio System

Features 8 MEMS beamforming microphones with Acoustic Echo Cancellation (AEC), Automatic Gain Control (AGC), and Noise Suppression (ANS) powered by advanced AI algorithms, ensuring every participant is heard clearly. Dual 8W stereo speakers deliver powerful, room-filling sound.



Expandable with Add-On Microphone

Supports up to 5 cascading APO-SKY-MIC units, extending voice pickup coverage for larger meeting spaces.



Flexible Control Options

Supports control and configuration via remote control, Web GUI, or API for convenient and efficient operation.

WyreStorm®

Powerful · Reliable · Simple

Why Choose Us: 1. Next Generation All-In-One Collaboration Experience

Transform your meeting spaces with the upgraded Apollo Video Bar — combining a wireless presentation and conference switcher with an all-in-one video bar in a single solution.

Powerful 4K AI Camera

Built-in 4K UHD camera delivers crystal-clear images and features advanced AI capabilities, including Auto Framing, Presenter Tracking, Speaker Tracking, and Individuals Gallery.

High-Fidelity Audio Performance

Dual 8W stereo speakers with bass enhancement and 8x beamforming microphone array ensure crystal-clear, natural sound — even in larger rooms.

Expandable Audio Pickup

Supports easy expansion of microphone pickup coverage using APO-SKY-MIC through Ethernet cabling.

Why Choose Us: 2. Wireless Presentation and Conference in Bar

Empowers hybrid workspaces with versatile wired and wireless connectivity, designed for simplicity and high performance.

Multi-Input Selection

Equipped with both wired (HDMI, USB-C) and wireless (Dongle, AirPlay, Miracast) casting, allows effortless switching between laptops, media devices, and presentation inputs.

Dual Output Connectivity


Supports dual 4K HDMI outputs, allowing different contents on two screens. On a single display, it enables dual views, giving users more information at a glance and enhancing collaboration.

One-Click Wireless Casting


Compatible with WyreStorm APO-DG2/APO-DG2-PRO USB-C dongles for one-click wireless casting and wireless conferencing, eliminating connection delays and setup time.

Interface of the Product

Front Panel

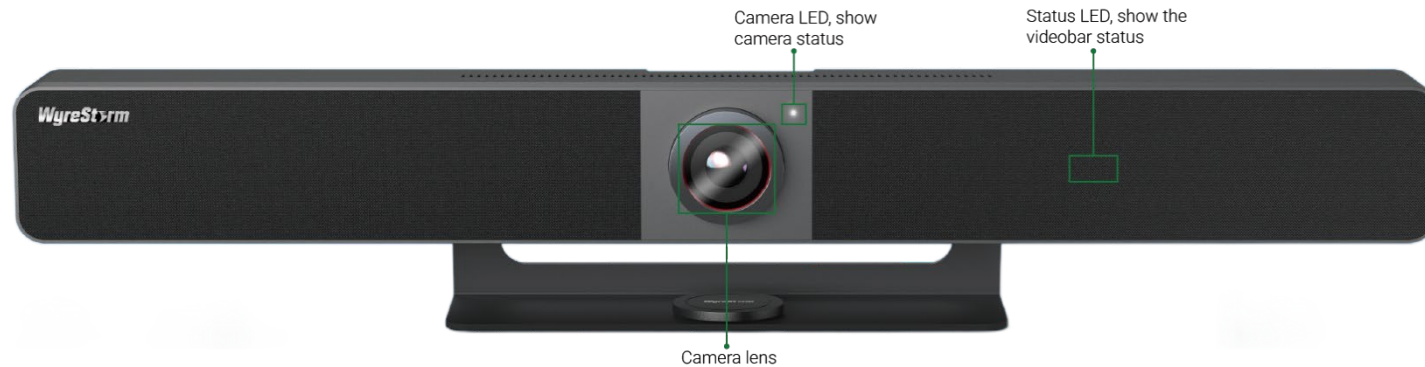

Rear Panel

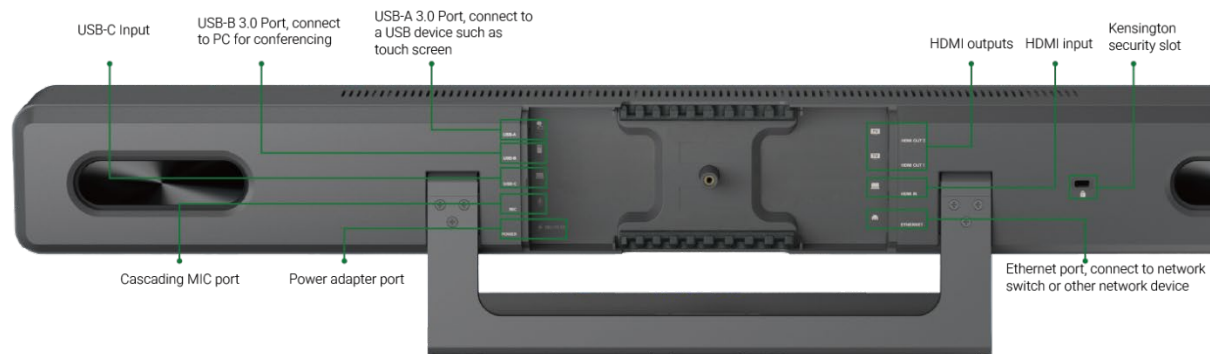

Featuring:

Wireless Casting

When used with APO-DG2/APO-DG2-PRO, users can perform wireless casting and wireless conferencing seamlessly.

Dual 4K Output

Two HDMI outputs, with HDMI out 1 supporting up to 4K@60Hz. Supports dual-view when using a single display.

Specifications & Packing List

Main Specifications


Camera	Lens	Fixed Focus, DFOV 120°
	Sensor	1/1.8", 8M effective pixels, Up to 4K@30fps
	Output Encoding	MJPEG/YUY2/H.264/H.265 UVC 1.1
	ePTZ	Supported, 5 x Digital Zoom
	AI Tracking	Auto Framing / Speaker Tracking / Presenter Tracking / Individuals Gallery
Speakerphone	Microphone	8 x Linear microphone arrays; Pick-up Range: 8m(Extendable with APO-SKY-MIC)
	Speaker	2 x 8 W
	AI Technology	AGC, AEC, ANS
Video	Video Resolution	USB-C IN: Up to 4K@30Hz; HDMI IN: Up to 4K@30Hz, HDCP 1.4; HDMI OUT 1: Up to 4K@60Hz, HDCP 2.3; HDMI OUT 2: Up to 4K@30Hz, HDCP 2.2
Wireless Collaboration	Wireless Casting	Miracast, AirPlay, APO-DG2/APO-DG2-PRO
	Wireless Conferencing	APO-DG2/APO-DG2-PRO
USB	USB	USB-C 3.0 host (60W charging) USB-B 3.0 host USB-A 3.0 device (1.25A current output)
Communication & Control	Control Method	Web UI, API, Remote Controller
	Security Protocols	HTTPS, SSH, 802.1x

What's in the Box?

- 1x DC power adapter 20V/6A with US/UK/EU/AU
- 1x 5m HDMI cable
- 1x 5m USB-A to USB-B cable
- 1x Remote controller
- 1x Magnetic lens cap
- 1x Wall Mounting Kit
- 1x Desktop stand
- 1x QSG
- 1x USB to RJ45 adapter(APO-MIC-EXT)

Typical Connection & Applications

The APO-VX20-UC v2 is a premium conference video bar that integrates a video switcher, speakerphone, and camera into a single device, delivering everything you need for video presentations and remote conferencing. Please refer to the typical connection diagram below.

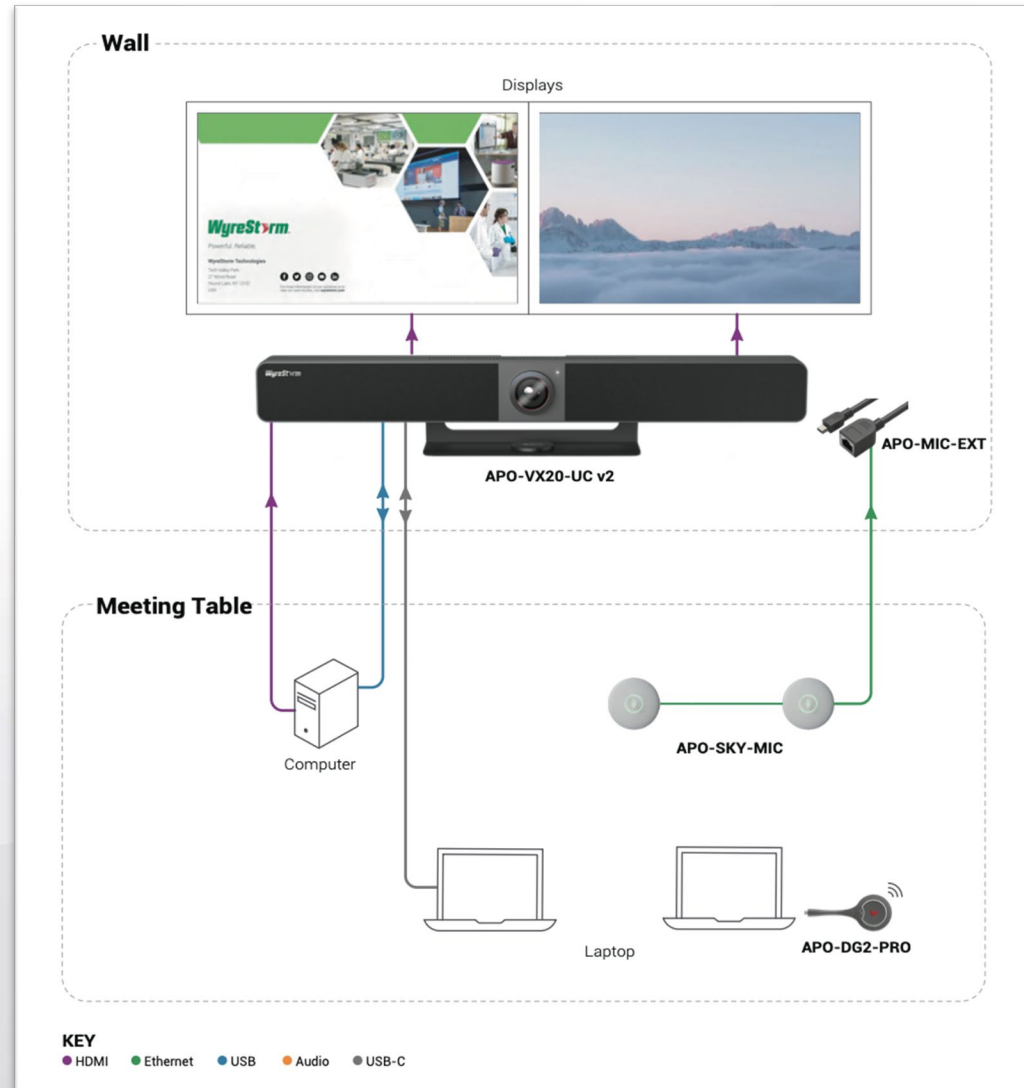


Typical Connection & Applications

Application Scenario 1: Medium Conference Room with MTR

This solution integrates the APO-VX20-UC v2 with a Microsoft Teams Room (MTR) system, creating an efficient and intelligent meeting environment. The all-in-one video bar ensures high-fidelity audio, crystal-clear 4K video, and seamless USB-C connectivity for BYOD collaboration.

Key Benefits Include:

- **Multiple Casting Methods:** Simplifies presentations with various casting options.
- **All-In-One Design:** Combines camera, microphones, and speakers in one sleek unit.
- **Flexible Connectivity:** Supports USB-C and HDMI for versatile source connections.
- **Enhanced Audio Coverage:** Compatible with APO-MIC-EXT and APO-SKY-MIC for scalable microphone expansion.
- **Seamless Wireless Casting:** USB-C dongle plug-and-play connection for quick casting and conferencing.

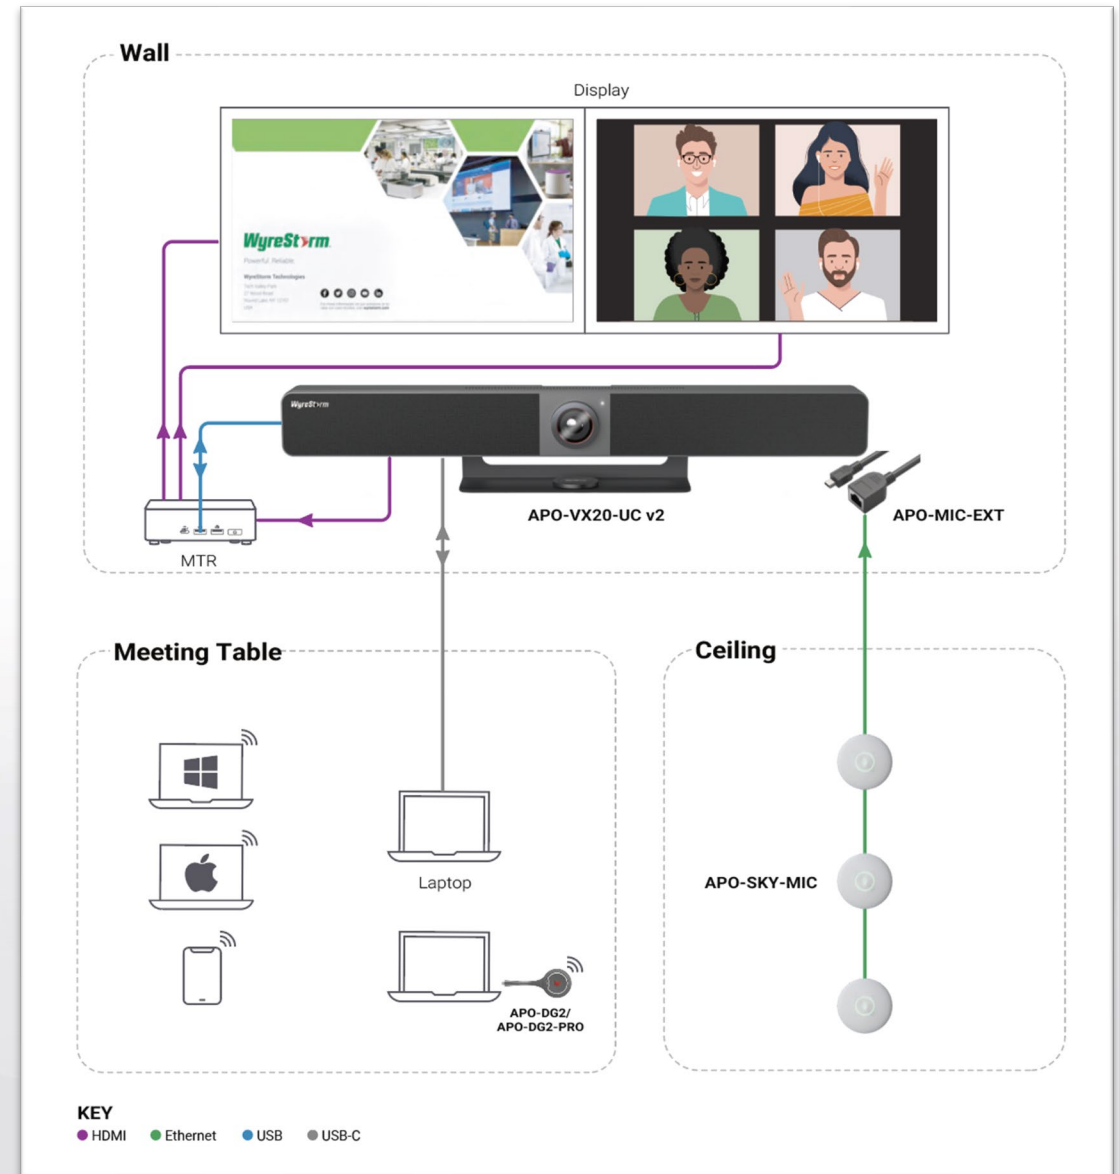


Typical Connection & Applications

Application Scenario 2: Medium Meeting Room with Touch Screen

This configuration combines the APO-VX20-UC v2 with an interactive touch display, providing a highly engaging and collaborative meeting experience. Participants can easily share content, control presentations, and connect their own devices for interactive collaboration.

Key Benefits Include:

- **Multiple Casting Methods:** Simplifies presentations with various casting options.
- **All-In-One Design:** Combines camera, microphones, and speakers in one sleek unit.
- **Flexible Connectivity:** Supports USB-C and HDMI for versatile source connections.
- **Enhanced Audio Coverage:** Compatible with APO-MIC-EXT and APO-SKY-MIC for scalable microphone expansion.
- **Seamless Wireless Casting:** USB-C dongle plug-and-play connection for quick casting and conferencing.

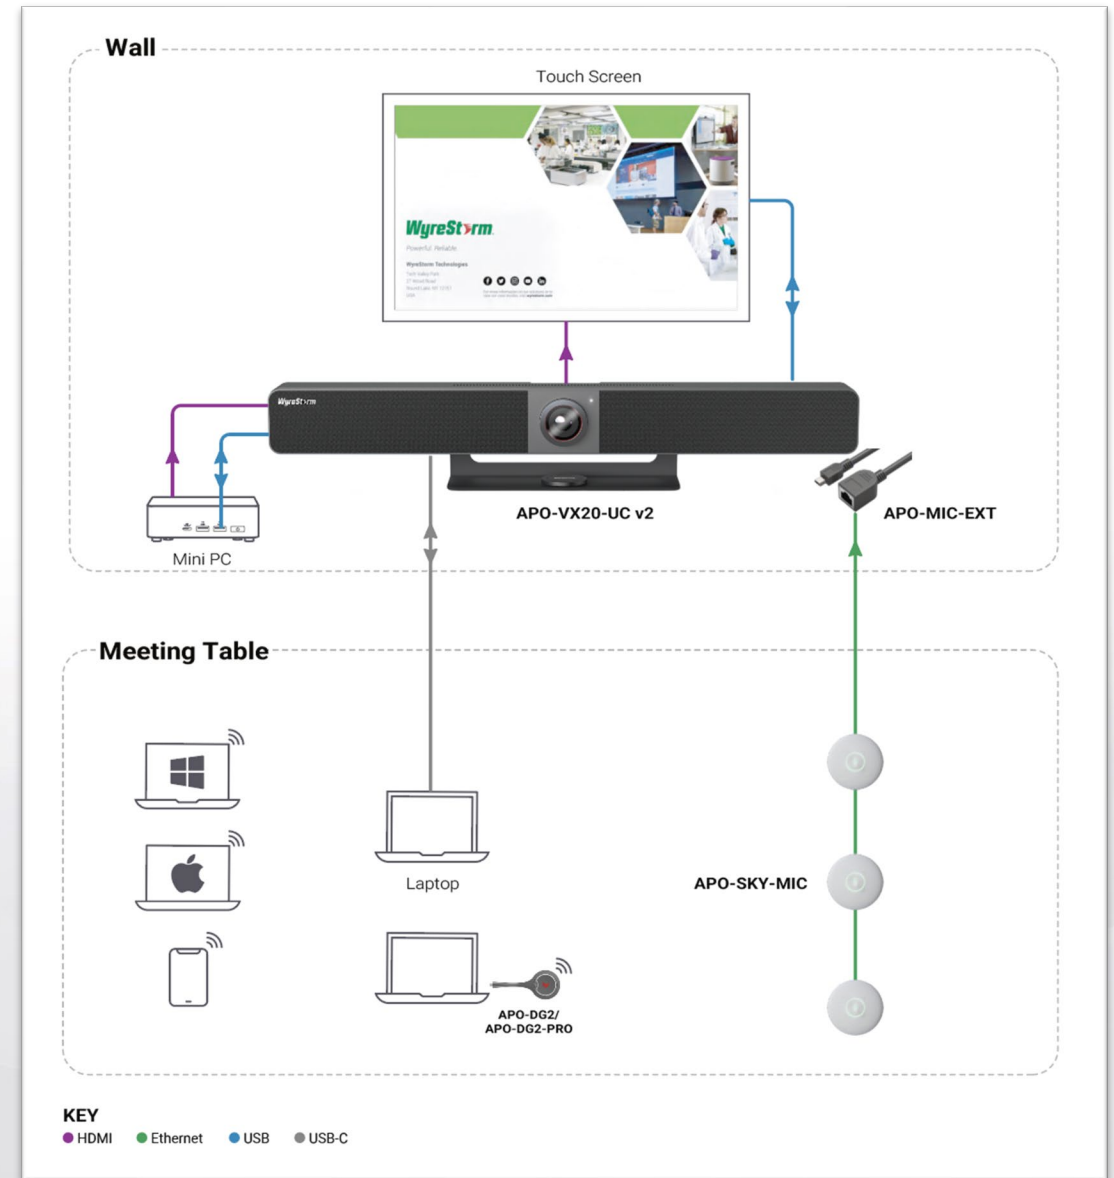

WyreStorm Video Bars Comparison


Features		APO-VX20-UC v2	APO-VX20-UC	HALO-VX10 v2
Camera	Sensor	1/1.8" CMOS 8M	1/2.5" CMOS 8M	1/2.7" CMOS 8M
	DFOV	120°	120°	120°
	Digital Zoom	5x	5x	5x
	Max. Camera Resolution	4K@30fps	4K@30fps	4K@30fps
	AI Tracking Functions	Auto Framing, Speaker Tracking, Presenter Tracking, Individuals Gallery	Auto Framing, Speaker Tracking, Presenter Tracking	Auto Framing, Speaker Tracking, Presenter Tracking
Video	Max. Video Output Resolution	4K@60Hz 4:4:4	4K@30Hz 4:4:4	No
	Video Inputs	1x USB-C & 1x HDMI	1x USB-C & 1x HDMI	No
	Video Outputs	2x HDMI	1x HDMI	No
	Wireless Casting	Airplay & Miracast & APO-DG2/APO-DG2-PRO	Airplay & Miracast & APO-DG1	No
	Wireless Conferencing	Yes, with APO-DG2/APO-DG2-PRO	No	No
	Dual View	Yes	Yes	No
Audio	Voice Picking up Distance (Without extension mics)	up to 8m	up to 5m	up to 5m
	Speaker	2x 8W	2x 8W	2x 3W
	Extension Microphones	5x APO-SKY-MIC	5x APO-SKY-MIC	3x HALO-COM-MIC
	3.5mm Analog Audio Out	No	No	Yes
Others	USB 3.0	Yes	Yes	Yes
	Remote Control	Yes	Yes	No

Comparison with Other Competitors

Features		Wyrestorm APO-VX20-UC v2	Barco ClickShare Bar Pro	Yealink A40	Neat Neat Bar Pro
Camera	Max. Camera Resolution	4K@30fps	4K@30fps	4K@30fps	1080p
	DFOV	120°	120°	120°	120°
	AI Tracking	Auto Framing Speaker Tracking Presenter Tracking Individuals Gallery	Auto Framing Speaker Tracking Composition Mode	IntelliFocus Auto Framing Speaker Tracking Smart Gallery (Zoom only)	Adaptive Group Framing Dynamic Individual Framing Dynamic Speaker Focus
Video	Video Input	1x HDMI 1x USB-C(60W charging)	1x USB-C	2x USB-C	1x HDMI 1x USB-C
	Max. Input Resolution	4K@30Hz	4K@30Hz	4K@30Hz	4K
	Video Output	2x HDMI	1x HDMI & 1x USB-C	2x HDMI	3x HDMI
	Max. Output Resolution	4K@60Hz	4K@30Hz	4K@30Hz	4K
Audio	Mics Array	8x MEMS mics	6x MEMS mics	8x MEMS mics	16x MEMS mics
	Audio Pickup	Up to 8m (Expandable up to 5 APO-SKY-MIC)	Up to 4m	Up to 6m	Not Given (Support mic extension)
	Speaker	2x 8W	2x 10W	2x 10w	3x speakers
Wireless Collaboration	Wireless Casting	Miracast, Airplay, Dongle	Miracast, Airplay, Google Cast, Dongle	No	No
	Wireless Conferencing	APO-GD2/APO-DG2-PRO	Dongle or App	No	No
	Max. Wireless Conferencing Resolution	1080P30Hz	720P15Hz	No	No

Quick Installation Guide

- **Connect and Power up:** Connect the power supply and other cables, then turn on the video bar.
- **Choose Your Installation Method:** Select a suitable installation method: table-top, on-display, or wall mount. For wall mounting, use the included brackets and ensure the video bar is securely and properly leveled. The bar can be mounted above or below the display as required.
- **Wired Connection:** For wired conferencing and screen sharing, connect your laptop using USB-C, or HDMI with USB, to access video, audio, camera, and USB peripherals.
- **Wireless Casting & Dongle Pairing:** Wirelessly cast content using built-in AirPlay or Miracast, or pair the optional APO-DG2 / APO-DG2-PRO USB-C dongle. Insert the dongle into the VX20 v2 USB-C port to pair, then plug it into your laptop and press the button to start wireless casting

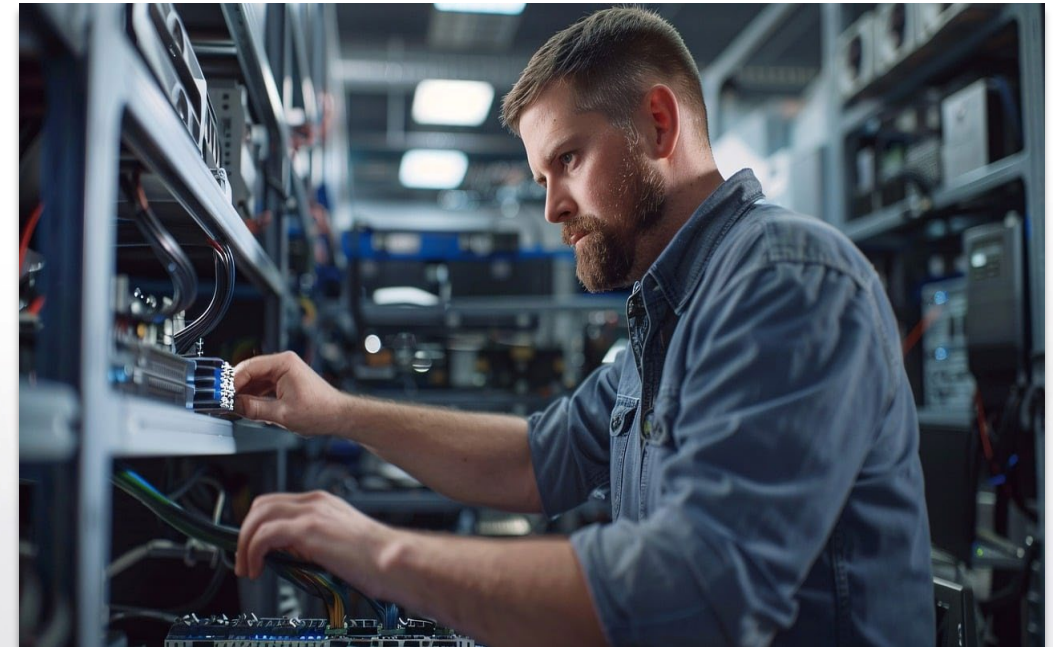

Introduction of Web Configuration Interface

The key settings and configurations you can perform are as follows:

- **Camera & Tracking Settings:** AI tracking modes (Auto Framing, Speaker Tracking, Presenter Tracking, Individuals Gallery), camera presets, and image settings.
- **Video Settings:** HDMI output resolution, EDID behavior, and CEC display control.
- **General Settings:** IP settings (DHCP/Static), device name, Wi-Fi hotspot name, access code, and login security.
- **Wireless & BYOD Settings:** Wireless casting enable/disable, BYOD mode configuration, Wi-Fi parameters, and dongle pairing support.



Final Thoughts

Q & A Session

Got questions? Don't hesitate to ask away.

