




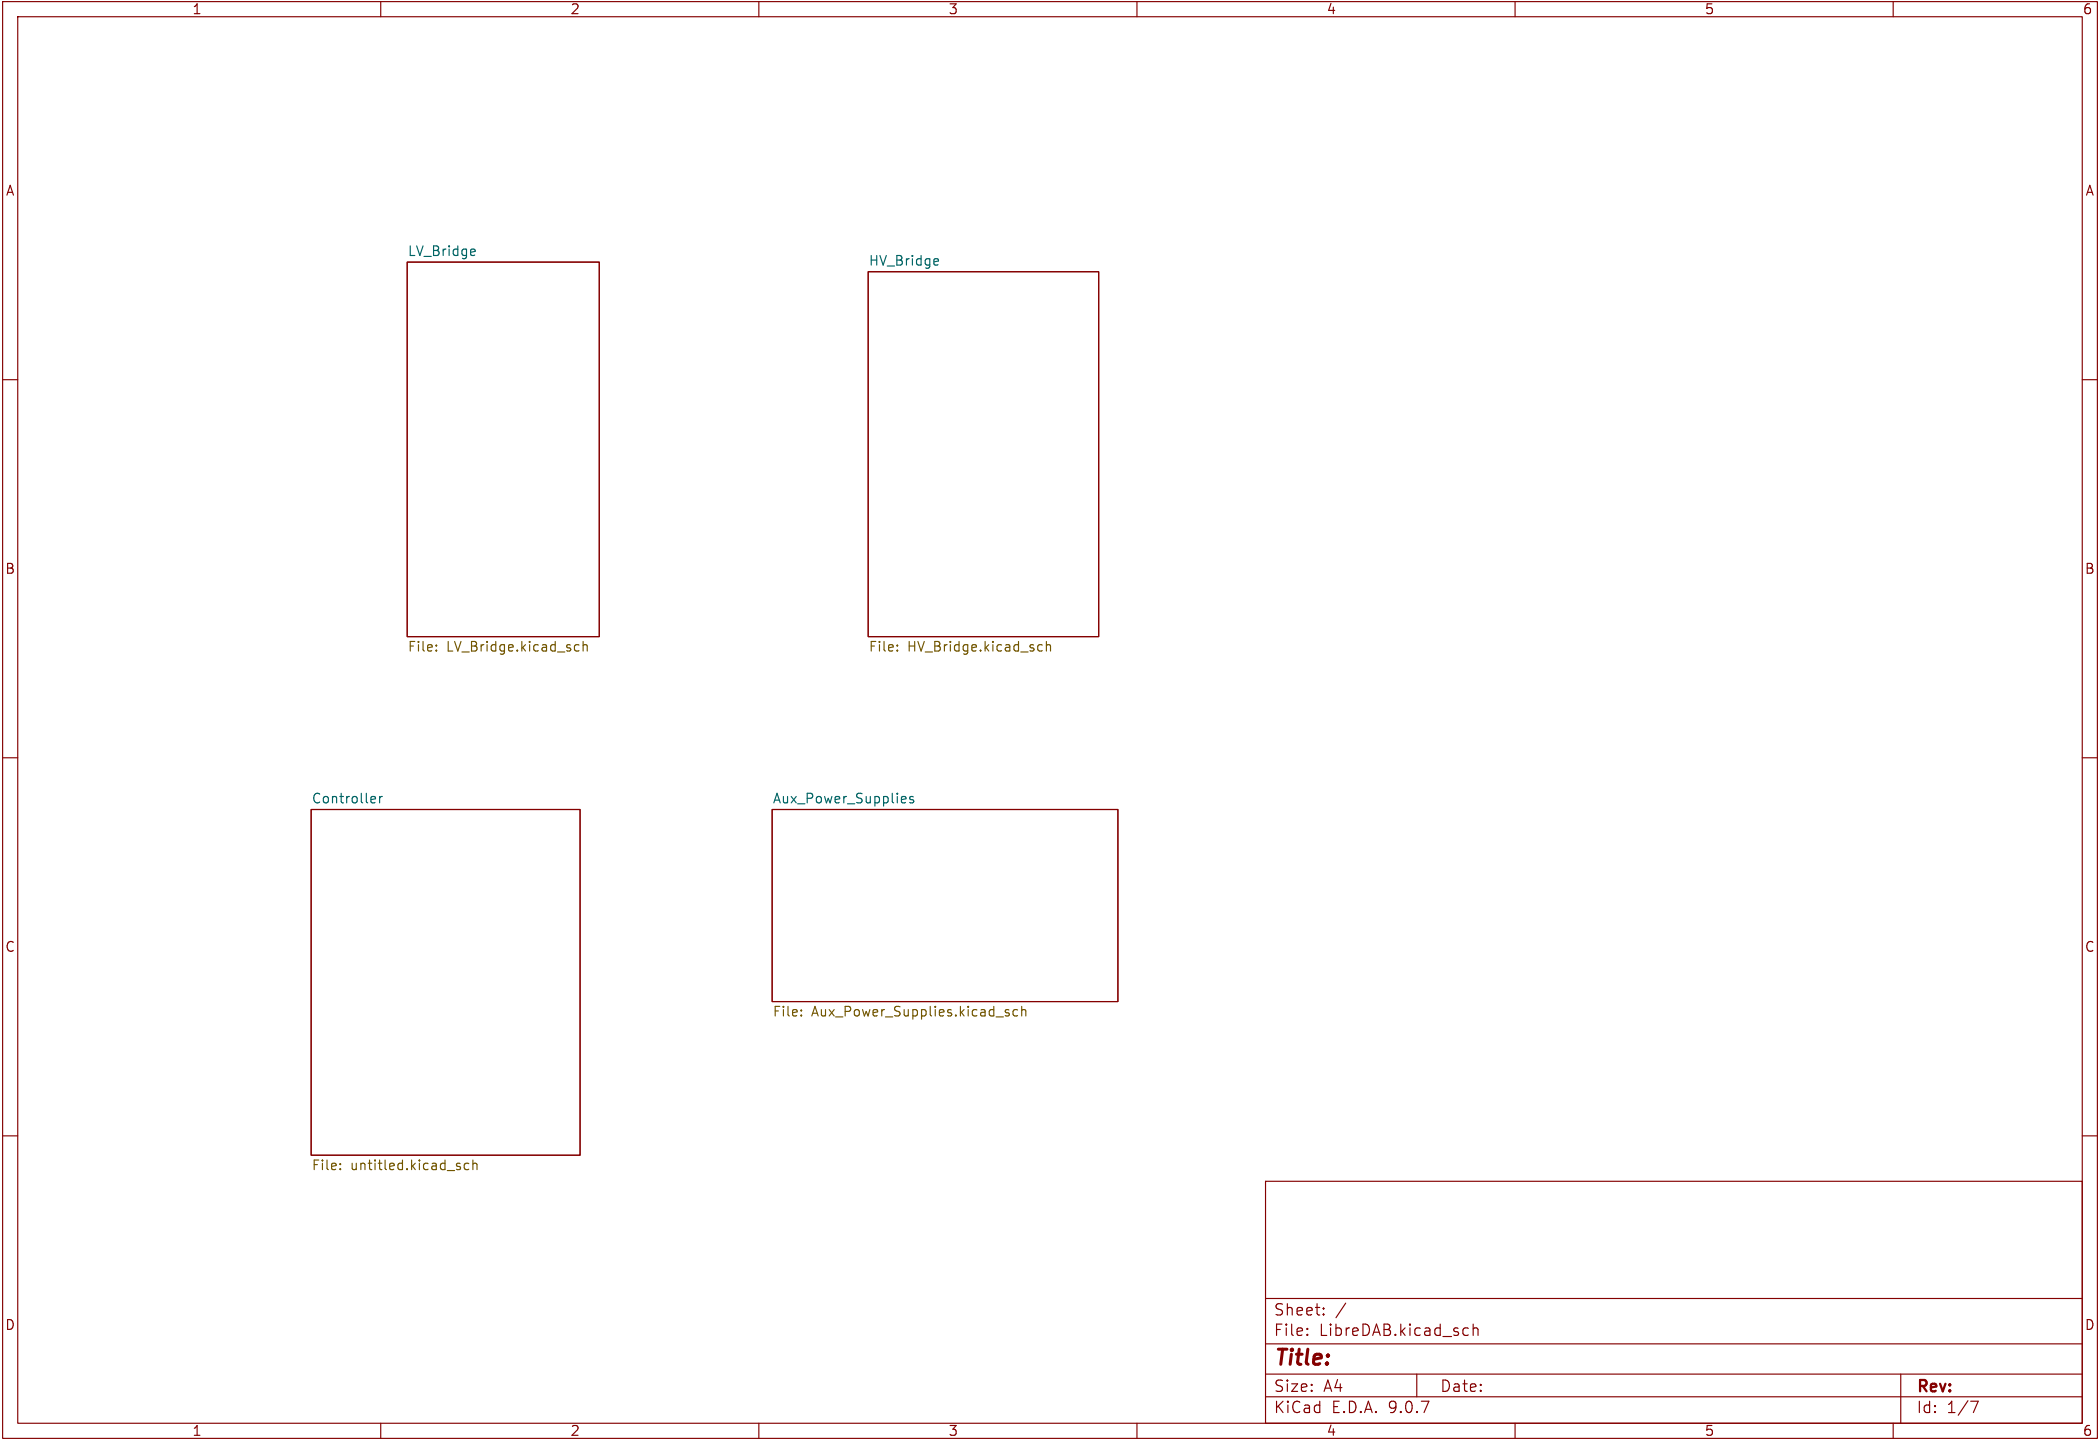

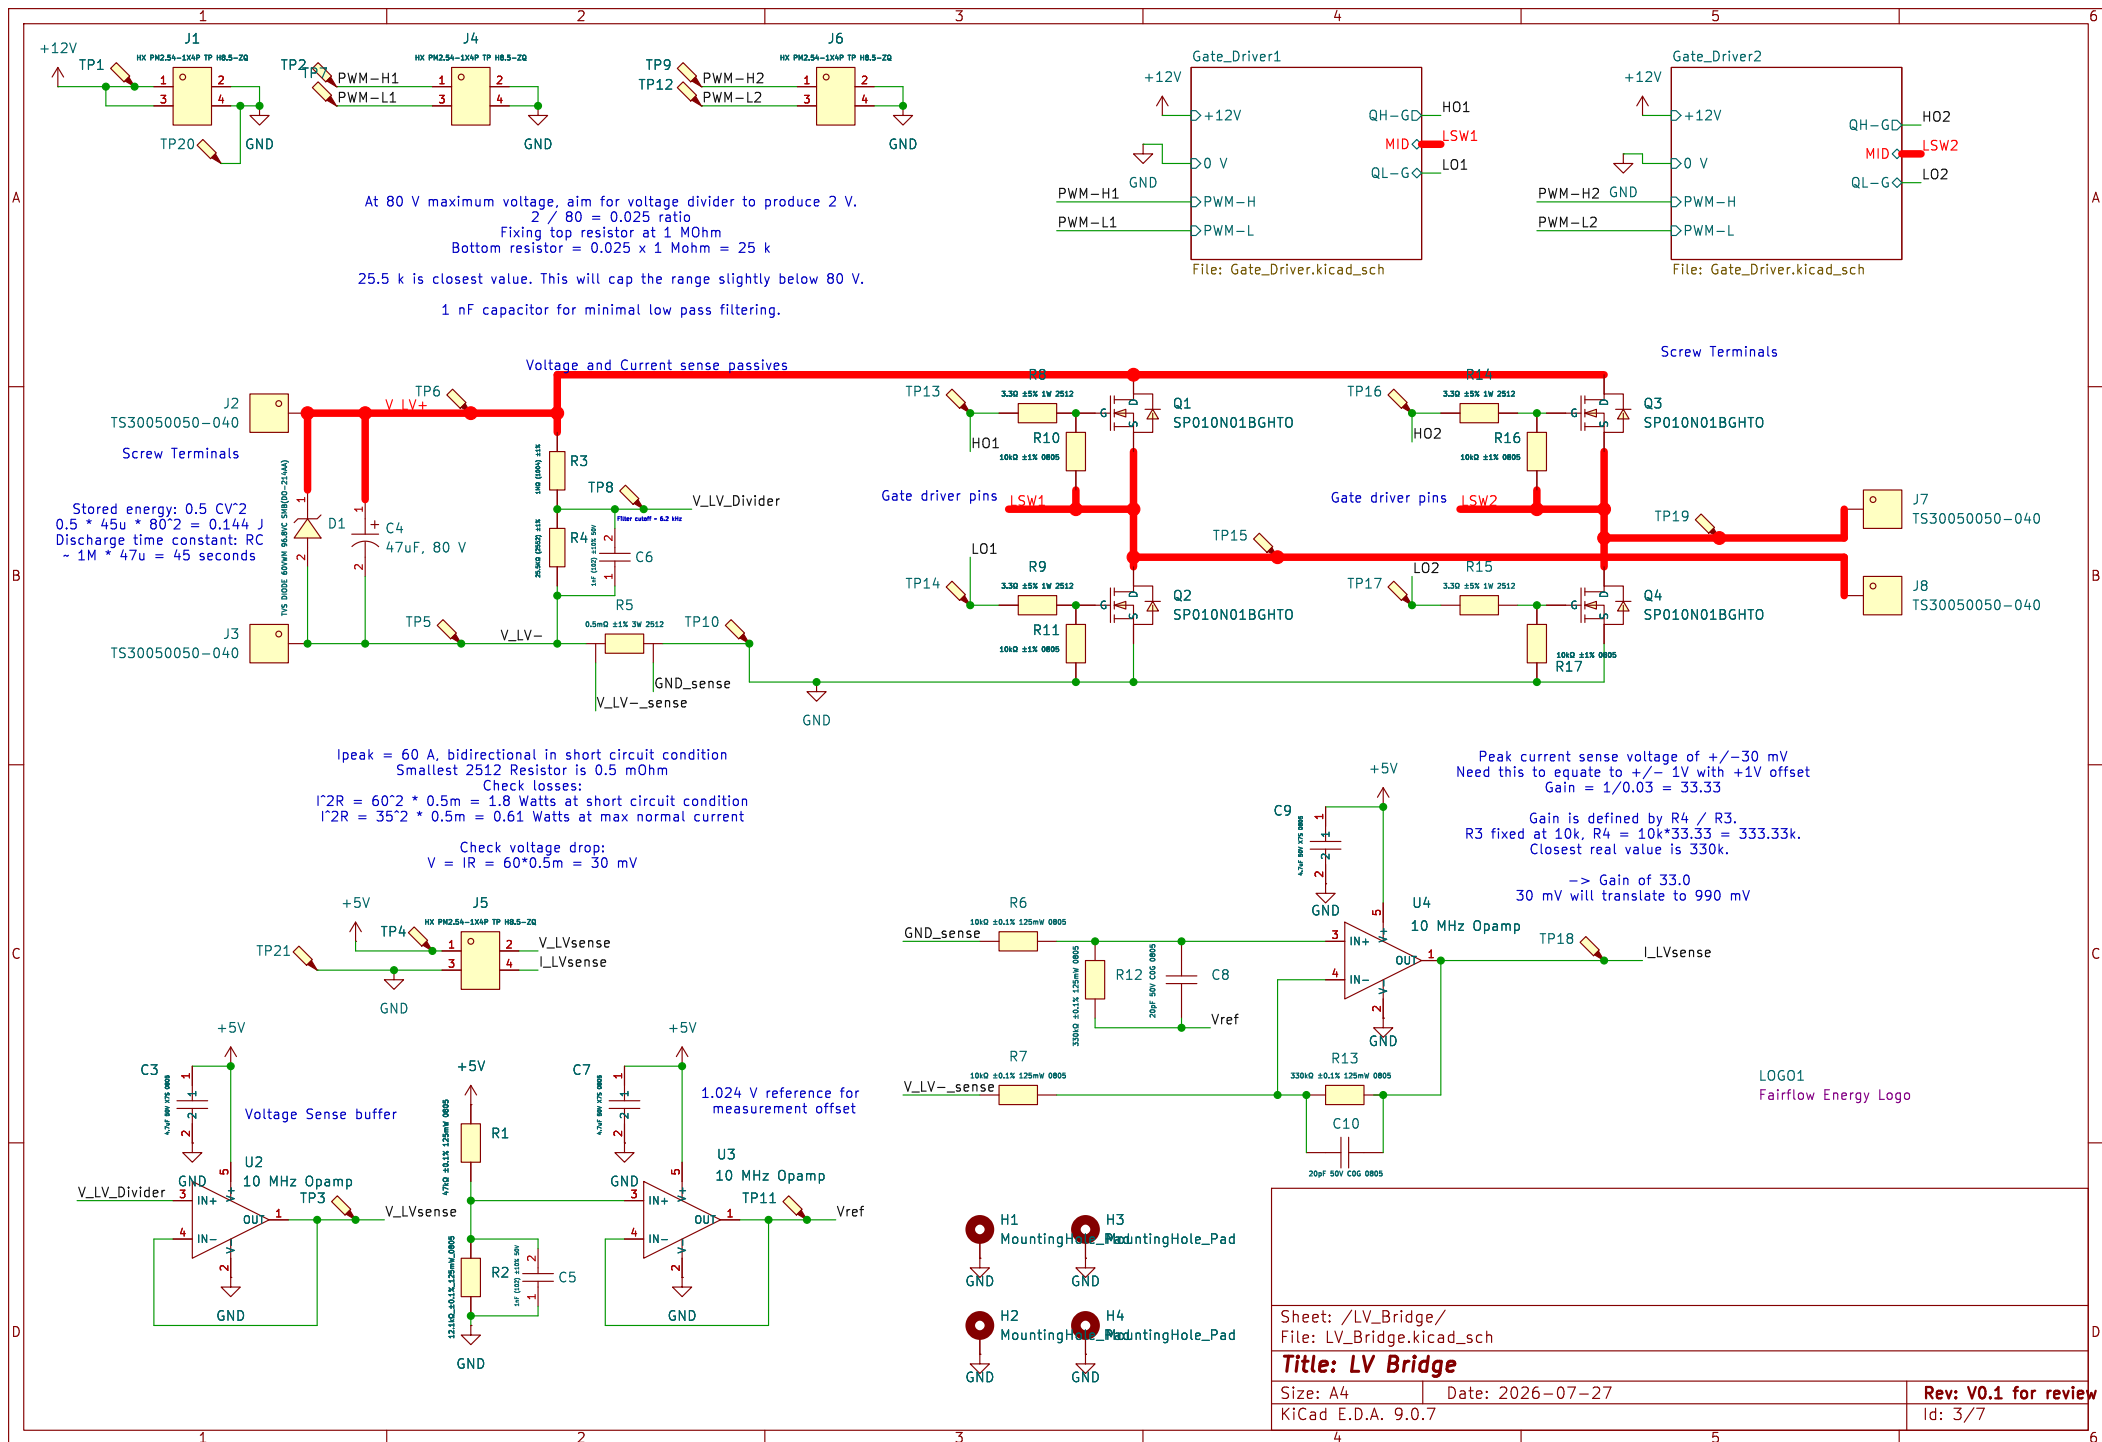

For Siliup MOSFET SP010N01BGHT0
 $P_{total} = Q_g \cdot V_{GS} \cdot f_{sw} = 208 \text{ nC} \times 12 \text{ V} \times 200 \text{ kHz} \approx 0.50 \text{ W}$
Rate gate drive resistors at 1 W to avoid thermal issues

Largest decoupling capacitors recommended from datasheet
– 4.7 uF VDD to GND capacitor
– 0.1 uF HB to HS Capacitor

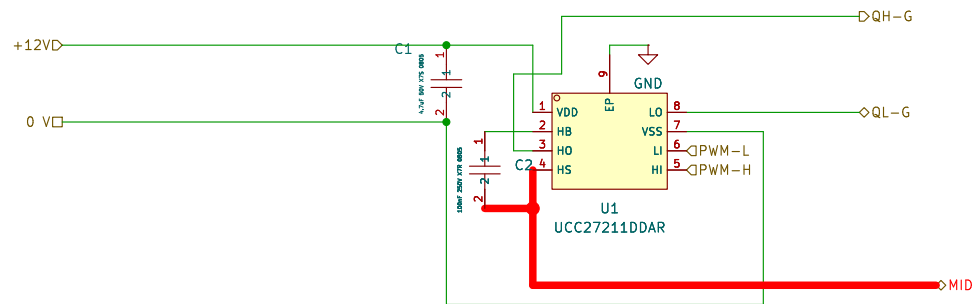

Sheet: /LV_Bridge/Gate_Driver1/
File: Gate_Driver.kicad_sch

Title:

Size: A4

Date:


KiCad E.D.A. 9.0.7

Rev:

Id: 2/7

For Siliup MOSFET SP010N01BGHT0
 $P_{total} = Q_g \cdot V_{GS} \cdot f_{sw} = 208 \text{ nC} \times 12 \text{ V} \times 200 \text{ kHz} \approx 0.50 \text{ W}$
Rate gate drive resistors at 1 W to avoid thermal issues

Largest decoupling capacitors recommended from datasheet
– 4.7 uF VDD to GND capacitor
– 0.1 uF HB to HS Capacitor

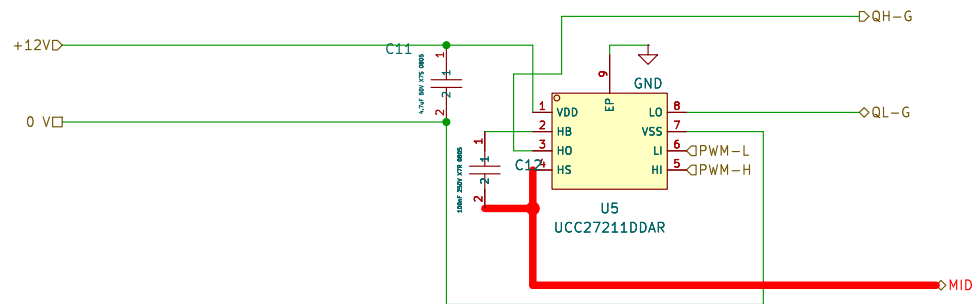

Sheet: /LV_Bridge/Gate_Driver2/
File: Gate_Driver.kicad_sch

Title:

Size: A4

Date:

KiCad E.D.A. 9.0.7

Rev:

Id: 7/7

1	2	3	4	5	6
A					A
B					B
C					C
D					D
1	2	3	4	5	6

Sheet: /HV_Bridge/ File: HV_Bridge.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 9.0.7		Id: 4/7

123456					
A					
B					
C					
D					
123456					

Sheet: /Controller/ File: untitled.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 9.0.7	Id: 5/7	

1	2	3	4	5	6
A					A
B					B
C					C
D					D
1	2	3	4	5	6

Sheet: /Aux_Power_Supplies/ File: Aux_Power_Supplies.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 9.0.7	Id: 6/7	