

Chapter 1

Utilizing Machine Learning to Monitor Railway Track Condition through Vibration Analysis

Anjan Bandyopadhyay¹, Shivam Agarwal²

1. Assistant Professor, Department of Computer Science and Engineering, Kalinga Institute of Industrial Technology (KIIT), Bhubaneswar, 751024, India, anjan.bandyopadhyayfcs@kiit.ac.in

2. Student, Department of Computer Science and Engineering, Kalinga Institute of Industrial Technology (KIIT), Bhubaneswar, 751024, India, 2129159@kiit.ac.in

Abstract-

Reducing and keeping away from the size of rail route mishaps brought about by defective tracks, just as the procedures of counteraction of such train wrecking concerns, should be respected critical for both public well-being and cost investment funds in reestablishing rail route mentors harmed by mishaps brought about by broken tracks. The objective of this article paper is to help with further developing shortcoming identification of rail route tracks, disconnection, and counteraction of disappointment brought about by defective rail route tracks in a critical time before the broken rail route tracks can cause a mishap, and the innovation we are utilizing is AI, which will assist with keeping up with the information of the relative multitude of tracks, which will assist with anticipating the expected issue.


Key Words: Condition monitoring; Vibration Sensors; low-cost monitoring of railway tracks; railway track surveillance; Machine learning;

1. INTRODUCTION

The utilization of the AI utilizing vibration is to further develop the condition observing of the rail route tracks so as to decrease the recurrence of future mishaps. The undertaking intends to accomplish a minimal expense, low-utilization, and unavoidable execution, stages like installed frameworks should be thought of [1,111]. Any Country's rail route framework is the foundation of its business and the travel industry transportation framework for that reason mishaps brought about by defective rail route tracks can diminish the development of a nation's economy[2,114]. Due to age-related concerns with field inspectors, railways have traditionally suffered from poor inspection quality.[13] This leads to low productivity, and railways have traditionally struggled with financing, but artificial intelligence may assist to minimise these expenses and enhance the accuracy of discovering flaws in railway lines swiftly and cheaply[4]. This type of condition monitoring is critical for defect identification in remote places such as mountainous regions or areas where field inspection is difficult.

Railway fish plates and fish bolts are the standard rail connection elements. A joint bar is a metal bar that is fastened to the ends of two rails to bring them together in a track[115,117]. They are used to keep the joint's strength and stiffness consistent for uniform flexibility. Typically, two railway fish plates are installed on either side of the rail waist. The absence of any of the plates is frequently due to a lack of nuts or bolts. This is also a major cause of train derailments [4,18].

Deep learning condition monitoring can provide artificial intelligence with the potential to learn new methods of defect detection via experience[21,22]. Artificial intelligence can avoid any type of tragic disaster on railway tracks by learning through deep learning in order to safeguard the public interest and lower the likelihood of a severe accident.

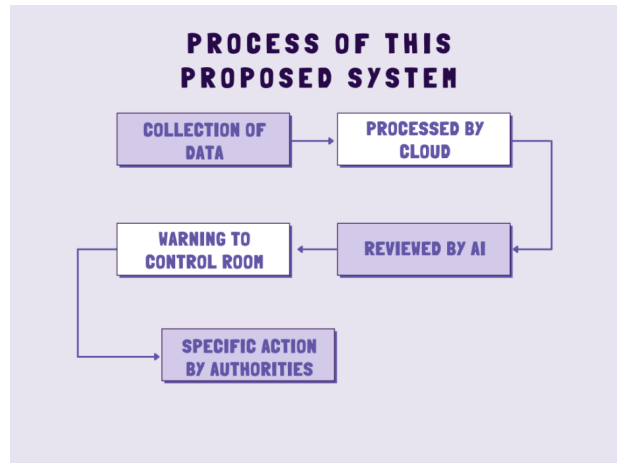


We should also be aware that every deadly accident on a railway track may harm the reputation of a country's infrastructure, which is critical for the development of its economy and tourism. This strategy is also long-term since artificial intelligence has a central deep-learning system that improves with each error[118,119].

Artificial intelligence merely takes data from node-based fault sensors and operates autonomously using the algorithm created by the developers.[23,121] Railways have always been slowed by bureaucracy, and the introduction of artificial intelligence can enhance their condition for speedier infrastructure development, consequently enhancing the state of railway lines and public safety. Pass procedures were insufficient to safeguard the public from tragic incidents[28].

With recent breakthroughs in sensors and technology, we can see that there are a plethora of sensors on the market that can currently do anything smart. Sensors and technologies that have recently been created can provide an indicator of the present state of a railway track in real-time, which can aid in track condition monitoring[8,10]. To analyze such a massive quantity of data throughout a country's rail network, we need an efficient algorithm.

Although data on railway track monitoring is available, image processing and computer vision techniques cannot solve all difficulties[26,27]. That is why efficient methods for detecting them are being developed. An algorithm that uses the principles of data structures and algorithm concepts and can use the Global Positioning System (GPS) to determine the absolute location of a crack should be developed.[3,9]

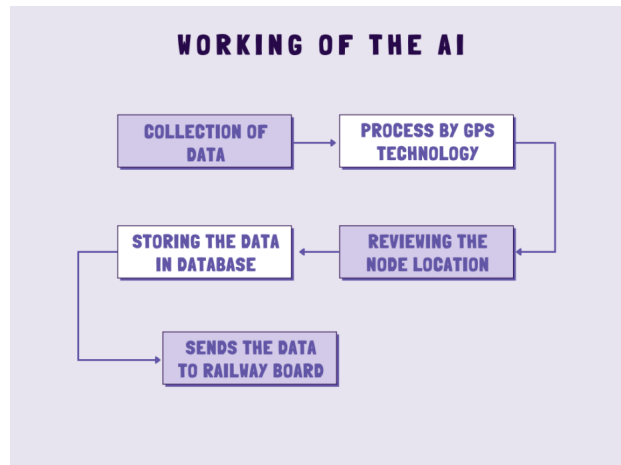


An algorithm that finds errors that originate from a certain node. It sends the data to the railway control room, where we can view the real-time location of the crack at a specific spot. SQL software can be used to store the database[122].

A railway track inspection system that is automated. which may distinguish between three sorts of track conditions: wheel burn, superelevation, and normal track If you find a flaw, the system will sound an alarm.[6,16]

Wheel burn on a track can occur as a result of a jammed wheel as a result of a locomotive jumping owing to an uneven ballast.

Super Elevation occurs when the outside rail of a train climbs above the required elevation. For a curved track, the outer rail is usually set higher than the inner rail[123].

Process Flow Diagram



The GPS will also send the location to the Control Center Because monitoring hundreds of thousands of miles of railway track involves a significant amount of money and labor, automatic fault detection of the railway track system is required to minimize human error[9,29].

Even human examination is susceptible to errors, and manual inspection is time-consuming and prejudiced. Okay, if they believe it will have a significant influence, railroad lines must be properly and timely maintained. The identification of cracks in train operation is critical for the proper operation of the system to mitigate the detrimental impact. To avoid mishaps, such a low-cost automation system must be developed[124,125].

Using RMS measurements to establish the tracking problem is quite difficult. Previously, the continuous wavelet transform was used to calculate track geometry using vibration from the car's body vibration approach.[5,14] Due to technical restrictions, the precise shape of the track was difficult to determine in the past. are mostly attributable to frequency and timing unpredictability[30,31].

If the signal processing can use the vibration sensor to obtain more information about the current state of the track, machine learning can use more information to anticipate and correct data for the specific defect in the node system. It is extremely difficult to detect the defect using a measurement system since there is no discernible difference in the corrugation of the tracks in the absence of presence, therefore measurement analysis is an erroneous technique to anticipate the data[36,126]. As a result, we apply signal processing to improve the accuracy of the data in our analysis by the deep learning method of ML.

A railway is an efficient mode of transport because it uses the low-resistance contact between the wheel and rail track. This contact is without friction and causes wear and tear on both surfaces, which leads to issues for operators when changing and tuning wheels[34,127].

In this paper, we will go through how machine learning may be used to improve the condition monitoring of railway tracks by employing vibration sensors and a node-based method. This paper is divided into four sections, each with its own conclusion.


1.1 History of Condition monitoring

Previously, traditional carts were used by field inspectors to undertake a systematic checkup of a railway defect, which caused many accidents since human error is very tedious and biased because the field inspectors themselves discover the faults and then work with their team to rectify them[35]. However, hiring a large number of field inspectors and defect detection carts is too expensive for a big railway network such as Indian Railways. This is where improvements should be made to reduce the cost of detecting faults in railway tracks[37]. Physical inspection is inefficient because the manually driven procedures utilised in the railway fault detection system have been shown to be insufficient for monitoring the health of the track and reducing accidents caused by track flaws [17,19].

1.2 Data Collection and Processing

Sensors for data gathering are part of the overall architecture of remote condition monitoring. Sensors are installed on assets to capture raw data, which is then transmitted over a wired or wireless network.[7] Data may be further examined to uncover trends and patterns, resulting in a better knowledge of an asset's health. The overall design of remote condition checking incorporates sensors for information assortment, which are set on a resource for gathering crude information, which is moved over a wired or remote organization to the

information assortment focus or focal control room or to the cloud[39,40]. This crude information can be additionally examined to recognize the patterns and examples, which brings about the understanding of the well-being status of a resource. Prior to executing remote condition checking innovation, it is vital all the time to design different factors like sensor advances, the position of the sensor, gathering, and treatment of factual information, data dispersion, information arranging, alert observing, gadget oversight, and upkeep in addition to other things also to the volumes of the information created by an ongoing sensor organization[49,51]. The track condition monitoring system was used to check the regional railway's track condition by measuring the vertical vibration acceleration of the car body. In our field test, a small onboard sensing device was installed aboard an in-service vehicle of a regional railway to continuously monitor car-body vibrations from October 2016 to October 2019[43,45].

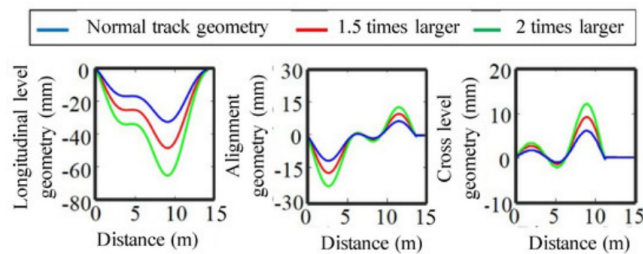

The vertical accelerations of the car body measured in October 2019 were used to assess track conditions. The monitored area was the section where the RMS values frequently exceeded 1.0 m/s². In October 2019, the total number of times where RMS values surpassed 1.0 m/s² between every pair of stations was counted and normal by the total number of runs and distance.

Machine learning can analyze the data in that database to anticipate the methods for detecting forthcoming defects and the capacity of a railway track node to maintain good statistics[44,128].

2. Use Of Vibration Sensors in condition monitoring

Vibration Sensors can help in the identification of the shortcoming in rail route track lines as they are piezoelectric accelerometers that can gauge the impact of changes in power, and strain by the transformation of mechanical power into electrical power. Utilizing the information given by vibration sensors, the framework can quantify the distinctions between the ordinary track wavering and flawed track swaying by estimating the vibration on the outer layer of the track to really take a look at the chance of any unpredictable movement on the railroad, perhaps it very well may be an issue or a weighty item on the track.[15,50]

As it recognizes the space between the track lines utilizing the information it gathered and gives the report of the ongoing circumstances of the track line to the control room and the driver of the running train so the driver can go to crisis lengths in the event of significant issues[129].

2.1 Introduction of how vibration sensors work.

Every sensor might be appointed a number, and by using the web and A.I frameworks. The sensors are planned so that they can communicate, work together, and give the aftereffect of a totally high level of reliable

information that can distinguish the genuine condition with insignificant blunders; notwithstanding, this framework requires an enormous number of hubs introduced around tracks in light of the fact that the information gave should be exact given the huge rail route lines of nations like India[52,130].

2.2 How vibrational sensors are used in condition monitoring

It is more suited because when an inspection train inspects a certain railway line, the track must remain idle, which means that other trains with routes through that specific railway line may have longer delays depending on the duration of the inspection[131,132].

Furthermore, given the length of railway tracks in countries like India, it is a very difficult and time-consuming process, and a computer system using machine learning algorithms can diagnose a particular railway line using sensors installed without the need for a specific inspection train or field workers and can process the data immediately, making it a very cost-effective method that can greatly reduce the need for field workers and inspection trains[53].

3. Benefits of Vibration sensors against traditional methods.

This method of fault diagnosis using vibration sensors and machine learning algorithms is more efficient than the traditional methods like Fault diagnosis by periodic maintenance and field inspection[56]. This proposed method is more suitable because traditional methods can highly possibly result in longer repairing time, and less productivity among the field workers, and it also requires a high quantity of field workers which can make fault diagnosis expensive and less efficient[62,63]. Countries like India and China, have huge railway lines in their respective landmass which may require a lot of field workers to maintain the track line.

3.1 How Artificial Intelligence and Machine learning improves the process

These days, the general public has strong machines like Desktop PC, Laptops, and embedded frameworks, the execution of strong calculations which can investigate the information given by the sensors introduced in the rail route quantities of a specific region[58].


The calculations can investigate the information so that it can distinguish a future or an expected shortcoming in the rail route tracks by estimating the life span of each shaft no. having vibration sensor introduced[56,59].

The AI framework can anticipate the deficiencies by contrasting the previous tension, grinding, and speed increase has given the sensors of a specific track to the current subtleties which can be useful in foreseeing the state of that track and along these lines A.I. can caution the control room about an expected breakage in the rail route track[60,61].

3.1 How Machine learning is used in condition monitoring.

On the off chance that there is no investigation train and there are different shortcoming identification hardware introduced in every one of the trains, the gear can perform condition observing of rail route tracks by shunt current recognition in track circuits[64,142].


A few thoughts on why it isn't appropriate to utilize shortcoming identification hardware. It can cost exceptionally high for buying such types of gear for every train[65,66].

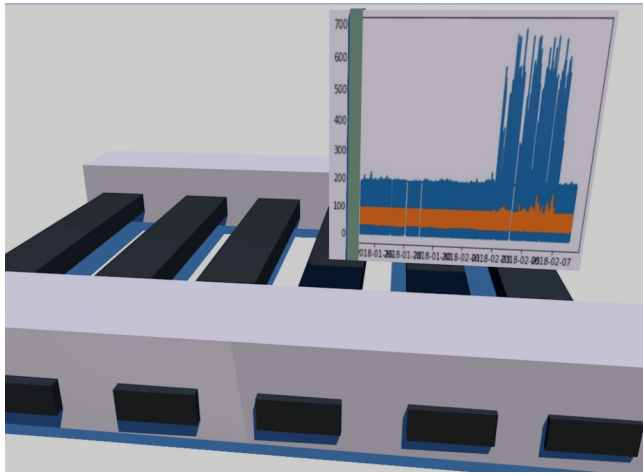



Enormous groups of specialists needed to play out this tremendous responsibility of alteration. It needs intermittent support to actually take a look at the state of the shortcoming identification hardware[67].

As shunt current can deliver electromagnetic waves, these waves can be effortlessly meddled by the commotion. In designing practice,

It is exceptionally difficult to acquire exact outcomes utilizing the conventional way and shunt current technique since it requires the exact place of the track circuit[70,89]. Consequently Not having exact information sources can without much of a stretch change the after-effects of a shortcoming identification hardware bringing about potential blunders[71,134].

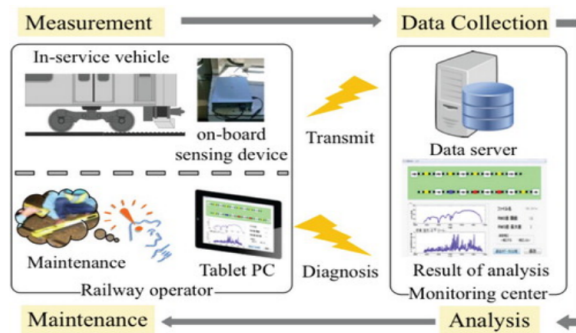

The car-body vibration is measured by accelerometers and rate gyros in the onboard sensor equipment. The location and speed of the train are detected by a global navigation satellite system (GNSS) receiver[72,90]. The collected data is continuously relayed to the data server at the monitoring center via a mobile phone network.

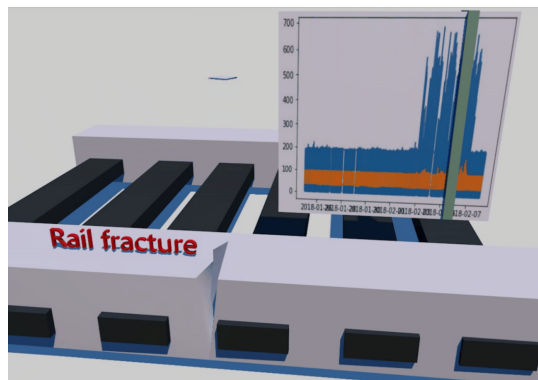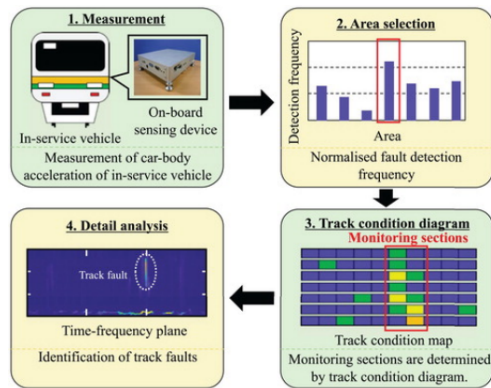

The diagnostic software analyses the acquired data, and the results are relayed back to the train operators via tablet computers over web channels[73,74]. The diagnostic data are utilized to help railway operators with their maintenance tasks.

The place of this proposed article is to give comprehension to the per-user concerning how vibration sensors using AI with multi-center point examination procedure can help in breaking down significant deficiency assurance methodologies into a more direct and time-useful way[75,76].

3.2 Why the addition of machine learning is an advantage.

It can greatly solve the problem of having high-cost input, Inspection trains, a high no. of field workers, or onboard fault detection equipment by the node method system as it does not require great modification. Even its benefits are

- A vector support machine is required to detect the issue. It is an algorithm for machine learning. This method determines the greatest distance between two groups and draws a line through the center of

them, The data was divided into two categories: longitudinal irregularity and alignment irregularity fault[77].

It performs online diagnosis which is very fast and efficient and can be done anytime without causing traffic delays or huge modifications[91].

The node system can provide detection without considering external factors by machine learning which means good engineering feasibility[78,79].

It does not require the precise location of the track as machine learning algorithms can predict the potential breakage by using past years' data of fault diagnosis[80].

4. Challenges faced by this method of monitoring railway tracks.

As we know machine learning technology is very new and specifically constructed algorithms can have the slightest errors which might create a lot of bugs requiring high-quality skilled workers in this field[83,92]. There are also some structural problems with the embedded system which must be deeply taken into account. Also, this technology requires rigorous testing which can take years to get this method on the ground. This paper provides only the theoretical and ideal parameters which can be different in real life[93,94]. Also, railway management must be very efficient in order to have this implemented properly because algorithms can only provide the possible conditions but the ground reality can be very different in case of errors that are unknown at the present time. Because we have any constraints here, the limiting of vibrating sensors for condition monitoring of railway tracks using machine learning is a very difficult and tough notion.

The constraint of this technique is that we must be precise in calculating the pressure, acceleration, and force that occur on the railway track[84,85].

Because machine learning is a new technology that utilizes its algorithm to better itself every time, we must be extremely exact.

As you may be aware, deep learning approaches are used to increase machine learning analysis and data prediction[95,141].

4.1 Limitations of Machine learning in condition monitoring.

Condition monitoring has numerous limits if we use machine learning:

- **A scarcity of publicly available data -**

Due to scarcity as an exception. Rail track flaws can be found in databases and are frequently used by scientists. They are exclusive and cannot be shared. This issue makes training, evaluating, and comparing more difficult[97]. The outcomes of machine learning algorithms are more difficult to predict. As a result, as long as there is no publicly accessible dataset and not all machine learning experts outside of the rail sector are interested[98,101]. If I will make an effort to contribute to the advancement of study in this area, which may lead to new discoveries. This will doubt whether these

ideas and slow the domain's advancement. The railroad sector must make rail track data available to universities.

- **Understanding of Machine Learning Models -**

A considerable number of articles published in the rail maintenance area used CNN models and encouraged the use of CNNs for automatic defect detection in real-world scenarios[102,103]. CNNs, on the other hand, are called black-box models that are not inherently interpretable. In other words, the machine learning researcher is unable to explain how a CNN model arrived at its predictions or demonstrate its reliability to the end user. The research community has not addressed the question of how we can trust ML models[104,105]. As a result, constructing an accurate black-box model should not be the main purpose of machine learning algorithms, but rather how these methods are implemented. It is necessary to examine flaw classification.

- **Presence of huge quantity of labeled datasets**

The presence of a sufficient number of samples can represent a more serious difficulty. This issue is particularly obvious in available datasets since scanning rail track photos is a time-consuming and costly operation that necessitates a high level of expertise and domain knowledge[106,107]. As a result, existing datasets frequently fail to meet the amount of data required for machine learning algorithms. Despite the fact that various research papers have been published and a few tools have been developed to help with the dataset labeling challenge[110].

5. Conclusion

The purpose of this proposed article is to inform the reader about how vibration sensors combined with artificial intelligence and a multi-hub investigation approach may aid in the deconstruction of time-consuming shortfall identification procedures.

Disclaimer

None

References

1. Milne, D.; Le Pen, L.; Watson, G.; Thompson, D.; Powrie, W.; Hayward, M.; Morley, S. Monitoring and repair of isolated trackbed defects on a ballasted railway. *Transp. Geotech.* 2018, *17*, 61–68.
2. Detection of Missing Nuts & Bolts on Rail Fishplate. Available online:
3. Singh, A.K.; Swarup, A.; Agarwal, A.; Singh, D. Vision-based rail track extraction and monitoring through drone imagery.
4. .Ritika, S.; Rao, D. Data Augmentation of Railway Images for Track Inspection. *arXiv* 2018, arXiv:1802.01286.
5. James, A.; Jie, W.; Xulei, Y.; Chenghao, Y.; Ngan, N.B.; Yuxin, L.; Yi, S.; Chandrasekhar, V.; Zeng, Z. Tracknet—A deep learning based fault detection for railway track inspection.
6. Krishna, B.; Seshendra, D.; Raja, G.; Sudharshan, T.; Srikanth, K. Railway track fault detection system by using ir sensors and bluetooth technology. *Asian J. Appl. Sci. Technol.*

7. Karthick, N.; Nagarajan, R.; Suresh, S.; Prabhu, R. Implementation of railway track crack detection and protection.
8. Mishra, U.; Gupta, V.; Ahzam, S.M.; Tripathi, S.M. Google Maps Based Railway Track Fault Detection Over Internet.
9. Nagdevte, D.; Zakir, M.; Muley, A.; Shelar, A. Detection of Crack In Rail Road Using Ultrasonic and PIR Sensor. *Int. Res. J. Eng. Technol. (IRJET)* 2017, 4, 2395-0056. [Google Scholar]
10. Lee, J.; Choi, H.; Park, D.; Chung, Y.; Kim, H.Y.; Yoon, S. Fault detection and diagnosis of railway point machines by sound analysis. *Sensors* 2016, 16, 549.
11. Alfi, S.; Bruni, S. Estimation of long wavelength track irregularity from onboard measurement. In *Proceedings of the 4th IET International Conference on Railway Condition Monitoring (RCM2008)*, London, UK, 18–20 June 2008.
12. Tsunashima, H.; Naganuma, Y.; Kobayashi, T. Track geometry estimation from car-body vibration. *Veh. Syst. Dyn.* 2014, 52 (Suppl. 1), 207–219.
13. Naganuma, Y.; Azami, S.; Tsunashima, H. Track Geometry Estimation from Car-body Motions of Shinkansen Vehicles. In *Proceedings of the International Symposium on Speed-up and Sustainable Technology for Railway and Maglev Systems 2015 (STECH2015)*, Chiba, Japan, 10–12 November 2015.
14. Tsunashima, H.; Naganuma, Y.; Matsumoto, A.; Mizuma, T.; Mori, H. Japanese railway condition monitoring of tracks using in-service vehicle. In *Proceedings of the 5th IET Conference on Railway Condition Monitoring (RCM 2011)*, Derby, UK, 29–30 November 2011.
15. Schwanen, W.; Kuijpers, A. Early Rail Defect Detection using Sound Measurements. In *Proceedings of the Third International Conference on Railway Technology: Research, Development and Maintenance*, Sardinia, Italy, 5–8 April 2016.
16. Mori, H.; Ohno, H.; Tsunashima, H.; Saito, Y. Development of Compact Size Onboard Device for Condition Monitoring of Railway Tracks. *J. Mech. Syst. Trans. Logist.* 2013, 6, 142–149.
17. Vinberg, E.; Martin, M.; Firdaus, A.; Tang, Y. *Railway Applications of Condition Monitoring*; KTH Royal Institute of Technology: Stockholm, Sweden, 2018.
18. Qiao Jian-Hua; Li Lin-sheng; Zhang Jing-gang; “Design of Rail Surface Crack- detecting System Based on Linear CCD Sensor,” *IEEE Int. Conf. on Networking, Sensing and Control*, vol. 14, no. 4, pp. 961-970, April 2008
19. M. Yinghua, Z. Yutang, L. Zhongcheng, and Y. Cheng Ye, “A fail-safe microprocessor-based system for interlocking on railways,” *Proceedings of the Annual Symposium on Reliability and Maintainability*, pp. 415- 420, Jan. 1994.
20. M.T. Musavi, K.H. Chan, D.M. Hummels, K. Kalantri, “On the generalization ability of neural network classifiers,” *IEEE Trans. Pattern Analysis and Machine Intelligence*, vol-16, Issue-6, pp. 659-663, June 1994.
21. Berlin, E.; Laerhoven Van, K. Sensor networks for railway monitoring: Detecting trains from their distributed vibration footprints. In *Proceedings of the 2013 IEEE International Conference on Distributed Computing in Sensor Systems*, Cambridge, MA, USA, 20–23 May 2013.
22. Chen, J.; Roberts, C.; Weston, P. Fault detection and diagnosis for railway track circuits using neuro-fuzzy systems. *Control Eng. Pract.* 2008, 16, 585–596.
23. Zhao, L.H.; Wu, J.P.; Ran, Y.K. Fault diagnosis for track circuit using AOK-TFRs and AGA. *Control Eng. Pract.* 2012, 20, 1270–1280.
24. Polivka, A.L.; West, P.; Malone, J.; Smith, B.E.; Renfrow, S.M. System and Method for Detecting Broken Rail and Occupied Track from a Railway Vehicle. U.S. Patent US 9,162,691 B2, 20 October 2015.

25. Turabimana, P.; Nkundineza, C. Development of an onboard measurement system for railway vehicle wheel flange wear. *Sensors* 2020, 20, 303. [CrossRef]
26. Y Santur, M Karakose, and E Akin, Learning Based Experimental Approach For Condition Monitoring Using Laser Cameras In Railway Tracks, *International Journal of Applied Mathematics, Electronics and Computers*, Vol. 4, No. 1, 2016, pp. 1-5.
27. P Xu, R Liu, F Wang, Q Sun, and H Teng, A novel description method for track irregularity evolution, *International Journal of Computational Intelligence Systems*, Vol. 4, No. 6, 2011, pp. 1358-1366.
28. A Berry, B Nejikovsky, X Gilbert, and A Jajaddini, High speed video inspection of joint bars using advanced image collection and processing techniques, In *Proc. of World Congress on Railway Research*, 2008.
29. Randall R.B. *Vibration-Based Condition Monitoring: Industrial, Aerospace and Automotive Applications*. John Wiley & Sons Ltd.; Chichester, UK: 2010.
30. Wolf M., Rudolph M., Kanoun O. Concept for an event-triggered wireless sensor network for vibration-based diagnosis in trams. *Vibroeng. Procedia*. 2019;27:55–60.
31. Bruni S., Goodall R., Mei T.X., Tsunashima H. Control and monitoring for railway vehicle dynamics User Modeling and User-Adapted Interaction.
32. Aydin I., Karaköse M., Akin E. Robust anomaly detection in pantograph-catenary system based on mean-shift tracking and foreground detection; *Proceedings of the 2013 IEEE International Conference on Systems, Man, and Cybernetics (SMC 2013)*; Manchester, UK. 13–16 October 2013; Washington, DC, USA: IEEE Computer Society; 2013. pp. 4444–4449.