
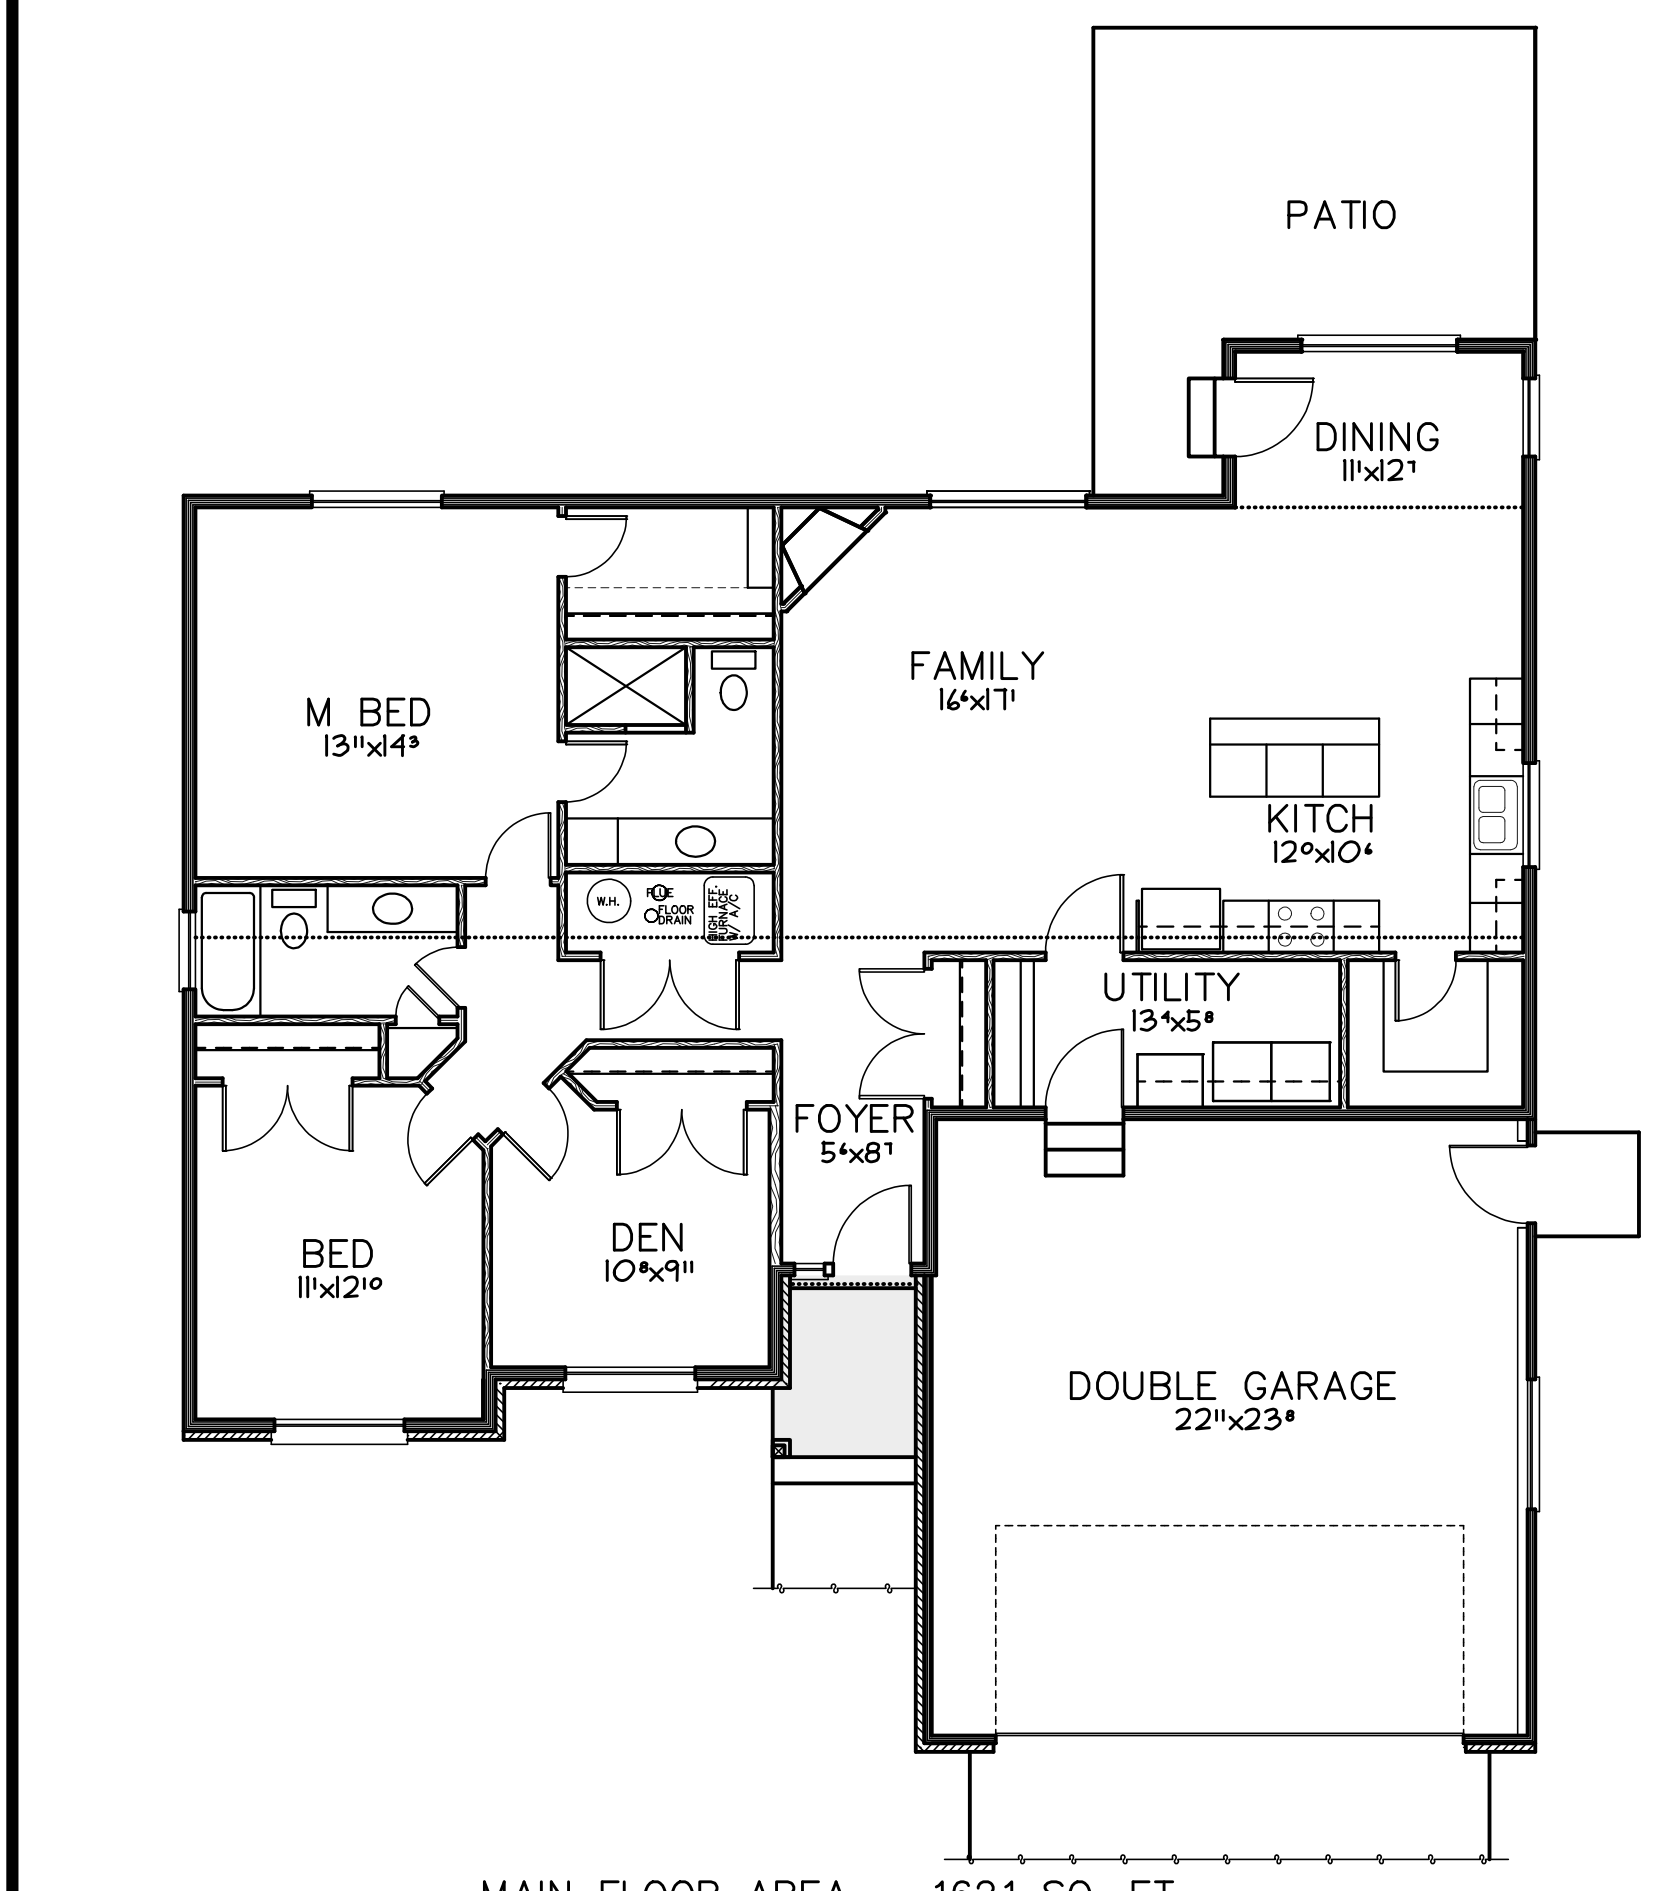


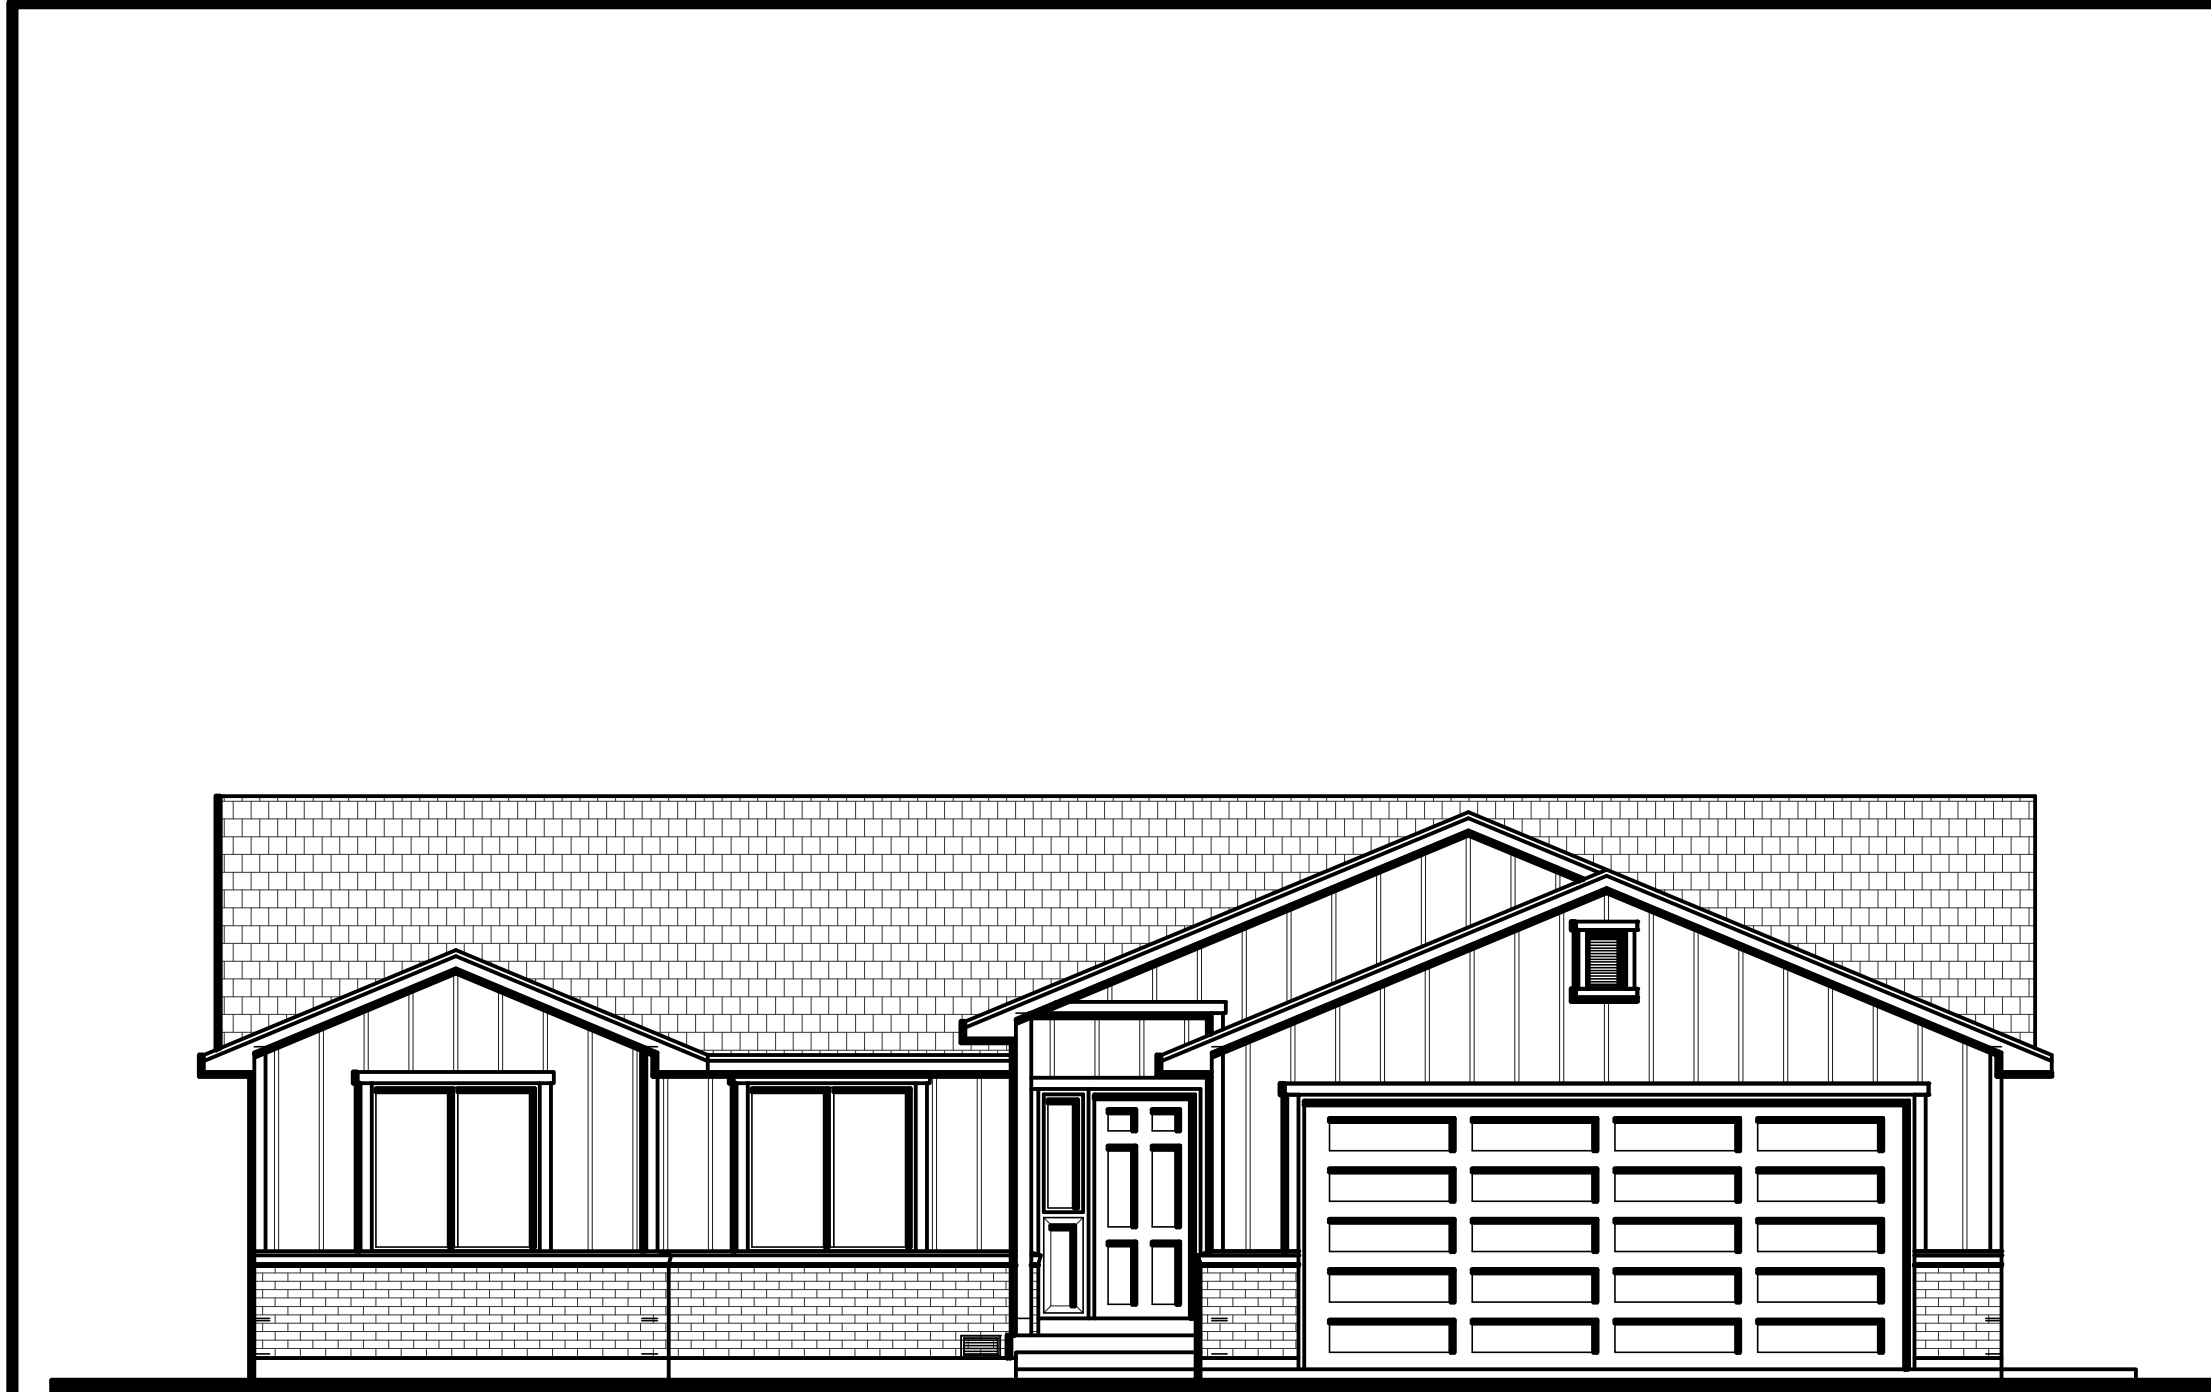

MAIN FLOOR AREA = 1621 SQ. FT.

BRICK VENEER STEEL ANGLE LINTEL SCHEDULE			COMMENTS
OPENING SIZE	ANGLE SIZE		
0'-0" TO 6'-11"	L3.1/2"x3.1/2"x1/4"		CONNECT STEEL ANGLE TO LVL BEAM WITH 1/2" DIA. X 3" LAG SCREWS AT 16" O.C.
7'-0" TO 8'-11"	L4"x3.1/2"x1/4"		
9'-0" TO 9'-11"	L5"x3.1/2"x1/4"		
10'-0" TO 18'-0"	L5"x3.1/2"x1/4"		
BRICK VENEER STEEL ANGLE LINTEL NOTES:			
1. ALL STEEL LINTELS SHALL HAVE A MINIMUM BEARING LENGTH OF 1" PER FOOT OF OPENING OR 4" MINIMUM TYPICAL. MAXIMUM BEARING LENGTH NEED NOT EXCEED 12".			
2. LINTELS ARE DESIGNED TO SUPPORT UNIFORM LOADS CONSISTING ONLY OF WEIGHT OF WALL WITHIN A 60 DEGREE ISOSCELES TRIANGLE AREA ABOVE OPENING.			
3. ALL STEEL LINTELS ARE TO HAVE LONG LEG VERTICAL.			
4. ALL ANGLE LINTELS SHALL BE CORROSIVE RESISTANT.			

CONCRETE FOOTING SCHEDULE ^{1,2,3}											
MARK	WIDTH	LENGTH	THICK.	CROSSWISE REINFORCING				LENGTHWISE REINFORCING			
				NO.	SIZE	LENGTH	SPACE	NO.	SIZE	LENGTH	SPACE
CONTINUOUS FOOTINGS											
FC1.5	1'-6"	CONT.	10"	N/A	N/A	N/A	N/A	2	#4	CONT.	12"
FC1.7	1'-8"	CONT.	10"	N/A	N/A	N/A	N/A	2	#4	CONT.	14"
FC2.0	2'-0"	CONT.	12"	N/A	N/A	N/A	N/A	3	#4	CONT.	9"
FC2.5	2'-6"	CONT.	12"	#4	2'-0"	12"	4	#4	CONT.	8"	
FC3.0	3'-0"	CONT.	12"	#4	2'-6"	12"	5	#4	CONT.	7.5"	
FC3.5	3'-6"	CONT.	12"	#4	3'-0"	12"	5	#4	CONT.	9"	
SQUARE FOOTINGS											
FS2.0	2'-0"	2'-0"	12"	3	#4	1'-6"	9"	3	#4	1'-6"	9"
FS2.5	2'-6"	2'-6"	12"	4	#4	2'-0"	8"	4	#4	2'-0"	8"
FS3.0	3'-0"	3'-0"	12"	5	#4	2'-6"	7.5"	5	#4	2'-6"	7.5"
FS3.5	3'-6"	3'-6"	12"	5	#4	3'-0"	9"	5	#4	3'-0"	9"
FS4.0	4'-0"	4'-0"	12"	6	#4	3'-6"	8.4"	6	#4	3'-6"	8.4"
FS4.5	4'-6"	4'-6"	12"	7	#4	4'-0"	8"	7	#4	4'-0"	8"
FS5.0	5'-0"	5'-0"	14"	8	#4	4'-6"	7.7"	8	#4	4'-6"	7.7"
CONCRETE FOOTING NOTES:											
1. PLACE ALL FOOTING REINFORCING IN BOTTOM OF FOOTING WITH 3" CLEAR CONCRETE COVER UNLESS NOTED OTHERWISE.											
2. ALSO PROVIDE SCHEDULED REINFORCING AT TOP OF FOOTING WHEN NOTED ON PLANS.											
3. FC - CONTINUOUS FOOTING; FS - SQUARE FOOTING											


METAL CONNECTOR SCHEDULE				
MARK	SIMPSON CONNECTOR	ATTACHMENT ¹	COMMENTS	
A34	A34 ANCHOR	(8)-8d NAILS		
A35	A35 ANCHOR	(12)-8d NAILS		
CS14x40	CS14x40" LONG STRAP	FILL HOLES WITH 10d NAILS	SEE DETAIL 1/S6.2	
CS14x48	CS14x48" LONG STRAP	FILL HOLES WITH 10d NAILS	SEE DETAIL 2/S6.2	
CS16x40	CS16x40" LONG STRAP	FILL HOLES WITH 8d NAILS	SEE DETAIL 1/S6.2	
CS16x48	CS16x48" LONG STRAP	FILL HOLES WITH 8d NAILS	SEE DETAIL 2/S6.2	
DSCSR ²	DSCSR/L- SDS3 TWIST STRAP	(24)- SDS 1/4"x3"	SIM. TO DETAIL 9/S6.1	
H1	H1 ANCHOR	(10)-8d NAILS		
HTS30C ²	HTS30C TWIST STRAP	(20)-10d NAILS	SEE DETAIL 9/S6.1	
LTP4	LTP4 ANCHOR	(12)-8d NAILS		
MST37	MST37 STRAP	(42)-16d NAILS	SEE DETAIL 10&11&12/S6.1	
MST48	MST48 STRAP	(34)-16d NAILS	SEE DETAIL 6/S5.2	
MSTA21	MSTA21 STRAP	(16)-10d NAILS	SEE DETAIL 6/S5.2	
MSTC48B3	MSTC48B3 STRAP	(54)-10d NAILS	SEE DETAIL 6/S5.2	
MTS24C ²	MT24C TWIST STRAP	(14)-10d NAILS	SEE DETAIL 11/S5.1 & 9/S6.2	
MTS30C ²	MTS30C TWIST STRAP	(14)-10d NAILS	SEE DETAIL 9/S6.1	
METAL CONNECTOR NOTES:				
1. USE 1 1/2" LONG NAILS WHEN INSTALLED IN 1 1/2" WOOD THICKNESS. OTHERWISE USE FULL LENGTH NAILS.				
2. STRAP MAY REQUIRE BEING INSTALLED PRIOR TO INSTALLATION OF WALL SHEATHING, AND/OR ADJACENT FRAMING, AND/OR SETTING TRUSSES. COORDINATE AS NECESSARY.				

- ### GENERAL STRUCTURAL NOTES
- #### I. CONCRETE, FOOTINGS, AND FOUNDATIONS:
- SOIL BEARING PRESSURE (SBP) IS ASSUMED TO BE AT LEAST 1500 PSF BY OWNER. NOTIFY THE ENGINEER IF THE SBP IS FOUND TO BE LESS THAN 1500 PSF.
 - ALL FOOTINGS SHALL BE ESTABLISHED ON UNDISTURBED SOIL OR COMPACTED STRUCTURAL FILL. ALL EXTERIOR FOOTINGS SHALL HAVE A MINIMUM DEPTH OF 30", OR THE LOCAL FROST DEPTH, WHICHEVER IS GREATER, BELOW FINISHED GRADE.
 - THE NATURAL UNDISTURBED SOIL BELOW ALL FOOTINGS SHALL BE VERIFIED FOR BEARING SUITABILITY. REMOVE ALL SOFT SPOTS AND REPLACE WITH COMPACTED STRUCTURAL FILL.
 - COMPACTED STRUCTURAL FILL: ALL FILL MATERIAL SHALL BE A WELL-GRADED GRANULAR MATERIAL WITH A MAXIMUM SIZE LESS THAN 4 INCHES AND WITH NOT MORE THAN 10 PERCENT PASSING NO. 200 SIEVE. IT SHALL BE COMPACTED TO 95 PERCENT OF THE MAXIMUM LABORATORY DENSITY AS DETERMINED BY ASTM D 1557. ALL FILL SHALL BE TESTED. COMPACTED STRUCTURAL FILL SHALL BE PLACED IN LIFTS NOT EXCEEDING 8 INCHES IN UNCOMPACTED THICKNESS.
 - PROVIDE CODE-APPROVED FOOTING DRAIN SYSTEM TO DRAIN WATER AWAY FROM ALL BASEMENT AREAS.
 - EXTERIOR GRADE SHALL BE GRADED TO DRAIN SURFACE WATER AWAY FROM FOUNDATION WALLS WITH A MINIMUM OF 6 INCH FALL WITHIN THE FIRST 10 FEET. IMPERVIOUS SURFACES WITHIN 10 FEET OF THE BUILDING FOUNDATION SHALL BE SLOPED 2 PERCENT MINIMUM AWAY FROM THE BUILDING.
 - ALL CONCRETE SLABS SHALL BE PLACED OVER 4" MINIMUM FREE DRAINING GRANULAR BASE OVER UNDISTURBED SOIL OR COMPACTED STRUCTURAL FILL.
 - SLABS ON GRADE SHALL HAVE CONTROL OR CONSTRUCTION JOINTS AS PER DETAILS.
 - THE MINIMUM 28 DAY COMPRESSIVE STRENGTH OF CONCRETE FOR FOOTINGS AND FOUNDATIONS SHALL BE 2500 PSI FOR COMMERCIAL OR NON-RESIDENTIAL STRUCTURES AND 3000 PSI FOR RESIDENTIAL STRUCTURES. USE 4000 PSI FOR SUSPENDED SLABS AND ALL OTHER CONCRETE.
 - REINFORCEMENT STEEL SHALL BE GRADE 60 (F_y = 60 KSI).
 - SUSPENDED SLABS AND ANY SUPPORTING STEEL BEAMS SHALL BE APPROPRIATELY FULLY SHORED 14 DAYS MINIMUM.
 - AT CONTRACTOR'S AND/OR OWNER'S OPTION USE EPOXY COATED REBAR IN SUSPENDED SLABS FOR EXTENDED SLAB LIFE.
 - EPOXY BOLTS SHALL BE ALL-THREAD GRADE 307 MIN. SMOOTH SHANK OR EXPANSION BOLTS (WELD ANCHORS) SHALL NOT BE USED.
 - REINFORCEMENT STEEL SHALL MEET THE FOLLOWING CONCRETE COVER REQUIREMENTS:
 - CAST AGAINST AND PERMANENTLY EXPOSED TO EARTH ----- 3 1/2"
 - FORMED CONCRETE EXPOSED TO EARTH OR WEATHER ----- 3/4"
 - FORMED CONCRETE NOT EXPOSED TO EARTH OR WEATHER ----- 3/4"
 - REINFORCEMENT STEEL SHALL HAVE THE FOLLOWING MINIMUM LAP SPLICE LENGTHS, UNLESS NOTED OTHERWISE ON DRAWINGS:
 - 30 BAR DIA. FOR #3 AND #4 BARS
 - 40 BAR DIA. FOR #5 THRU #8 BARS
 - FOR ALL OPENINGS LESS THAN 6'-6" IN CONCRETE FOUNDATION WALLS, PROVIDE A 10" MIN. DEEP CONCRETE CHORD WITH 2" MIN. MINIMUM UNITS. OTHERWISE, EXTEND BARS 24" MINIMUM BEYOND EDGE OF THE OPENINGS AND PROVIDE BARS ABOVE TOP OF OPENING. CONTACT THE ENGINEER FOR REINFORCING OF OPENINGS GREATER THAN 6'-6" IF NOT NOTED ON PLANS.
 - FOUNDATION ANCHOR BOLTS SHALL BE 5/8" DIA. x12" MIN. FOR COMMERCIAL OR NON-RESIDENTIAL STRUCTURES AND 1/2" DIA. x10" MIN. FOR RESIDENTIAL STRUCTURES UNLESS NOTED OTHERWISE. SPACING OF ANCHOR BOLTS SHALL BE 2' O.C. MAX. WITH ONE LOCATED AT LEAST WITHIN 4" TO 12" OF EACH END OF SILL PLATE. SEE SHEAR WALL SCHEDULE FOR MORE STRINGENT ANCHOR BOLT REQUIREMENTS AT SPECIFIC SHEAR WALLS.
 - PROVIDE 7" MIN. EMBEDMENT INTO CONCRETE
 - USE 0.229"x3" PLATE WASHERS AT 16" O.C. FOR PLATE ANCHORAGE.
 - EPOXY BOLTS MAY BE USED IN LIEU OF ANCHOR BOLTS (SEE DETAIL 3/S4.2).
 - ALL WOOD IN CONTACT WITH CONCRETE, MASONRY, OR SOIL SHALL CONSIST OF TREATED WOOD OR HAVE A MOISTURE BARRIER PLACED BETWEEN WHICH MEETS THE CODE REQUIREMENTS. FASTENERS INTO TREATED WOOD SHALL BE OF HOT-DIPPED GALVANIZED STEEL, STAINLESS STEEL, SILICON BRONZE, OR COPPER.


- #### II. WOOD FRAMING:
- ##### A. MATERIALS:
- GLU-LAM TIMBER: 24F-V4 DF/DF
 - BEAM MARKS WITH "10" DESIGNATES THE USE OF DOUGLAS FIR-LARCH NO. 2 OR BETTER STANDARD LUMBER. BEAM MARKS WITH "LVL" DESIGNATES THE USE OF ENGINEERED LUMBER WITH THE FOLLOWING MINIMUM PROPERTIES: F_b = 2600 psi, F_v = 285 psi, E = 1.9x10⁶ psi.
 - "10" BEAM SIZES SHOWN ARE NOMINAL AND HAVE SMALLER ACTUAL BEAM DIMENSIONS AS BASED ON STANDARD LUMBER. PROVIDE 1/2" PLYWOOD OR OSB BETWEEN INDIVIDUAL BEAM-PLYS TO CREATE A BEAM DEPTH OF 10".
 - MULTIPLE MEMBER BEAMS/HEADERS SHALL BE NAILED TOGETHER WITH A MINIMUM OF 2 ROWS OF 16d NAILS AT 12" O.C. FOR BEAM DEPTHS 12 IN. OR LESS. USE 3 ROWS OF 16d NAILS AT 12" O.C. FOR BEAM DEPTHS GREATER THAN 12 IN.
 - CONTACT THE ENGINEER FOR BEAM/HEADER SIZES WITH SPANS GREATER THAN 5'-2" THAT ARE NOT NOTED ON THE DRAWINGS.
 - "FLUSH", WHEN NOTED ON PLANS, INDICATES TO PLACE THE BEAM SO THAT THE TOP AND/OR BOTTOM OF THE BEAM IS FLUSH WITH THE SUPPORTED FRAMING.
 - DO NOT USE LVL BEAMS WHERE THEY MAY BE EXPOSED TO WEATHER (E.G. DECK FRAMING).
- ##### B. PROVIDE SUPPORT STUDS AT THE ENDS OF ALL BEAMS, HEADERS, AND GIRDER TRUSSES AS FOLLOWS, UNLESS NOTED OTHERWISE:
- SPANS LESS THAN 5'-0": 1 SUPPORT STUD MINIMUM.
SPANS 5'-0" TO 10'-0": 2 SUPPORT STUDS MINIMUM.
SPANS 10'-0" TO 14'-0": 3 SUPPORT STUDS MINIMUM.
SPANS GREATER THAN 14'-0": 4 SUPPORT STUDS MINIMUM.
- ##### C. FOR SPANS OF 6'-0" AND GREATER, AT EXTERIOR WALLS, PROVIDE A MINIMUM OF 2 FULL HEIGHT KING STUDS (TOP PLATE TO BOTTOM PLATE) AT THE ENDS OF ALL BEAMS. UNLESS NOTED OTHERWISE, PROVIDE KING STUDS LESS THAN 6'-0", PROVIDE A MINIMUM OF 1 FULL HEIGHT KING STUD.
- ##### D. USE APPROPRIATE SIMPSON POST CAPS / TIES TO CONNECT BEAMS TO POSTS / STUDS FOR SPANS OF 6'-0" AND GREATER.
- ##### E. ALL WOOD POSTS SHALL HAVE APPROPRIATE SIMPSON POST CAPS AND BASE CONNECTORS INSTALLED GOOD FOR AT LEAST 900 POUNDS UPLIFT. WOOD POSTS INSTALLED ON CONCRETE SHALL HAVE AT LEAST A 1" STANDOFF BASE. WHERE POSTS ARE INSTALLED ON CONC. PIERS OR FOOTINGS SEE DETAILS 9/S4.1, 10/S4.1 AND 8/S4.2 FOR ADDITIONAL INFORMATION.
- ##### F. USE APPROPRIATE SIMPSON HANGERS WHERE JOISTS AND BEAMS NEED TO HANG FROM SUPPORTING BEAMS. USE TOP PLATE FLANGE HANGERS, UNLESS NOTED OTHERWISE ON THE DRAWINGS, AS PER DETAIL 10/S5.2.

WALL LEGEND AND ABBREVIATIONS			
SYMBOL/ABBREVIATION	DESCRIPTION	SYMBOL/ABBREVIATION	DESCRIPTION
A.B.	"ANCHOR BOLT"		PREFAB STONE
ABV.	"ABOVE"		BRICK/NATURAL STONE
A.P.O.	"AS PER OWNER"		NOTCH IN TOP OF FDN. WALL
BL.W.	"BELOW"		CONC. FDN. WALL
BRG.	"BEARING"		CONC. FOOTING
C.J.	"CONTROL/CONSTRUCTION JOINT"		STEPPED FOOTING
C.O.	"CONCRETE"		2nd BEARING WALL
CONT.	"CONTINUOUS"		2nd BEARING WALL
DET.	"DETAIL"		2nd BEARING WALL
EA.	"EACH"		2nd NON-BEARING WALL
FDTN.	"FOUNDATION"		2nd NON-BEARING WALL
FTG.	"FOOTING"		2nd NON-BEARING SHEAR WALL
G.L.B.	"GLU-LAM BEAM"		2nd NON-BEARING SHEAR WALL
MAX.	"MAXIMUM"		HEADER/BREAM
MIN.	"MINIMUM"		6d POST
O.C.	"ON CENTER"		6d POST
OPP.	"OPPOSITE"		
SIM.	"SIMILAR"		
TYP.	"TYPICAL"		
U.N.O.	"UNLESS NOTED OTHERWISE"		


SHEET INDEX	
SHEET	DESCRIPTION
S1.1	INDEX, GENERAL STRUCTURAL NOTES, SCHEDULES
S2.1	ELEVATIONS
S2.2	CRAWL SPACE AND FOUNDATION PLAN (FLOOR FRAMING)
S2.3	MAIN FLOOR PLAN (ROOF FRAMING)
S3.1	ROOF LAYOUT AND ELECTRICAL PLAN
S4.1	FOOTING AND FOUNDATION DETAILS
S4.2	FOOTING AND FOUNDATION DETAILS
S5.1	FLOOR FRAMING DETAILS
S5.2	FLOOR FRAMING DETAILS
S6.1	ROOF FRAMING DETAILS
S6.2	ROOF FRAMING DETAILS
S6.3	NOT USED

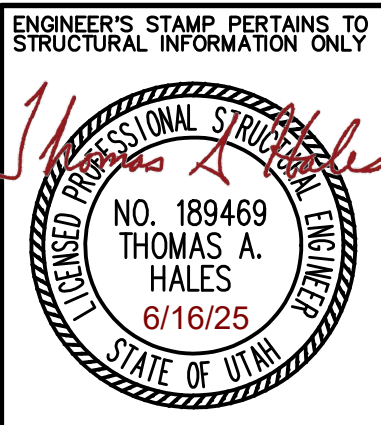


CONTRACTOR & OWNER SHALL VERIFY ALL DIMENSIONS, AREAS, AND CONDITIONS, READ ALL NOTES AND BECOME THOROUGHLY FAMILIAR WITH THE DRAWINGS, AND ALL ASSOCIATED COSTS, PRIOR TO CONSTRUCTION.

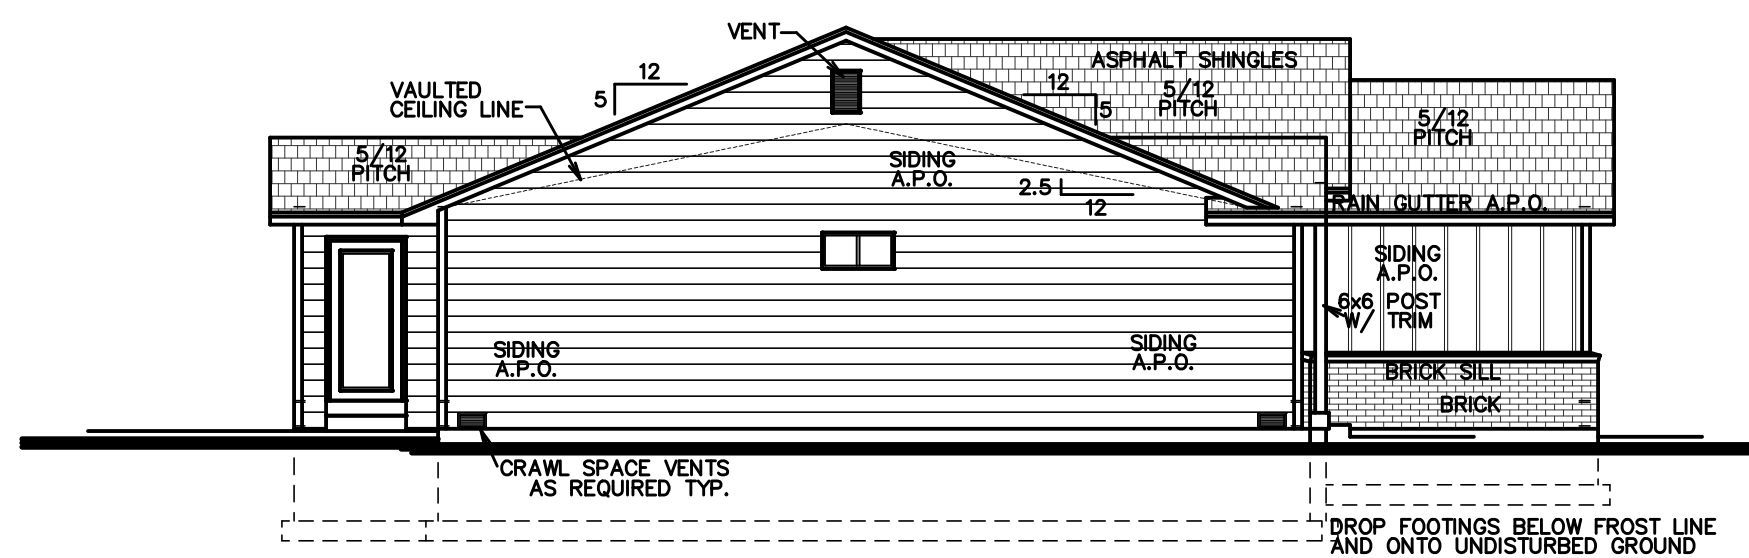


LEFT ELEVATION
SCALE: 1/8"=1'-0"

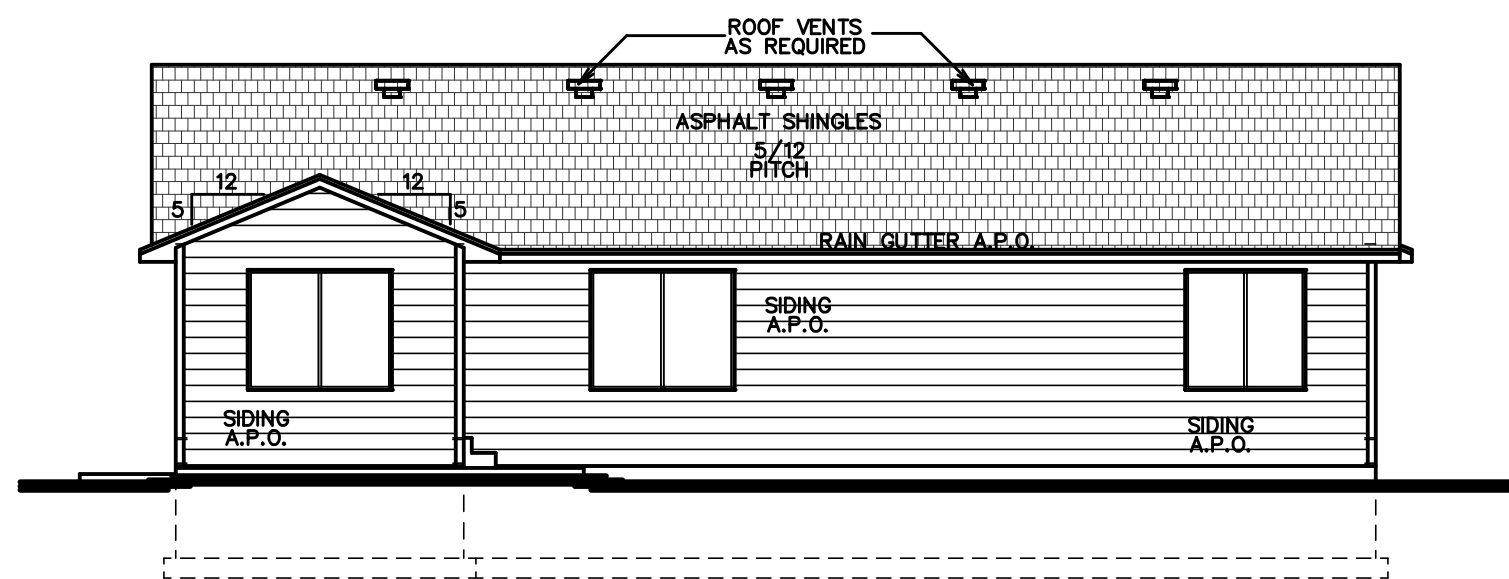

REAR ELEVATION
SCALE: 1/8"=1'-0"

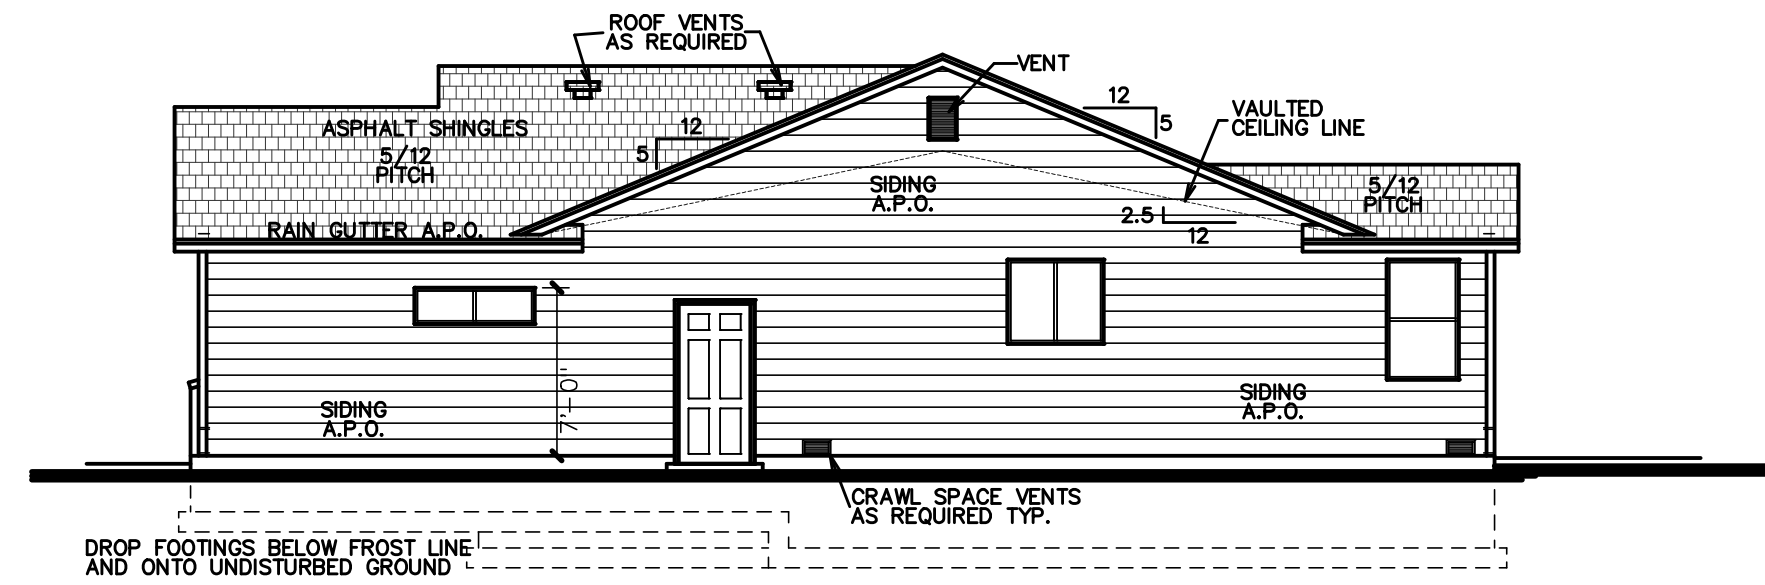

RIGHT ELEVATION
SCALE 1/8"=1'-0"

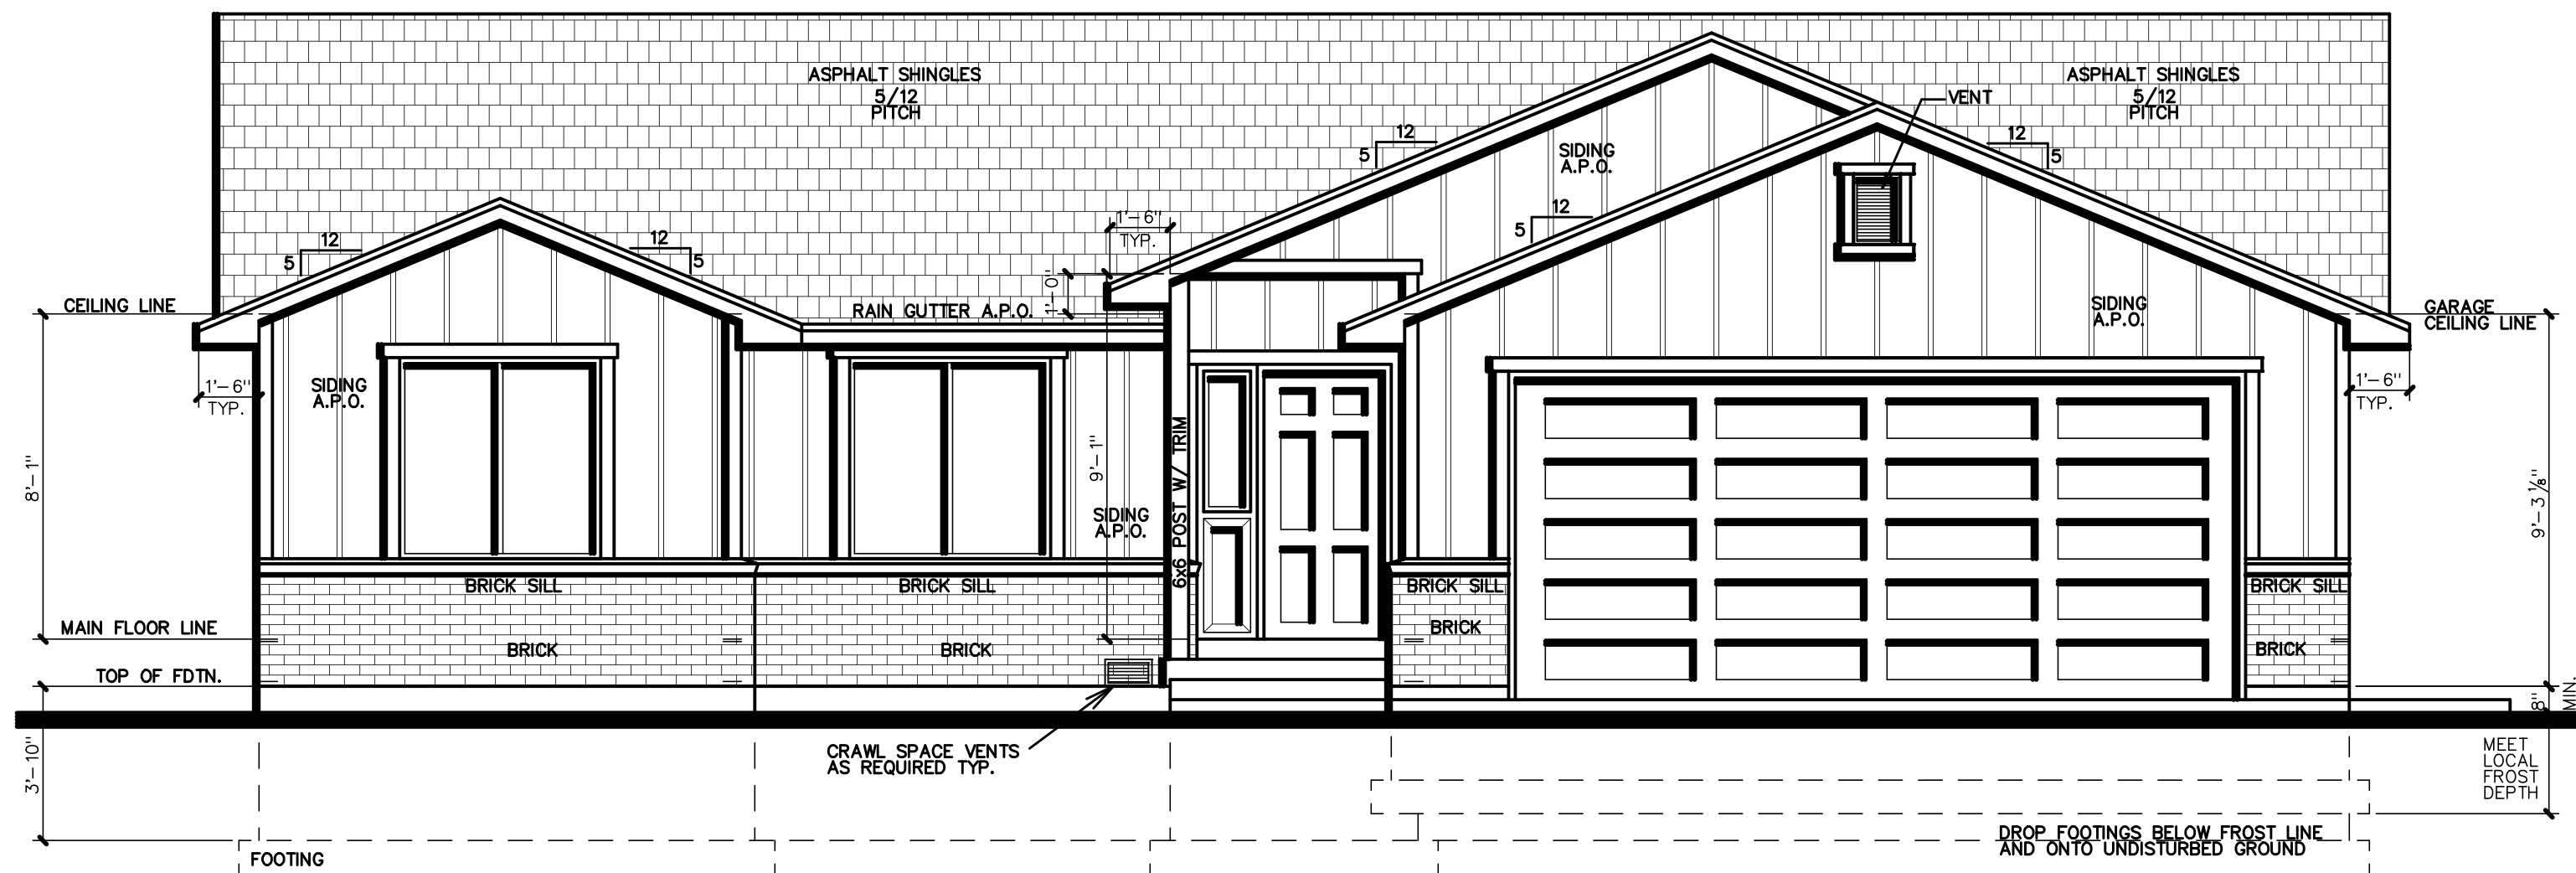

FRONT ELEVATION
SCALE: 1/4"=1'-0"

NOTE:
ADD IN OVERBUILD FRAMING
AS REQUIRED FOR ROOF LINES
-SEE DETAIL 6/56.2

NOTE TO TRUSS COMPANY:
IF TRUSSES ARE UNABLE TO BE DESIGNED
TO WORK AS SHOWN IN DRAWINGS (INCLUDING
ATTIC BONUS ROOMS, VAULTED AND RAISED
CEILINGS, ETC.) NOTIFY DESIGNER AND
CONTRACTOR FOR RESOLUTION BEFORE
PROCEEDING WITH FABRICATION OF TRUSSES.
ALSO REVIEW GENERAL NOTES AND ALL OTHER
APPLICABLE NOTES AND DETAILS BEFORE
PROCEEDING WITH FABRICATION OF TRUSSES.

NOTE TO WINDOW/DOOR SUPPLIER:
ALL WINDOW AND DOOR SIZES AND LOCATIONS SHALL BE
VERIFIED WITH THE OWNER/GENERAL CONTRACTOR AND WITH
THE ROUGH FRAMING OPENINGS BEFORE FABRICATION.
WINDOWS AND DOORS SHALL NOT BE FABRICATED BEFORE
ROUGH FRAMING IS COMPLETE AND VERIFIED AS NOTED
ABOVE. THE WINDOW/DOOR SUPPLIER AND
OWNER/GENERAL CONTRACTOR SHALL ASSUME ALL RISKS
ASSOCIATED WITH WINDOWS/DOORS FABRICATED BEFORE
VERIFICATION AS NOTED ABOVE.

DESIGN LOADS	
ROOF:	SNOW - 30 psf DEAD - 17 psf
FLOOR:	LIVE - 40 psf DEAD - 12 psf
DECK:	LIVE - 60 psf DEAD - 12 psf
GROUND SNOW LOAD - 43 psf	
ULTIMATE DESIGN WIND SPEED, V_{ult} - 115 mph	
NOMINAL DESIGN WIND SPEED, V_{nom} - 90 mph	
SEISMIC DESIGN CATEGORY 'D'	
SITE CLASS 'D'	
SOIL BEARING PRESSURE - 1500 psf	

NOTICE AND WARNING	
THESE DRAWINGS & DESIGNS ARE THE PROPERTY OF LOMOND VIEW DESIGNS, LLC AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT WRITTEN CONSENT.	
THESE DRAWINGS & DESIGNS MAY BE USED FOR THE CONSTRUCTION OF A SINGLE BUILDING LOCATED AS FOLLOWS:	
LOT #:	
SUBDIVISION:	
ADDRESS:	375 W. 800 S.
CITY:	LEWISTON
STATE:	UTAH
DATE:	6/16/2025

SURFACE DRAINAGE:
EXTERIOR GRADE SHALL BE
GRADED TO DRAIN SURFACE WATER
AWAY FROM FOUNDATION WALLS
WITH A MINIMUM OF 6 INCH FALL
WITHIN THE FIRST 10 FEET.
IMPERVIOUS SURFACES WITHIN 10
FEET OF THE BUILDING FOUNDATION
SHALL BE SLOPED 2 PERCENT
MINIMUM AWAY FROM THE BUILDING

CONSTRUCTION COST NOTE:
THE BUILDING DESIGN SHOWN IN THESE PLANS IS BASED ON
DIRECTION PROVIDED TO US BY THE OWNER AND/OR
GENERAL CONTRACTOR. WE HAVE NOT ATTEMPTED, AND IT
IS OUT OF THE SCOPE OF OUR SERVICES, TO PROVIDE
COST ESTIMATE SERVICES FOR THE CONSTRUCTION OF THIS
BUILDING AND ASSOCIATED SITE IMPROVEMENTS OR TO
PROVIDE A DESIGN THAT IS SUITABLE FOR THE COST
EXPECTATIONS OF THE OWNER. IT IS THE SOLE
RESPONSIBILITY OF THE OWNER AND/OR GENERAL
CONTRACTOR TO DETERMINE IF THE COST OF THE BUILDING
AND ASSOCIATED SITE IMPROVEMENTS WILL BE
SATISFACTORY TO THE OWNER'S EXPECTATIONS.


SITE AND LOT NOTE:
THE BUILDING DESIGN SHOWN IN THESE PLANS IS
REFLECTING OF SITE CONDITIONS PROVIDED TO US BY THE
OWNER AND/OR GENERAL CONTRACTOR. WE HAVE NOT
ATTEMPTED, AND IT IS OUT OF THE SCOPE OF OUR
SERVICES, TO EVALUATE THE SITE FOR SUITABILITY OF THE
CONSTRUCTION OF THE BUILDING DESIGN SHOWN. IT IS THE
SOLE RESPONSIBILITY OF THE OWNER AND/OR GENERAL
CONTRACTOR TO ENSURE THAT THE SITE IS SUITABLE FOR
CONSTRUCTION (INCLUDING GRADE HEIGHTS, DRAINAGE, SLOPES,
RETAINING AREAS, ETC.) ARE OR WILL BE MADE SUITABLE
TO WORK WITH THE BUILDING DESIGN SHOWN.

THESE DRAWINGS AND SPECIFICATIONS HAVE BEEN PREPARED WITH THE ASSUMPTION THAT THE
OWNER/GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND
REVIEW ALL DRAWINGS THROUGHOUT THE CONSTRUCTION PROCESS. THE CONTRACTOR SHALL BE
RESPONSIBLE FOR VERIFYING THE ACCURACY OF ALL INFORMATION PROVIDED TO THEM BY THE
OWNER/GENERAL CONTRACTOR. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL
NECESSARY PERMITS AND REVIEW ALL DRAWINGS THROUGHOUT THE CONSTRUCTION PROCESS.
THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND REVIEW
ALL DRAWINGS THROUGHOUT THE CONSTRUCTION PROCESS. THE CONTRACTOR SHALL BE
RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND REVIEW ALL DRAWINGS
THROUGHOUT THE CONSTRUCTION PROCESS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR
OBTAINING ALL NECESSARY PERMITS AND REVIEW ALL DRAWINGS THROUGHOUT THE
CONSTRUCTION PROCESS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL
NECESSARY PERMITS AND REVIEW ALL DRAWINGS THROUGHOUT THE CONSTRUCTION
PROCESS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY
PERMITS AND REVIEW ALL DRAWINGS THROUGHOUT THE CONSTRUCTION PROCESS.

**CONTRACTOR & OWNER SHALL VERIFY ALL
DIMENSIONS, AREAS, AND CONDITIONS, READ
ALL NOTES AND BECOME THOROUGHLY
FAMILIAR WITH THE DRAWINGS, AND ALL
ASSOCIATED COSTS, PRIOR TO CONSTRUCTION.**

NOTES TO PLAN:

1. SEE GENERAL STRUCTURAL NOTES, SCHEDULES, AND DETAILS FOR ADDITIONAL CONSTRUCTION REQUIREMENTS. THIS PLAN IS TO BE WORKED ALONG WITH THESE OTHER SUPPORTING SHEETS. THE OWNER AND CONTRACTOR SHALL THOROUGHLY REVIEW AND BECOME FAMILIAR WITH THESE DRAWINGS BEFORE PROCEEDING WITH CONSTRUCTION.
2. FOOTINGS: SEE THE GENERAL STRUCTURAL NOTES, THE CONCRETE FOOTING SCHEDULE, AND THE DETAILS ON SHEETS S4.1 AND S4.2 FOR ADDITIONAL INFORMATION. FOOTINGS SUPPORTING CONCRETE FOUNDATION WALLS SHALL BE A FC2.0 FOOTING UNLESS NOTED OTHERWISE. FOOTINGS SUPPORTING INTERIOR WOOD BEARING WALLS SHALL BE A FC1.5 FOOTING UNLESS NOTED OTHERWISE. FOOTINGS SUPPORTING A CONV. PATIO/DECK POST SHALL BE A FS3.0 FOOTING UNLESS NOTED OTHERWISE. SEE DETAILS 1/5/4.1 AND 4/5/4.1 FOR FOOTING STEPS, CORNERS, AND INTERSECTIONS.
3. FOUNDATION WALLS: SEE THE GENERAL STRUCTURAL NOTES, THE CONCRETE FOUNDATION WALL SCHEDULE, AND THE DETAILS ON SHEETS S4.1 AND S4.2 FOR ADDITIONAL INFORMATION. REINFORCING SHALL BE BASED ON THE FOUNDATION WALL HEIGHT AS DESIGNATED IN THE SCHEDULE. CONTACT THE DESIGNER FOR FOUNDATION WALLS WITH HEIGHTS BETWEEN LOW AND HIGH GRADES THAT ARE GREATER THAN THAT SHOWN IN THE SCHEDULE. SEE DETAIL 4/5/4.1 FOR FOUNDATION WALL CORNERS AND INTERSECTIONS. FOUNDATION WALLS SHALL NOT BE BACKFILL UNTIL THE FLOORS ARE PROPERLY INSTALLED TO PROVIDE ADEQUATE BRACING. SOIL USED FOR BACKFILL SHALL CONFORM TO THAT SPECIFIED IN THE CONCRETE FOUNDATION WALL SCHEDULE.
4. ANCHOR BOLTS: SEE THE GENERAL STRUCTURAL NOTES AND SHEAR WALL SCHEDULE, SHEET S5.1 FOR FOUNDATION ANCHOR BOLT REQUIREMENTS.
5. HOLDOWNS: SEE THE METAL HOLDOWN SCHEDULE ON SHEET S5.1 AND DETAILS 1/5/4.2 FOR ADDITIONAL INFORMATION. PROVIDE HOLDOWNS AS NOTED ON THE DRAWINGS. USE RIM JOIST VERSION OF STRAP WHEN LOCATED AT RIM JOIST. FOR WEST OR EAST WALLS, USE AN OVERLAP METHOD OF HOLDOWN STRAP AS NOTED IN THE COMMENTS COLUMN OF THE METAL HOLDOWN SCHEDULE.
6. RETAINING WALLS: SEE DETAILS 1/5/4.1 AND 2/5/4.1 FOR RETAINING WALL. CONTACT THE DESIGNER FOR WALLS RETAINING LANDSCAPE AREAS ONLY. CONTACT THE DESIGNER FOR RETAINING WALLS EXCEEDING THE HEIGHT SHOWN IN THE DETAILS OR AREAS WHERE VEHICLE LOADING WILL BE WITHIN FOUR FEET OF TOP OF WALL.
7. DECK FOOTINGS: PLASTIC CONCRETE SPOT FOOTING FORMS WITH EQUIVALENT OR GREATER FOOTING FOOTPRINT AND REINFORCING MAY BE USED IN PLACE OF TRADITIONALLY FORMED FOOTINGS.
8. CONCRETE PORCH SLABS: PROVIDE REINFORCING FOR SELF SUSPENDED CONCRETE PORCH SLABS AS SHOWN IN DETAIL 4/5/5.2.
9. CONCRETE SLABS OVER BACKFILL: PROVIDE REBAR DOWELS FROM CONCRETE SLABS TO ADJACENT CONCRETE FOUNDATION WALLS OVER BACKFILL AREAS AS SHOWN IN DETAIL 3/5/5.2.
10. CONCRETE SLAB CONTROL JOINTS: SLABS ON GRADE SHALL HAVE CONTROL OR CONSTRUCTION JOINTS PROVIDED AT A SPACING NOT TO EXCEED 30 TIMES THE SLAB THICKNESS IN ANY DIRECTION. JOINTS SO THE LENGTH TO WIDTH RATIO BETWEEN THE JOINTS IS NOT MORE THAN 1.25 TO 1. INSTALL CONTROL JOINTS WITHIN 24 HOURS OF CONCRETE PLACEMENT BY SAW CUTTING TO A DEPTH OF 1/4 THE THICKNESS OF THE SLAB. ALL DISCONTINUOUS CONTROL OR CONSTRUCTION JOINTS SHALL BE REINFORCED WITH (2) #4 x 48" REBAR. SEE DETAILS.
11. WALLS: 2x4 WALLS ARE SHOWN WITH A 3 1/2" THICKNESS AND 2x6 WALLS ARE SHOWN WITH A 5 1/2" THICKNESS. ALL BEARING AND BRACED WALLS SHALL HAVE STUDS PLACED AT 16" O.C. MAXIMUM, UNLESS NOTED OTHERWISE.
12. SHEAR WALLS: SEE THE SHEAR WALL SCHEDULE FOR ADDITIONAL INFORMATION. ALL EXTERIOR WALLS SHALL BE A SW2 TYPE SHEAR WALL UNLESS NOTED OTHERWISE. TO RESIST SEISMIC/WIND FORCES, ALL SHEAR WALLS SHALL BE ATTACHED AT THE TOP AND BOTTOM BY ONE OF THE METHODS SHOWN IN THE DETAILS ON SHEETS S4.1 THRU S4.3. ALL BEARING WALL OPENINGS SHALL HAVE A HEADER PROVIDED AS NOTED ON THE PLANS.
13. BEARING AND EXTERIOR WALLS: ALL BEARING AND EXTERIOR WALLS SHALL CONSIST OF FULL HEIGHT STUD FRAMING AND BE ATTACHED AT THE TOP AND BOTTOM BY ONE OF THE METHODS SHOWN IN THE DETAILS ON SHEETS S4.1 THRU S4.3. ALL BEARING WALL OPENINGS SHALL HAVE A HEADER PROVIDED AS NOTED ON THE PLANS.
14. WOOD BEAMS AND HEADERS: UNLESS SPECIFICALLY CALLED OUT ON THE DRAWING, SEE THE WOOD BEAM/HEADER SCHEDULE FOR SIZES AND ADDITIONAL INFORMATION. CONTACT THE DESIGNER FOR WOOD BEAM/HEADER SIZES NOT DESIGNATED ON PLANS THAT HAVE A SPAN GREATER THAN 5'-2". SEE THE WOOD BEAM/HEADER SCHEDULE FOR SPANS UP TO 5'-2" THAT ARE NOT NOTED OTHERWISE ON THE PLANS.
15. FLOOR FRAMING: ALL FLOOR JOISTS SHALL BE SUPPORTED AT BEARING POINTS BY ONE OF THE METHODS SHOWN IN THE DETAILS ON SHEETS S5.1 THRU S5.2. U.N.O. FLOOR JOISTS THAT RUN PARALLEL TO EXTERIOR BEARING AND/OR SHEAR WALLS SHALL HAVE SOLID BLOCKING PROVIDED BY ONE OF THE METHODS SHOWN IN DETAILS 2, 3, 5, 6, 8, OR 9/5/5.1. WHERE POSSIBLE, ALL FLOOR FRAMING SHALL BE CONTINUOUS OVER INTERMEDIATE BEARING SUPPORTS.
16. FLOOR FRAMING PERFORMANCE: THE FLOOR FRAMING SYSTEM DESIGNATED IN THESE DRAWINGS EXCEED THE MINIMUM CODE REQUIREMENTS AND REPRESENT A STANDARD FLOOR FRAMING SYSTEM. HOWEVER, DUE TO VARIATIONS IN AN INDIVIDUAL'S PERCEPTION OF AN ACCEPTABLE FLOOR PERFORMANCE, THE OWNER/CONTRACTOR SHALL VERIFY THAT THE DESIGNATED FLOOR FRAMING SYSTEM IS ACCEPTABLE TO THE OWNER'S EXPECTATIONS BEFORE BEGINNING FLOOR CONSTRUCTION.
17. WOOD POSTS: ALL WOOD POSTS SHALL HAVE APPROPRIATE METAL POST CAPS AND BASE CONNECTORS INSTALLED GOOD FOR AT LEAST 900 POUNDS UPLIFT. WOOD POSTS INSTALLED ON CONCRETE SHALL HAVE AT LEAST ONE STANDOFF BASE. WHERE POSTS ARE INSTALLED ON CONC. PIERS OR FOOTINGS SEE DETAILS 9/5/4.1, 10/5/4.1, AND 8/5/4.2 FOR ADDITIONAL INFORMATION.
18. METAL CONNECTORS: PROVIDE METAL CONNECTORS AS NOTED ON THE DRAWINGS. SEE THE METAL CONNECTOR SCHEDULE ON SHEET S1.1 FOR ADDITIONAL INFORMATION.
19. DECK FLOORS: ALL DECK FLOORS SHALL BE HORIZONTALLY TIED TO INTERIOR FLOORS TO RESIST SEISMIC FORCES. SEE DETAIL 11/5/5.1.
20. TIE UPPER FLOOR WALLS TO LOWER FLOOR WALLS WITH SIMPSON M5T48 STRAP WHERE NOTED ON PLANS. SEE METAL CONNECTOR SCHEDULE AND DETAIL 6/5/5.2.
21. TRUSS FABRICATION: IF TRUSSES ARE UNABLE TO BE DESIGNED TO WORK WITH THE LAYOUT AS SHOWN IN THE DRAWINGS (INCLUDING ATTIC BONUS ROOMS, VAULTED CEILINGS, RAISED CEILINGS, ETC.) NOTIFY THE DESIGNER AND CONTRACTOR FOR RESOLUTION BEFORE PROCEEDING WITH FABRICATION OF TRUSSES.
22. TRUSS, RAFTER, AND ROOF FRAMING: ALL TRUSSES AND RAFTERS SHALL BE SUPPORTED AT BEARING POINTS BY ONE OF THE METHODS SHOWN IN THE DETAILS ON SHEETS S5.1 THRU S5.3. UNLESS NOTED OTHERWISE, PROVIDE OVERBUILD TRUSSES OR STICK FRAME AS SHOWN IN DETAIL 6/5/6.2.
23. TRUSS DRAG STRUTS: TRUSSES NOTED AS DRAG STRUTS SHALL BE DESIGNED FOR A 200 PLF MIN. IN-PLANE HORIZ. SEISMIC DRAG APPLIED AT THE TRUSS TOP CHORD UNLESS NOTED OTHERWISE.

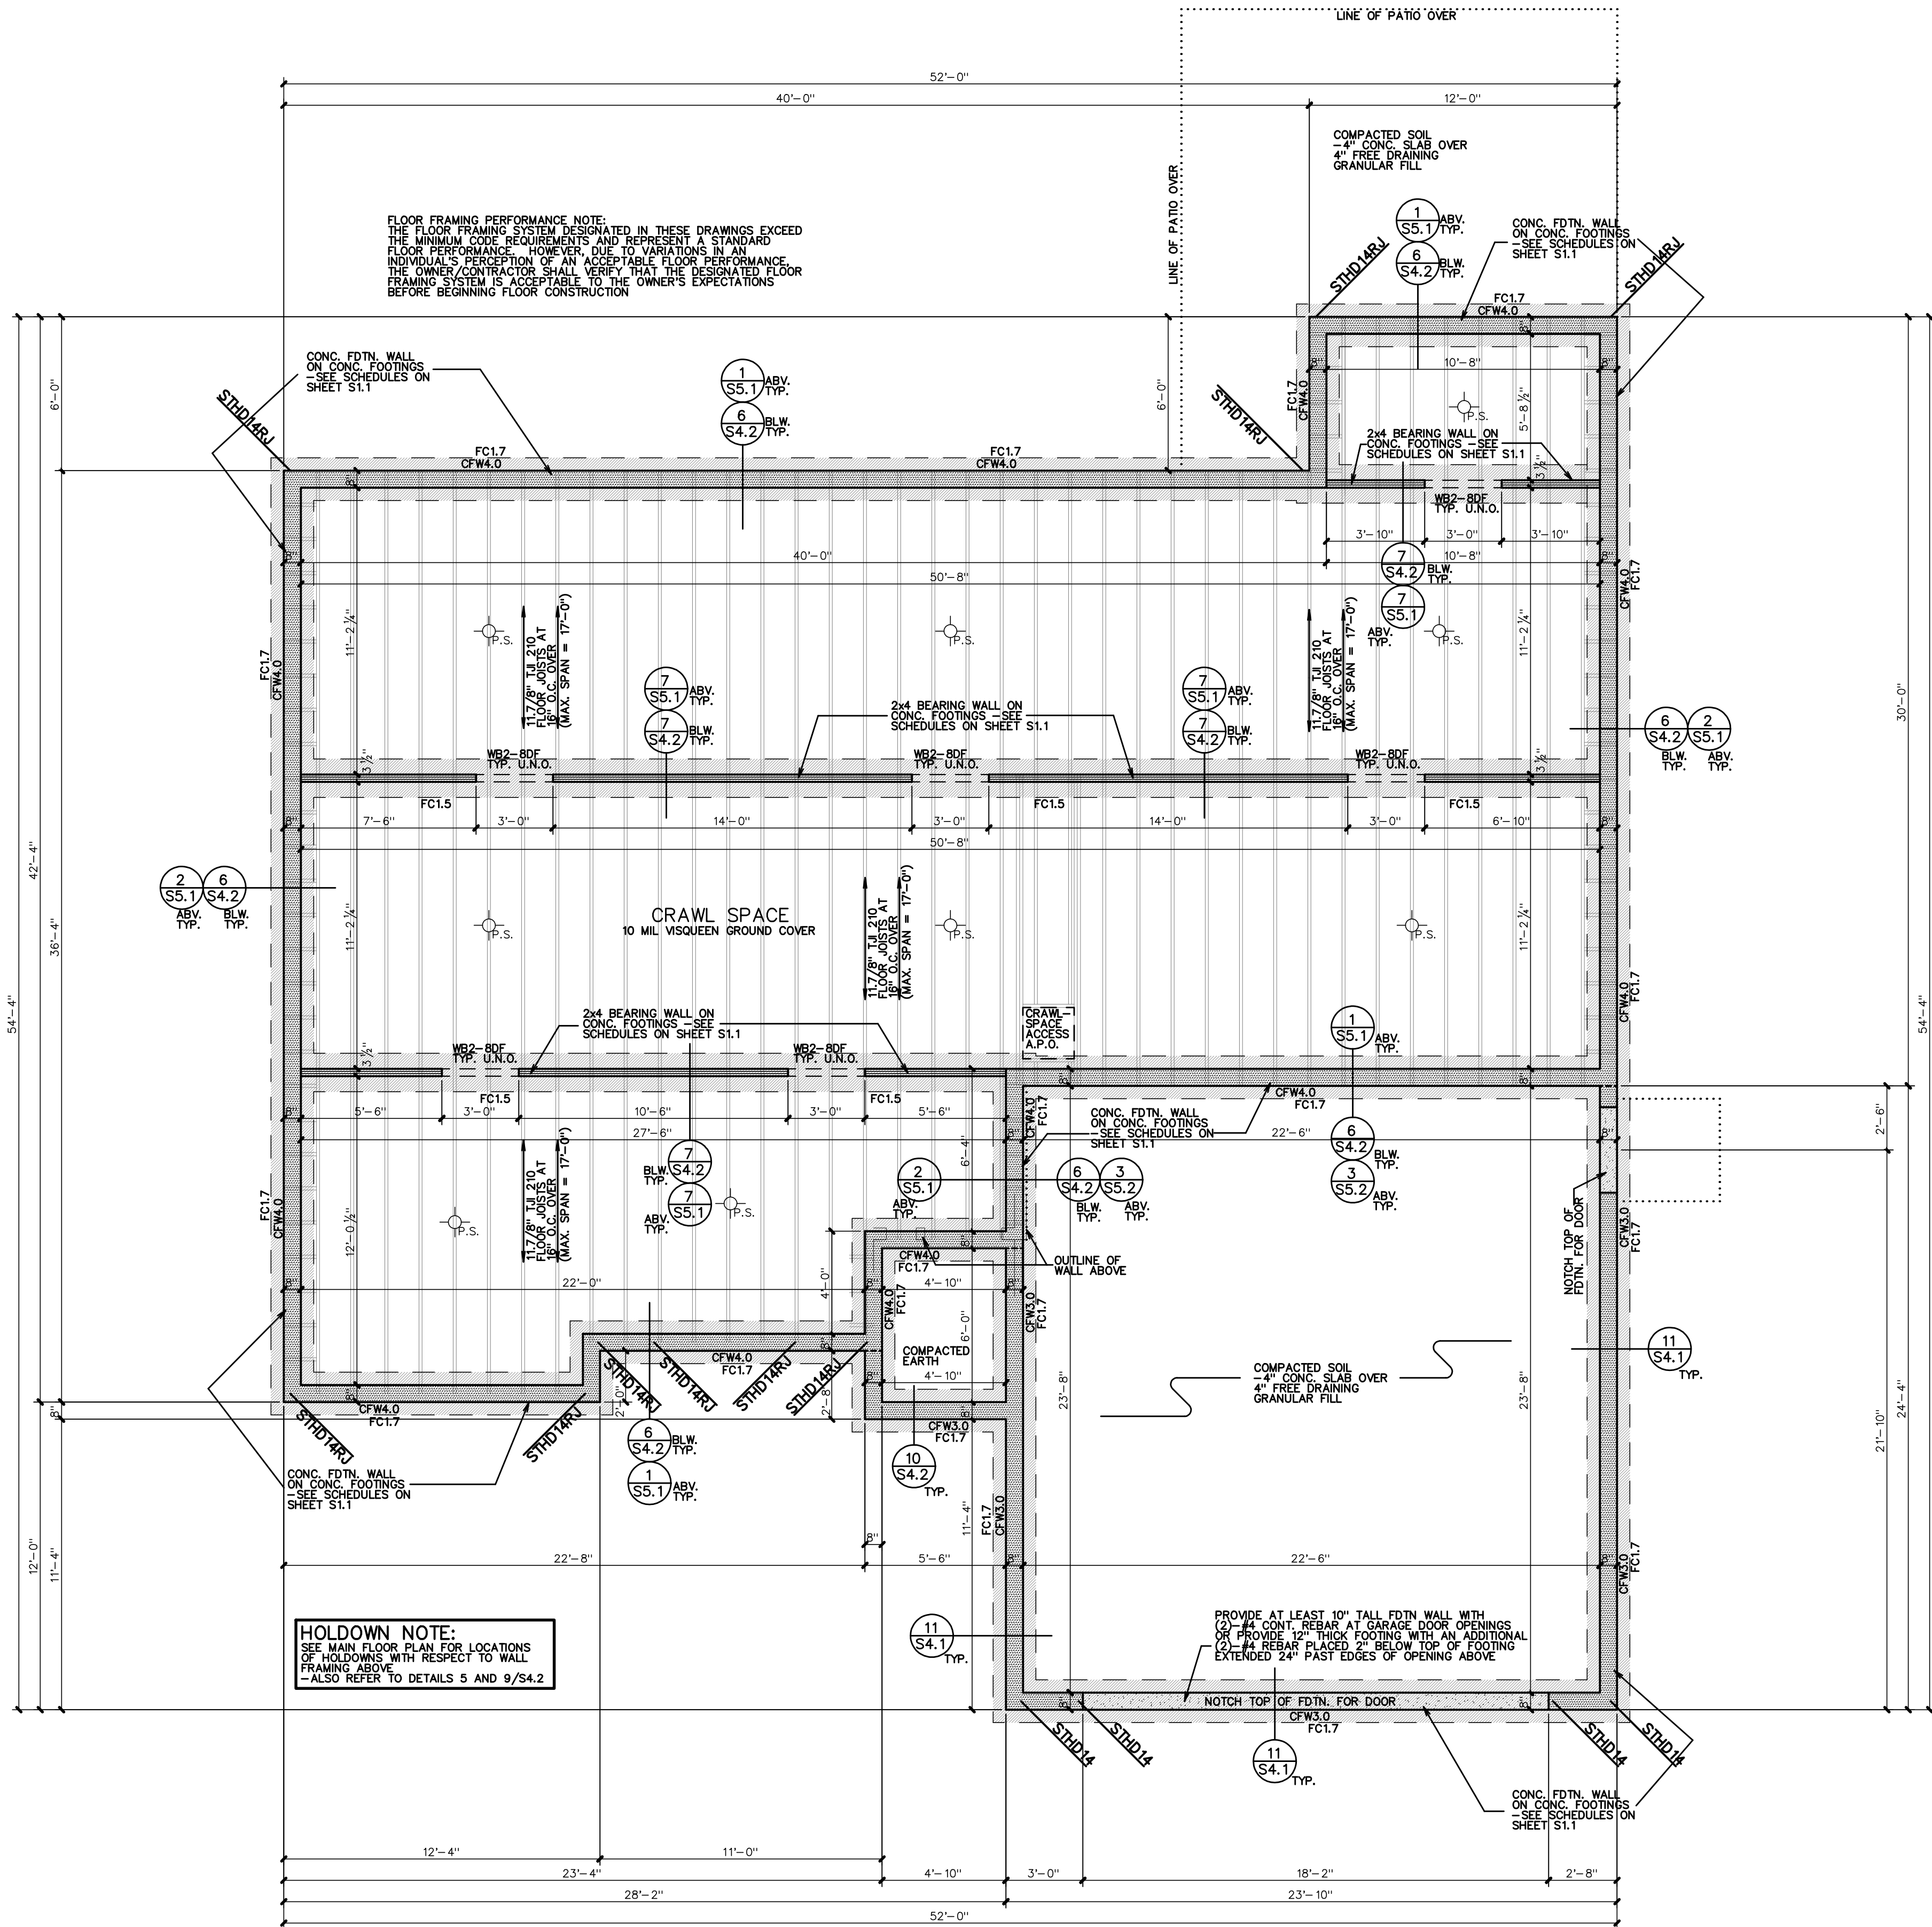

HOLDOWN NOTE:
SEE MAIN FLOOR PLAN FOR LOCATIONS OF HOLDOWNS WITH RESPECT TO WALL FRAMING ABOVE.
-ALSO REFER TO DETAILS 5 AND 9/5/4.2

CONSTRUCTION COST NOTE:
THE BUILDING DESIGN SHOWN IN THESE PLANS IS BASED ON THE GENERAL CONTRACTOR'S BEST ESTIMATE. THE OWNER AND CONTRACTOR SHALL VERIFY THAT THE DESIGNATED FLOOR FRAMING SYSTEM IS ACCEPTABLE TO THE OWNER'S EXPECTATIONS BEFORE BEGINNING FLOOR CONSTRUCTION.

SURFACE DRAINAGE:
EXTERIOR GRADE SHALL BE GRADUALLY SLOPED TO DRAIN SURFACE WATER AWAY FROM FOUNDATION WALLS WITH A MINIMUM OF 6 INCH FALL WITHIN THE FIRST 10 FEET. RETAINING WALLS SHALL BE SLOPED 2 PERCENT MINIMUM AWAY FROM THE BUILDING.


SITE AND LOT NOTE:
THE BUILDING DESIGN SHOWN IN THESE PLANS IS BASED ON THE GENERAL CONTRACTOR'S BEST ESTIMATE. THE OWNER AND CONTRACTOR SHALL VERIFY THAT THE DESIGNATED FLOOR FRAMING SYSTEM IS ACCEPTABLE TO THE OWNER'S EXPECTATIONS BEFORE BEGINNING FLOOR CONSTRUCTION.

CRAWL SPACE/
FOUNDATION PLAN
SCALE: 1/4"=1'-0"

DESIGN LOADS	
ROOF:	
SNOW - 30 psf	
DEAD - 17 psf	
FLOOR:	
LIVE - 40 psf	
DEAD - 12 psf	
DECK:	
LIVE - 60 psf	
DEAD - 12 psf	
GROUND SNOW LOAD - 43 psf	
ULTIMATE DESIGN WIND SPEED, V _{ult} - 115 mph	
NOMINAL DESIGN WIND SPEED, V _{des} - 90 mph	
SEISMIC DESIGN CATEGORY 'D'	
SITE CLASS 'D'	
SOIL BEARING PRESSURE - 1500 psf	

NOTICE AND WARNING
THESE DRAWINGS & DESIGNS ARE THE PROPERTY OF LOMOND VIEW DESIGNS, LLC AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT WRITTEN CONSENT.
THESE DRAWINGS & DESIGNS MAY BE USED FOR THE CONSTRUCTION OF A SINGLE BE BUILDING LOCATED AS FOLLOWS:
LOT #: _____
SUBDIVISION: _____
ADDRESS: 375 W. 800 S.
CITY: LEWISTON STATE: UTAH
ANY OTHER USE OF THESE DRAWINGS & DESIGNS IS STRICTLY FORBIDDEN AND VIOLATORS WILL BE PROSECUTED.
DATE: 6/16/2025

CONTRACTOR & OWNER SHALL VERIFY ALL DIMENSIONS, AREAS, AND CONDITIONS, READ ALL NOTES AND BECOME THOROUGHLY FAMILIAR WITH THE DRAWINGS, AND ALL ASSOCIATED COSTS, PRIOR TO CONSTRUCTION.

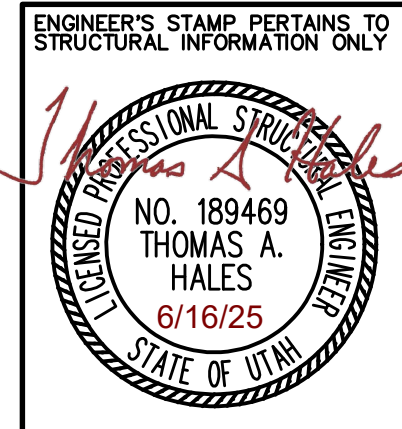

COPYRIGHT NOTICE:
THESE PLANS, DRAWINGS & DESIGNS ARE THE PROPERTY OF LOMOND VIEW DESIGNS, LLC AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT WRITTEN CONSENT.

FOR: JEFF BECKSTEAD
375 W. 800 S.
LEWISTON, UTAH 84320

304 WEST PLEASANT VIEW DR.
ODEN, UTAH 84414
PHONE: (801)-782-0484
FAX: (801)-782-8631
WWW.LOMONDVIEW.COM


Lomond View
DESIGN & CONSTRUCTION

CRAWL SPACE/FOUNDATION PLAN
DRAWN: CWH
DATE: 6/16/2025
JOB NO.: 25041
PLAN NO.: 3-2-1621 RAMBLER

S2.2


NOTES TO PLAN:

- SEE GENERAL STRUCTURAL NOTES, SCHEDULES, AND DETAILS FOR ADDITIONAL CONSTRUCTION REQUIREMENTS. THIS PLAN IS TO BE WORKED ALONG WITH THESE OTHER SUPPORTING SHEETS. THE OWNER AND CONTRACTOR SHALL THOROUGHLY REVIEW AND BECOME FAMILIAR WITH THESE DRAWINGS BEFORE PROCEEDING WITH CONSTRUCTION.
- FOOTINGS: SEE THE GENERAL STRUCTURAL NOTES, THE CONCRETE FOOTING SCHEDULE, AND THE DETAILS ON SHEETS S4.1 AND S4.2 FOR ADDITIONAL INFORMATION. FOOTINGS SUPPORTING CONCRETE FOUNDATION WALLS SHALL BE A FC-2 FOOTING UNLESS NOTED OTHERWISE. FOOTINGS SUPPORTING INTERIOR WALL BEARING WALLS SHALL BE A FC-15 FOOTING UNLESS NOTED OTHERWISE. FOOTINGS SUPPORTING A CO-2 PATIO/DECK SHALL BE A FC-3 FOOTING UNLESS NOTED OTHERWISE. SEE DETAILS 3/S4.1 AND 4/S4.1 FOR FOOTING STEPS, CORNERS, AND INTERSECTIONS.
- FOUNDATION WALLS: SEE THE GENERAL STRUCTURAL NOTES, THE CONCRETE FOUNDATION WALL SCHEDULE, AND THE DETAILS ON SHEETS S4.1 AND S4.2 FOR ADDITIONAL INFORMATION. REINFORCING SHALL BE BASED ON THE FOUNDATION WALL HEIGHT AS DESIGNATED IN THE SCHEDULE. CONTACT THE DESIGNER FOR FOUNDATION WALLS WITH HEIGHTS BETWEEN LOW AND HIGH GRADE. FOUNDATION WALLS GREATER THAN THAT SHOWN IN THE SCHEDULE. SEE DETAIL 4/S4.1 FOR FOUNDATION WALL CORNERS AND INTERSECTIONS. FOUNDATION WALLS SHALL NOT BE BACKFILLED UNTIL THE FLOORS ARE PROPERLY INSTALLED TO PROVIDE ADEQUATE BRACING. SOIL USED FOR BACKFILL SHALL CONFORM TO THAT SPECIFIED IN THE CONCRETE FOUNDATION WALL SCHEDULE.
- ANCHOR BOLTS: SEE THE GENERAL STRUCTURAL NOTES AND SHEAR WALL SCHEDULE FOR ANCHOR BOLTS. SEE S1.1 FOR FOUNDATION ANCHOR BOLT REQUIREMENTS.
- HOLD-DOWNS: SEE THE METAL HOLD-DOWN SCHEDULE ON SHEET S1.1 AND DETAILS 5 & 9/S4.2 FOR ADDITIONAL INFORMATION. PROVIDE HOLD-DOWNS AS NOTED ON THE DRAWINGS. USE RIM JOIST VERSION OF STRAP WHEN LOCATED AT RIM JOIST. FOR MISSED OR MISPLACED HOLD-DOWNS USE AN ALTERNATE HOLD-DOWN STRAP AS NOTED IN THE COMMENTS COLUMN OF THE METAL HOLD-DOWN SCHEDULE.
- RETAINING WALLS: SEE DETAILS 1/S4.1 AND 2/S4.1 FOR RETAINING WALL CONSTRUCTION INFORMATION. FOR WALLS RETAINING LANDSCAPE, CONTACT THE DESIGNER FOR RETAINING WALLS EXCEEDING THE HEIGHT SHOWN IN THE SCHEDULE OR AREAS WHERE VEHICLE LOADING MAY BE WITHIN FOUR FEET OF TOP OF WALL.
- DECK FOOTINGS: PLASTIC CONCRETE SPOT FOOTING FORMS WITH EQUIVALENT OR GREATER FOOTING FOOTPRINT AND REINFORCING MAY BE USED IN PLACE OF TRADITIONALLY FORMED FOOTINGS.
- CONCRETE PORCH SLABS: PROVIDE REINFORCING FOR SELF SUSPENDED CONCRETE PORCH SLABS AS SHOWN IN DETAIL 4/S5.2.
- CONCRETE SLABS OVER BACKFILL: PROVIDE REBAR DOWELS FROM CONCRETE TO CONCRETE WALLS OR CONCRETE FOUNDATION WALLS OVER BACKFILL AREAS AS SHOWN IN DETAIL 3/S5.2.
- CONCRETE SLAB CONTROL JOINTS: SLABS ON GRADE SHALL HAVE CONTROL OR CONSTRUCTION JOINTS PROVIDED AT A SPACING NOT TO EXCEED 30 TIMES THE SLAB THICKNESS IN ANY DIRECTION. INVERTED JOINTS SHALL BE USED. THE RATIO BETWEEN THE JOINTS IS NOT MORE THAN 1.25 TO 1. INSTALL CONTROL JOINTS WITHIN 24 HOURS OF CONCRETE PLACEMENT. DISCONTINUOUS CONTROL OR CONSTRUCTION JOINTS SHALL BE REINFORCED WITH (2)-#4 x 48" REBAR. SEE DETAILS.
- WALLS: 2x4 WALLS ARE SHOWN WITH A 3 1/2" THICKNESS AND 2x6 WALLS ARE SHOWN WITH A 5 1/2" THICKNESS. ALL BEARING, SHEAR, AND BRACED WALLS SHALL HAVE STUDS PLACED AT 16" O.C. MAXIMUM, UNLESS NOTED OTHERWISE.
- SHEAR WALLS: SEE THE SHEAR WALL SCHEDULE FOR ADDITIONAL INFORMATION. EXTERIOR WALLS SHALL BE SW2 TYPE SHEAR WALL UNLESS NOTED OTHERWISE. TO RESIST TO BE SHEAR WALLS, SEE DETAIL 1/S5.1. SHEAR WALLS SHALL BE ATTACHED AT THE TOP AND BOTTOM BY ONE OF THE METHODS SHOWN IN THE DETAILS S5.1 THRU S5.4. UNLESS NOTED OTHERWISE, WALLS NOTED AS "BRACED WALLS" SHALL BE A SW1 SHEAR WALL TYPE.
- BEARING AND EXTERIOR WALLS: ALL BEARING AND EXTERIOR WALLS SHALL CONSIST OF FULL HEIGHT STUD FRAMING AND BE ATTACHED AT THE TOP AND BOTTOM BY ONE OF THE METHODS SHOWN IN THE DETAILS S5.1 THRU S5.4. UNLESS NOTED OTHERWISE, WALLS NOTED AS "BRACED WALLS" SHALL BE A SW1 SHEAR WALL TYPE.
- WOOD BEAMS AND HEADERS: UNLESS SPECIFICALLY CALLED OUT ON THE DRAWINGS, SEE THE WOOD BEAM/HEADER SCHEDULE FOR SIZES AND ADDITIONAL INFORMATION. CONTACT THE DESIGNER FOR WOOD BEAM OR HEADERS NOT DESIGNATED ON PLANS THAT HAVE A SPAN GREATER THAN 5'-2". SEE THE WOOD BEAM/HEADER SCHEDULE FOR SPANS UP TO 5'-2" THAT ARE NOT NOTED OTHERWISE ON THE PLANS.
- FLOOR FRAMING: ALL FLOOR JOISTS SHALL BE SUPPORTED AT BEARING POINTS BY ONE OF THE METHODS SHOWN IN THE DETAILS S5.1 THRU S5.2. UNLESS NOTED OTHERWISE, FLOOR JOISTS SHALL RUN PARALLEL TO EXTERIOR BEARING AND/OR SHEAR WALLS. SHEAR WALLS SHALL HAVE SOLID BLOCKING PROVIDED BY ONE OF THE METHODS SHOWN IN DETAILS 2/S5.1, 3/S5.1, 4/S5.1, 5/S5.1, 6/S5.1, 7/S5.1, 8/S5.1, 9/S5.1, 10/S5.1, 11/S5.1, 12/S5.1, 13/S5.1, 14/S5.1, 15/S5.1, 16/S5.1, 17/S5.1, 18/S5.1, 19/S5.1, 20/S5.1, 21/S5.1, 22/S5.1, 23/S5.1, 24/S5.1, 25/S5.1, 26/S5.1, 27/S5.1, 28/S5.1, 29/S5.1, 30/S5.1, 31/S5.1, 32/S5.1, 33/S5.1, 34/S5.1, 35/S5.1, 36/S5.1, 37/S5.1, 38/S5.1, 39/S5.1, 40/S5.1, 41/S5.1, 42/S5.1, 43/S5.1, 44/S5.1, 45/S5.1, 46/S5.1, 47/S5.1, 48/S5.1, 49/S5.1, 50/S5.1, 51/S5.1, 52/S5.1, 53/S5.1, 54/S5.1, 55/S5.1, 56/S5.1, 57/S5.1, 58/S5.1, 59/S5.1, 60/S5.1, 61/S5.1, 62/S5.1, 63/S5.1, 64/S5.1, 65/S5.1, 66/S5.1, 67/S5.1, 68/S5.1, 69/S5.1, 70/S5.1, 71/S5.1, 72/S5.1, 73/S5.1, 74/S5.1, 75/S5.1, 76/S5.1, 77/S5.1, 78/S5.1, 79/S5.1, 80/S5.1, 81/S5.1, 82/S5.1, 83/S5.1, 84/S5.1, 85/S5.1, 86/S5.1, 87/S5.1, 88/S5.1, 89/S5.1, 90/S5.1, 91/S5.1, 92/S5.1, 93/S5.1, 94/S5.1, 95/S5.1, 96/S5.1, 97/S5.1, 98/S5.1, 99/S5.1, 100/S5.1, 101/S5.1, 102/S5.1, 103/S5.1, 104/S5.1, 105/S5.1, 106/S5.1, 107/S5.1, 108/S5.1, 109/S5.1, 110/S5.1, 111/S5.1, 112/S5.1, 113/S5.1, 114/S5.1, 115/S5.1, 116/S5.1, 117/S5.1, 118/S5.1, 119/S5.1, 120/S5.1, 121/S5.1, 122/S5.1, 123/S5.1, 124/S5.1, 125/S5.1, 126/S5.1, 127/S5.1, 128/S5.1, 129/S5.1, 130/S5.1, 131/S5.1, 132/S5.1, 133/S5.1, 134/S5.1, 135/S5.1, 136/S5.1, 137/S5.1, 138/S5.1, 139/S5.1, 140/S5.1, 141/S5.1, 142/S5.1, 143/S5.1, 144/S5.1, 145/S5.1, 146/S5.1, 147/S5.1, 148/S5.1, 149/S5.1, 150/S5.1, 151/S5.1, 152/S5.1, 153/S5.1, 154/S5.1, 155/S5.1, 156/S5.1, 157/S5.1, 158/S5.1, 159/S5.1, 160/S5.1, 161/S5.1, 162/S5.1, 163/S5.1, 164/S5.1, 165/S5.1, 166/S5.1, 167/S5.1, 168/S5.1, 169/S5.1, 170/S5.1, 171/S5.1, 172/S5.1, 173/S5.1, 174/S5.1, 175/S5.1, 176/S5.1, 177/S5.1, 178/S5.1, 179/S5.1, 180/S5.1, 181/S5.1, 182/S5.1, 183/S5.1, 184/S5.1, 185/S5.1, 186/S5.1, 187/S5.1, 188/S5.1, 189/S5.1, 190/S5.1, 191/S5.1, 192/S5.1, 193/S5.1, 194/S5.1, 195/S5.1, 196/S5.1, 197/S5.1, 198/S5.1, 199/S5.1, 200/S5.1, 201/S5.1, 202/S5.1, 203/S5.1, 204/S5.1, 205/S5.1, 206/S5.1, 207/S5.1, 208/S5.1, 209/S5.1, 210/S5.1, 211/S5.1, 212/S5.1, 213/S5.1, 214/S5.1, 215/S5.1, 216/S5.1, 217/S5.1, 218/S5.1, 219/S5.1, 220/S5.1, 221/S5.1, 222/S5.1, 223/S5.1, 224/S5.1, 225/S5.1, 226/S5.1, 227/S5.1, 228/S5.1, 229/S5.1, 230/S5.1, 231/S5.1, 232/S5.1, 233/S5.1, 234/S5.1, 235/S5.1, 236/S5.1, 237/S5.1, 238/S5.1, 239/S5.1, 240/S5.1, 241/S5.1, 242/S5.1, 243/S5.1, 244/S5.1, 245/S5.1, 246/S5.1, 247/S5.1, 248/S5.1, 249/S5.1, 250/S5.1, 251/S5.1, 252/S5.1, 253/S5.1, 254/S5.1, 255/S5.1, 256/S5.1, 257/S5.1, 258/S5.1, 259/S5.1, 260/S5.1, 261/S5.1, 262/S5.1, 263/S5.1, 264/S5.1, 265/S5.1, 266/S5.1, 267/S5.1, 268/S5.1, 269/S5.1, 270/S5.1, 271/S5.1, 272/S5.1, 273/S5.1, 274/S5.1, 275/S5.1, 276/S5.1, 277/S5.1, 278/S5.1, 279/S5.1, 280/S5.1, 281/S5.1, 282/S5.1, 283/S5.1, 284/S5.1, 285/S5.1, 286/S5.1, 287/S5.1, 288/S5.1, 289/S5.1, 290/S5.1, 291/S5.1, 292/S5.1, 293/S5.1, 294/S5.1, 295/S5.1, 296/S5.1, 297/S5.1, 298/S5.1, 299/S5.1, 300/S5.1, 301/S5.1, 302/S5.1, 303/S5.1, 304/S5.1, 305/S5.1, 306/S5.1, 307/S5.1, 308/S5.1, 309/S5.1, 310/S5.1, 311/S5.1, 312/S5.1, 313/S5.1, 314/S5.1, 315/S5.1, 316/S5.1, 317/S5.1, 318/S5.1, 319/S5.1, 320/S5.1, 321/S5.1, 322/S5.1, 323/S5.1, 324/S5.1, 325/S5.1, 326/S5.1, 327/S5.1, 328/S5.1, 329/S5.1, 330/S5.1, 331/S5.1, 332/S5.1, 333/S5.1, 334/S5.1, 335/S5.1, 336/S5.1, 337/S5.1, 338/S5.1, 339/S5.1, 340/S5.1, 341/S5.1, 342/S5.1, 343/S5.1, 344/S5.1, 345/S5.1, 346/S5.1, 347/S5.1, 348/S5.1, 349/S5.1, 350/S5.1, 351/S5.1, 352/S5.1, 353/S5.1, 354/S5.1, 355/S5.1, 356/S5.1, 357/S5.1, 358/S5.1, 359/S5.1, 360/S5.1, 361/S5.1, 362/S5.1, 363/S5.1, 364/S5.1, 365/S5.1, 366/S5.1, 367/S5.1, 368/S5.1, 369/S5.1, 370/S5.1, 371/S5.1, 372/S5.1, 373/S5.1, 374/S5.1, 375/S5.1, 376/S5.1, 377/S5.1, 378/S5.1, 379/S5.1, 380/S5.1, 381/S5.1, 382/S5.1, 383/S5.1, 384/S5.1, 385/S5.1, 386/S5.1, 387/S5.1, 388/S5.1, 389/S5.1, 390/S5.1, 391/S5.1, 392/S5.1, 393/S5.1, 394/S5.1, 395/S5.1, 396/S5.1, 397/S5.1, 398/S5.1, 399/S5.1, 400/S5.1, 401/S5.1, 402/S5.1, 403/S5.1, 404/S5.1, 405/S5.1, 406/S5.1, 407/S5.1, 408/S5.1, 409/S5.1, 410/S5.1, 411/S5.1, 412/S5.1, 413/S5.1, 414/S5.1, 415/S5.1, 416/S5.1, 417/S5.1, 418/S5.1, 419/S5.1, 420/S5.1, 421/S5.1, 422/S5.1, 423/S5.1, 424/S5.1, 425/S5.1, 426/S5.1, 427/S5.1, 428/S5.1, 429/S5.1, 430/S5.1, 431/S5.1, 432/S5.1, 433/S5.1, 434/S5.1, 435/S5.1, 436/S5.1, 437/S5.1, 438/S5.1, 439/S5.1, 440/S5.1, 441/S5.1, 442/S5.1, 443/S5.1, 444/S5.1, 445/S5.1, 446/S5.1, 447/S5.1, 448/S5.1, 449/S5.1, 450/S5.1, 451/S5.1, 452/S5.1, 453/S5.1, 454/S5.1, 455/S5.1, 456/S5.1, 457/S5.1, 458/S5.1, 459/S5.1, 460/S5.1, 461/S5.1, 462/S5.1, 463/S5.1, 464/S5.1, 465/S5.1, 466/S5.1, 467/S5.1, 468/S5.1, 469/S5.1, 470/S5.1, 471/S5.1, 472/S5.1, 473/S5.1, 474/S5.1, 475/S5.1, 476/S5.1, 477/S5.1, 478/S5.1, 479/S5.1, 480/S5.1, 481/S5.1, 482/S5.1, 483/S5.1, 484/S5.1, 485/S5.1, 486/S5.1, 487/S5.1, 488/S5.1, 489/S5.1, 490/S5.1, 491/S5.1, 492/S5.1, 493/S5.1, 494/S5.1, 495/S5.1, 496/S5.1, 497/S5.1, 498/S5.1, 499/S5.1, 500/S5.1, 501/S5.1, 502/S5.1, 503/S5.1, 504/S5.1, 505/S5.1, 506/S5.1, 507/S5.1, 508/S5.1, 509/S5.1, 510/S5.1, 511/S5.1, 512/S5.1, 513/S5.1, 514/S5.1, 515/S5.1, 516/S5.1, 517/S5.1, 518/S5.1, 519/S5.1, 520/S5.1, 521/S5.1, 522/S5.1, 523/S5.1, 524/S5.1, 525/S5.1, 526/S5.1, 527/S5.1, 528/S5.1, 529/S5.1, 530/S5.1, 531/S5.1, 532/S5.1, 533/S5.1, 534/S5.1, 535/S5.1, 536/S5.1, 537/S5.1, 538/S5.1, 539/S5.1, 540/S5.1, 541/S5.1, 542/S5.1, 543/S5.1, 544/S5.1, 545/S5.1, 546/S5.1, 547/S5.1, 548/S5.1, 549/S5.1, 550/S5.1, 551/S5.1, 552/S5.1, 553/S5.1, 554/S5.1, 555/S5.1, 556/S5.1, 557/S5.1, 558/S5.1, 559/S5.1, 560/S5.1, 561/S5.1, 562/S5.1, 563/S5.1, 564/S5.1, 565/S5.1, 566/S5.1, 567/S5.1, 568/S5.1, 569/S5.1, 570/S5.1, 571/S5.1, 572/S5.1, 573/S5.1, 574/S5.1, 575/S5.1, 576/S5.1, 577/S5.1, 578/S5.1, 579/S5.1, 580/S5.1, 581/S5.1, 582/S5.1, 583/S5.1, 584/S5.1, 585/S5.1, 586/S5.1, 587/S5.1, 588/S5.1, 589/S5.1, 590/S5.1, 591/S5.1, 592/S5.1, 593/S5.1, 594/S5.1, 595/S5.1, 596/S5.1, 597/S5.1, 598/S5.1, 599/S5.1, 600/S5.1, 601/S5.1, 602/S5.1, 603/S5.1, 604/S5.1, 605/S5.1, 606/S5.1, 607/S5.1, 608/S5.1, 609/S5.1, 610/S5.1, 611/S5.1, 612/S5.1, 613/S5.1, 614/S5.1, 615/S5.1, 616/S5.1, 617/S5.1, 618/S5.1, 619/S5.1, 620/S5.1, 621/S5.1, 622/S5.1, 623/S5.1, 624/S5.1, 625/S5.1, 626/S5.1, 627/S5.1, 628/S5.1, 629/S5.1, 630/S5.1, 631/S5.1, 632/S5.1, 633/S5.1, 634/S5.1, 635/S5.1, 636/S5.1, 637/S5.1, 638/S5.1, 639/S5.1, 640/S5.1, 641/S5.1, 642/S5.1, 643/S5.1, 644/S5.1, 645/S5.1, 646/S5.1, 647/S5.1, 648/S5.1, 649/S5.1, 650/S5.1, 651/S5.1, 652/S5.1, 653/S5.1, 654/S5.1, 655/S5.1, 656/S5.1, 657/S5.1, 658/S5.1, 659/S5.1, 660/S5.1, 661/S5.1, 662/S5.1, 663/S5.1, 664/S5.1, 665/S5.1, 666/S5.1, 667/S5.1, 668/S5.1, 669/S5.1, 670/S5.1, 671/S5.1, 672/S5.1, 673/S5.1, 674/S5.1, 675/S5.1, 676/S5.1, 677/S5.1, 678/S5.1, 679/S5.1, 680/S5.1, 681/S5.1, 682/S5.1, 683/S5.1, 684/S5.1, 685/S5.1, 686/S5.1, 687/S5.1, 688/S5.1, 689/S5.1, 690/S5.1, 691/S5.1, 692/S5.1, 693/S5.1, 694/S5.1, 695/S5.1, 696/S5.1, 697/S5.1, 698/S5.1, 699/S5.1, 700/S5.1, 701/S5.1, 702/S5.1, 703/S5.1, 704/S5.1, 705/S5.1, 706/S5.1, 707/S5.1, 708/S5.1, 709/S5.1, 710/S5.1, 711/S5.1, 712/S5.1, 713/S5.1, 714/S5.1, 715/S5.1, 716/S5.1, 717/S5.1, 718/S5.1, 719/S5.1, 720/S5.1, 721/S5.1, 722/S5.1, 723/S5.1, 724/S5.1, 725/S5.1, 726/S5.1, 727/S5.1, 728/S5.1, 729/S5.1, 730/S5.1, 731/S5.1, 732/S5.1, 733/S5.1, 734/S5.1, 735/S5.1, 736/S5.1, 737/S5.1, 738/S5.1, 739/S5.1, 740/S5.1, 741/S5.1, 742/S5.1, 743/S5.1, 744/S5.1, 745/S5.1, 746/S5.1, 747/S5.1, 748/S5.1, 749/S5.1, 750/S5.1, 751/S5.1, 752/S5.1, 753/S5.1, 754/S5.1, 755/S5.1, 756/S5.1, 757/S5.1, 758/S5.1, 759/S5.1, 760/S5.1, 761/S5.1, 762/S5.1, 763/S5.1, 764/S5.1, 765/S5.1, 766/S5.1, 767/S5.1, 768/S5.1, 769/S5.1, 770/S5.1, 771/S5.1, 772/S5.1, 773/S5.1, 774/S5.1, 775/S5.1, 776/S5.1, 777/S5.1, 778/S5.1, 779/S5.1, 780/S5.1, 781/S5.1, 782/S5.1, 783/S5.1, 784/S5.1, 785/S5.1, 786/S5.1, 787/S5.1, 788/S5.1, 789/S5.1, 790/S5.1, 791/S5.1, 792/S5.1, 793/S5.1, 794/S5.1, 795/S5.1, 796/S5.1, 797/S5.1, 798/S5.1, 799/S5.1, 800/S5.1, 801/S5.1, 802/S5.1, 803/S5.1, 804/S5.1, 805/S5.1, 806/S5.1, 807/S5.1, 808/S5.1, 809/S5.1, 810/S5.1, 811/S5.1, 812/S5.1, 813/S5.1, 814/S5.1, 815/S5.1, 816/S5.1, 817/S5.1, 818/S5.1, 819/S5.1, 820/S5.1, 821/S5.1, 822/S5.1, 823/S5.1, 824/S5.1, 825/S5.1, 826/S5.1, 827/S5.1, 828/S5.1, 829/S5.1, 830/S5.1, 831/S5.1, 832/S5.1, 833/S5.1, 834/S5.1, 835/S5.1, 836/S5.1, 837/S5.1, 838/S5.1, 839/S5.1, 840/S5.1, 841/S5.1, 842/S5.1, 843/S5.1, 844/S5.1, 845/S5.1, 846/S5.1, 847/S5.1, 848/S5.1, 849/S5.1, 850/S5.1, 851/S5.1, 852/S5.1, 853/S5.1, 854/S5.1, 855/S5.1, 856/S5.1, 857/S5.1, 858/S5.1, 859/S5.1, 860/S5.1, 861/S5.1, 862/S5.1, 863/S5.1, 864/S5.1, 865/S5.1, 866/S5.1, 867/S5.1, 868/S5.1, 869/S5.1, 870/S5.1, 871/S5.1, 872/S5.1, 873/S5.1, 874/S5.1, 875/S5.1, 876/S5.1, 877/S5.1, 878/S5.1, 879/S5.1, 880/S5.1, 881/S5.1, 882/S5.1, 883/S5.1, 884/S5.1, 885/S5.1, 886/S5.1, 887/S5.1, 888/S5.1, 889/S5.1, 890/S5.1, 891/S5.1, 892/S5.1, 893/S5.1, 894/S5.1, 895/S5.1, 896/S5.1, 897/S5.1, 898/S5.1, 899/S5.1, 900/S5.1, 901/S5.1, 902/S5.1, 903/S5.1, 904/S5.1, 905/S5.1, 906/S5.1, 907/S5.1, 908/S5.1, 909/S5.1, 910/S5.1, 911/S5.1, 912/S5.1, 913/S5.1, 914/S5.1, 915/S5.1, 916/S5.1, 917/S5.1, 918/S5.1, 919/S5.1, 920/S5.1, 921/S5.1, 922/S5.1, 923/S5.1, 924/S5.1, 925/S5.1, 926/S5.1, 927/S5.1, 928/S5.1, 929/S5.1, 930/S5.1, 931/S5.1, 932/S5.1, 933/S5.1, 934/S5.1, 935/S5.1, 936/S5.1, 937/S5.1, 938/S5.1, 939/S5.1, 940/S5.1, 941/S5.1, 942/S5.1, 943/S5.1, 944/S5.1, 945/S5.1, 946/S5.1, 947/S5.1, 948/S5.1, 949/S5.1, 950/S5.1, 951/S5.1, 952/S5.1, 953/S5.1, 954/S5.1, 955/S5.1, 956/S5.1, 957/S5.1, 958/S5.1, 959/S5.1, 960/S5.1, 961/S5.1, 962/S5.1, 963/S5.1, 964/S5.1, 965/S5.1, 966/S5.1, 967/S5.1, 968/S5.1, 969/S5.1, 970/S5.1, 971/S5.1, 972/S5.1, 973/S5.1, 974/S5.1, 975/S5.1, 976/S5.1, 977/S5.1, 978/S5.1, 979/S5.1, 980/S5.1, 981/S5.1, 982/S5.1, 983/S5.1, 984/S5.1, 985/S5.1, 986/S5.1, 987/S5.1, 988/S5.1, 989/S5.1, 990/S5.1, 991/S5.1, 992/S5.1, 993/S5.1, 994/S5.1, 995/S5.1, 996/S5.1, 997/S5.1, 998/S5.1, 999/S5.1, 1000/S5.1, 1001/S5.1, 1002/S5.1, 1003/S5.1, 1004/S5.1, 1005/S5.1, 1006/S5.1, 1007/S5.1, 1008/S5.1, 1009/S5.1, 1010/S5.1, 1011/S5.1, 1012/S5.1, 1013/S5.1, 1014/S5.1, 1015/S5.1, 1016/S5.1, 1017/S5.1, 1018/S5.1, 1019/S5.1, 1020/S5.1, 1021/S5.1, 1022/S5.1, 1023/S5.1, 1024/S5.1, 1025/S5.1, 1026/S5.1, 1027/S5.1, 1028/S5.1, 1029/S5.1, 1030/S5.1, 1031/S5.1, 1032/S5.1, 1033/S5.1, 1034/S5.1, 1035/S5.1, 1036/S5.1, 1037/S5.1, 1038/S5.1, 1039/S5.1, 1040/S5.1, 1041/S5.1, 1042/S5.1, 1043/S5.1, 1044/S5.1, 1045/S5.1, 1046/S5.1, 1047/S5.1, 1048/S5.1, 1049/S5.1, 1050/S5.1, 1051/S5.1, 1052/S5.1, 1053/S5.1, 1054/S5.1, 1055/S5.1, 1056/S5.1, 1057/S5.1, 1058/S5.1, 1059/S5.1, 1060/S5.1, 1061/S5.1, 1062/S5.1, 1063/S5.1, 1064/S5.1, 1065/S5.1, 1066/S5.1, 1067/S5.1, 1068/S5.1, 1069/S5.1, 1070/S5.1, 1071/S5.1, 1072/S5.1, 1073/S5.1, 1074/S5.1, 1075/S5.1, 1076/S5.1, 1077/S5.1, 1078/S5.1, 1079/S5.1, 1080/S5.1, 1081/S5.1, 1082/S5.1, 1083/S5.1, 1084/S5.1, 1085/S5.1, 1086/S5.1, 1087/S5.1, 1088/S5.1, 1089/S5.1, 1090/S5.1, 1091/S5.1, 1092/S5.1, 1093/S5.1, 1094/S5.1, 1095/S5.1, 1096/S5.1, 1097/S5.1, 1098/S5.1, 1099/S5.1, 1100/S5.1, 1101/S5.1, 1102/S5.1, 1103/S5.1, 1104/S5.1, 1105/S5.1, 1106/S5.1, 1107/S5.1, 1108/S5.1, 1109/S5.1, 1110/S5.1, 1111/S5.1, 1112/S5.1, 1113/S5.1, 1114/S5.1, 1115/S5.1, 1116/S5.1, 1117/S5.1, 1118/S5.1, 1119/S5.1, 1120/S5.1, 1121/S5.1, 1122/S5.1, 1123/S5.1, 1124/S5.1, 1125/S5.1, 1126/S5.1, 1127/S5.1, 1128/S5.1, 1129/S5.1, 1130/S5.1, 1131/S5.1, 1132/S5.1, 1133/S5.1, 1134/S5.1, 1135/S5.1, 1136/S5.1, 1137/S5.1, 1138/S5.1, 1139/S5.1, 1140/S5.1, 1141/S5.1, 1142/S5.1, 1143/S5.1, 1144/S5.1, 1145/S5.1, 1146/S5.1, 1147/S5.1, 1148/S5.1, 1149/S5.1, 1150/S5.1, 1151/S5.1, 1152/S5.1, 1153/S5.1, 1154/S5.1, 1155/S5.1, 1156/S5.1, 1157/S5.1, 1158/S5.1, 1159/S5.1, 1160/S5.1, 1161/S5.1, 1162/S5.1, 1163/S5.1, 1164/S5.1, 1165/S5.1, 1166/S5.1, 1167/S5.1, 1168/S5.1, 1169/S5.1, 1170/S5.1, 1171/S5.1, 1172/S5.1, 1173/S5.1, 1174/S5.1, 1175/S5.1, 1176/S5.1, 1177/S5.1, 1178/S5.1, 1179/S5.1, 1180/S5.1, 1181/S5.1, 1182/S5.1, 1183/S5.1, 1184/S5.1, 1185/S5.1, 1186/S5.1, 1187/S5.1, 1188/S5.1, 1189/S5.1, 1190/S5.1, 1191/S5.1, 1192/S5.1, 1193/S5.1, 1194/S5.1, 1195/S5.1, 1196/S5.1, 1197/S5.1, 1198/S5.1, 1199/S5.1, 1200/S5.1,

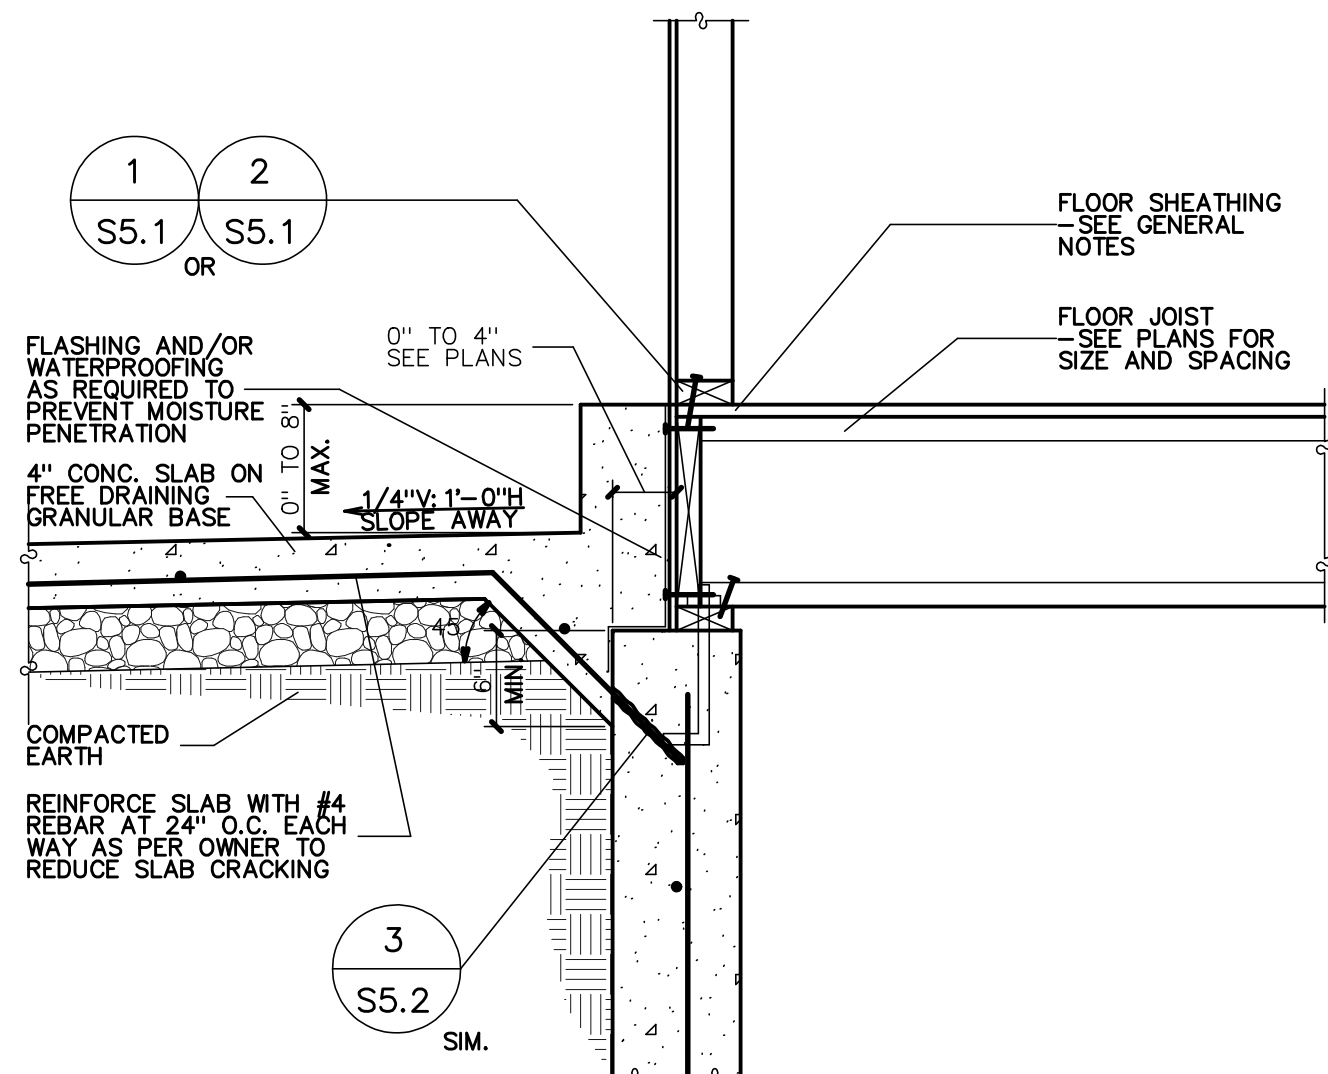


RAISED PATIO SLAB DETAIL
NO SCALE

2
S3.1

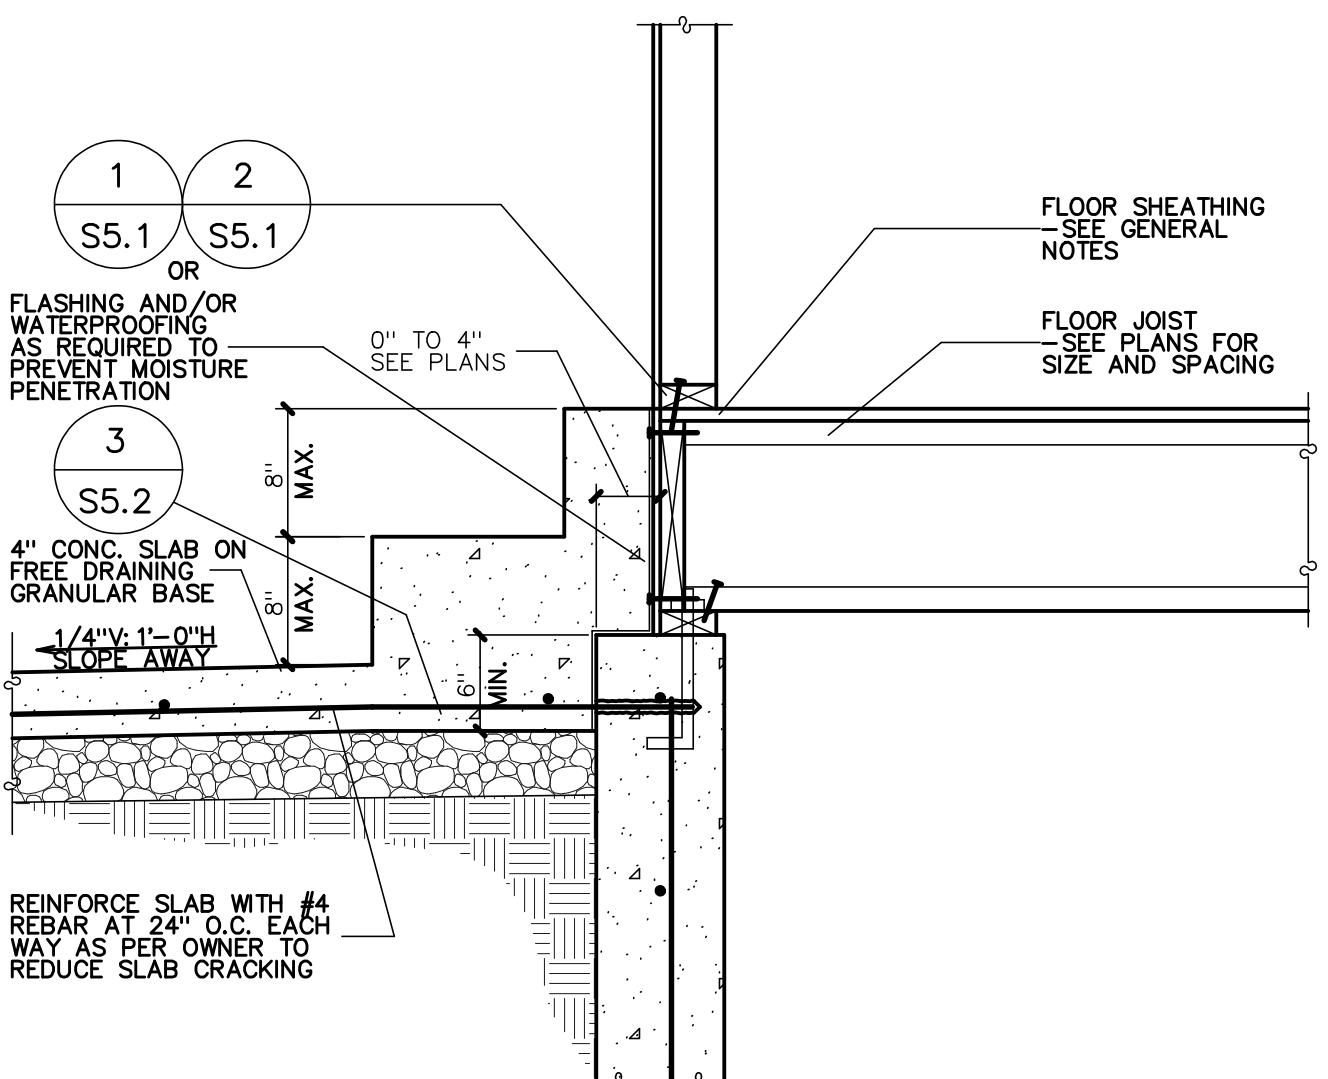


RAISED PATIO SLAB FOR STAIRS DETAIL
NO SCALE

1
S3.1

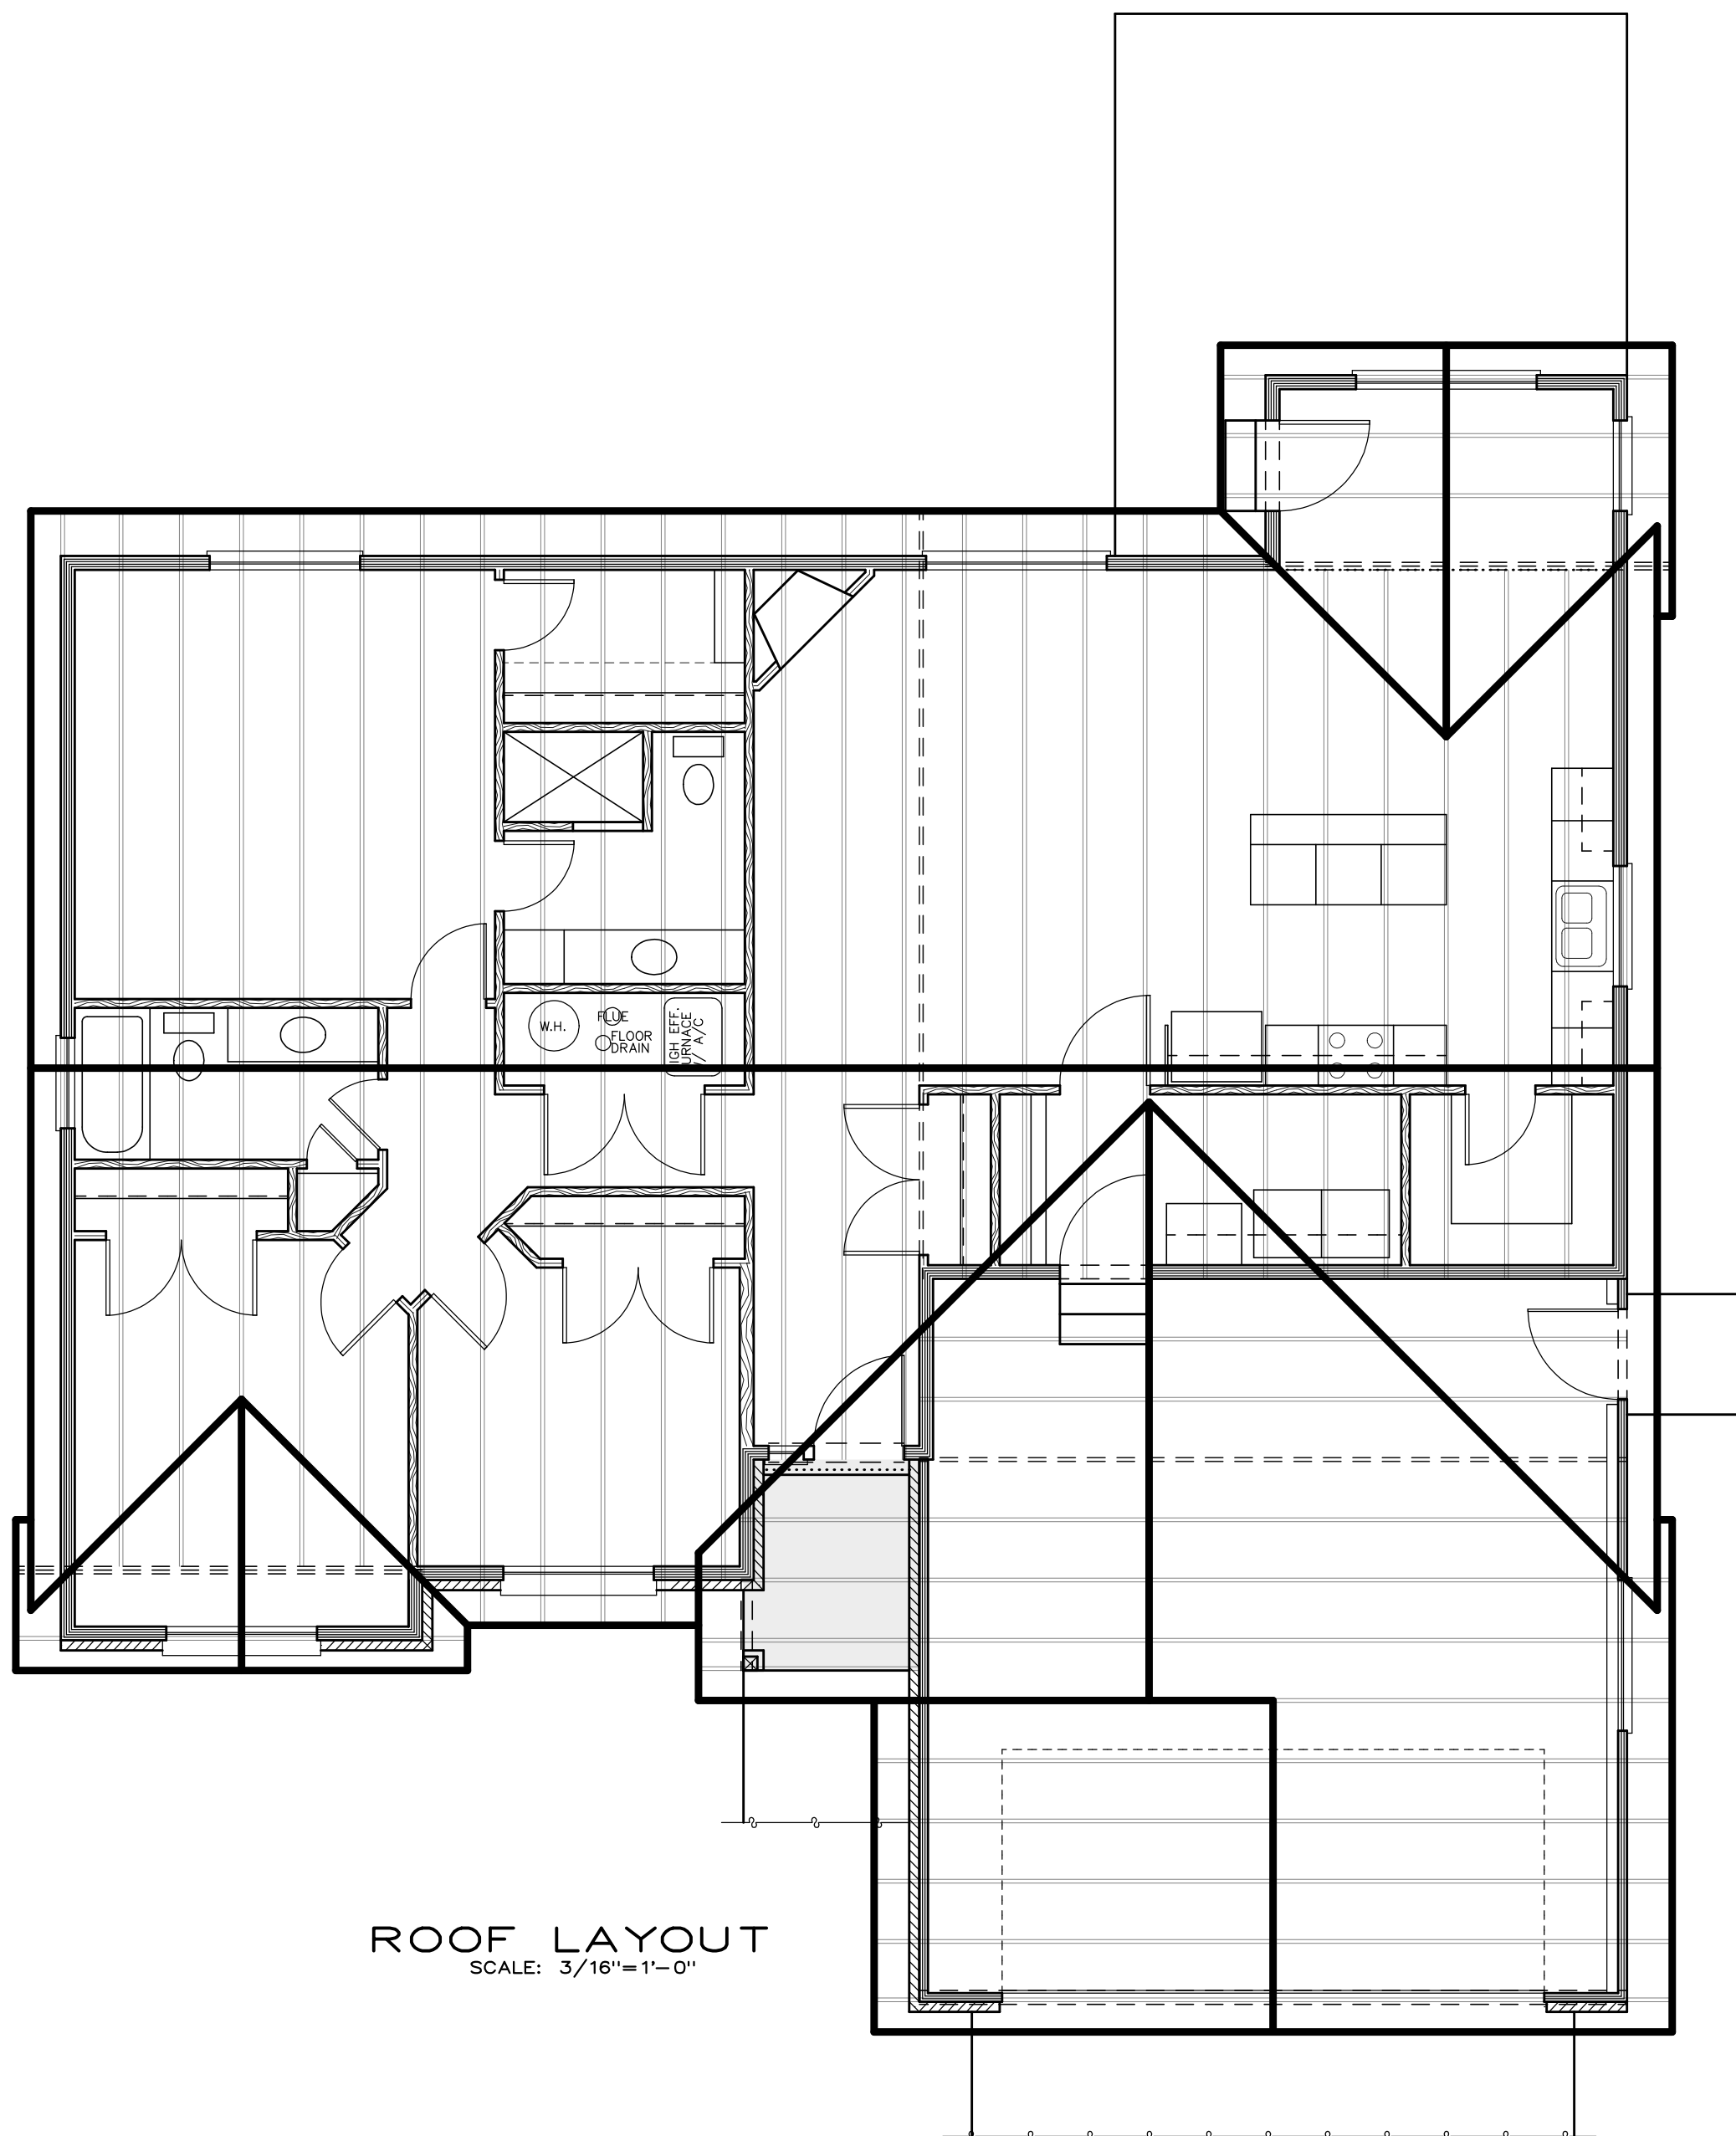

ROOF LAYOUT
SCALE: 3/16"=1'-0"

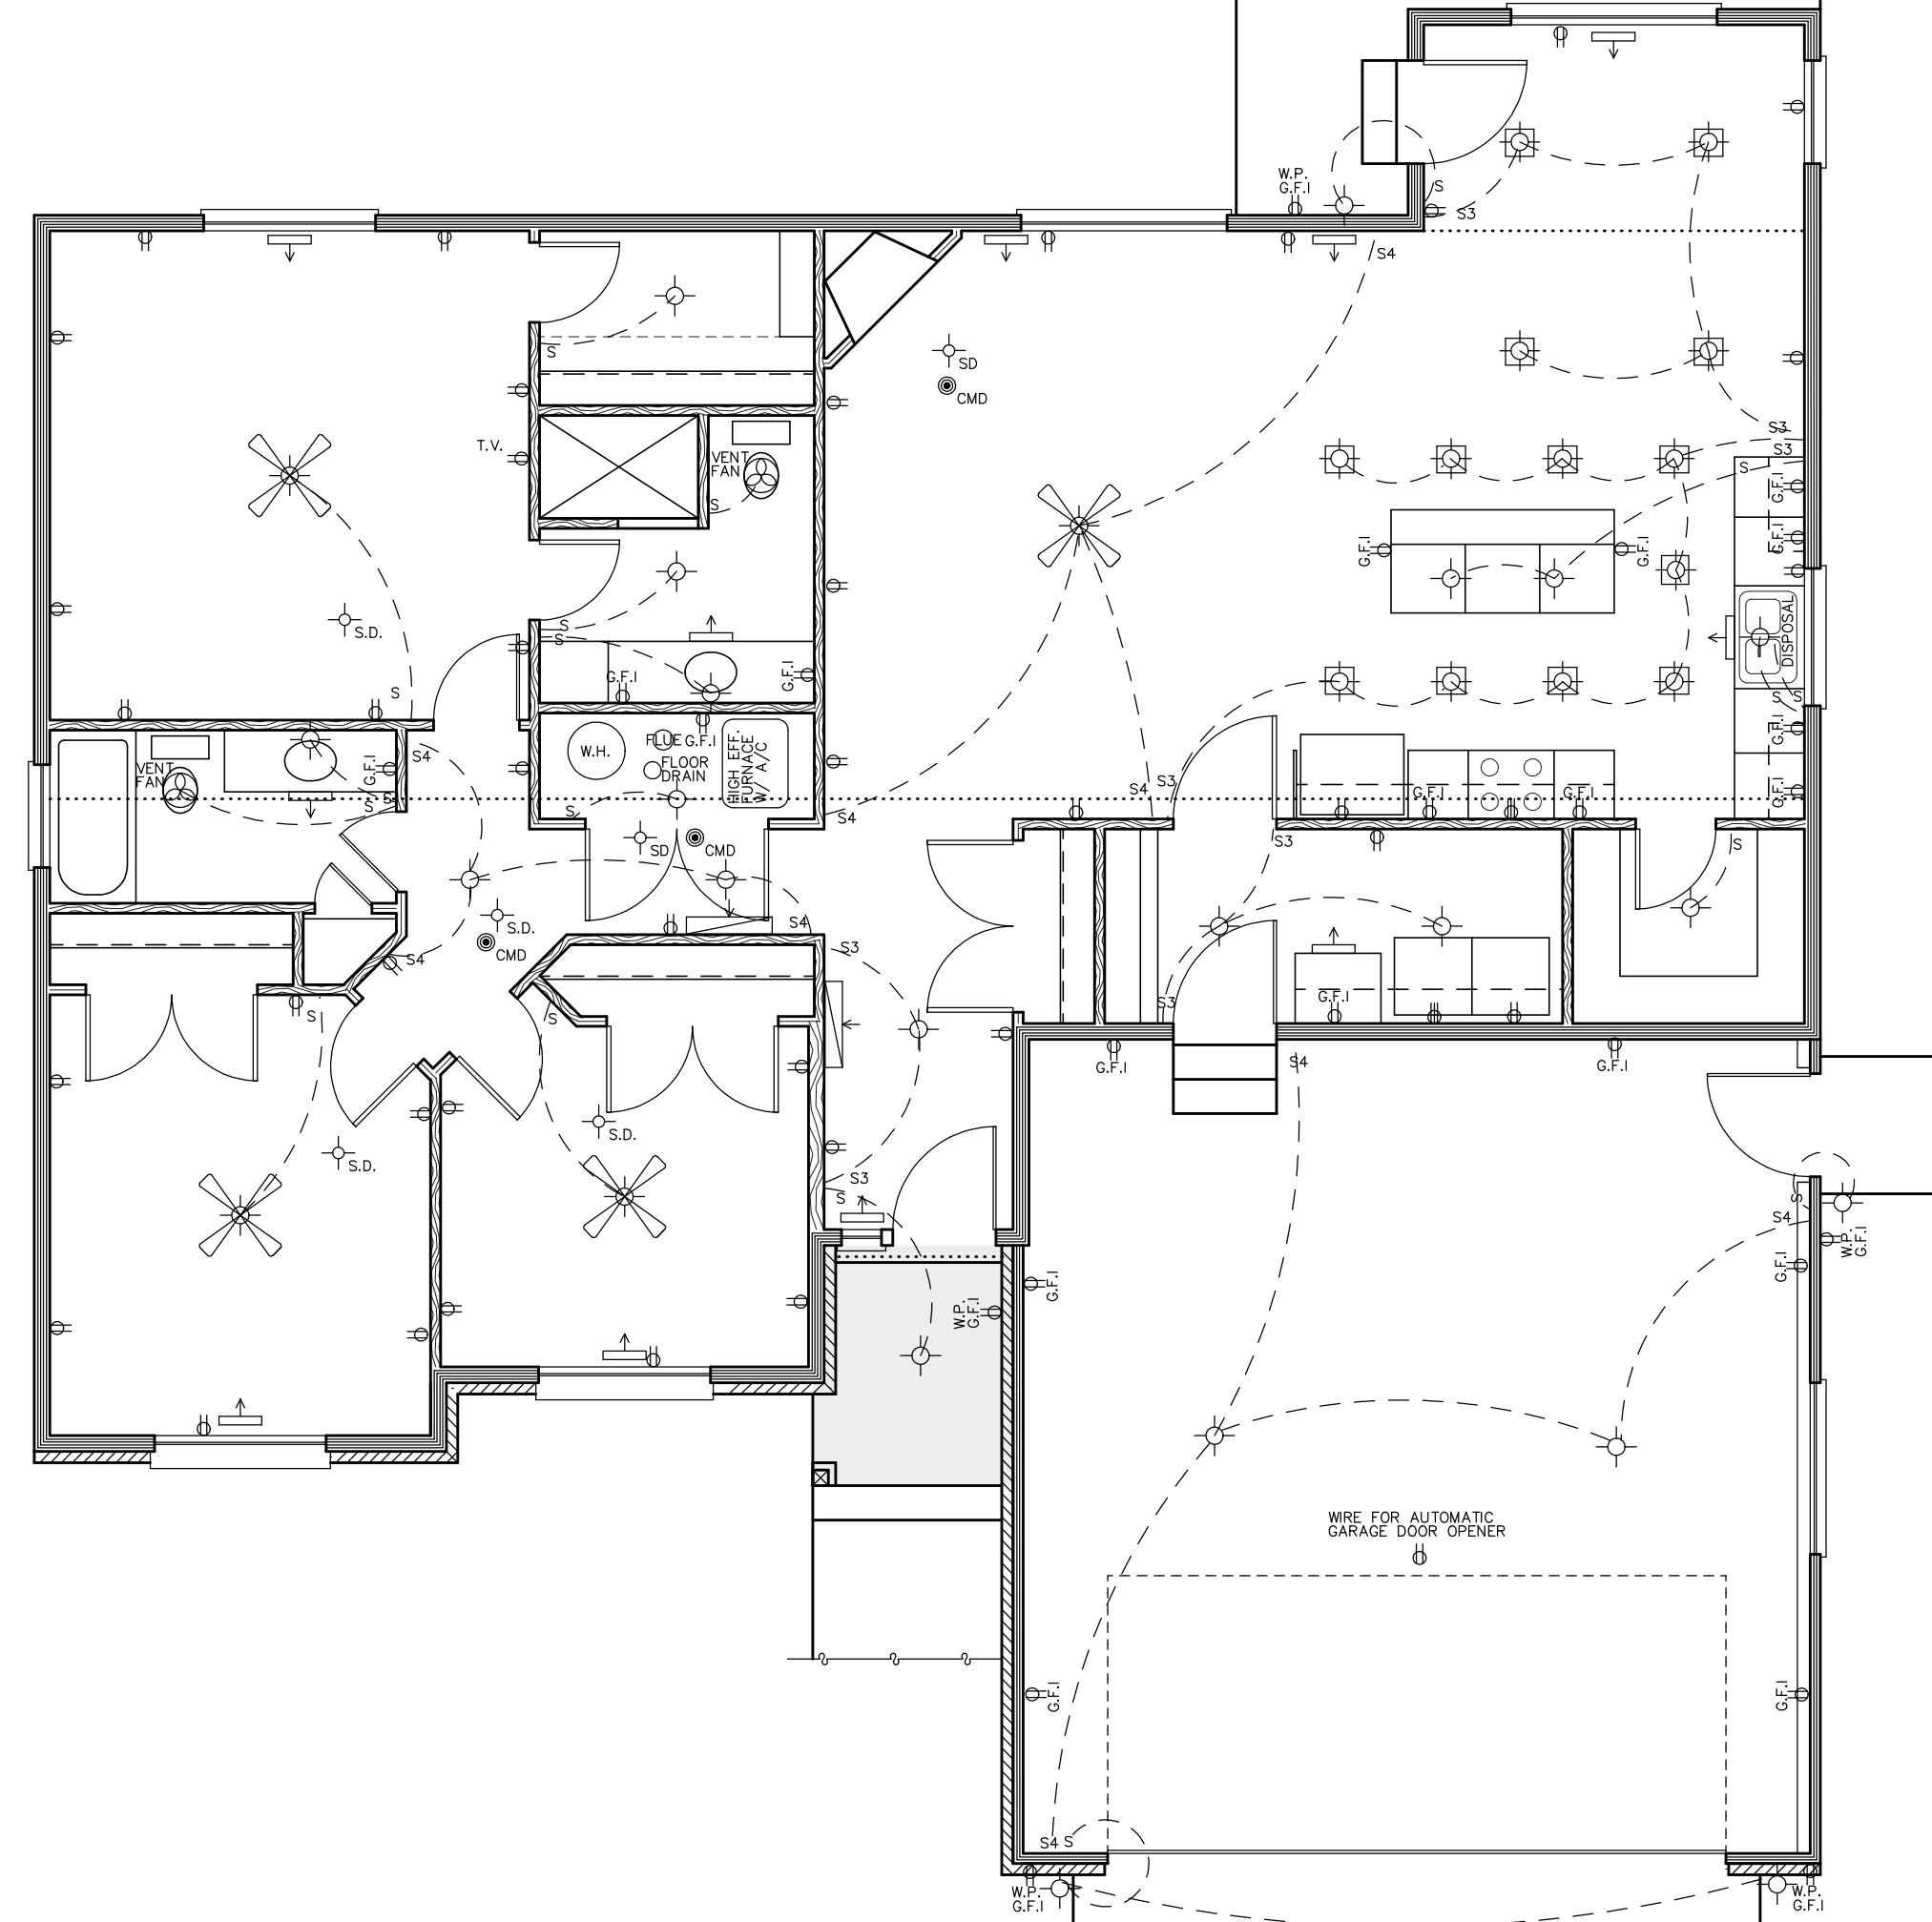

MAIN FLOOR ELEC./H.V.A.C. LAYOUT
SCALE: 3/16"=1'-0"

GENERAL NOTES

I. ROOF NOTES

1. PROVIDE ICE AND WATER SHIELD ON ROOF FROM ALL EAVE EDGES TO 24" INSIDE THE EXTERIOR WALL. ROOFS WITH SLOPES LESS THAN 4/12 SHALL HAVE ICE AND WATER SHIELD INSTALLED ON ENTIRE ROOF PLANE.
2. PROVIDE INSULATION DEPTH MARKERS EVERY 300 SQ. FT. OF ATTIC SPACE.
3. PROVIDE ATTIC VENTILATION AND ATTIC ACCESS AS PER LOCAL CODE.
4. ATTIC VENTILATION: TOTAL SQ. FT./300x144 = TOTAL SQ. IN.
- PROVIDE 50% ATTIC VENTS AND 50% SOFFIT VENTS
- BAFFLE TRUSS CAVITIES AT EXTERIOR WALLS

II. ELECTRICAL NOTES


1. THE ELECTRICAL PLAN SHOWN ONLY REPRESENTS A BASIC ELECTRICAL LAYOUT. ALL ELECTRICAL SHALL BE COORDINATED WITH THE OWNER AND SHALL MEET THE APPLICABLE ELECTRICAL CODES.
2. SMOKE DETECTORS SHALL BE INSTALLED IN EACH SLEEPING ROOM, OUTSIDE EACH SEPARATE SLEEPING AREA IN THE IMMEDIATE VICINITY OF THE BEDROOM, NEXT TO A FURNACE AND WATER HEATERS, AND ON EACH ADDITIONAL STORY OF THE DWELLING AS PER LOCAL ELECTRICAL CODES.
3. CARBON MONOXIDE DETECTORS (CMD) SHALL BE INSTALLED OUTSIDE OF EACH SEPARATE SLEEPING AREA IN THE IMMEDIATE VICINITY OF THE BEDROOMS IN DWELLING UNITS WITHIN WHICH FUEL FIRED APPLIANCES ARE INSTALLED, AND IN DWELLING UNITS THAT HAVE ATTACHED GARAGES AS PER LOCAL CODE.
4. ARC-FAULT CIRCUIT INTERRUPTERS SHALL BE INSTALLED IN ALL BEDROOMS AS PER LOCAL ELECTRICAL CODES.
5. GROUND-FAULT CIRCUIT INTERRUPTERS SHALL BE INSTALLED IN ALL OUTDOOR OUTLETS AND OUTLET CIRCUITS IN KITCHENS, BATHROOMS, GARAGES, AND WHERE OUTLETS ARE CLOSE TO A WATER SOURCE AS PER LOCAL ELECTRICAL CODES.

III. MISCELLANEOUS NOTES

1. ADDITIONS: CONTRACTOR SHALL COORDINATE AND ADJUST FOUNDATION AND OTHER WALL HEIGHTS AS NEEDED TO ALLOW FLOOR LEVELS TO BE FLUSH BETWEEN NEW AND EXISTING FLOORS. ALSO, THE HVAC SYSTEM INTO EXISTING HVAC SYSTEM, OR PROVIDE NEW AS PER LOCAL CODES.
2. POISON SOIL FOR TERMITE CONTROL AS PER LOCAL CODE REQUIREMENTS
3. PROVIDE 5/8" TYPE 'X' FIRE RATED GYPSUM BOARD AT AREAS AS REQUIRED BY LOCAL FIRE CODE.
4. WINDOW FRAMING: ALL OPENABLE WINDOWS THAT HAVE A WINDOW SILL LOCATED MORE THAN 72" ABOVE THE EXTERIOR FINISHED GRADE OR SURFACE BELOW SHALL BE PLACED SO THAT THE WINDOW SILL IS AT LEAST 24" ABOVE THE INTERIOR FINISHED FLOOR OR SHALL HAVE A WINDOW GUARD PROVIDED AS PER CODE. ALL WINDOWS USED FOR EGRESS SHALL HAVE A MAXIMUM SILL HEIGHT OF 44" ABOVE FINISHED FLOOR.
5. PROVIDE R-13 INSULATION MINIMUM IN 2x4 EXTERIOR WALLS, AND R-19 INSULATION MINIMUM IN 2x6 EXTERIOR WALLS. PROVIDE R-38 INSULATION MINIMUM AT ALL INTERIOR TRUSS ATTIC SPACES AND RAFTER FRAMING.
6. CRAWL SPACE VENTS: PROVIDE CRAWL SPACE VENTS AS PER LOCAL CODE REQUIREMENTS FOR ALL CRAWL SPACE AREAS.

THESE DRAWINGS AND SPECIFICATIONS HAVE BEEN PREPARED WITH THE ASSUMPTION THAT THE CONTRACTOR WILL HAVE A THOROUGH KNOWLEDGE OF THE APPLICABLE BUILDING CODES AND REQUIREMENTS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND FOR VERIFYING ALL MATERIALS, METHODS, CONNECTIONS, AND OTHER INFORMATION NECESSARY FOR THE PROPER CONSTRUCTION AND COMPLETION OF THE PROJECT. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING AND VERIFYING THE MATERIALS, METHODS, CONNECTIONS, AND OTHER INFORMATION NECESSARY FOR THE PROPER CONSTRUCTION AND COMPLETION OF THE PROJECT. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING AND VERIFYING THE MATERIALS, METHODS, CONNECTIONS, AND OTHER INFORMATION NECESSARY FOR THE PROPER CONSTRUCTION AND COMPLETION OF THE PROJECT. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING AND VERIFYING THE MATERIALS, METHODS, CONNECTIONS, AND OTHER INFORMATION NECESSARY FOR THE PROPER CONSTRUCTION AND COMPLETION OF THE PROJECT.

CONTRACTOR & OWNER SHALL VERIFY ALL DIMENSIONS, AREAS, AND CONDITIONS, READ ALL NOTES, AND BECOME THOROUGHLY FAMILIAR WITH THE DRAWINGS, AND ALL ASSOCIATED COSTS, PRIOR TO CONSTRUCTION.

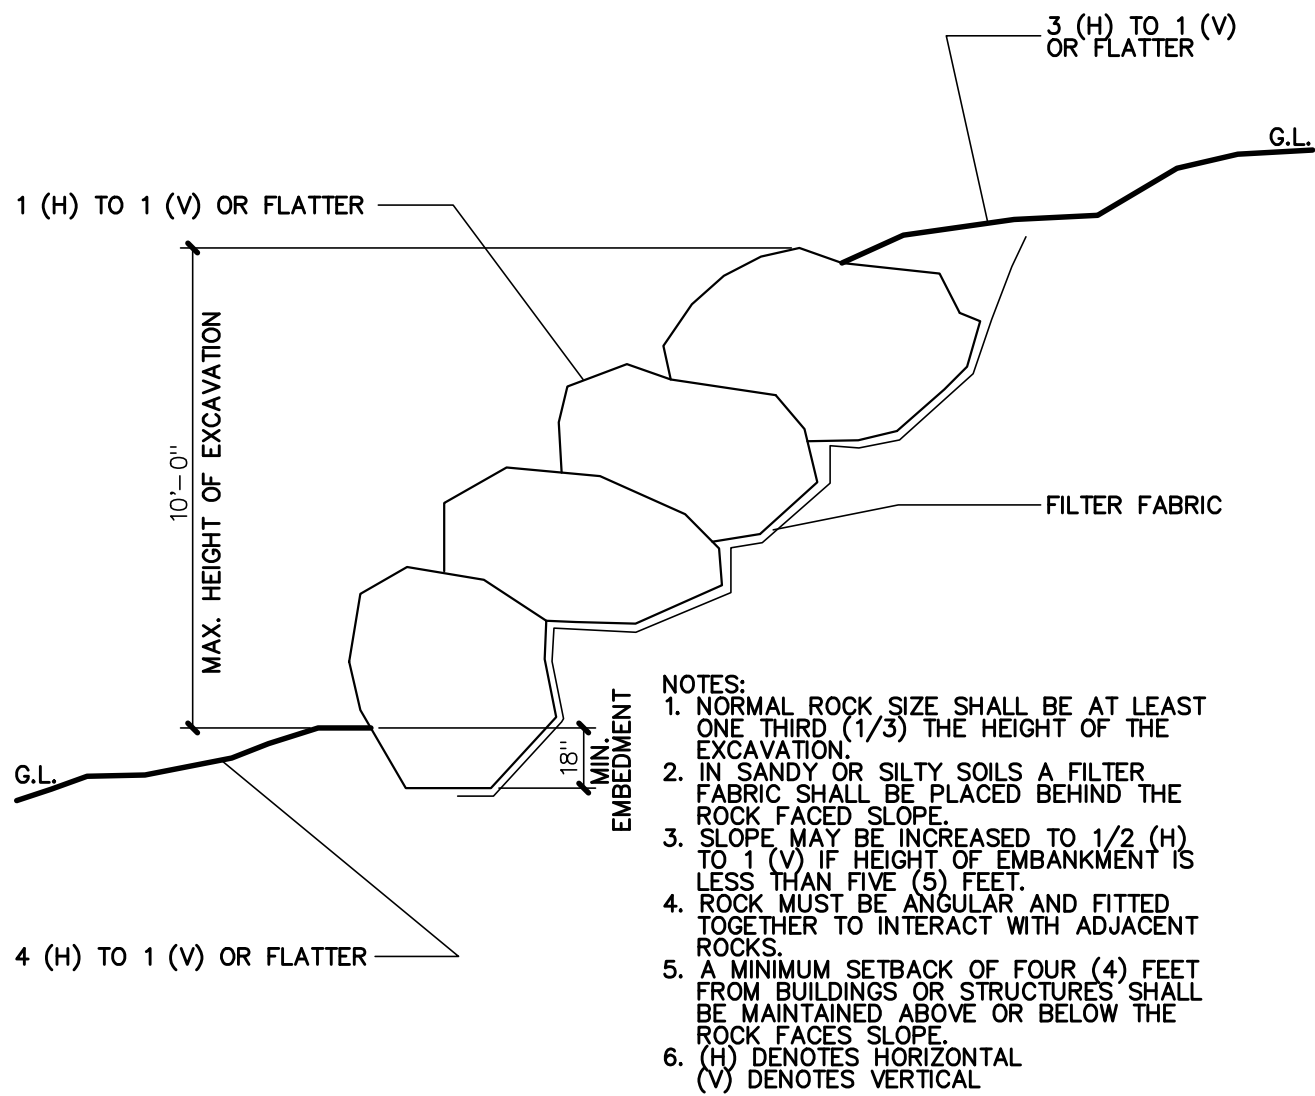

ROCK RETAINING WALL UP TO 10'-0" HEIGHT
NO SCALE


1
S4.1

CONCRETE RETAINING WALL SCHEDULE ^{1,4}														
MARK	'W'	'H' ²	'A'	'B'	'V' BARS ³		'D' BARS		'T' BARS		'TL' BARS		'BL' BARS	
					SIZE	SPACE	SIZE	SPACE	SIZE	SPACE	SIZE	NO.	SIZE	NO.
CRW2.0	8" MIN.	TO 2'-0"	8"	8"	#4	18"	N/A	N/A	#4	18"	#4	3	#4	2
CRW4.0	8" MIN.	TO 4'-0"	1'-0"	1'-8"	#4	12"	N/A	N/A	#4	12"	#4	4	#4	2
CRW6.5	8" MIN.	TO 6'-6"	1'-0"	3'-0"	#5	12"	N/A	N/A	#4	12"	#4	5	#4	2
CRW8.0	8" MIN.	TO 8'-0"	1'-3"	3'-6"	#5	10"	#4	24"	#4	10"	#4	6	#4	3
CRW9.5	8" MIN.	TO 9'-6"	1'-6"	4'-6"	#6	10"	#4	24"	#4	8"	#4	7	#4	3
CONC. RETAINING WALL NOTES:														
1. LOCATE A HORIZONTAL BAR WITHIN 4" OF TOP AND BOTTOM OF WALL.														
2. WALL HEIGHT MAY BE INCREASED AS NEEDED WHERE FOOTINGS NEED TO BE DROPPED FOR FROST PROTECTION OR SOIL CONDITIONS AS LONG AS THE UNBALANCED FILL (H'-HEIGHT BETWEEN LOW AND HIGH GRADE) DOES NOT EXCEED 12'. THE SHOWING OF AN ADDITIONAL HORIZONTAL REBAR AS NEEDED TO NOT EXCEED THAT SHOWN.														
3. A BAR SHALL NOT BE SPECIFIED BELOW MID-HEIGHT OF WALL.														
4. THIS SCHEDULE IS FOR RETAINING LANDSCAPE AREAS ONLY. DO NOT USE WHERE VEHICLE LOADING WILL BE WITHIN FOUR FEET OF TOP OF WALL.														

CONC. RETAINING WALL NOTES:


1. LOCATE A HORIZONTAL BAR WITHIN 4" OF TOP AND BOTTOM OF WALL.
2. WALL HEIGHT MAY BE INCREASED AS NEEDED WHERE FOOTINGS NEED TO BE DROPPED FOR FROST PROTECTION OR SOIL CONDITIONS AS LONG AS THE UNBALANCED FILL HEIGHT (H'-HEIGHT BETWEEN LOW AND HIGH GRADE) DOES NOT EXCEED THAT SHOWN. ADD ADDITIONAL HORIZONTAL REBAR AS NEEDED TO NOT EXCEED THAT SHOWN.
3. 'V' BARS SHALL NOT BE SPLICED BELOW MID-HEIGHT OF WALL.
4. THIS SCHEDULE IS FOR RETAINING LANDSCAPE AREAS ONLY. DO NOT USE WHERE VEHICLE LOADING WILL BE WITHIN FOUR FEET OF TOP OF WALL.

CONCRETE RETAINING WALL
NO SCALE

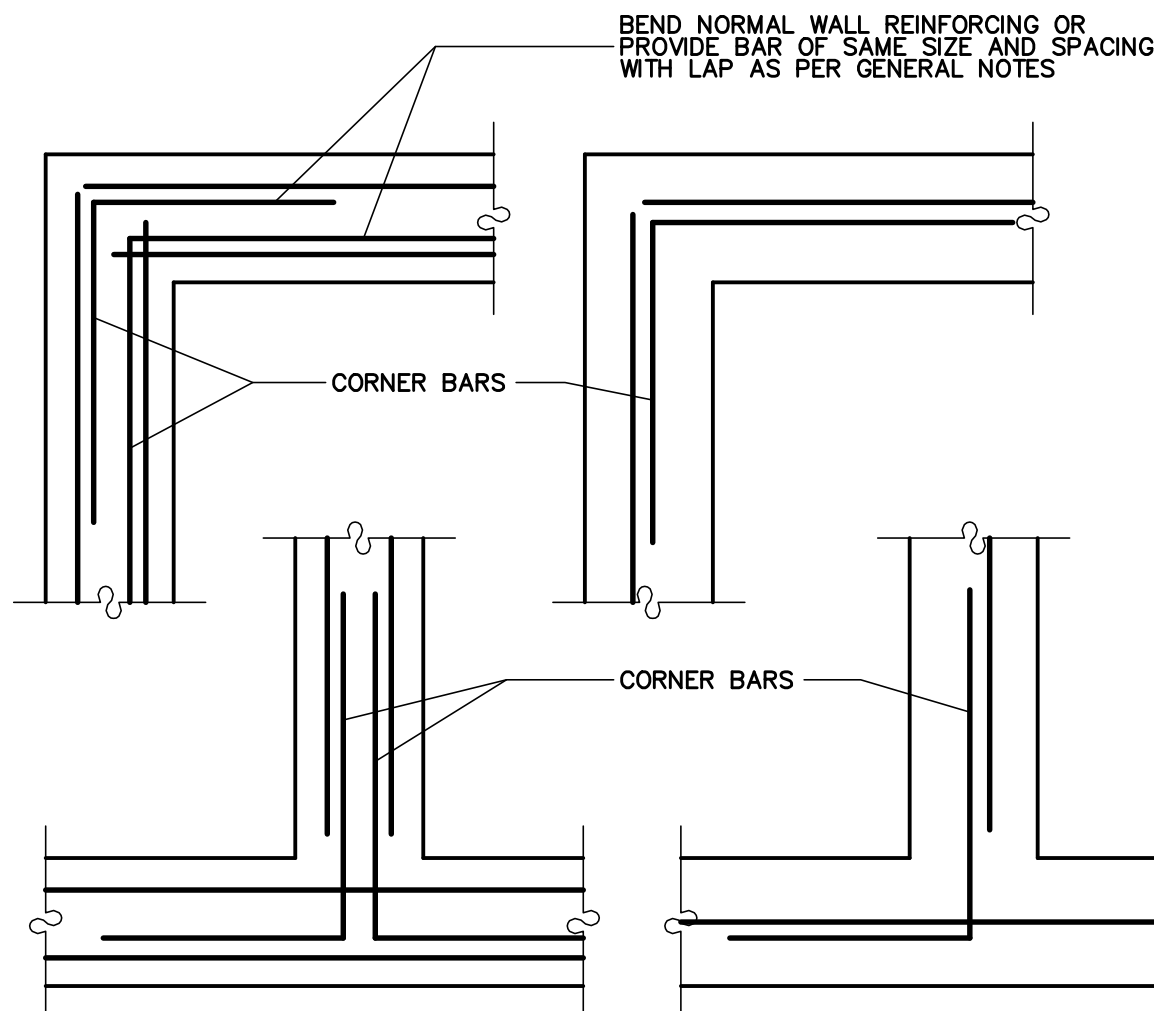


CONC. FOUNDATION WALL/FOOTING
CORNERS AND INTERSECTION
NO SCALE

4
S4.1

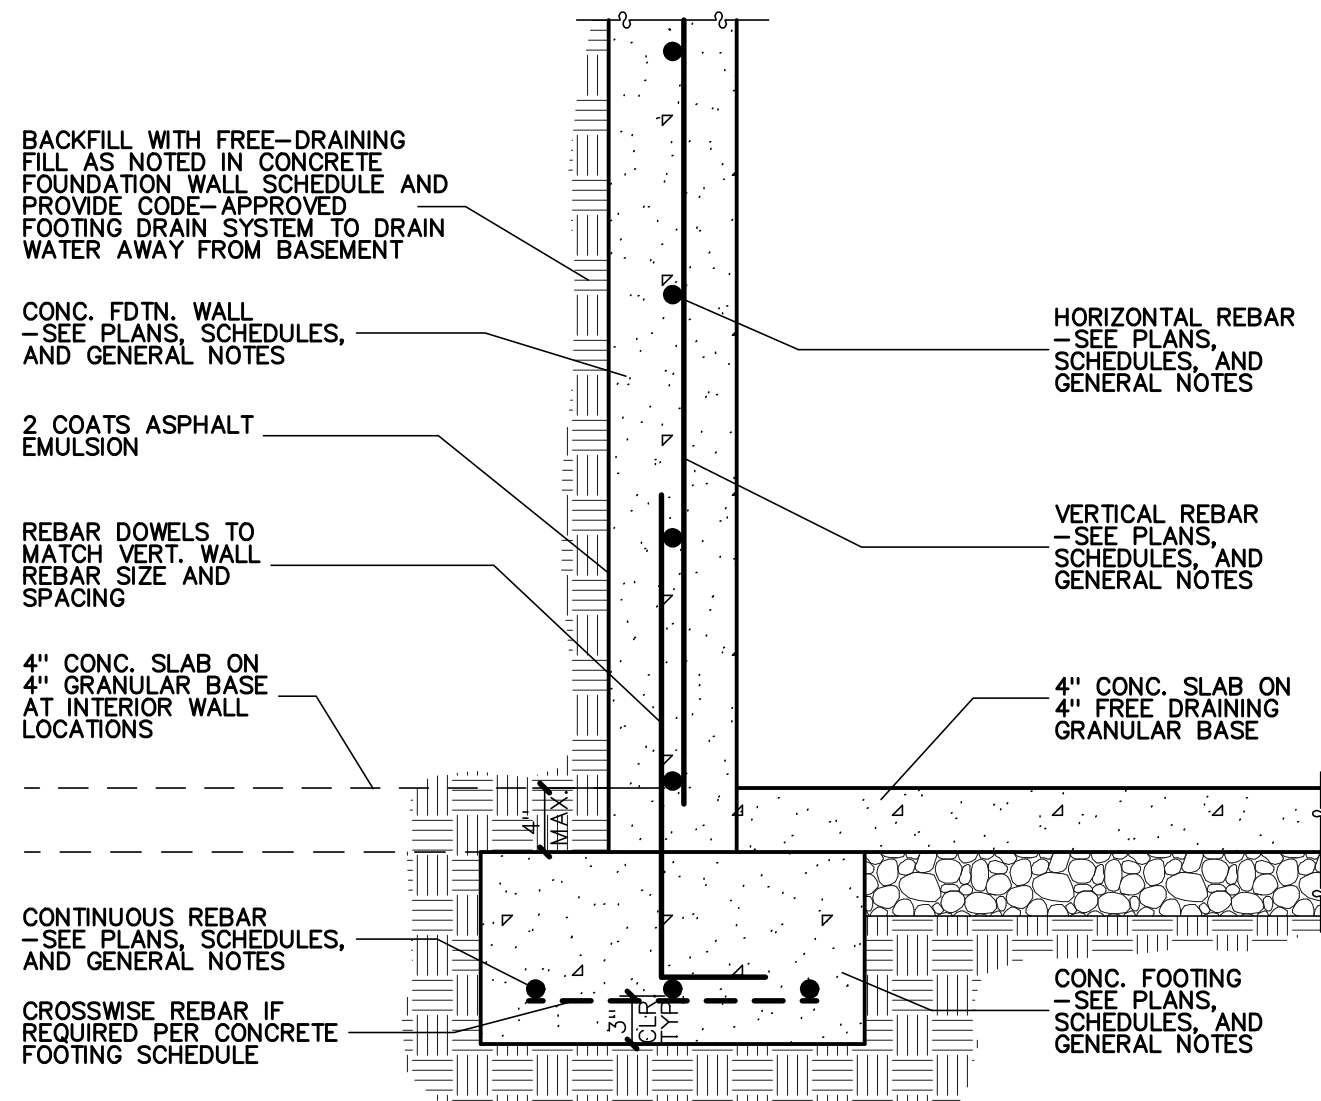


FOUNDATION WALL ON FOOTING
NO SCALE

5
S4.1

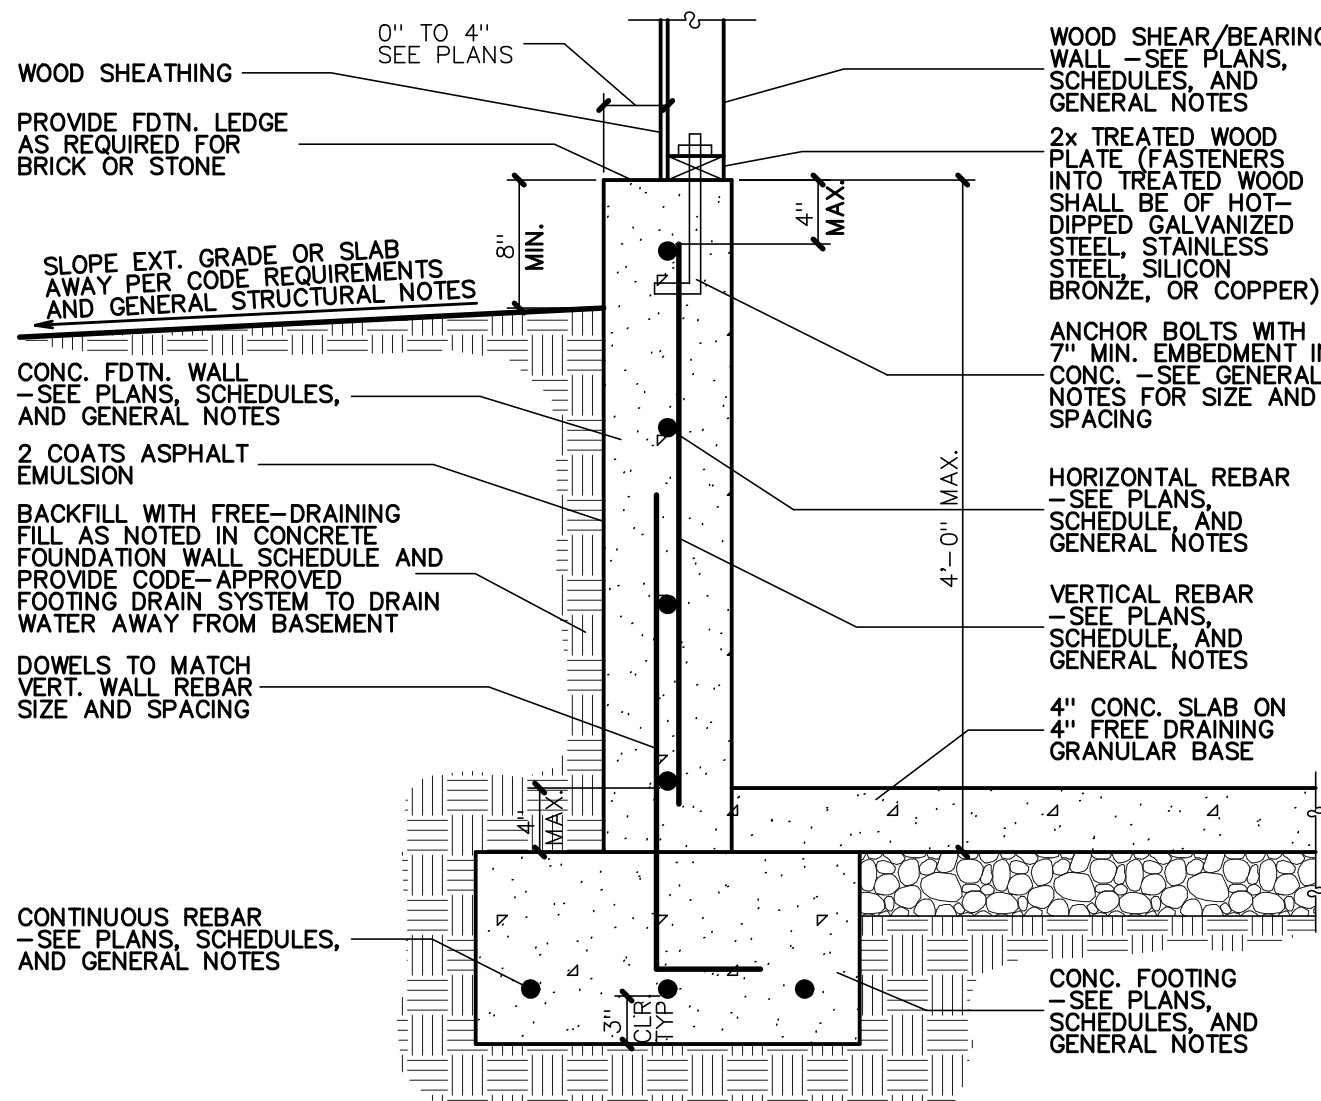


4'-0" FOUNDATION WALL ON FOOTING
NO SCALE

6
S4.1

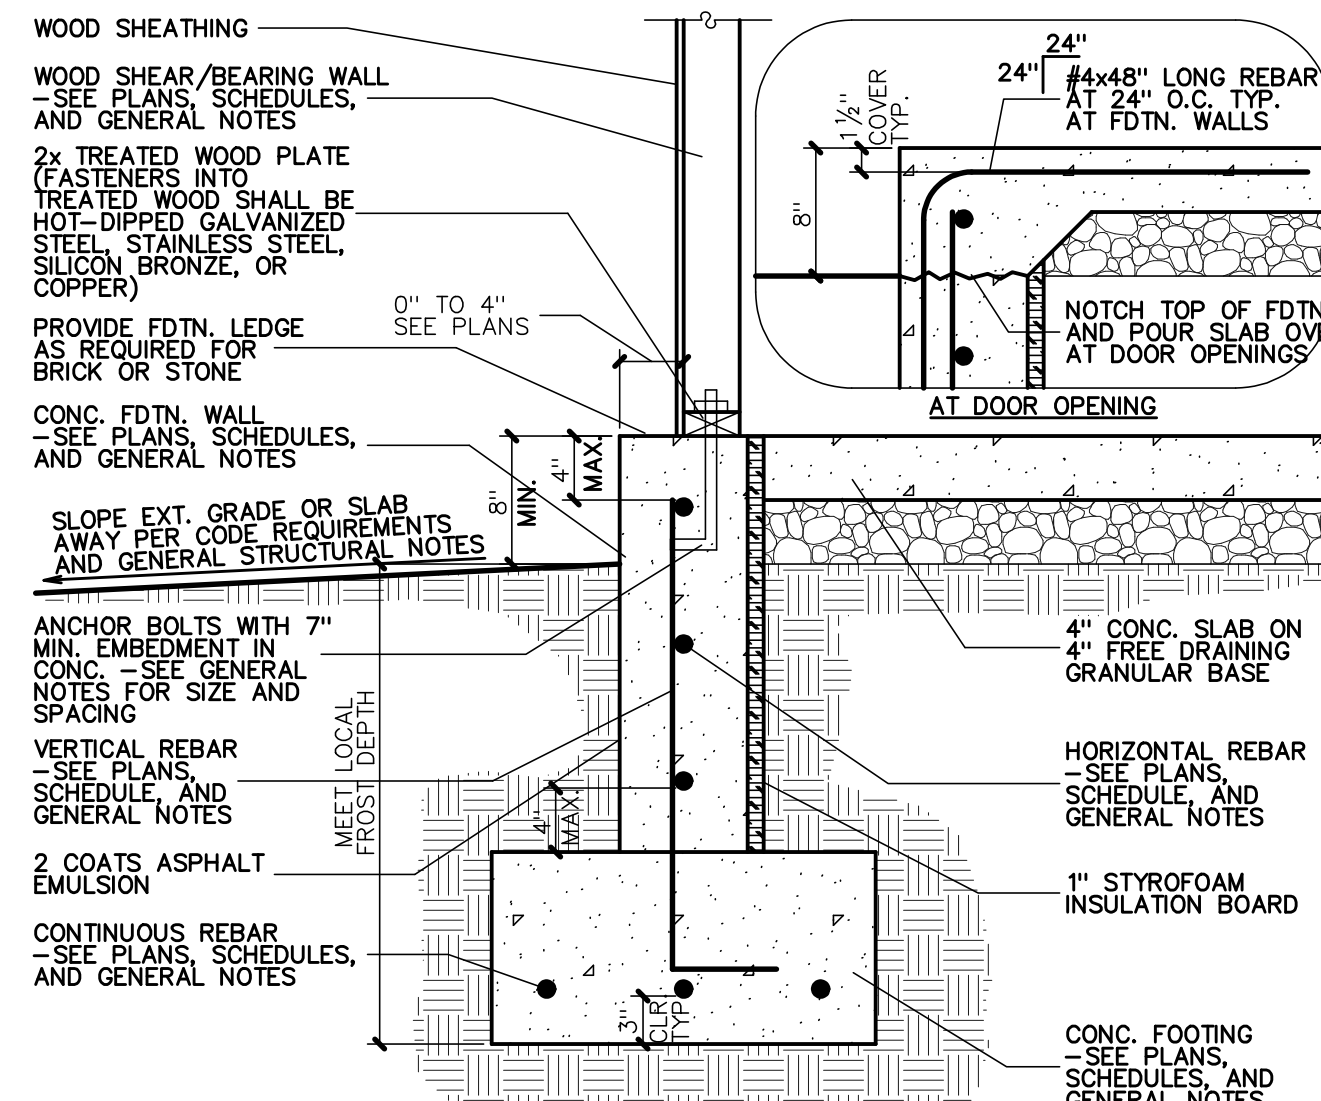


FOUNDATION WALL ON FOOTING
NO SCALE

7
S4.1

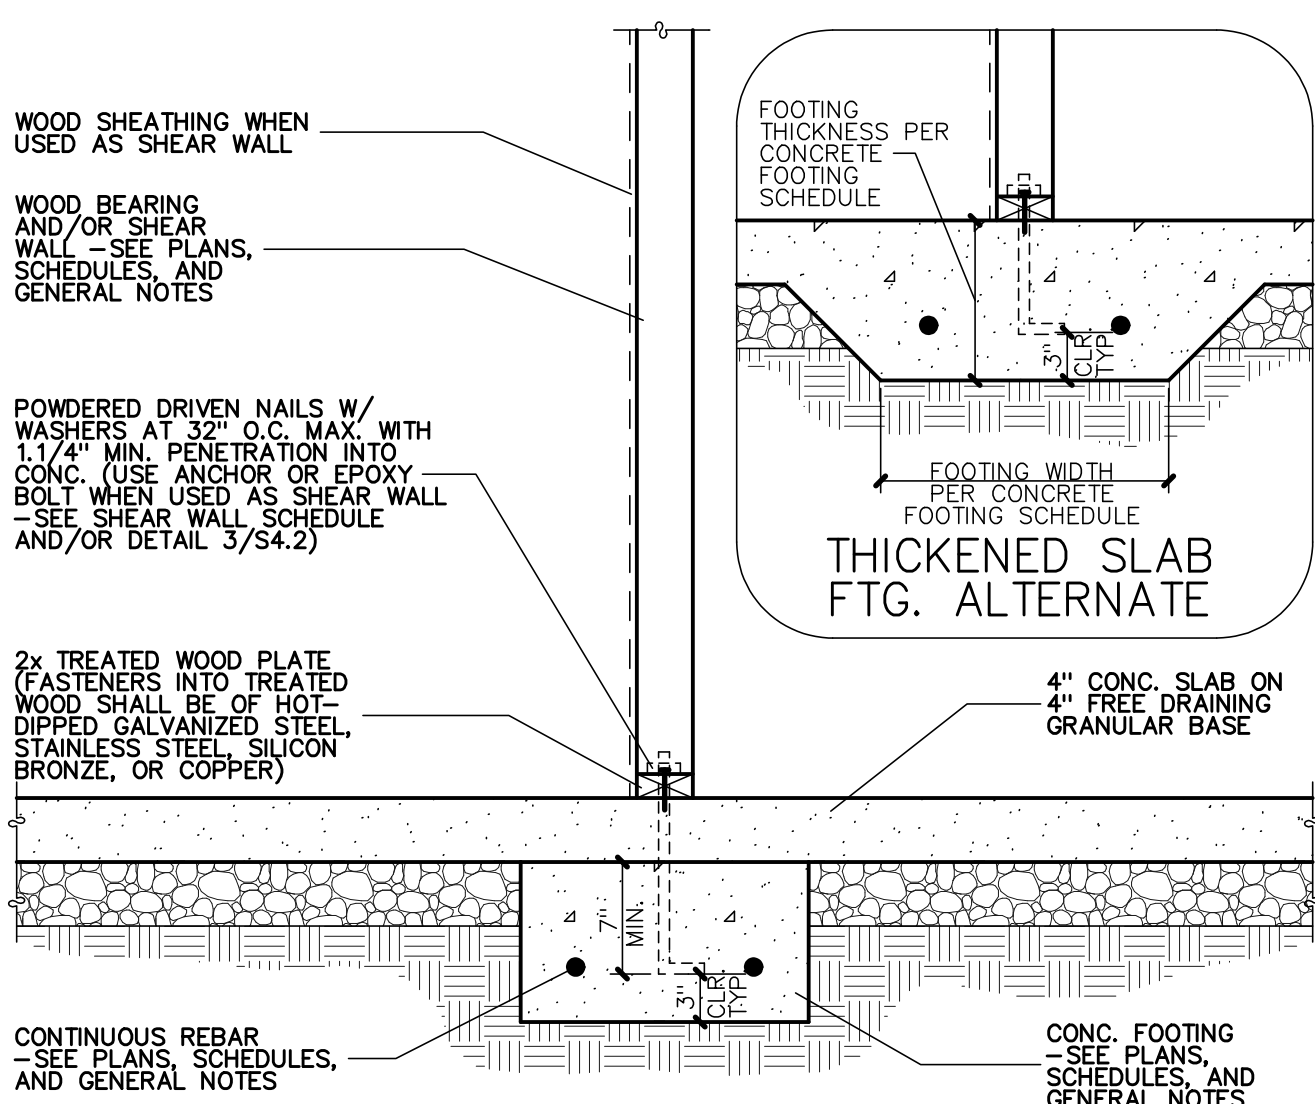


INTERIOR BEARING AND/OR
SHEAR WALL ON CONC. FOOTING
NO SCALE

8
S4.1

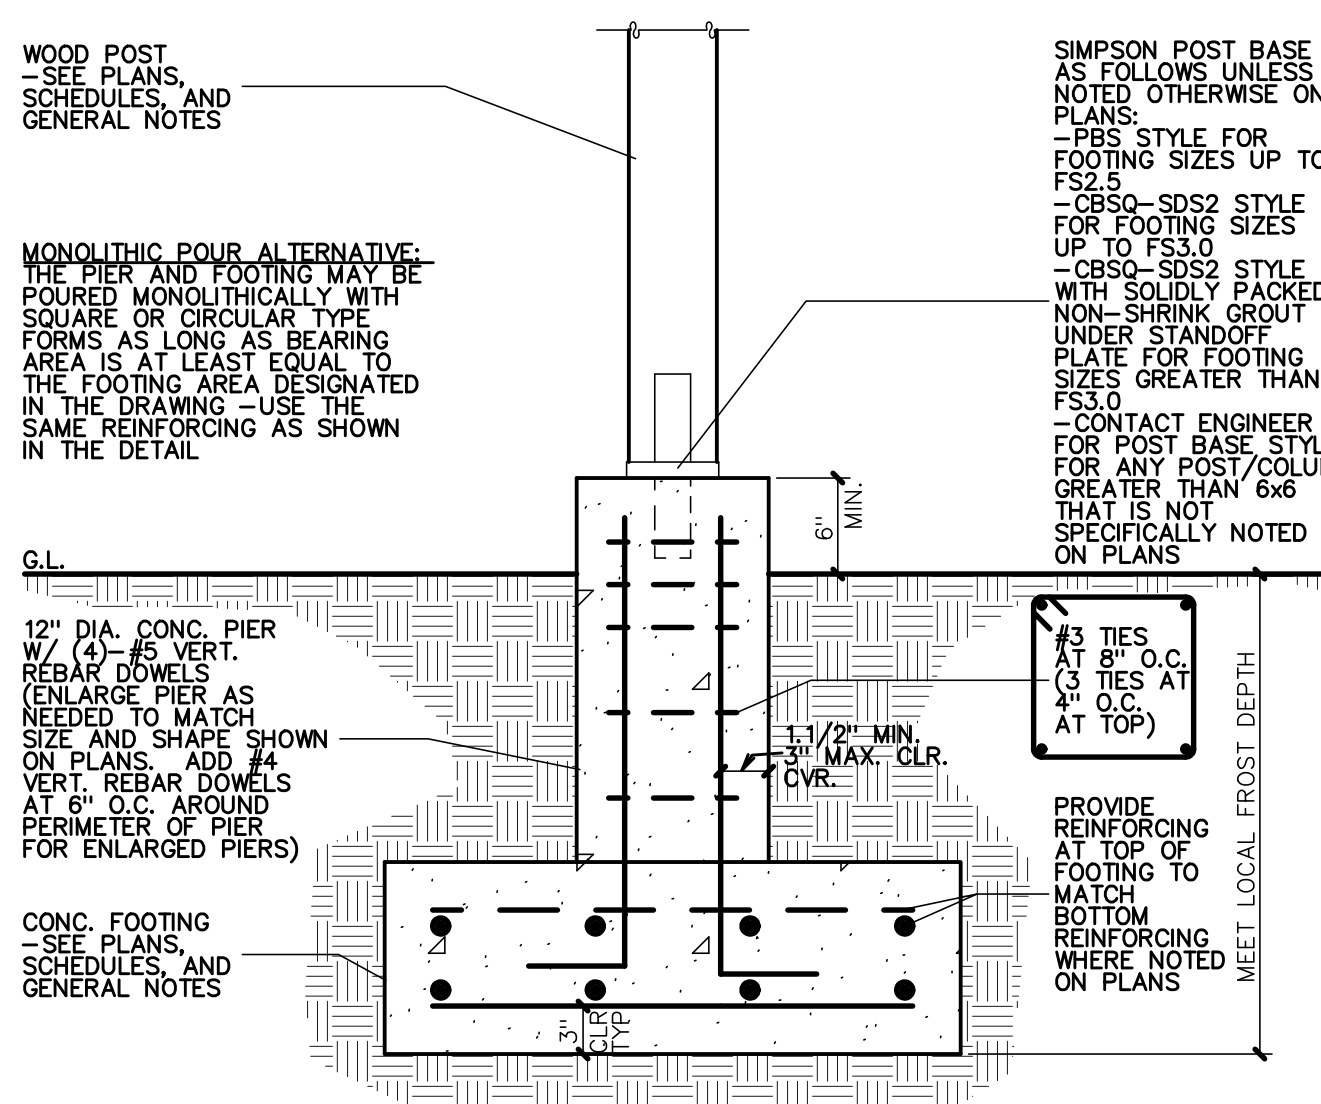


EXTERIOR WOOD POST ON CONC. PIER/FOOTING
NO SCALE

9
S4.1

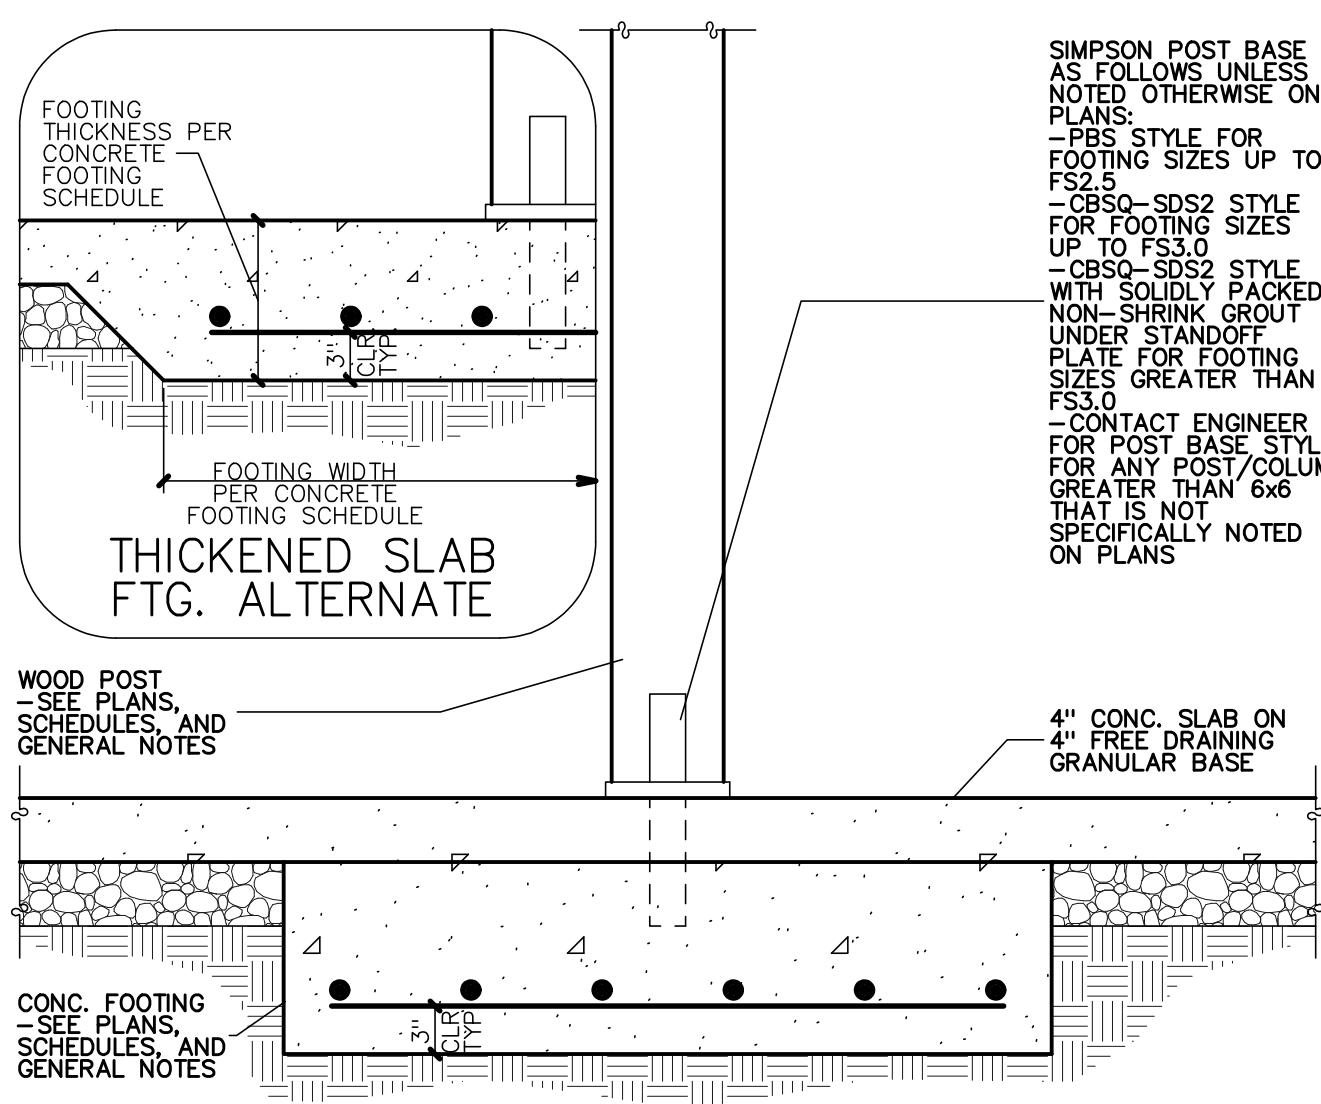


INTERIOR WOOD POST ON CONC. FOOTING
NO SCALE

10
S4.1

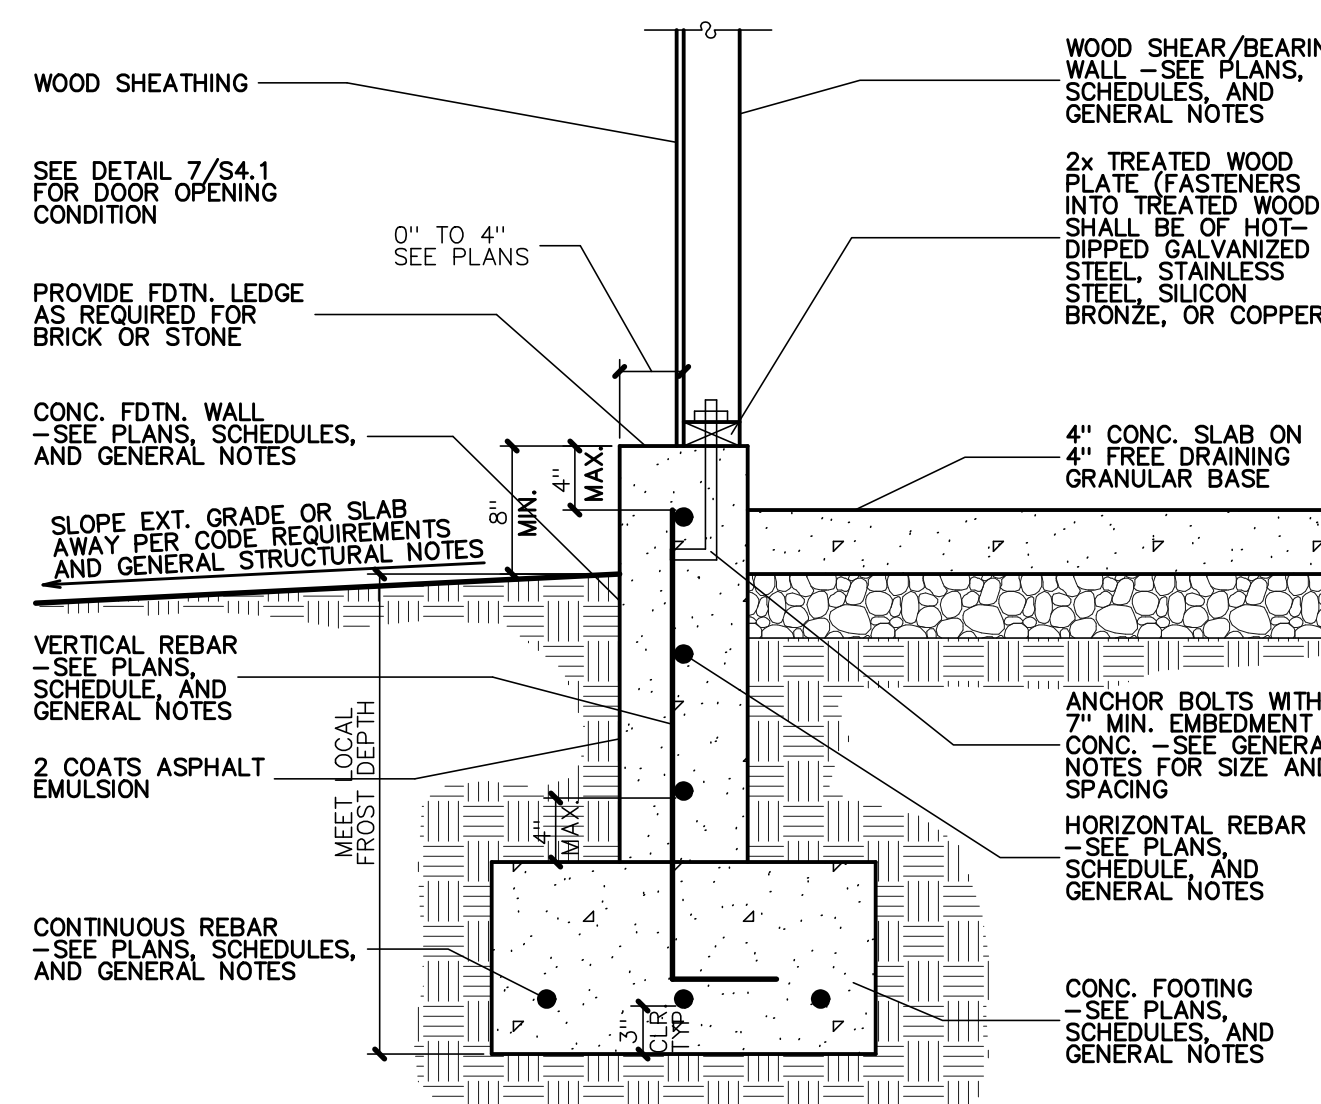


FOUNDATION WALL ON FOOTING
NO SCALE

11
S4.1

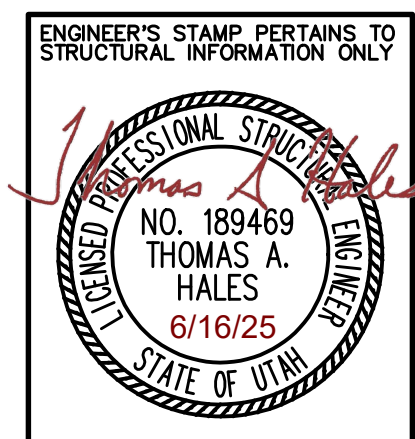


CONTRACTOR & OWNER SHALL VERIFY ALL DIMENSIONS, AREAS, AND CONDITIONS, READ ALL NOTES AND BECOME THOROUGHLY FAMILIAR WITH THE DRAWINGS, AND ALL ASSOCIATED COSTS, PRIOR TO CONSTRUCTION.


NOTE: ALL DETAILS SHOWN ON THIS SHEET ARE NOT NECESSARILY USED ON THIS JOB -- SEE PLAN SHEETS FOR REFERENCES TO DETAILS

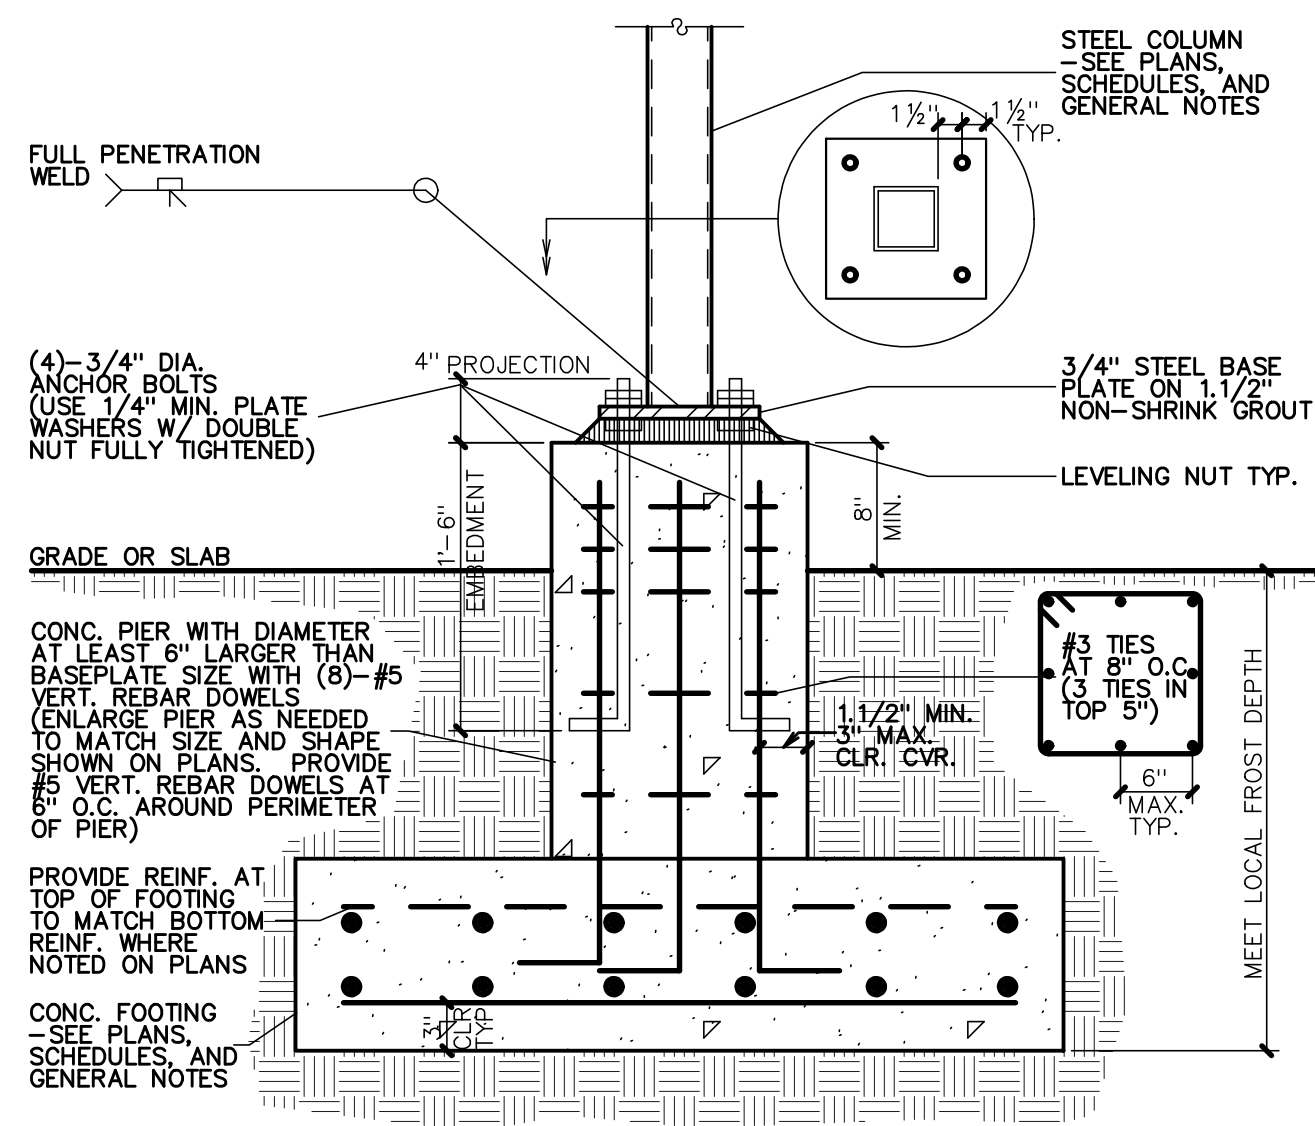


EXTERIOR STEEL POST ON CONC. FOOTING
NO SCALE

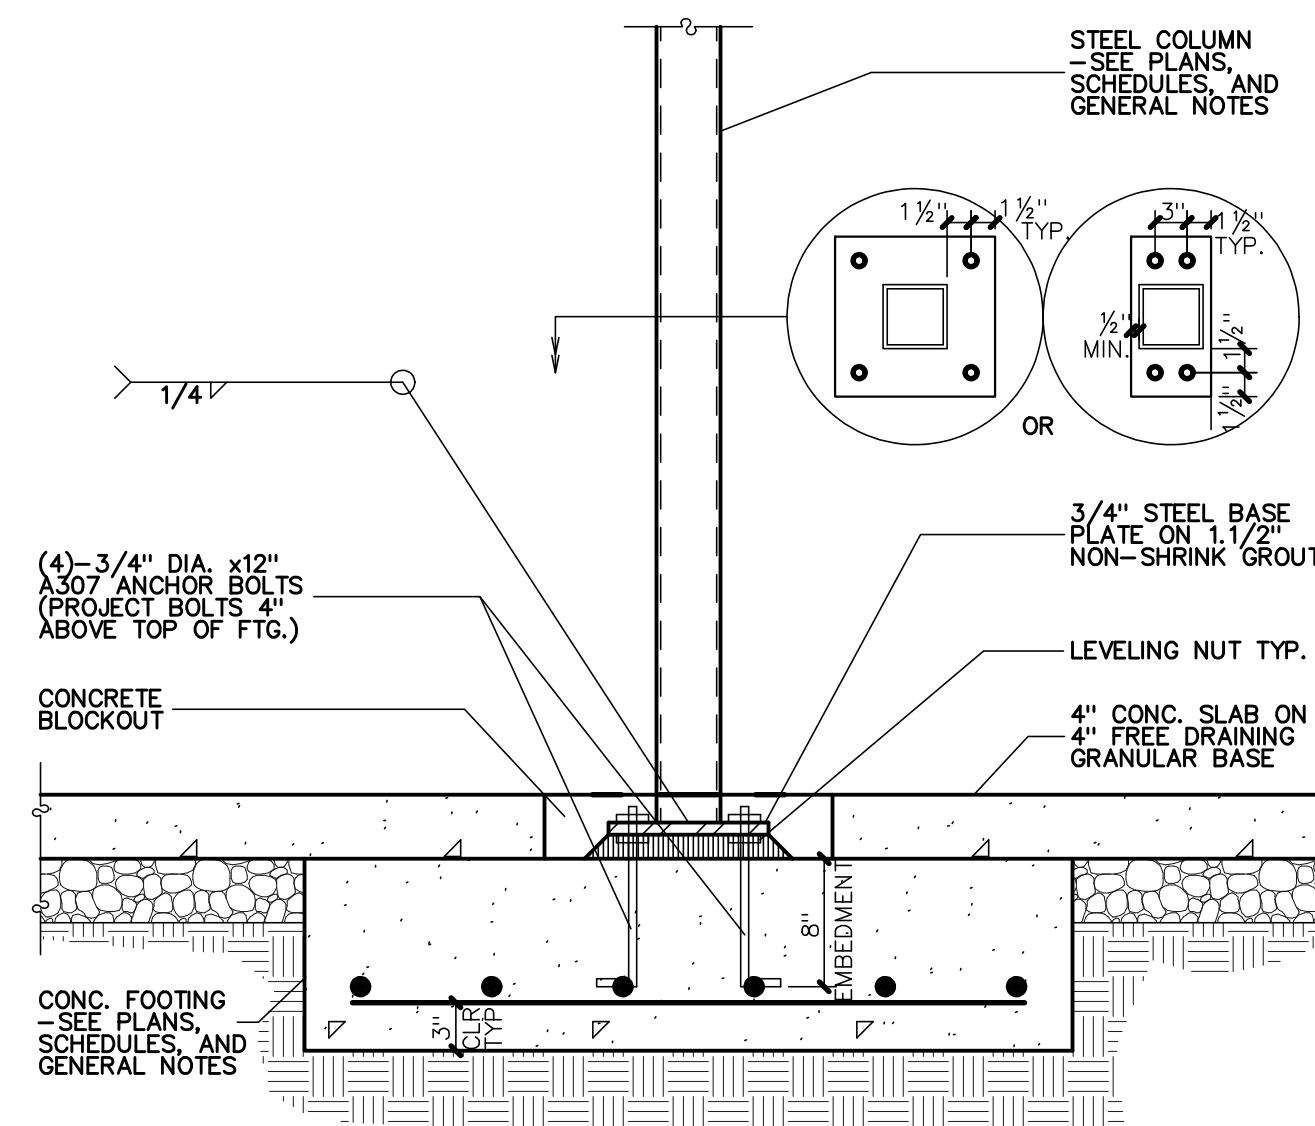


INTERIOR STEEL POST ON CONC. FOOTING
NO SCALE

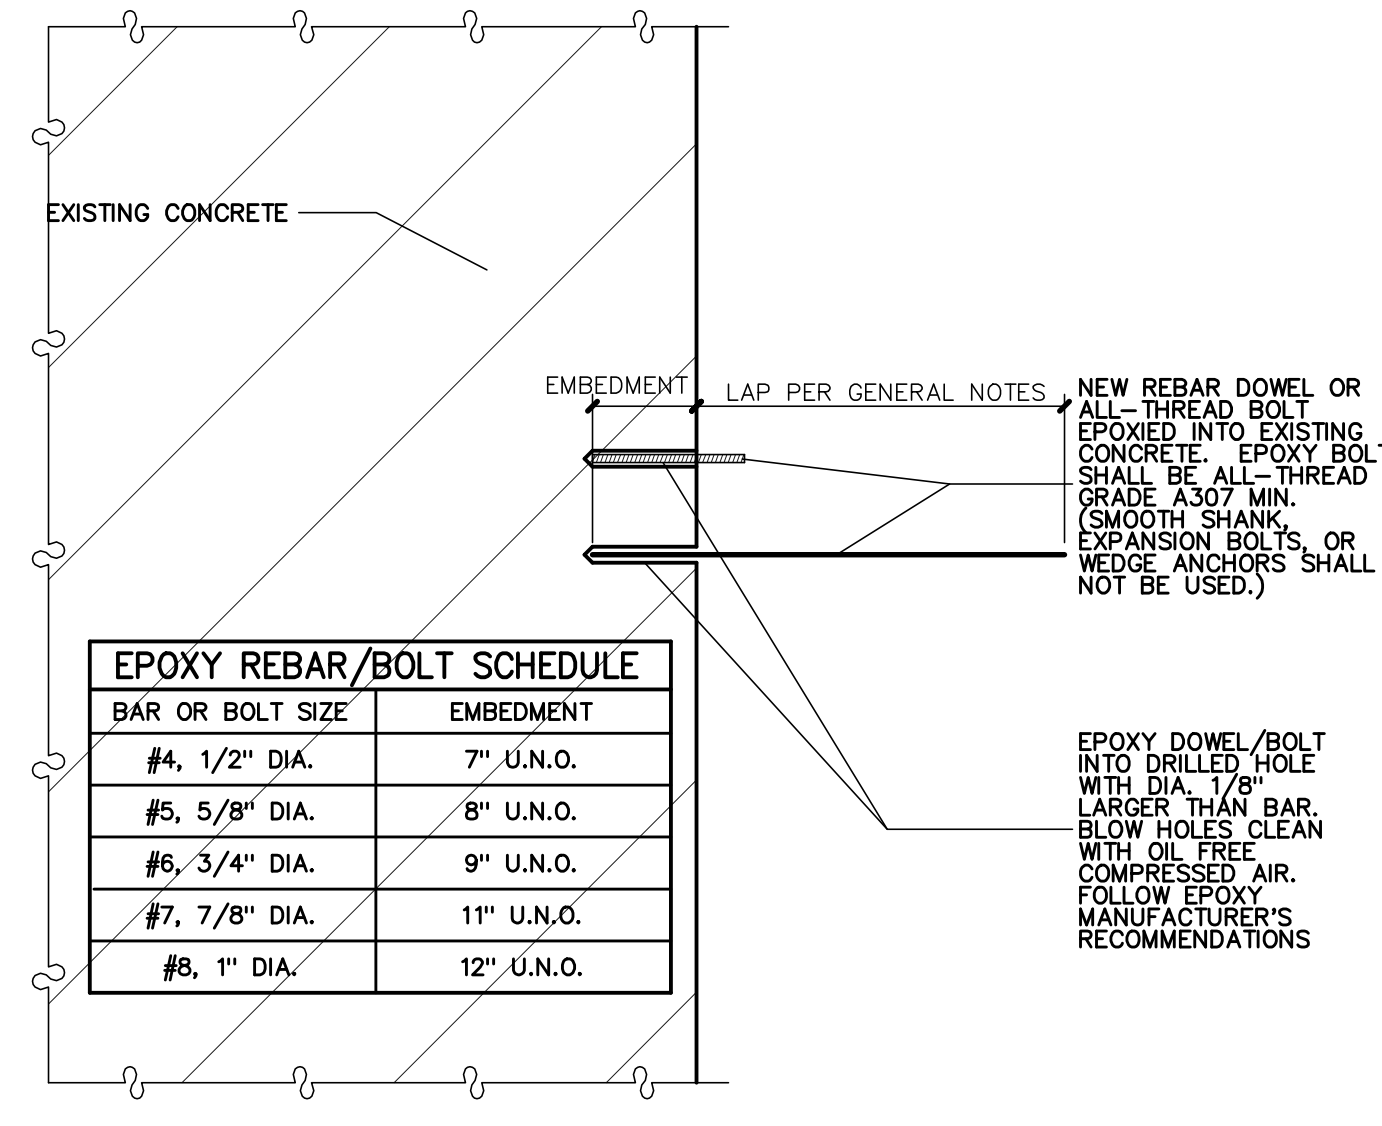


EPOXY REBAR DOWEL SCHEDULE
NO SCALE

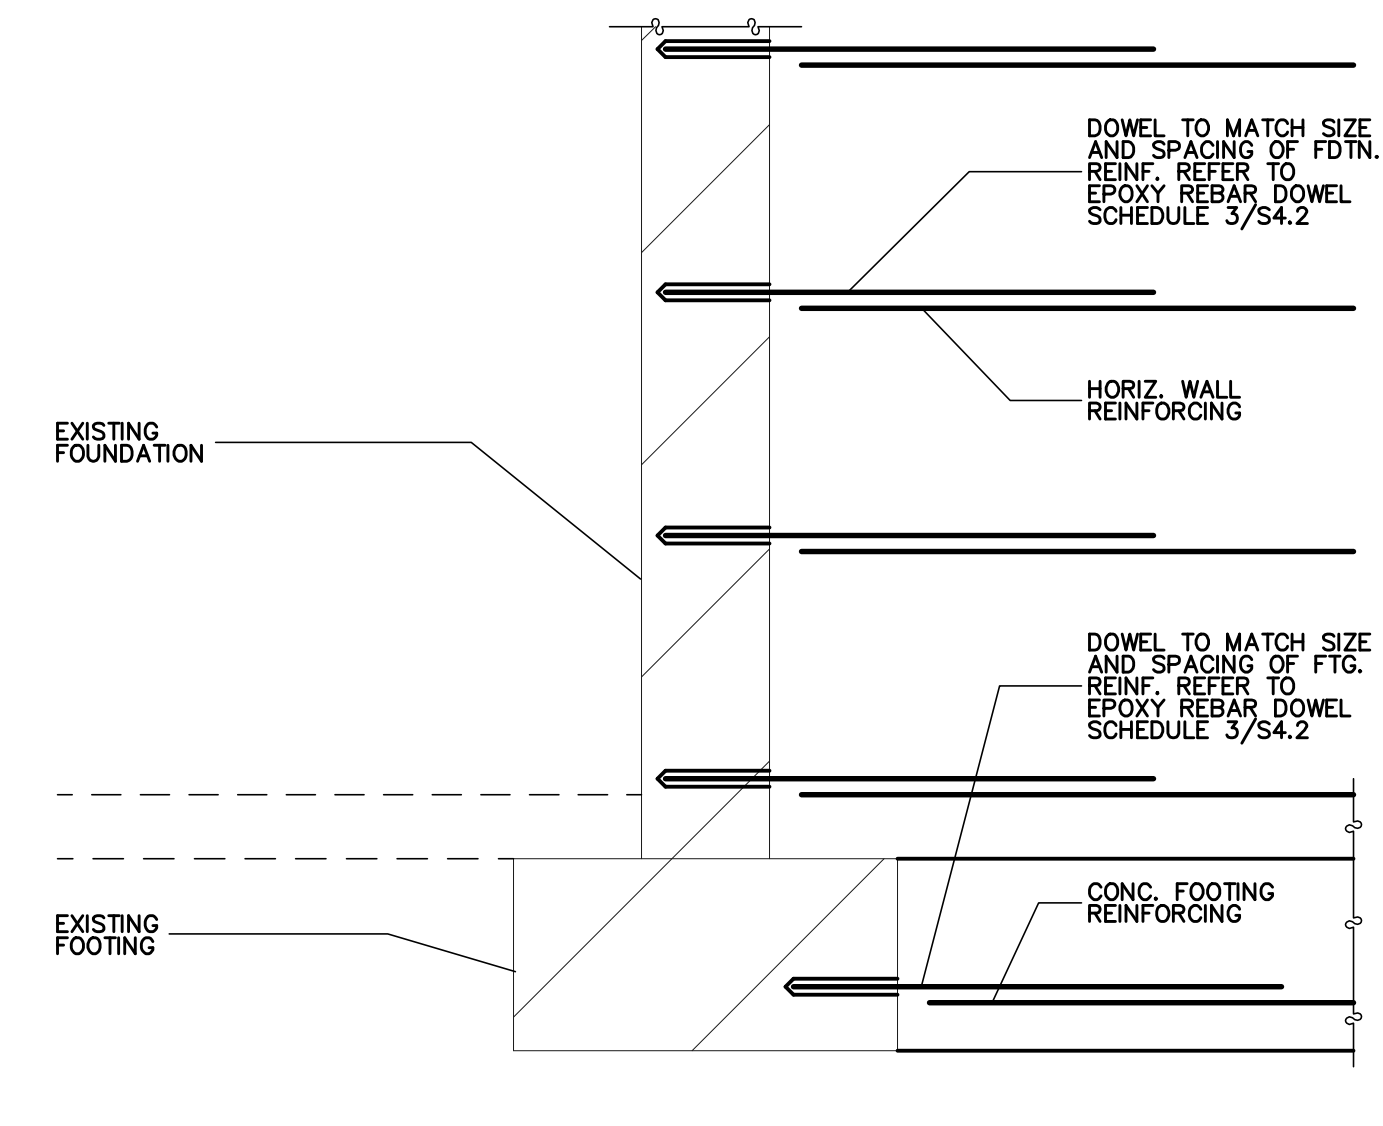


CONC. FDN. WALL/FOOTING CONNECTION
TO EXIST. CONC. FDN. WALL/FOOTING
NO SCALE

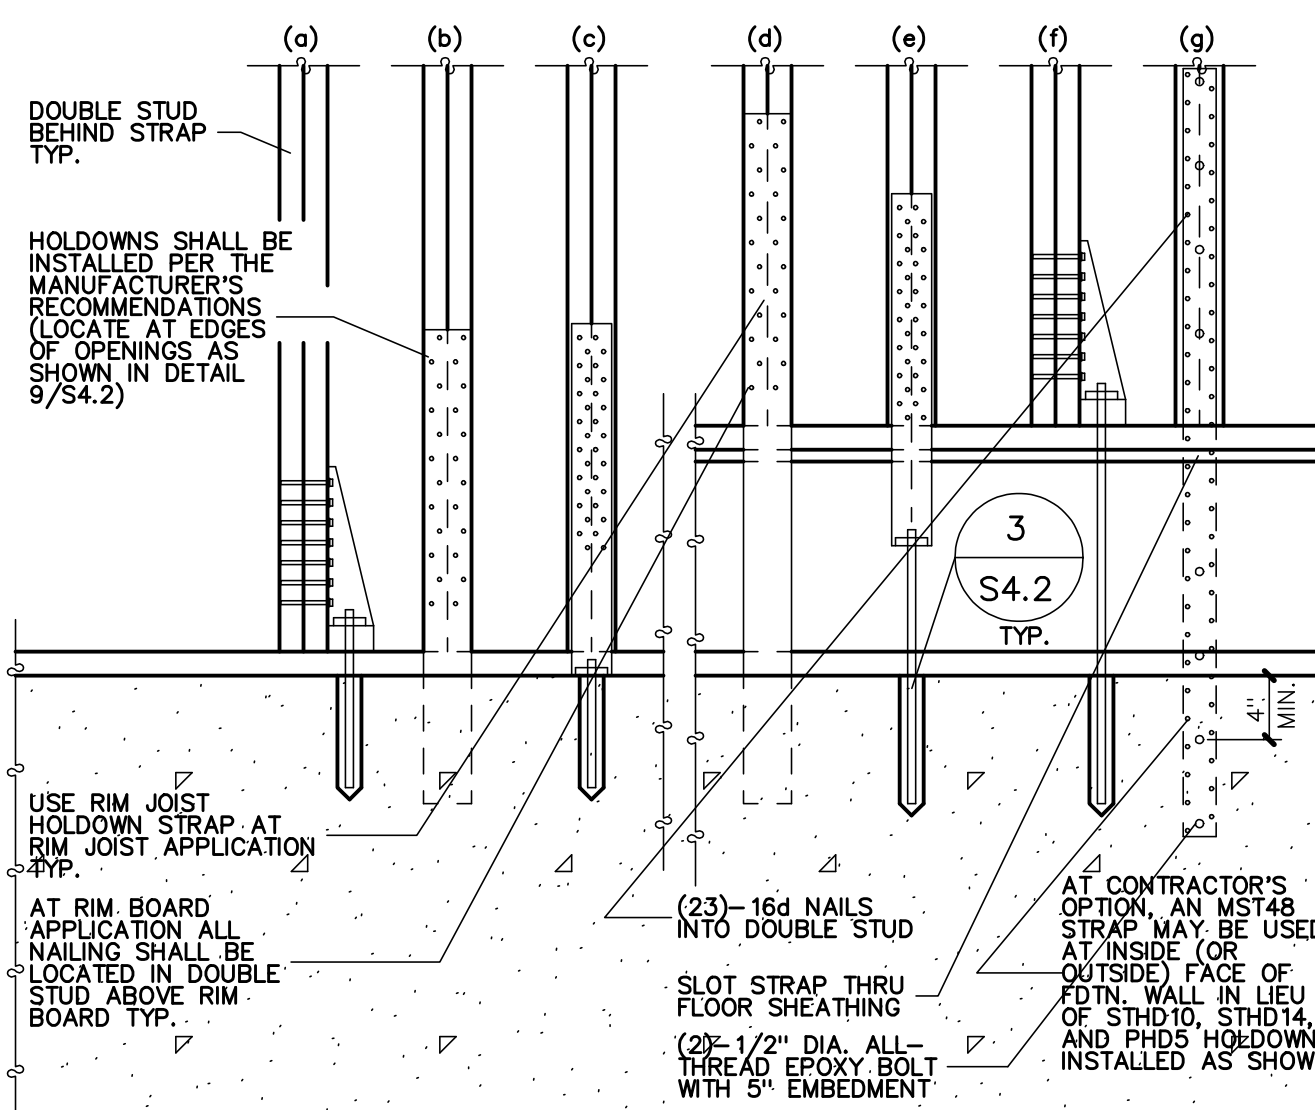


VARIOUS HOLDOWN
INSTALLATION CONFIGURATIONS
NO SCALE

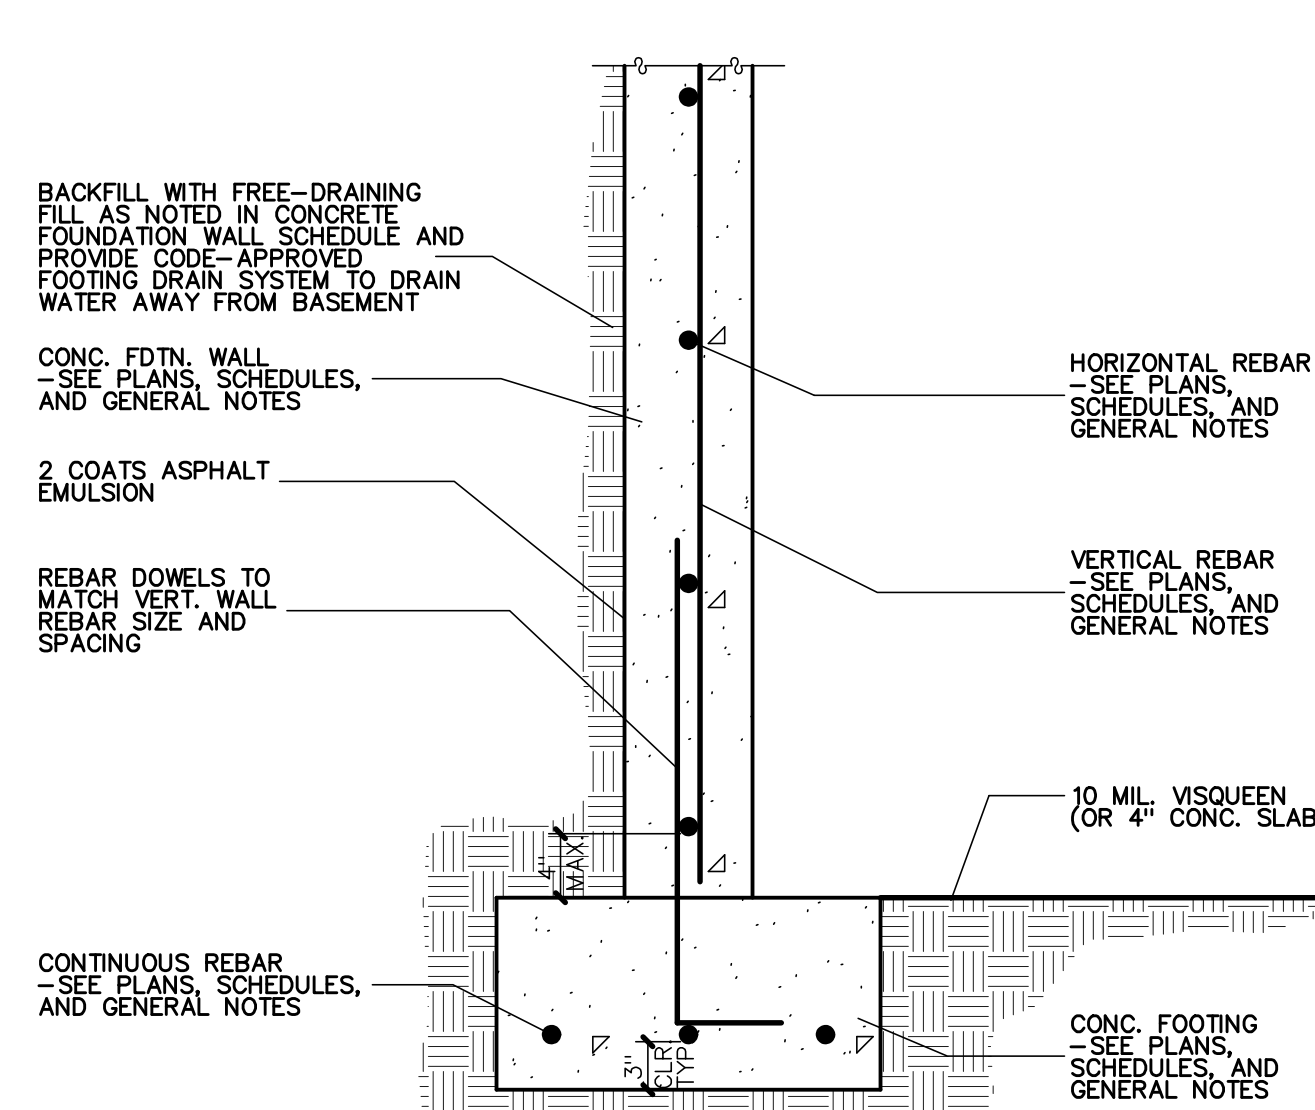


CRAWL SPACE CONC. FDN.
WALL ON CONC. FOOTING
NO SCALE

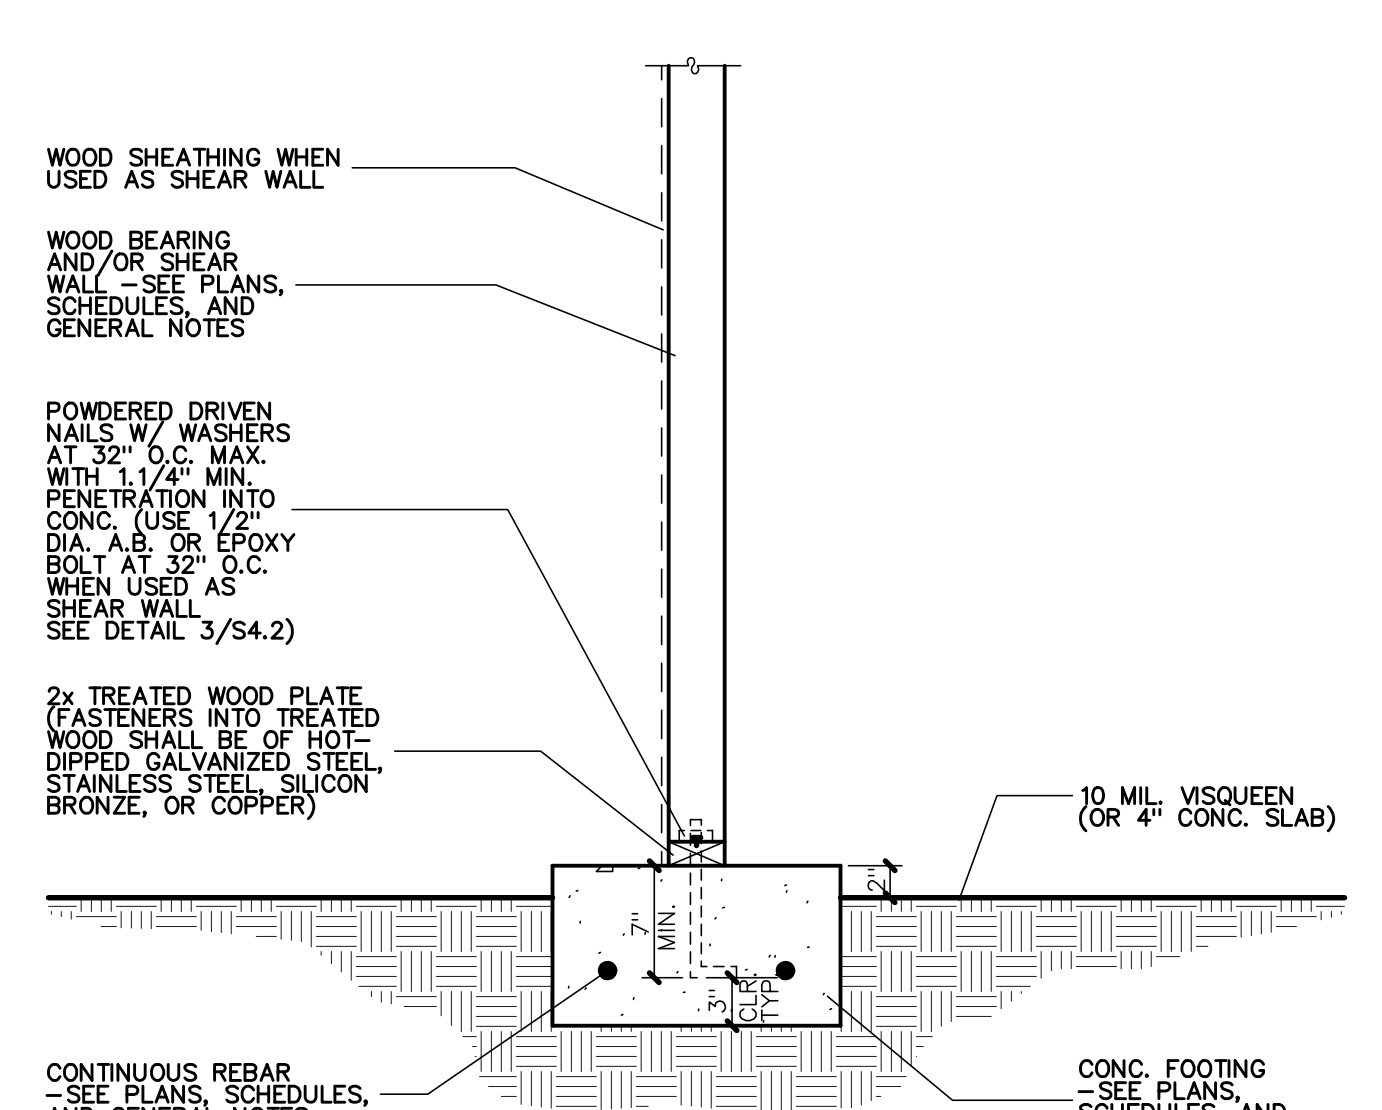


CRAWL SPACE INTERIOR BEARING AND/OR
SHEAR WALL ON CONC. FOOTING
NO SCALE

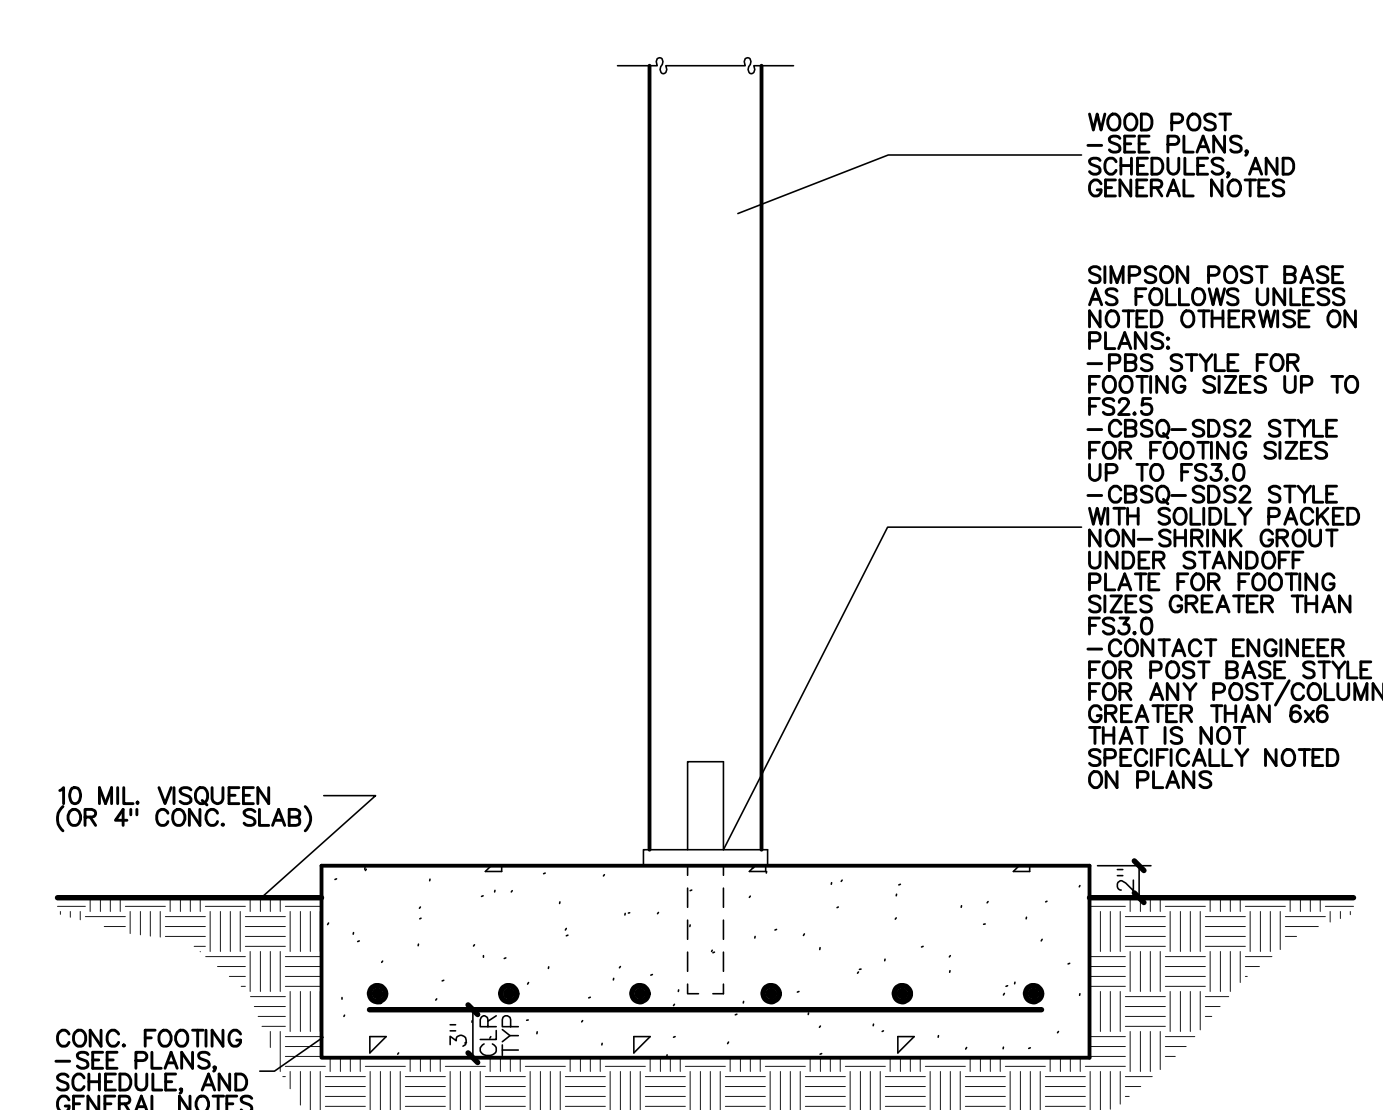


CRAWL SPACE INTERIOR WOOD
POST ON CONC. FOOTING
NO SCALE

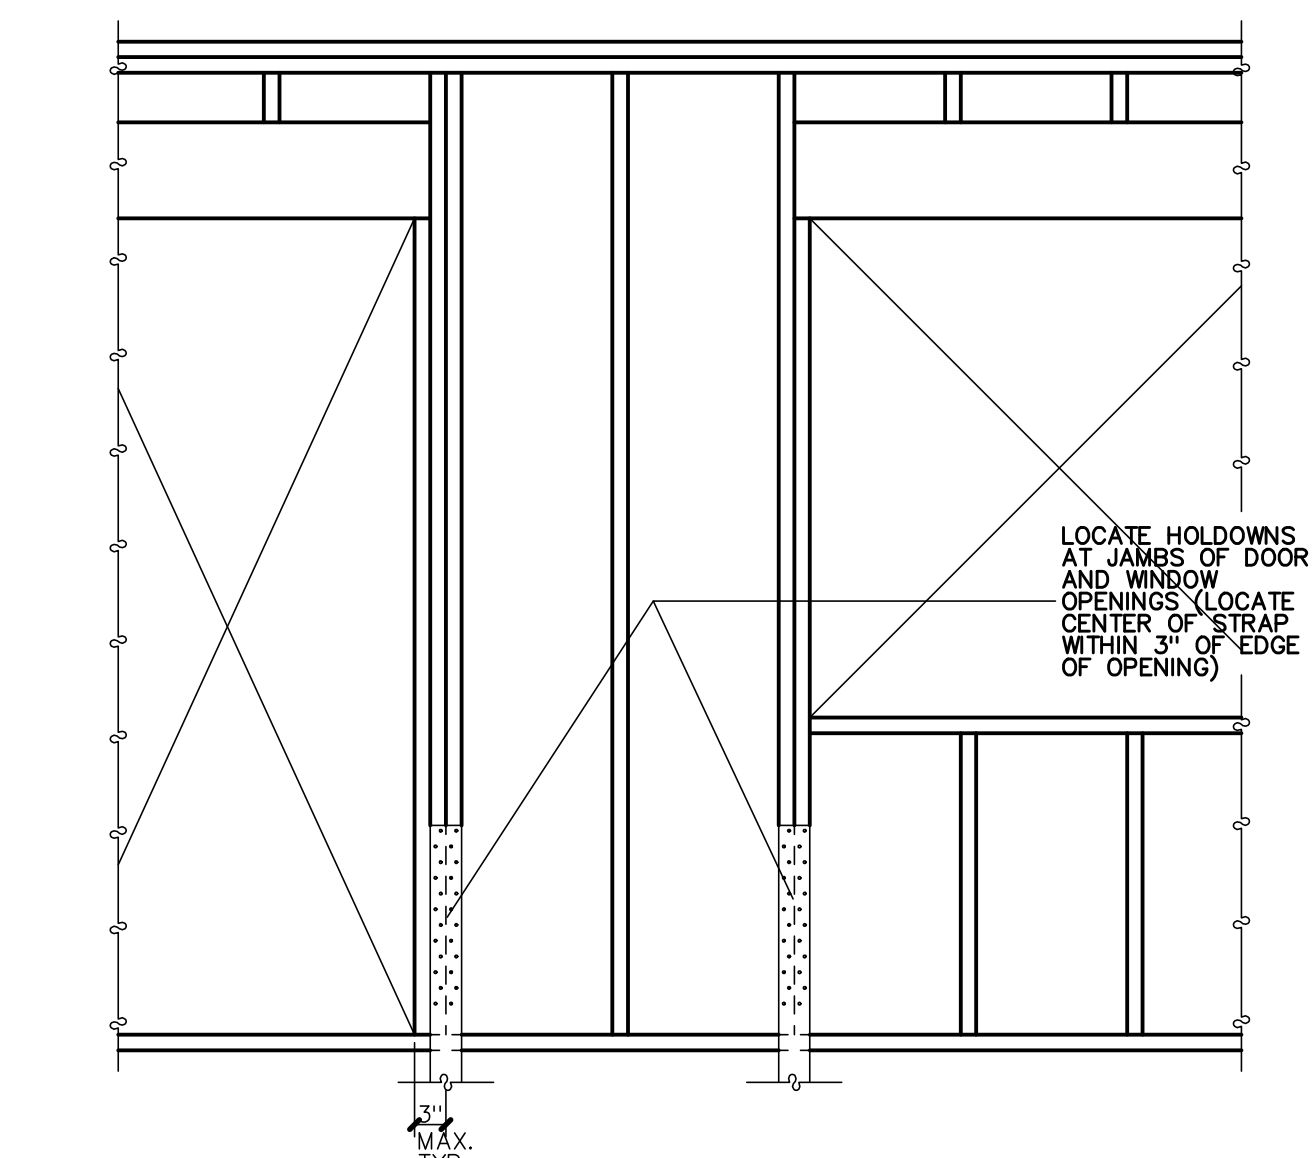


HOLDOWN LOCATION
NO SCALE

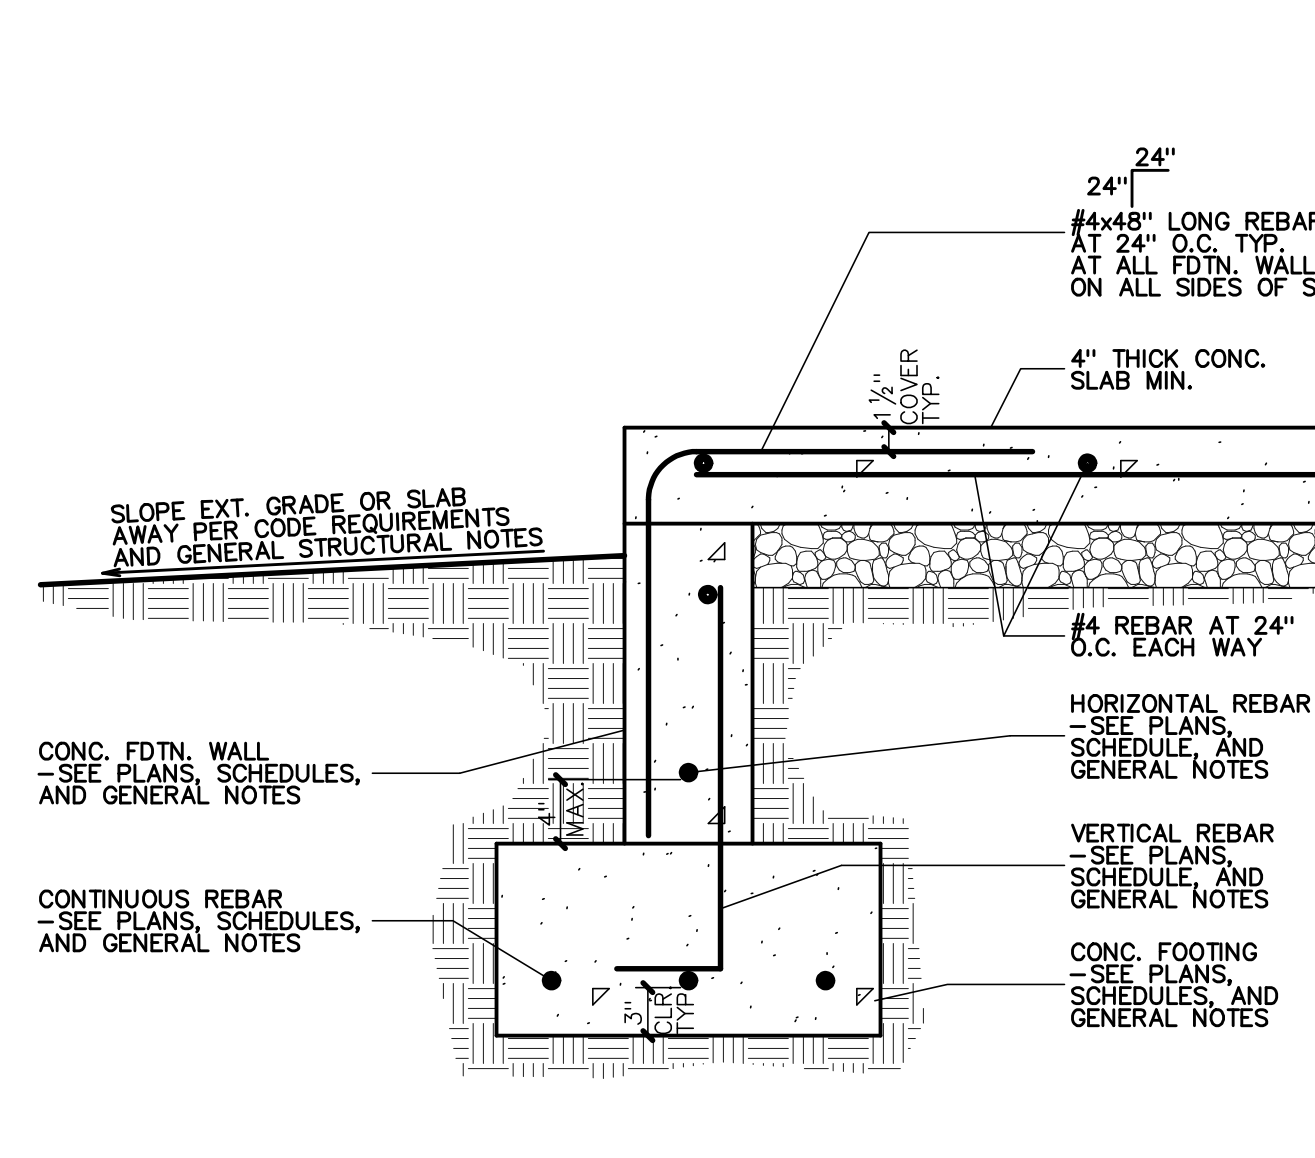


CONC. PORCH SLAB-ON-GRADE
NO SCALE

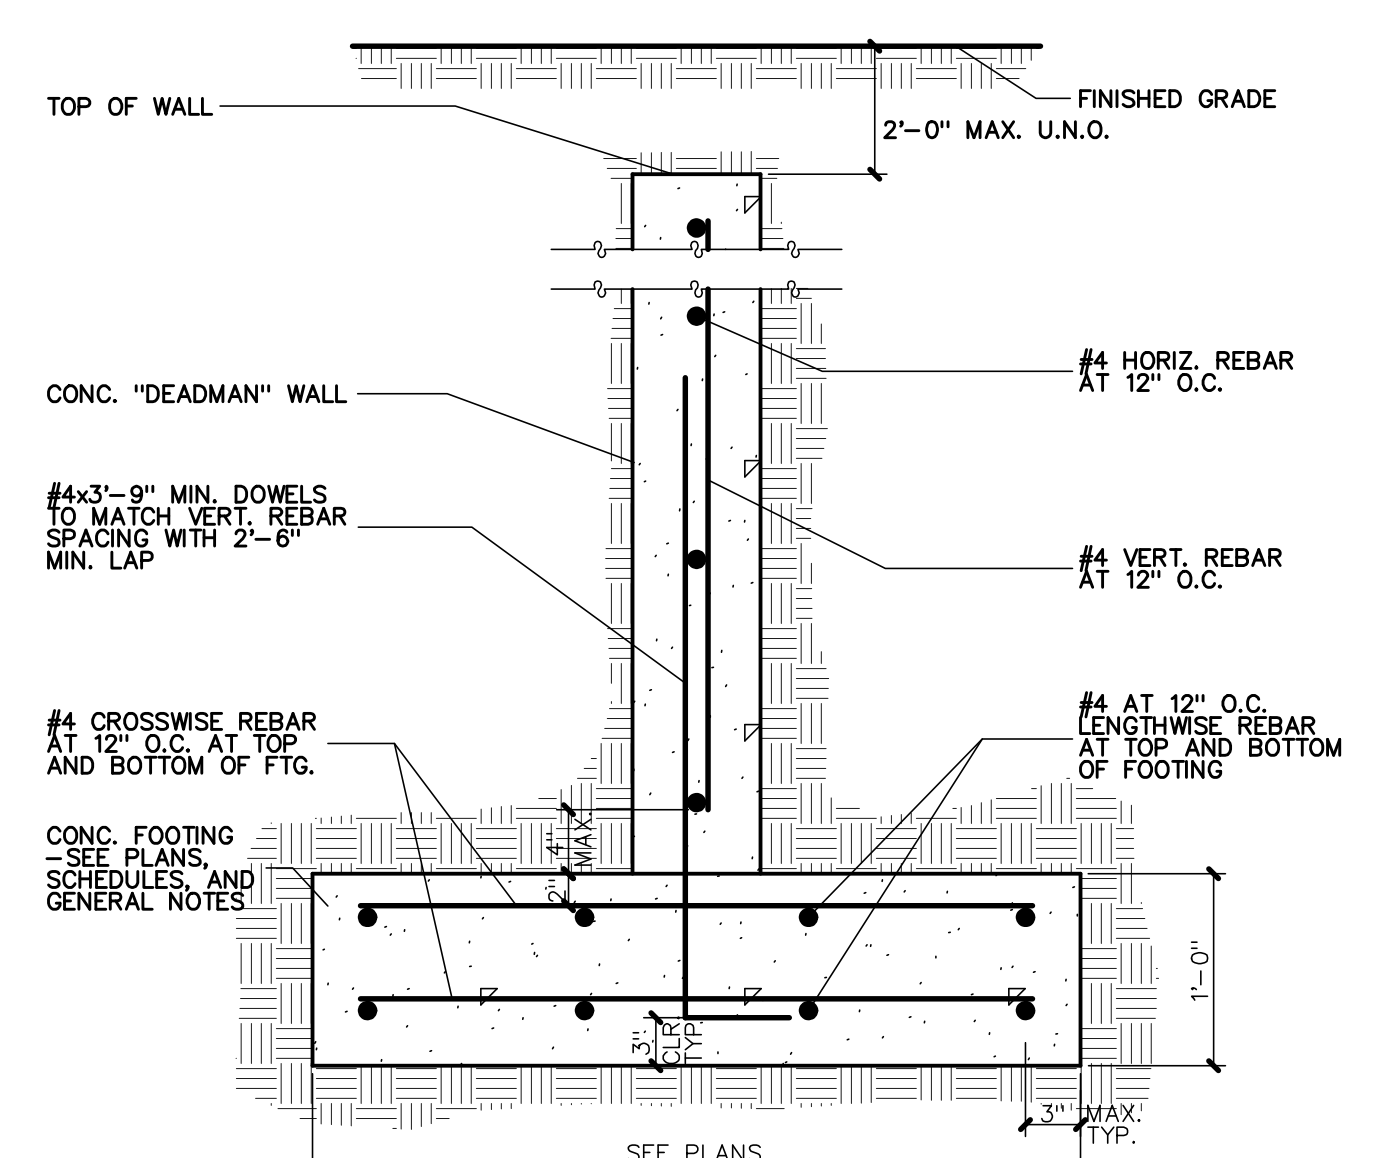

FOOTING AT "DEADMAN" WALL
NO SCALE

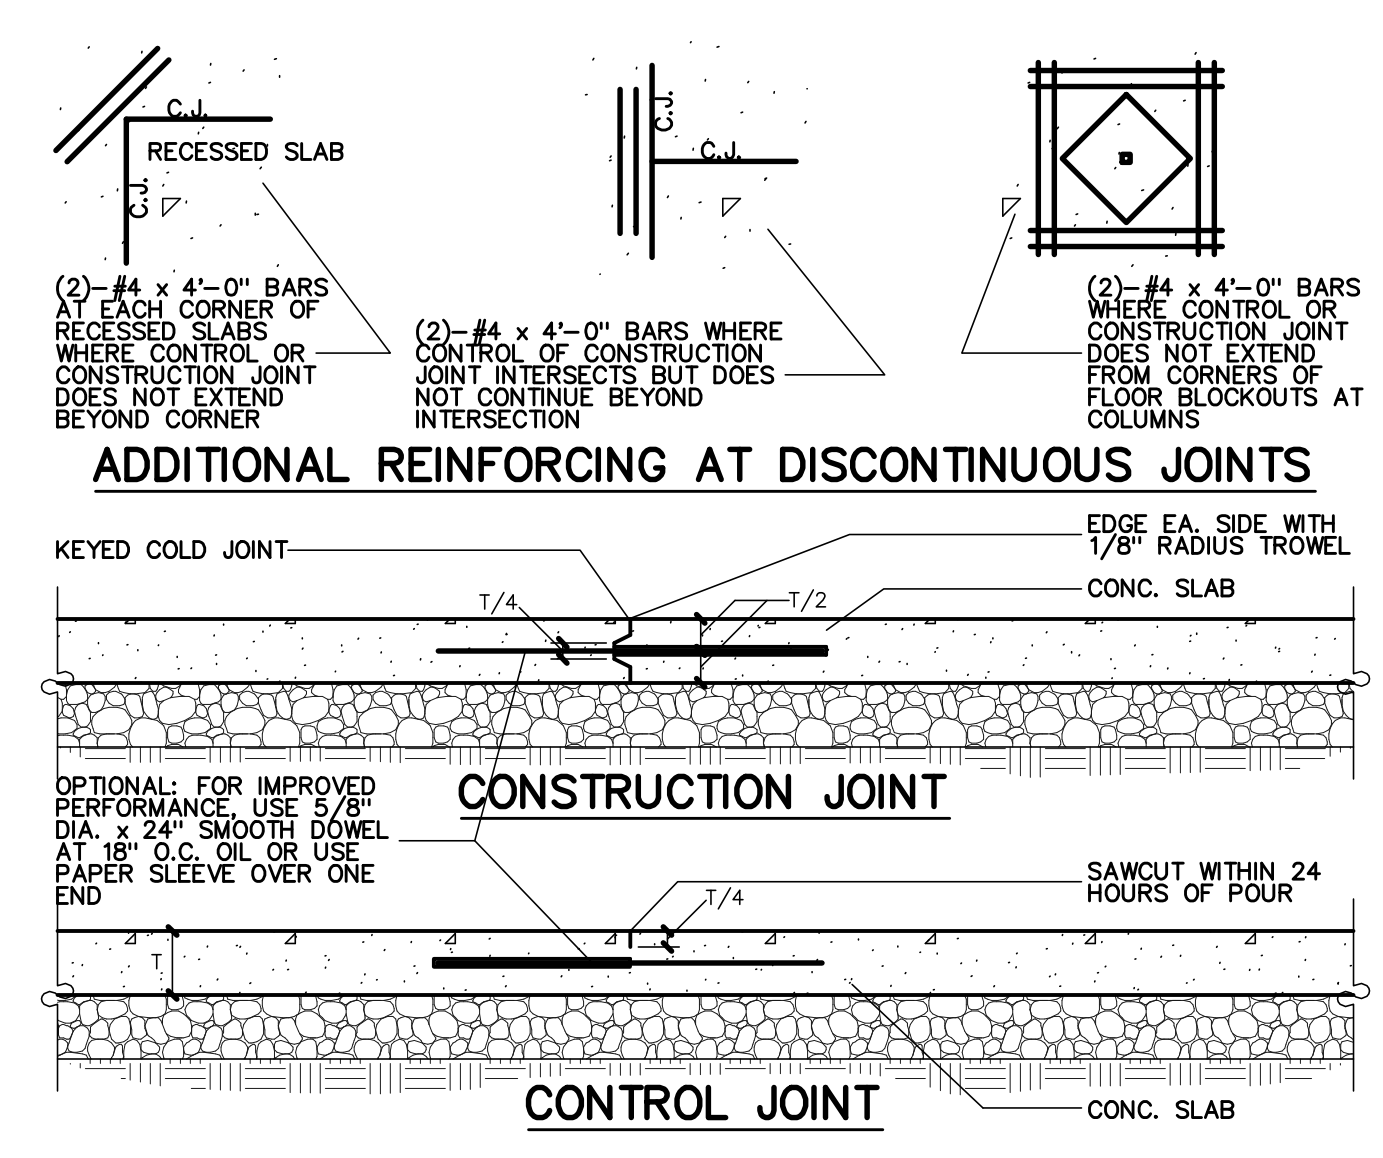

TYPICAL SLAB-ON-GRADE JOINTS
NO SCALE

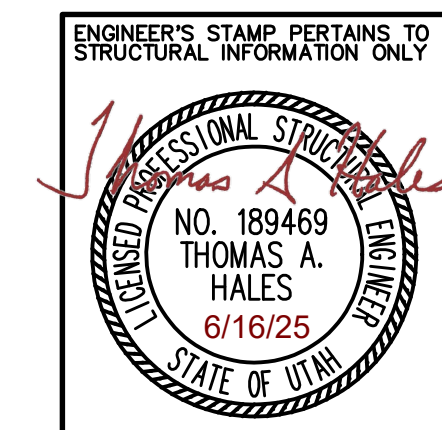

NOTE: ALL DETAILS SHOWN ON THIS SHEET ARE NOT NECESSARILY USED ON THIS JOB --- SEE PLAN SHEETS FOR REFERENCES TO DETAILS


COPYRIGHT NOTICE:
THESE PLANS, DRAWINGS & DESIGNS
ARE THE PROPERTY OF LOMOND VIEW
DESIGNS, LLC. NO PART SHALL BE
REPRODUCED OR COPIED WITHOUT
WRITTEN CONSENT.

FOR: **JEFF BECKSTEAD**
304 WEST PLEASANT VIEW DR.
OGDEN, UTAH 84414
PHONE: (801)-782-0484
FAX: (801)-782-8631
WWW.LOMONDVIEW.COM

FOOTING AND FOUNDATION DETAILS


SHEET TITLE: **S4.2**

DATE: 6/16/2025
DRAWN: CWH
TYPE: CHG TO 1520230310, #23004
PLAN NO.: 3-2-1621 RAMBLER

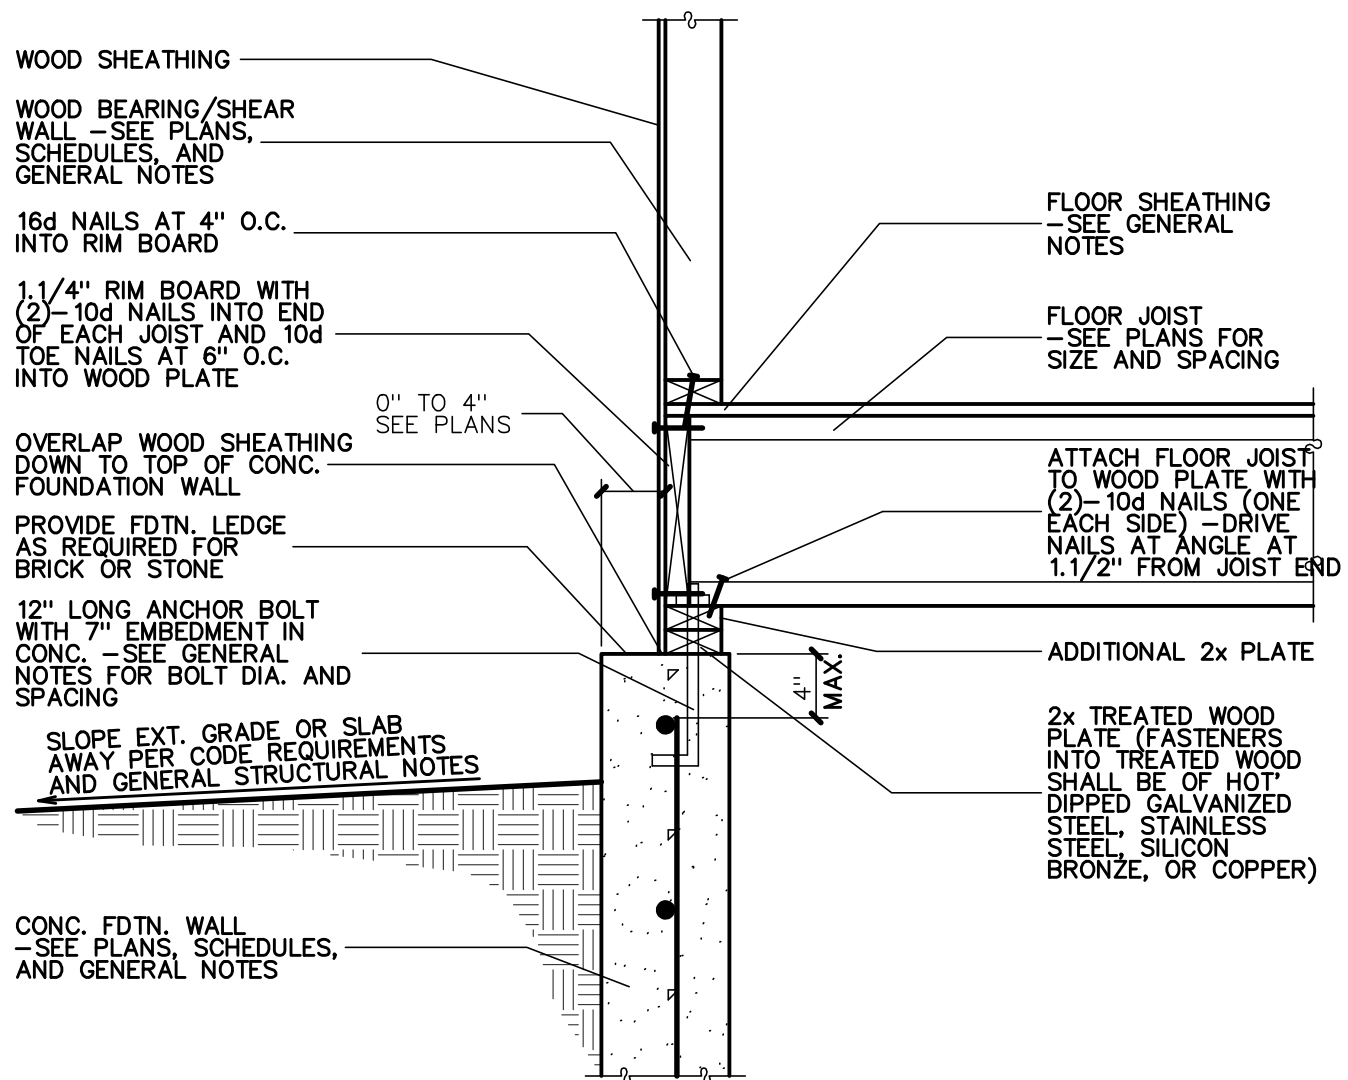


FDTN. WALL WITH DOUBLE PLATE OPTION
NO SCALE

1
S5.2

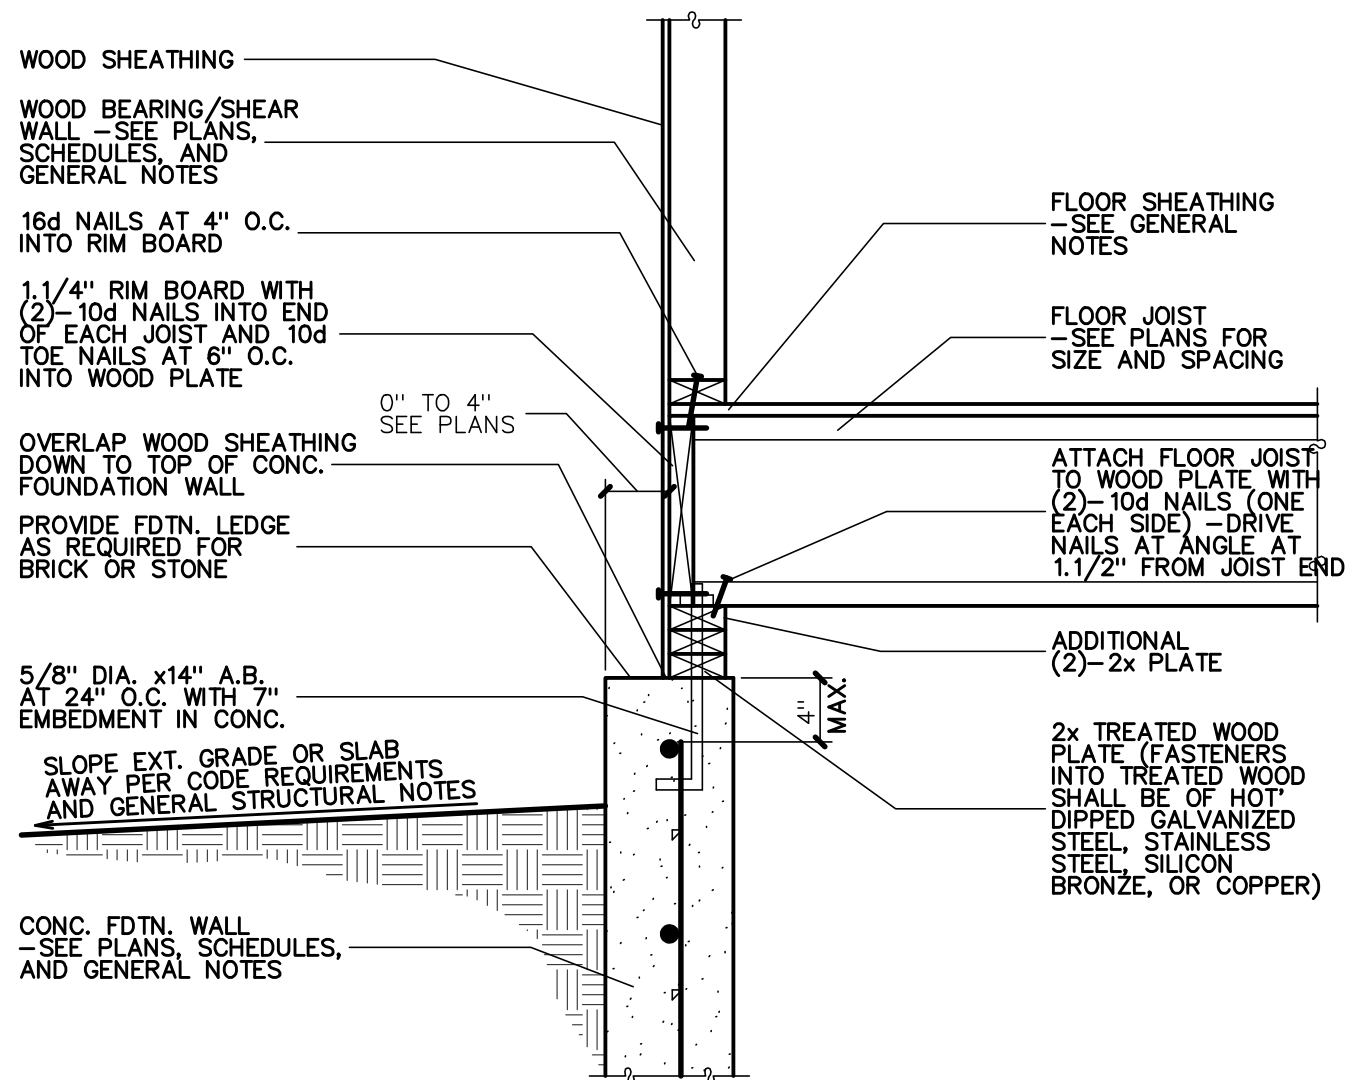


FDTN. WALL WITH TRIPLE PLATE OPTION
NO SCALE

2
S5.2

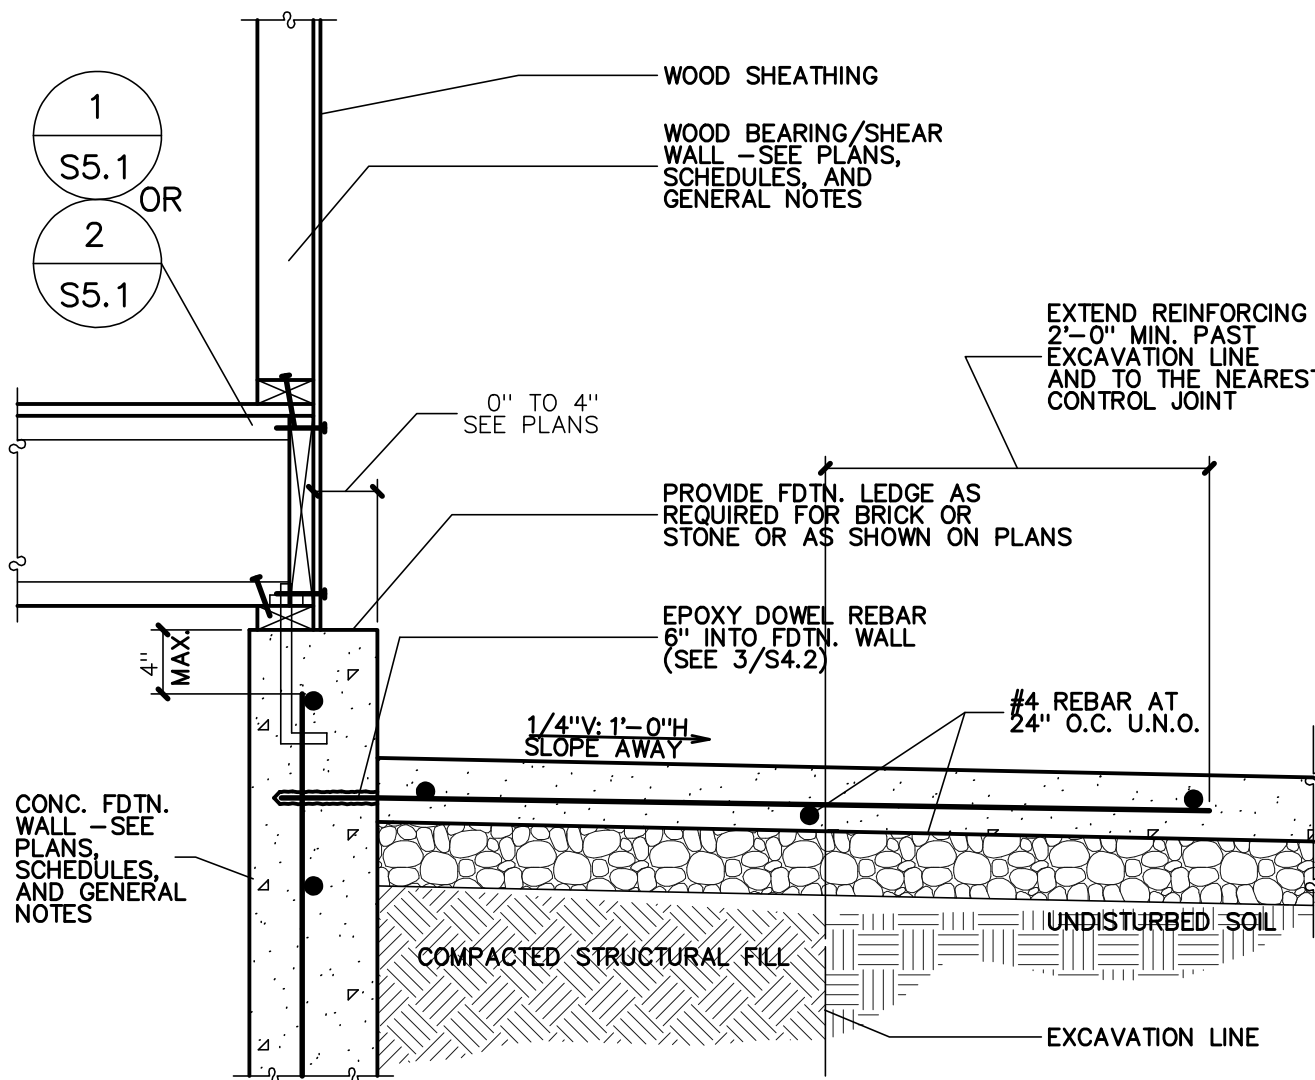


REBAR DOWELS FOR CONC. SLAB AT CONC. FDTN.
NO SCALE

3
S5.2

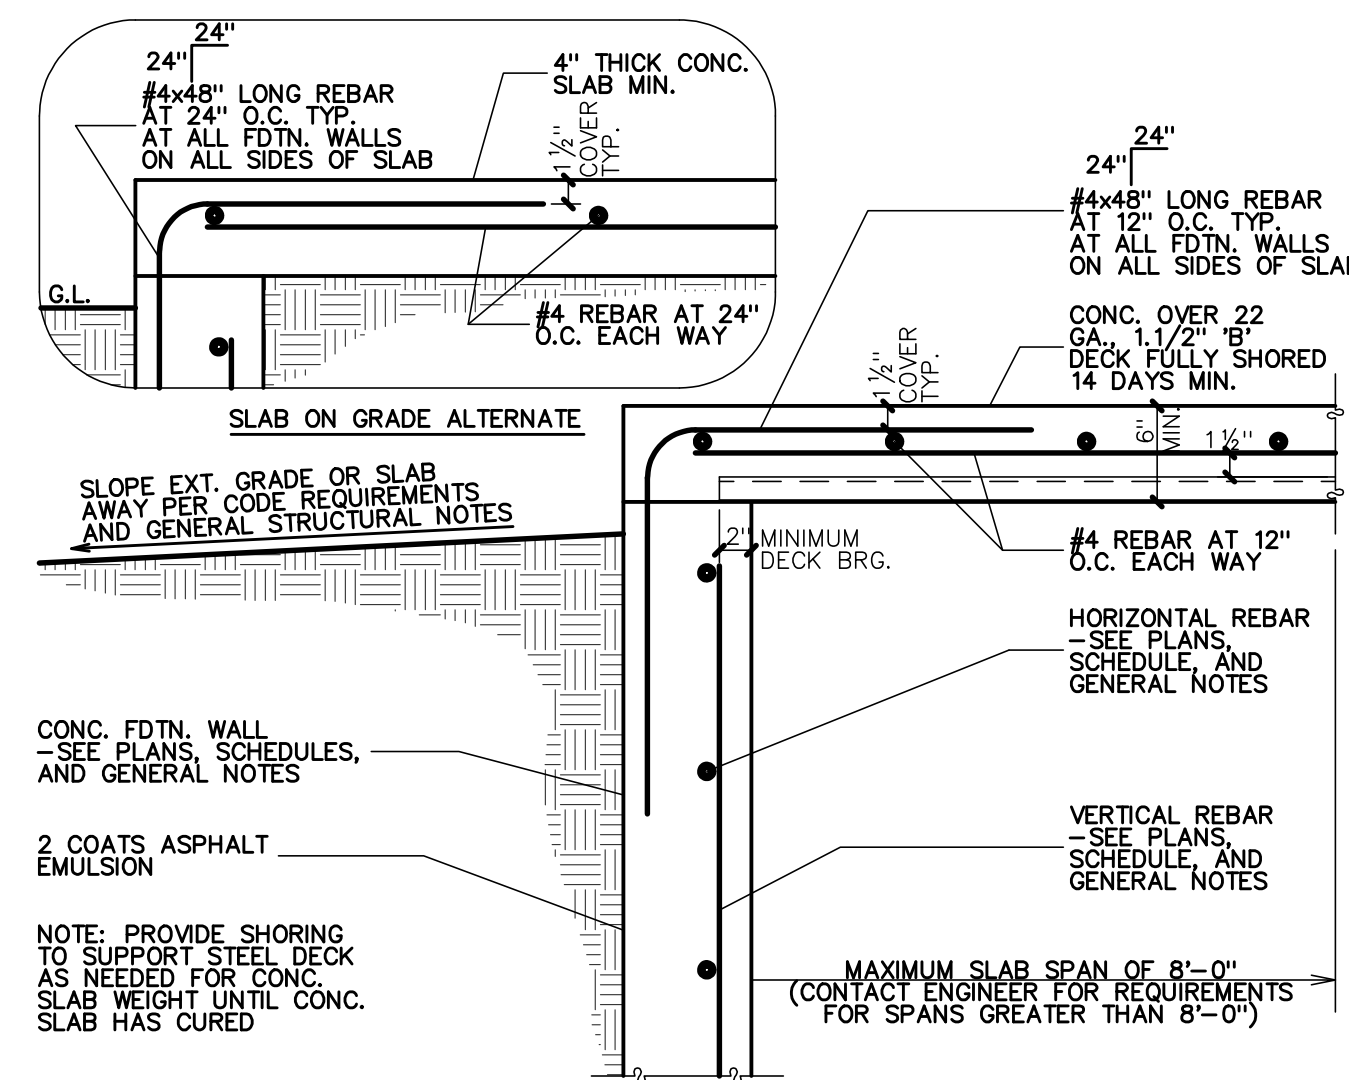


CONC. PORCH SUSPENDED SLAB
NO SCALE

4
S5.2

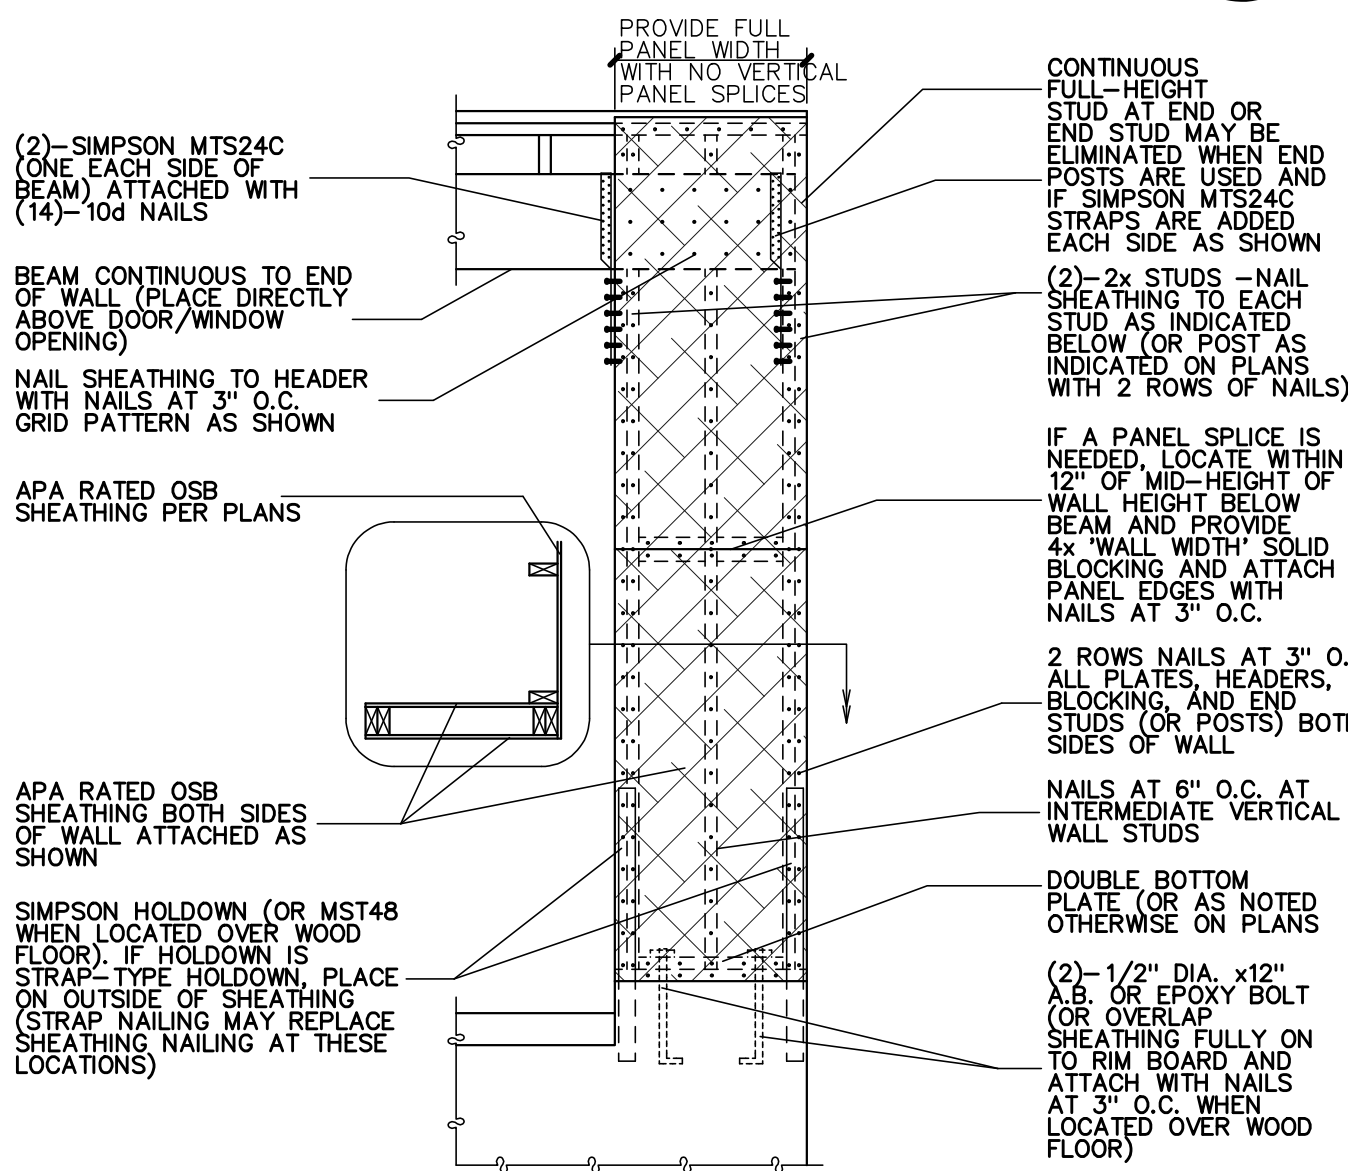


SW5 SHEAR WALL CONSTRUCTION
NO SCALE

5
S5.2

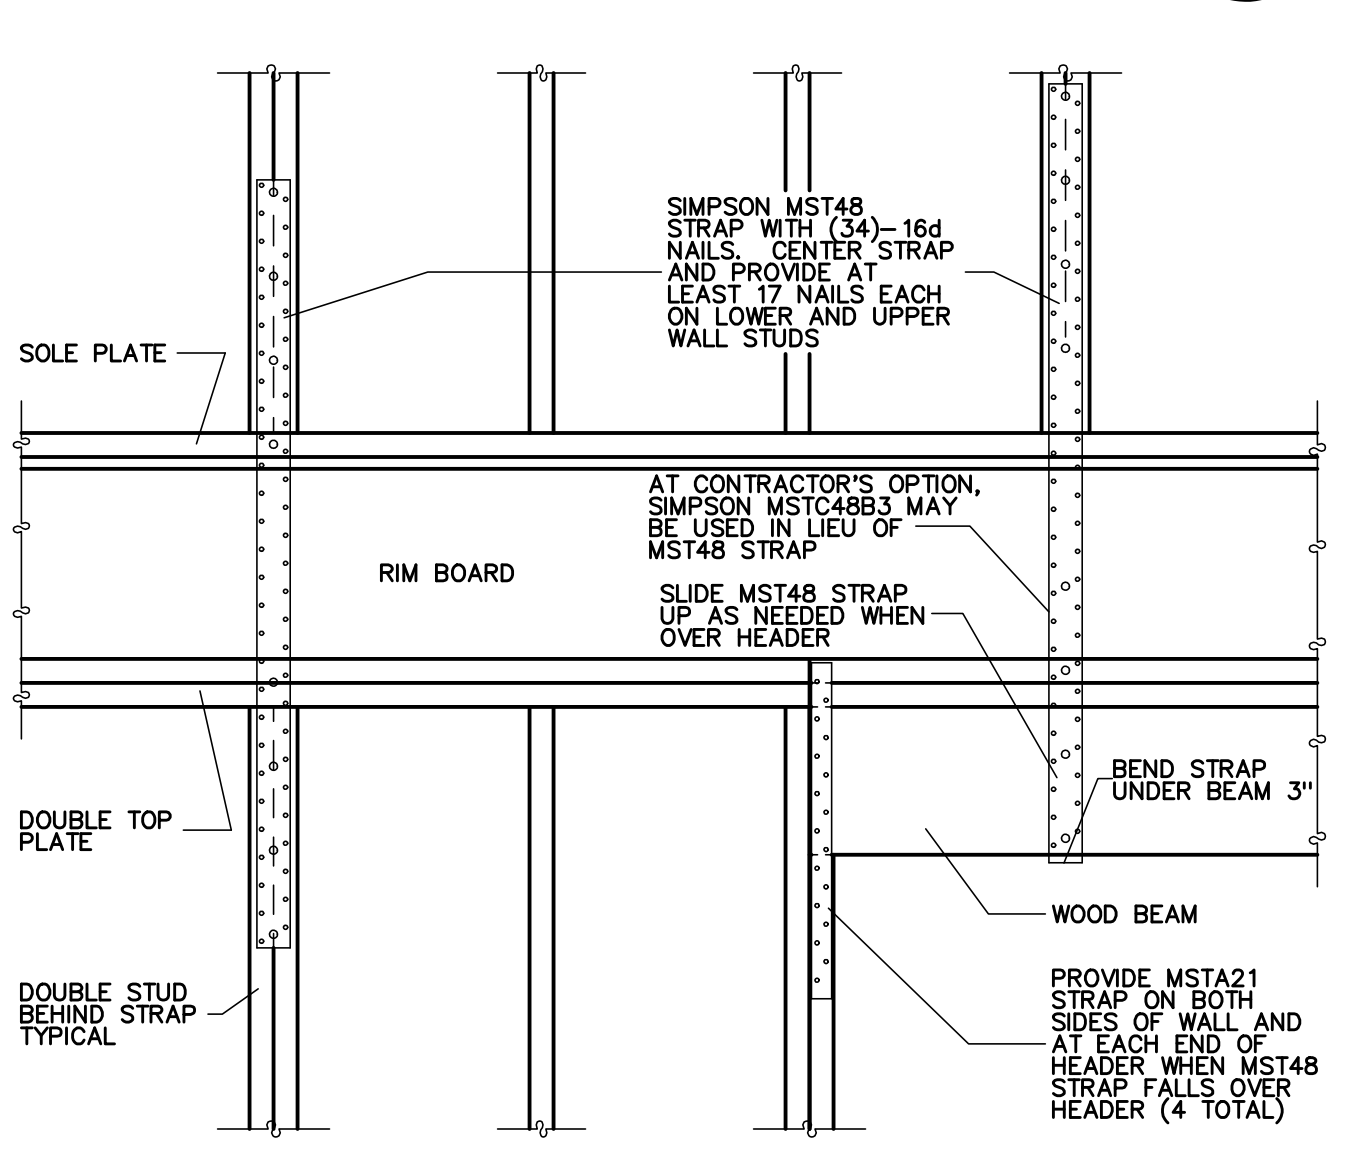


MST48 AND MST21 FLOOR-TO-FLOOR ATTACHMENT
NO SCALE

6
S5.2

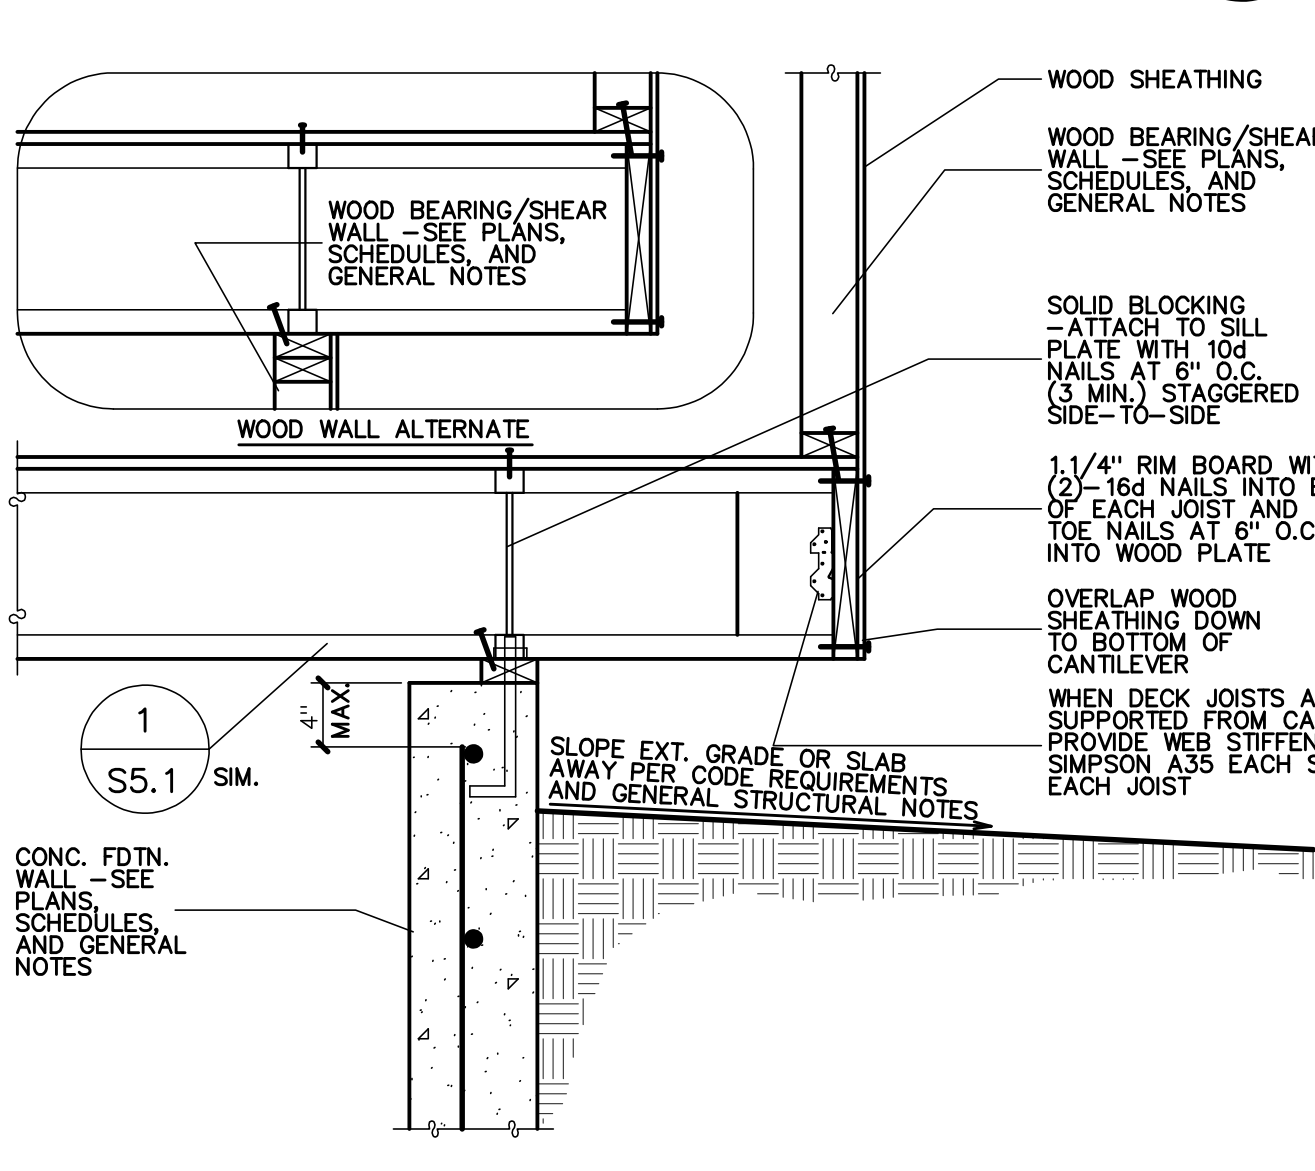


CANTILEVERED FLOOR
NO SCALE

7
S5.2

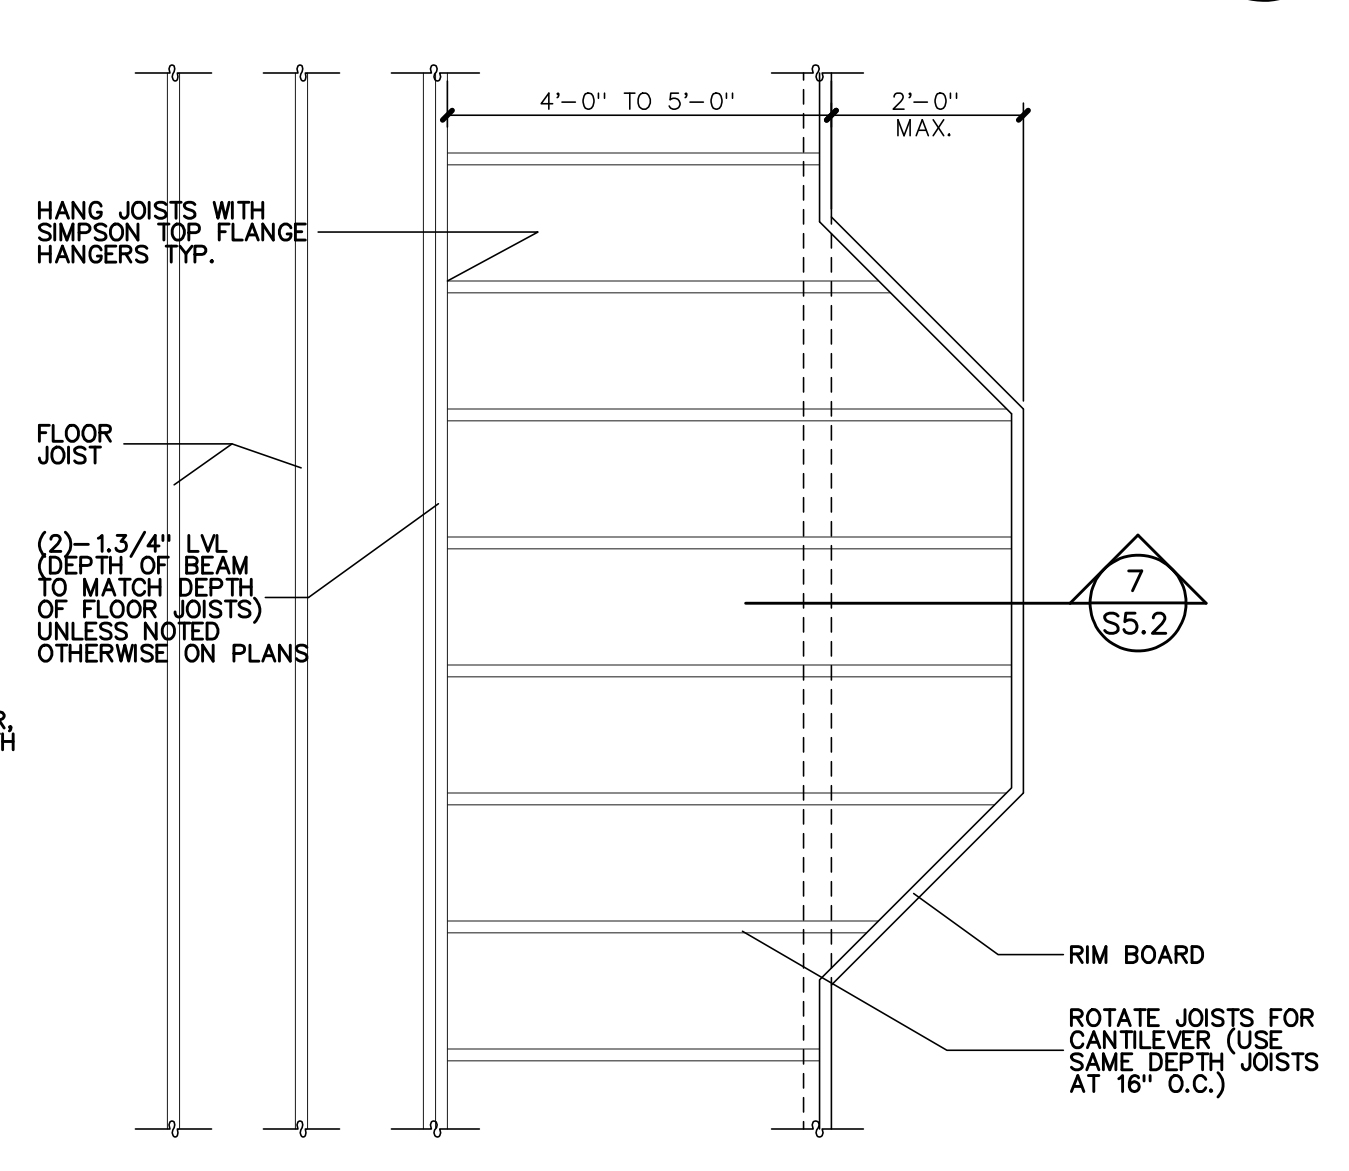


CANTILEVERED FLOOR LAYOUT WHEN PERPENDICULAR TO FLOOR JOISTS
NO SCALE

8
S5.2

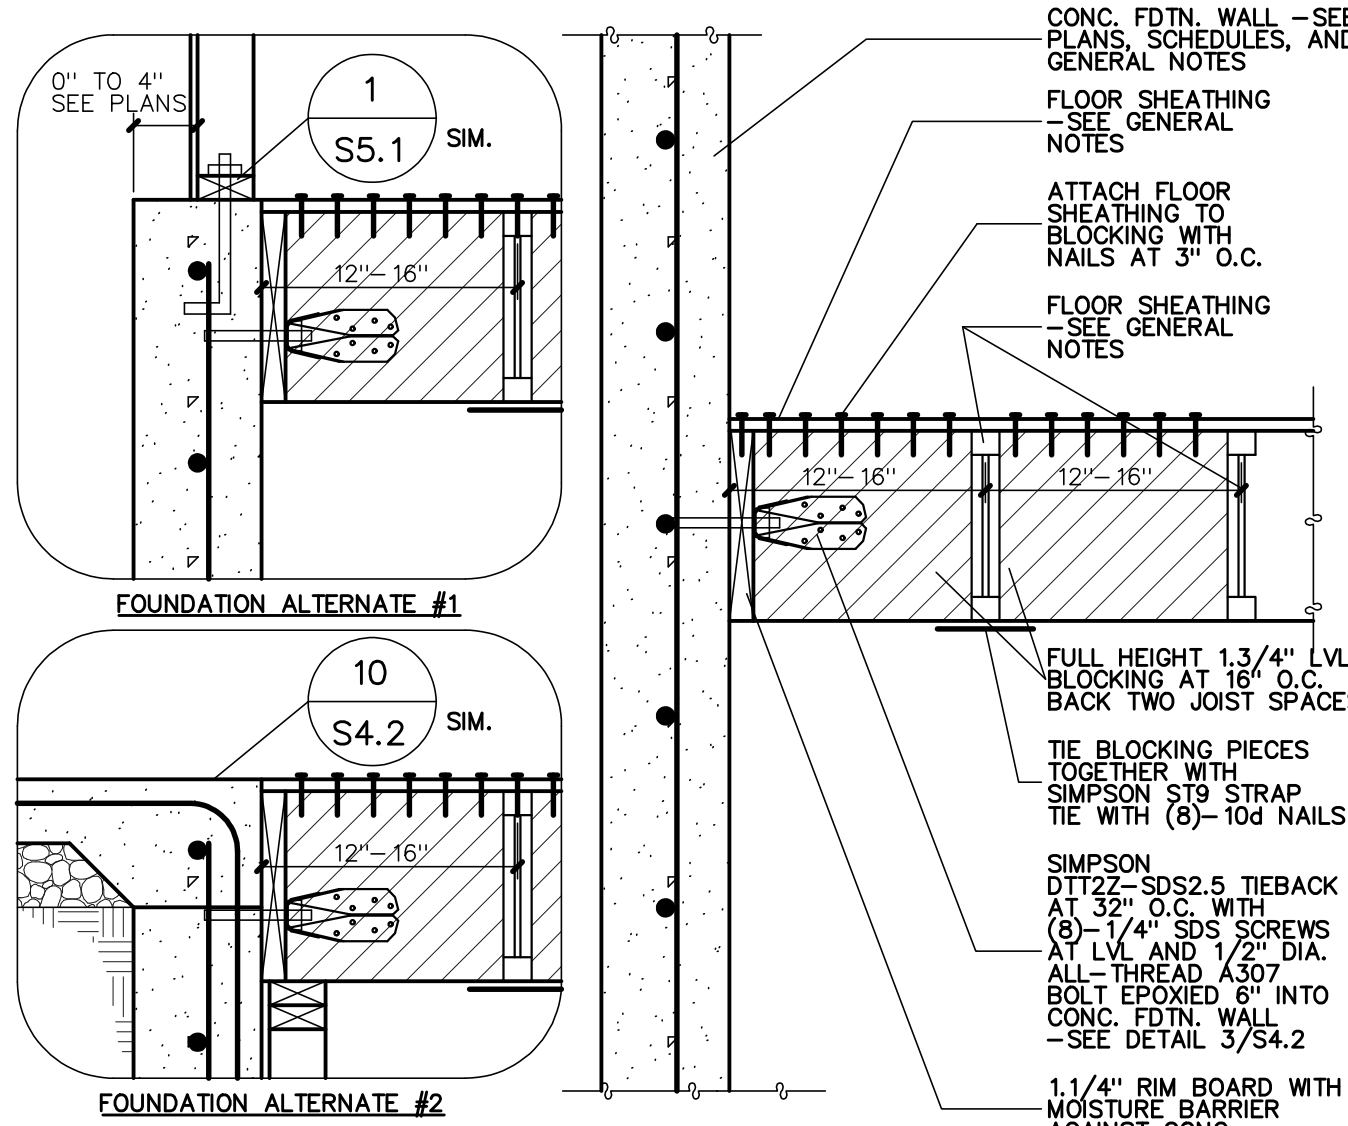


FLOOR JOIST TO FACE OF FOUNDATION WALL
NO SCALE

9
S5.2

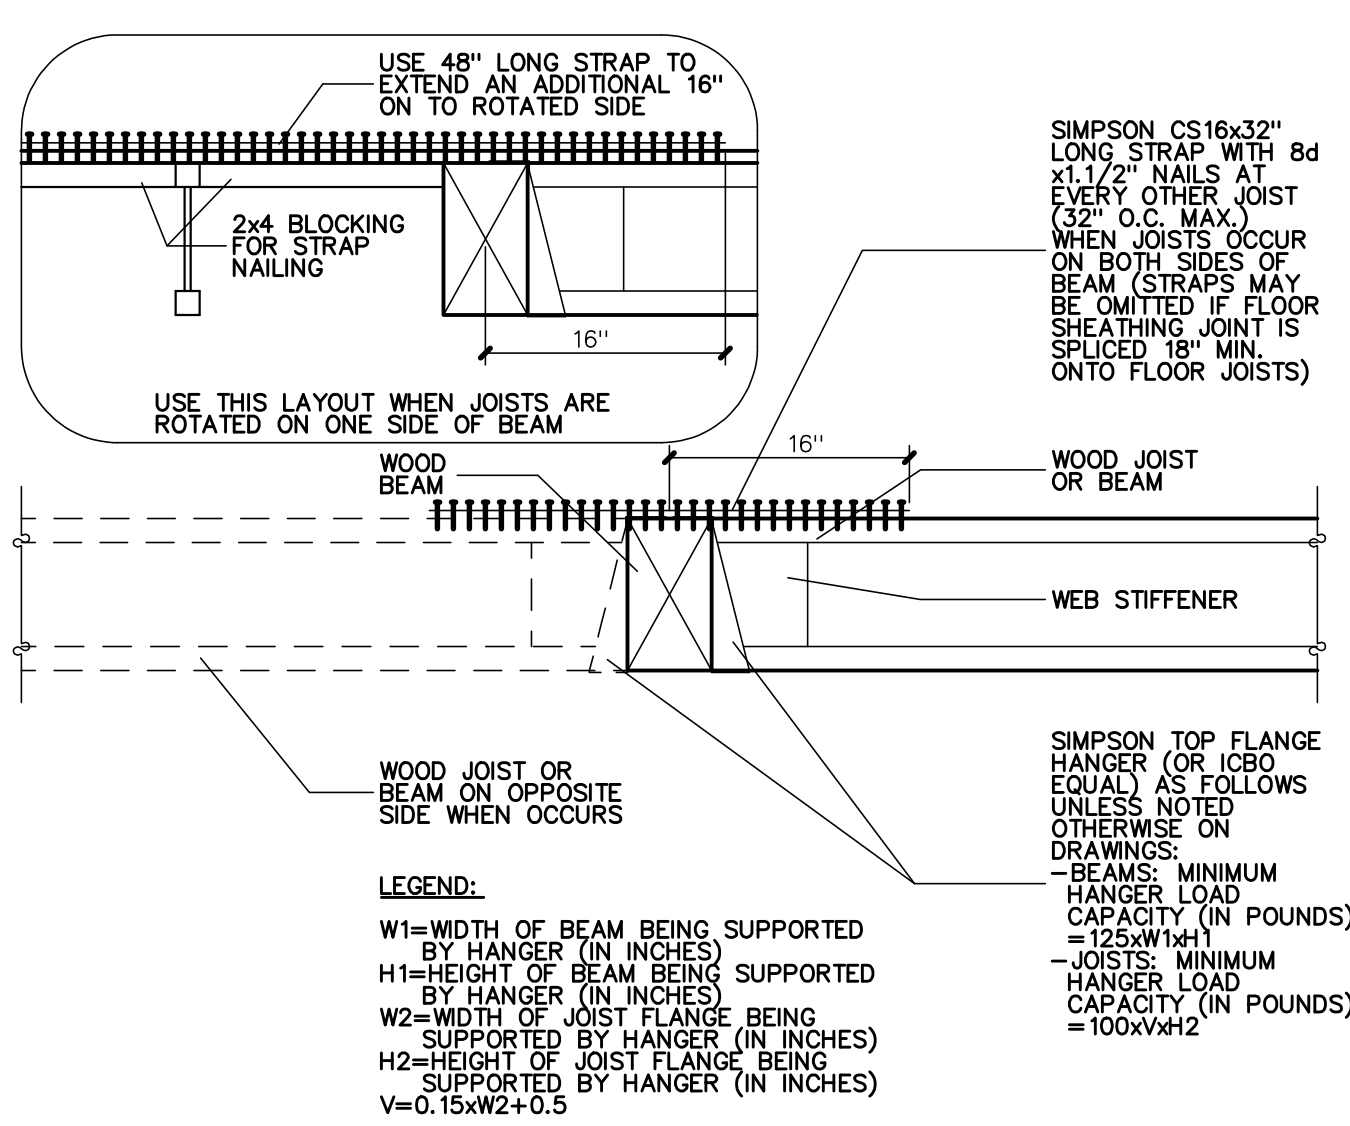


WOOD JOIST OR BEAM TO WOOD BEAM CONNECTION
NO SCALE

10
S5.2

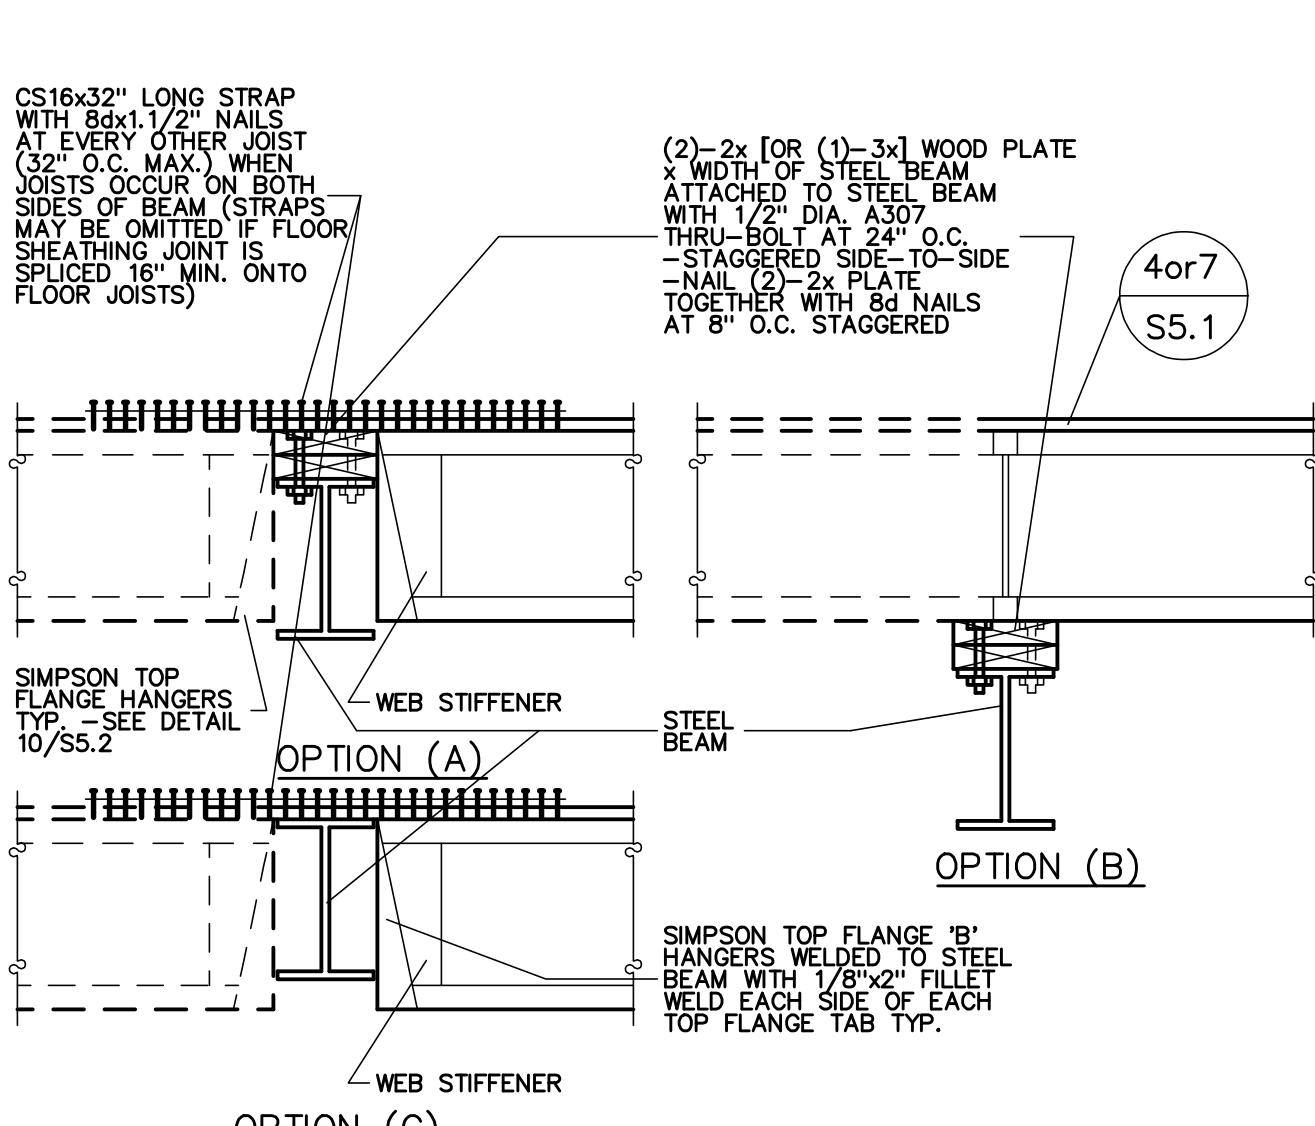

FLOOR JOIST SUPPORT AT STEEL BEAM
NO SCALE

11
S5.2

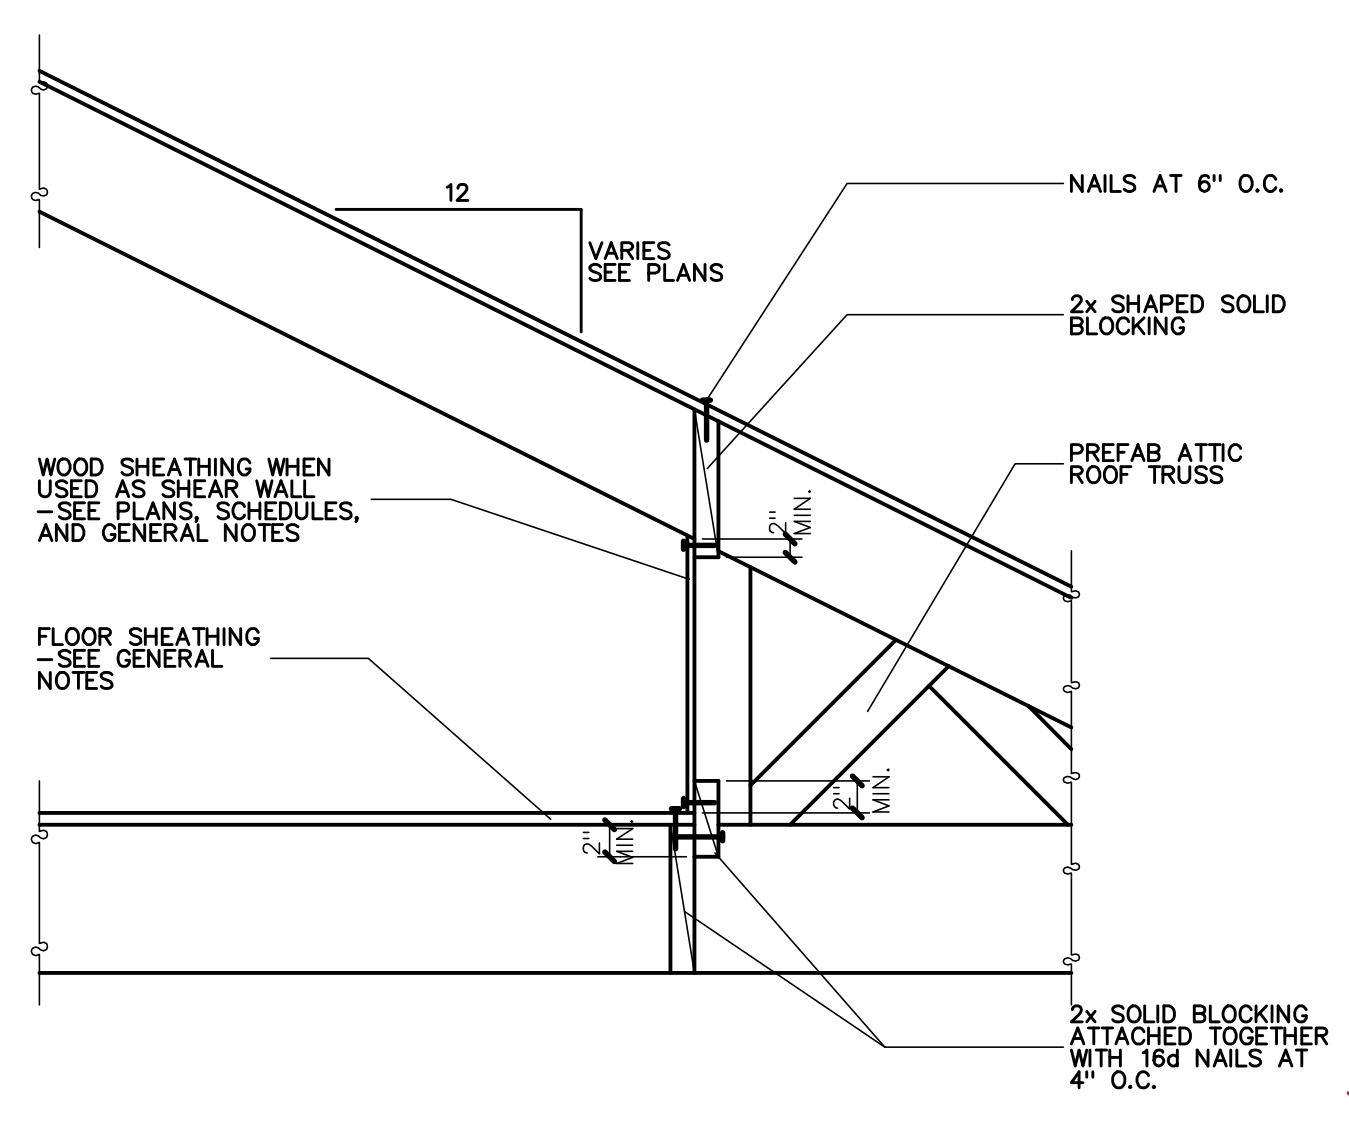


INTERIOR DIAPHRAGM ATTACHMENT AT ATTIC TRUSS FLOOR
NO SCALE

12
S5.2

THESE DRAWINGS AND SPECIFICATIONS HAVE BEEN PREPARED WITH THE ASSUMPTION THAT THE CONTRACTOR HAS ADEQUATE KNOWLEDGE OF THE BUILDING CODES, ORDINANCES, AND REGULATIONS OF THE JURISDICTION. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND FOR VERIFYING THE ACCURACY OF ALL INFORMATION PROVIDED BY THE OWNER. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND FOR VERIFYING THE ACCURACY OF ALL INFORMATION PROVIDED BY THE OWNER. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND FOR VERIFYING THE ACCURACY OF ALL INFORMATION PROVIDED BY THE OWNER.

CONTRACTOR & OWNER SHALL VERIFY ALL DIMENSIONS, AREAS, AND CONDITIONS, READ ALL NOTES AND BECOME THOROUGHLY FAMILIAR WITH THE DRAWINGS, AND ALL ASSOCIATED COSTS, PRIOR TO CONSTRUCTION.

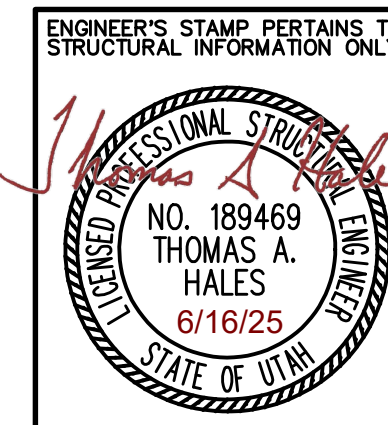

FLOOR FRAMING DETAILS

SHEET TITLE:
DATE: 6/16/2025
DRAWN: CWH
JOB NO.: 25041
TYPE: CHG TO 1520230310, #23004
PLAN NO.: 3-2-1621 RAMBLER

S5.2

SHEET

FOR:

304 WEST PLEASANT VIEW DR.
ORDEN, UTAH 84414
PHONE: (801)-782-0484
FAX: (801)-782-8631
WWW.LOMONDVIEW.COM



JEFF BECKSTEAD

375 W. 800 S.
LEWISTON, UTAH 84320

COPYRIGHT NOTICE:





THESE PLANS, DRAWINGS & DESIGNS ARE THE PROPERTY OF LOMOND VIEW DESIGN, LLC. NO PART SHALL BE REPRODUCED OR COPIED WITHOUT WRITTEN CONSENT.

NOTE: ALL DETAILS SHOWN ON THIS SHEET ARE NOT NECESSARILY USED ON THIS JOB --- SEE PLAN SHEETS FOR REFERENCES TO DETAILS

© COPYRIGHT 2025 LOMOND VIEW DESIGNS, LLC

PLANT DATE/TIME: 6/16/2025 4:51 PM

Beckstead, Jeff (chg to 1520230310, #23004)

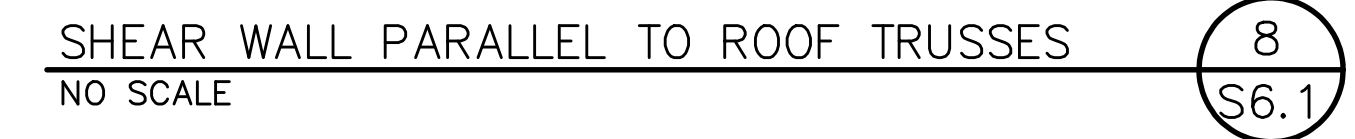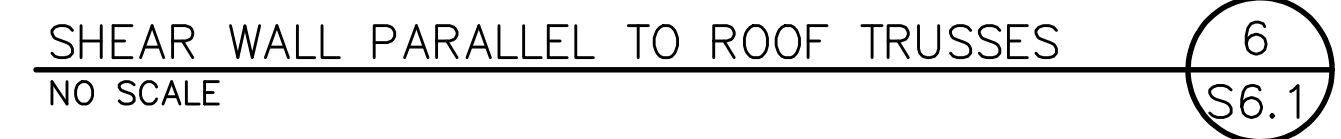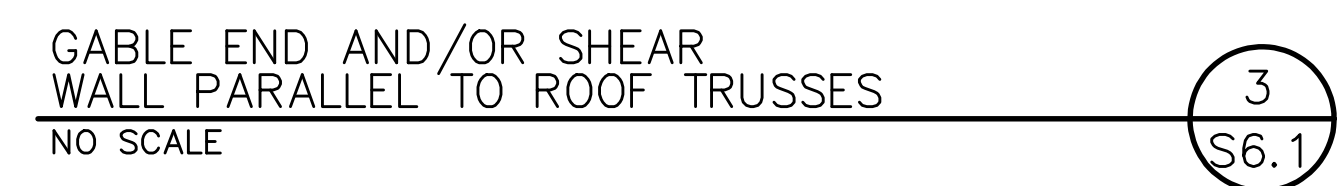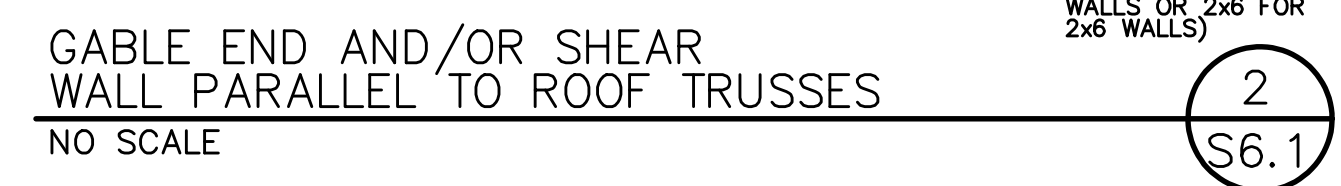

CONTRACTOR & OWNER SHALL VERIFY ALL DIMENSIONS, AREAS, AND CONDITIONS, READ ALL NOTES AND BECOME THOROUGHLY FAMILIAR WITH THE DRAWINGS, AND ALL ASSOCIATED COSTS. PRIOR TO CONSTRUCTION

PLOT DATE/TIME: 6/16/2025 4:52 PM

COPYRIGHT NOTICE:

JEFF BECKSTEAD

FOR:

304 WEST PLEASANT VIEW DR.
OGDEN, UTAH 84414
PHONE: (801)-782-0484
FAX: (801)-782-8631
WWW.LOMONDVIEW.COM





ROOF FRAMING DETAILS

SHEET
TITLE: ROOF FF

S6.1

Beckstead, Jeff (chg to 1520230310, #23004)

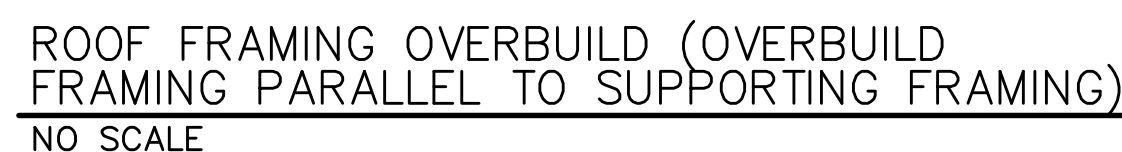

CONTRACTOR & OWNER SHALL VERIFY ALL DIMENSIONS, AREAS, AND CONDITIONS, READ ALL NOTES AND BECOME THOROUGHLY FAMILIAR WITH THE DRAWINGS, AND ALL ASSOCIATED COSTS. PRIOR TO CONSTRUCTION.

SHEET
TITLE: ROOF FRAMING DETAILS

DATE:	6/16/2025	DRAWN: CWH
JOB NO.:	25041	TYPE: CHG TO 1520230310, #23004
PLAN NO.:	3-2-1621 RAMBLER	

30

Lomond View
DESIGNS, LLC



304 WEST PLEASANT VIEW DR.
OGDEN, UTAH 84414
PHONE: (801)-782-0484
FAX: (801)-782-8631
WWW.LOMONDVIEW.COM

JEFF BECKSTEAD
375 W. 800 S.
LEWISTON, UTAH 84320

COPYRIGHT NOTICE:
THESE PLANS, DRAWINGS & DESCRIPTIONS ARE THE PROPERTY OF LOMONDI DESIGN, LLC AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT WRITTEN CONSENT.