

Product introduction


The CDKU-S series is a single-output closed switching power supply with an ultra-thin 30mm design and a full range of 90-264VAC input voltage (200W, 350W with toggle switch options). Can choose a group of 5V, 12V, 24V, 36V, 48V single output (special requirements can be customized). The product adopts all-metal shell and honeycomb heat dissipation design, with good heat dissipation performance, the product can work normally in -30℃~70℃ temperature, 20%~90%RH relative humidity environment, the efficiency is as high as 89%, no-load power consumption is as low as 0.2~1.0W, can meet the international energy requirements.

Product characteristics

- 30mm ultra-thin design
- 90~264VAC full range AC input
- Low power consumption
- High frequency PWM control technology
- 100% full load burn-in test
- Over voltage, overload, short circuit, over temperature (200W 350W) protection
- LED work indicator
- CE、RoHs、EMC
- Working height 2000m above sea level

Small size

Advantage Selling point: The full series of 30mm thickness design, size than the market equivalent mainstream products occupy an absolute advantage Customer benefits: the same power segment of similar products, for customers to save 20% installation space

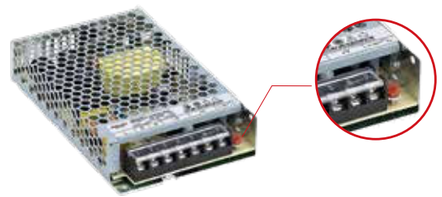

Complete specifications


Advantage Selling point: Provide 7 different power segment specifications of power supply products, output voltage ±10% adjustable Customer benefits: wide selection of products, cost-effective, reduce unnecessary loss



CDKU-S Ultra-thin switching power supply

Excellent performance

Advantage Selling point: The use of high-quality raw materials, excellent product performance
Customer benefits: no-load power consumption as low as 0.2~1W, efficiency ≈89%

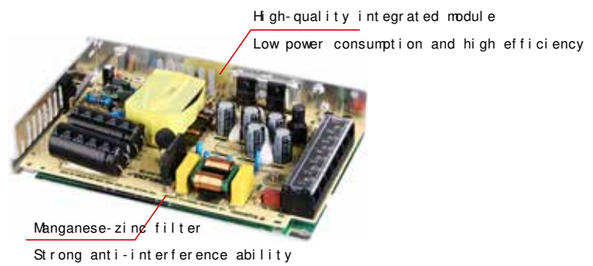

Safety protection

Advantage selling point: Standard terminal protection cover
Customer benefits: Prevent accidental contact with terminal leading to electric shock, effectively improve the safety of use

"Burp" protection

Advantage Selling point: The full range of product overload short-circuit protection is "hiccup" protection mode Customer benefits: to meet the needs of OEM customers for protection methods

Easy to install

Advantages and selling points: plate installation, rail installation (installation accessories need to be selected) 2 installation methods flexible choice, anti-hole installation
Customer benefits: To meet the requirements of different installation methods, anti-hole can effectively avoid the risk of short circuit caused by different lengths of screws


Selection guide

Product name	Number of output circuits	Rated power	Output voltage
CDKU	S	□	□
	S：Single loop output	35W 50W 75W 100W 150W 200W 350W	5V 12V 24V 36V 48V

CDKU-S Ultra-thin switching power supply

Instructions

CDKU-S Switching power supply

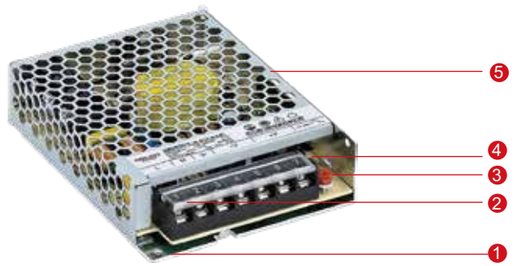

1. Two M3 mounting screws securing holes
2. Terminal with transparent protective plastic cover as standard
3. Potentiometer to adjust output voltage (±10%)
4. Green LED indicator indicating working status
5. Output voltage selector switch (200W, 350W products only)

Technical parameter

Item		Technical parameter						
Rated power		35W	50W	75W	100W	150W	200W	350W
AC Input Voltage (AC)		100~264V(Actual input voltage range：90~264V)					85~132V/176~264V(Switch selection)	
Ac input frequency		47~63 Hz						
Output stability		1%						
Load adjustment rate		1% Typical value						
Output voltage fine-tuning range		±10%（Rated output voltage）						
Ripple and noise		1% peak value (100mVp-p typical value)						
Overvoltage protection		110%~140%(Protection mode: turn off the output voltage, automatically recover after the exception is eliminated)						
Overload protection		110%~150%(Protected mode: hiccup mode. After the exception is removed, the system automatically recovers)						
Temperature protection		--					100±5℃	
Cooling mode		Natural air cooling（200W 以下）						
Working environment		Operating temperature -30~+70, relative humidity 20%-90%RH						
Overall dimensions (mm)		99*82*30		99*97*30	129*97*30	159*97*30	215*115*30	
Mounting dimension		Figure F1		Figure F2	Figure F3	Figure F4	Figure F5	Figure F6
Weight (kg)		0.23	0.23	0.25	0.34	0.48	0.66	0.76
Safety and electromagnetic let	Safety regulation	UL60950-1,TUV EN60950-1,EN60335-1,EN61558-1/-2-16,CCC GB4943,1,BSMI CNS14336-1,EAC TP 004,AS/NZS 60950.1(by CB)						
	Withstand voltage	Input to output: 4KVAC, input to ground: 2KVAC, output to ground 1.25KAC/1min						
	Insulation resistance	Input to output, input to ground, output to ground /500VDC/25/70%RH						
	Electromagnetic compatibility emission	Conform to EN55032(CISPR32)Class B,EN55014,EN61000-3-2.-3 GB/T 9254,BSMI CNS13438,EAC TP TC 020						
	Electromagnetic compatibility immunity	Conform to EN61000-4-2,3,4,5,6,8,11,EN61000-6-2(EN50082-2)Class A heavy industry standard,EAC TP TC 020						

Technical parameter



35W

Product name	Output voltage	Current range	Ripple noise	Voltage accuracy	Efficiency	Order number
CDKU-S35-5	5V	0~7A	80mvp-p	±2%	≥80%	CDKUS3505
CDKU-S35-12	12V	0~2.4A	120mvp-p	±1%	≥85%	CDKUS3512
CDKU-S35-24	24V	0~1.5A	150mvp-p	±1%	≥87%	CDKUS3524
CDKU-S35-36	36V	0~1A	200mvp-p	±1%	≥87%	CDKUS3536
CDKU-S35-48	48V	0~0.8A	200mvp-p	±1%	≥89%	CDKUS3548



50W

Product name	Output voltage	Current range	Ripple noise	Voltage accuracy	Efficiency	Order number
CDKU-S50-5	5V	0~10A	80mvp-p	±2%	≥81%	CDKUS5005
CDKU-S50-12	12V	0~4.2A	120mvp-p	±1%	≥85%	CDKUS5012
CDKU-S50-24	24V	0~2.2A	150mvp-p	±1%	≥86%	CDKUS5024
CDKU-S50-36	36V	0~1.45A	200mvp-p	±1%	≥86%	CDKUS5036
CDKU-S50-48	48V	0~1.1A	200mvp-p	±1%	≥87%	CDKUS5048



75W

Product name	Output voltage	Current range	Ripple noise	Voltage accuracy	Efficiency	Order number
CDKU-S75-5	5V	0~14A	80mvp-p	±2%	≥80%	CDKUS7505
CDKU-S75-12	12V	0~6A	120mvp-p	±1%	≥85%	CDKUS7512
CDKU-S75-24	24V	0~3.2A	150mvp-p	±1%	≥86%	CDKUS7524
CDKU-S75-36	36V	0~2.1A	200mvp-p	±1%	≥86%	CDKUS7536
CDKU-S75-48	48V	0~1.6A	200mvp-p	±1%	≥88%	CDKUS7548



100W

Product name	Output voltage	Current range	Ripple noise	Voltage accuracy	Efficiency	Order number
CDKU-S100-5	5V	0~18A	100mvp-p	±2%	≥80%	CDKUS10005
CDKU-S100-12	12V	0~8.5A	120mvp-p	±1%	≥85%	CDKUS10012
CDKU-S100-24	24V	0~4.5A	150mvp-p	±1%	≥86%	CDKUS10024
CDKU-S100-36	36V	0~2.8A	200mvp-p	±1%	≥87%	CDKUS10036
CDKU-S100-48	48V	0~2.3A	200mvp-p	±1%	≥88%	CDKUS10048



Technical parameter

150W

Product name	Output voltage	Current range	Ripple noise	Voltage accuracy	Efficiency	Order number
CDKU-S150-5	12V	0~22A	100mvp-p	±2%	≥80%	CDKUS15005
CDKU-S150-12	24V	0~12.5A	150mvp-p	±1%	≥85	CDKUS15012
CDKU-S150-24	36V	0~6.5A	200mvp-p	±1%	%≥87%	CDKUS15024
CDKU-S150-36	48V	0~4.3A	200mvp-p	±1%	≥87%	CDKUS15036
CDKU-S150-48		0~3.3A	200mvp-p	±1%	≥89%	CDKUS15048



200W

Product name	Output voltage	Current range	Ripple noise	Voltage accuracy	Efficiency	Order number
CDKU-S200-5	5V	0~40A	150mvp-p	±2%	≥80%	CDKUS20005
CDKU-S200-12	12V	0~17A	150mvp-p	±1%	≥85%	CDKUS20012
CDKU-S200-24	24V	0~8.8A	150mvp-p	±1%	≥87%	CDKUS20024
CDKU-S200-36	36V	0~5.9A	200mvp-p	±1%	≥87%	CDKUS20036
CDKU-S200-48	48V	0~4.4A	200mvp-p	±1%	≥89%	CDKUS20048




350W

Product name	Output voltage	Current range	Ripple noise	Voltage accuracy	Efficiency	Order number
CDKU-S350-5	5V	0~60A	150mvp-p	±2%	≥80%	CDKUS35005
CDKU-S350-12	12V	0~29A	150mvp-p	±1%	≥85%	CDKUS35012
CDKU-S350-24	24V	0~14.6A	150mvp-p	±1%	≥87%	CDKUS35024
CDKU-S350-36	36V	0~9.7A	200mvp-p	±1%	≥88%	CDKUS35036
CDKU-S350-48	48V	0~7.3A	200mvp-p	±1%	≥89%	CDKUS35048


CDKU-S Ultra-thin switching power supply

Installation instructions


• CDKU-S35~50

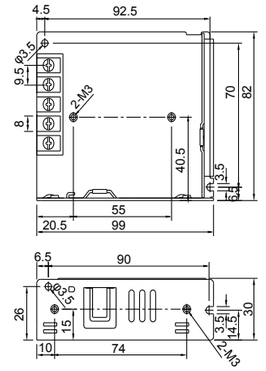


• CDKU-S75




• CDKU-S100

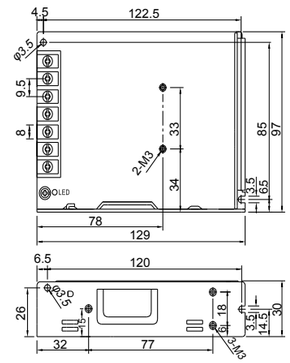

• CDKU-S150

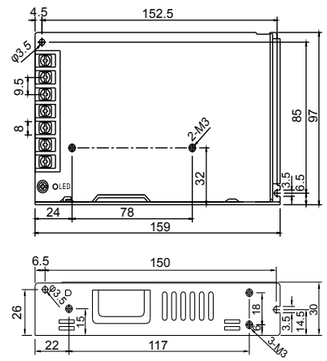

• CDKU-S200



• CDKU-S350

