StoneX ROOFING SOLUTIONS

Contractor Brochure



StoneX Royal

Eclipse

UPGRADE TO STONEX METAL ROOFING


The Most Reliable Roofing Brand

StoneX
ROOFING SOLUTIONS



At StoneX, we specialize in premium stone coated steel roofing solutions that blend timeless aesthetics with unmatched durability. With a commitment to quality, innovation, and customer satisfaction, we deliver roofing systems that stand the test of time—resistant to harsh weather,
Fire, corrosion, and fading. Our expert team works closely with homeowners, contractors, and developers to provide stylish, low-maintenance roofing options that enhance curb appeal and long-term value.
Whether you're building new or replacing an old roof, trust StoneX to protect what matters most—with strength, style, and superior performance.

Structure



COMPONENTS:

1. Transparent acrylic varnish – contributes to self-cleaning from dust during rain
2. Colored stone granules – protects from mechanical damage and creates an outstanding appearance
3. Acrylic primer – provides adhesion of stone granules
4. Protective coating – serves as an additional anti-corrosion protection
5. Aluzinc (AZ -150 gsm) layer – preserves the steel layer from corrosion
6. High-quality steel sheet – being the base of the material provides strength and rigidity
7. Aluzinc(AZ - 150 gsm) layer – preserves the steel layer from corrosion
8. Protective coating – serves as an additional anti-corrosion protection

Advantages

PICTURESQUE ROOFING

The true beauty of natural stone and noble colors embodied in a time-honoured form will definitely distinguish your home among all others.

PERFECT FOR ANY ARCHITECTURAL STYLE

The variety of types and colors of stone-coated metal roof tiles by StoneX allow adorning the facade of any luxurious mansion, the elegant architecture of any villa

LIGHTWEIGHT

The weight of stone-coated metal roof tiles by StoneX is only about 6 kg/m^2, which is seven times lighter than clay tiles. It results in the lower load and greater safety.

KEEPS YOUR HOME QUIET

The special structure of the material and the properties of its components effectively resist the noise of rain and wind, keeping the home quiet and protecting your peace of mind.

DURABILITY

Metal and stone grant strength and durability. The metal alloy acts as a reliable base for the tiles, while the bright colored stone granules protect their surface for many decades.

ALL-WEATHER

The material is resistant to sudden changes in temperature and suitable for use in any climate. Neither ice hail nor the scorching sun will harm your roof.

WIND RESISTENCE

Interlocking panel system offers extraordinary resistance to wind uplift of up to 230 km/h. Be sure of your roof in any storm!

FIRE SAFETY


Stone-coated metal roof tiles by Stoneneither burn nor spread the fire being the safe roofing material.

StoneX Roman




PROPERTIES	ROMAN	ROMAN PLUS
Panel size	1322×425 mm	1322×450 mm
Effective size	1253×370 mm	1253×400 mm
Panels per sqm	2.10 pcs/m2	1.96 pcs/m2
Weight per sqm	5.96 kg/m^2	5.96 kg/m^2

StoneX Bond

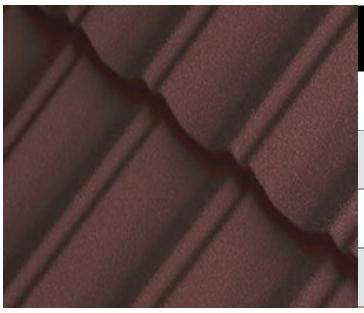

PROPERTIES	BOND
Panel size	1340×420 mm
Effective size	1265×370 mm
Panels per sqm	2.13 pcs/m2
Weight per sqm	5.96 kg/m^2

StoneX Royal

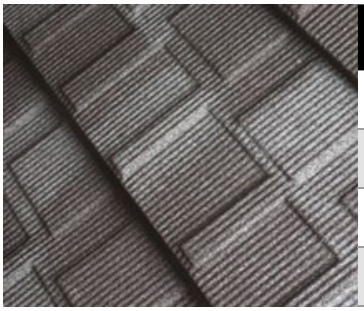


PROPERTIES	SHINGLE
Panel size	1360×420 mm
Effective size	1330×370 mm
Panels per sqm	2.00 pcs/m2
Weight per sqm	5.60 kg/m^2

StoneX Slate



PROPERTIES	SLATE
Panel size	1320×420 mm
Effective size	1250×370 mm
Panels per sqm	2.16 pcs/m2
Weight per sqm	6.05 kg/m^2

StoneX Shake

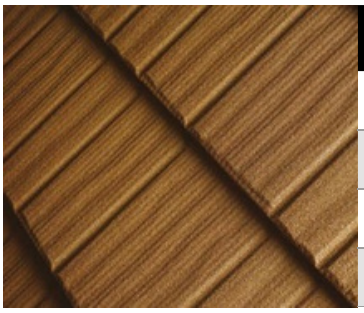

PROPERTIES	SHAKE
Panel size	1370×420 mm
Effective size	1330×370 mm
Panels per sqm	2.00 pcs/m2
Weight per sqm	5.60 kg/m^2

Collection of colors

NOTE: Actual product colors may vary slightly from the colors shown in the catalogue. If color hue is critical for you, please request full-size samples before making your final choice.

Basic colors


Charcoal


Dark grey


Capri blue


Jade


Coffee brown


Teak


Terracotta


Brick red

Dual colors


Granite black


Moss brown


Sea blue


Forest green


Desert brown



Sea mud


Jasper red



Tuscany

Accessories


Barge board flashing




Side flashing




Flat sheet




Fascia flashing

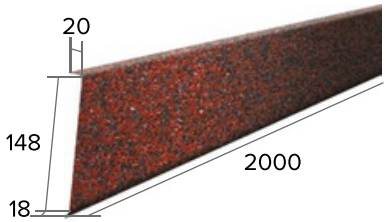


Valley

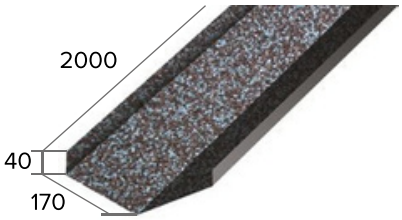


Wall flashing

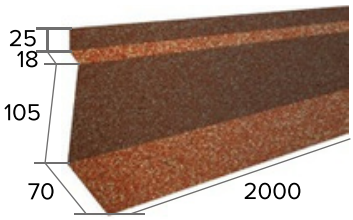


Ridge board flashing

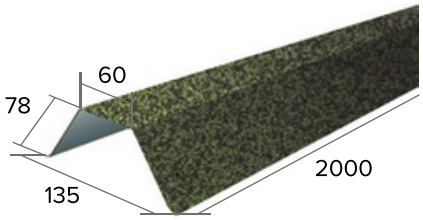


Barrel cap




Angle trim




Ridge cap 105

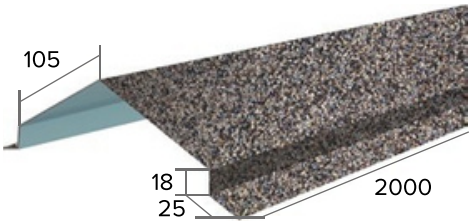


Ridge cap 150

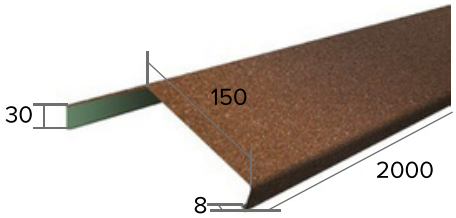

Top course

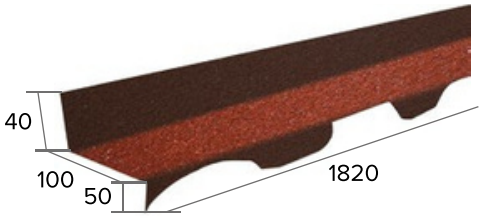

Bird stop

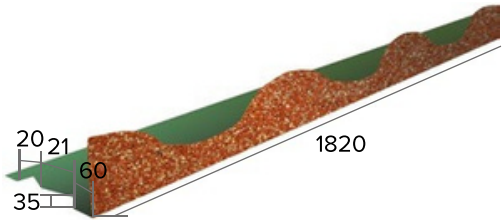

Touch up kit




0.5mm

Royal



Royal Eclipse

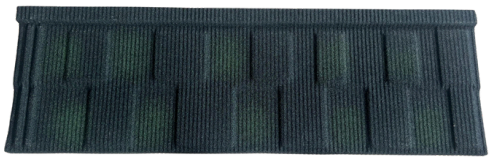

Royal Forest Green




Royal Coffee Brown



Royal Terracotta



Royal Jasper Red

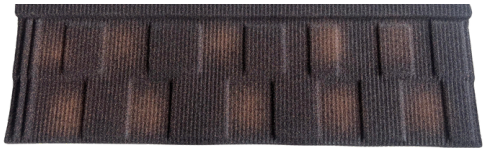

Royal Coffee Brown Double

Bond



Bond Charcol



Bond Coffee Brown



Bond Grey



Bond Teak



Bond Sea Blue



Bond Brick Red

Roman



Roman Grey



Roman Brick Red



Roman Coffee Brown

0.45mm


Royal




Royal Brick Red



Royal Coffee Brown Double

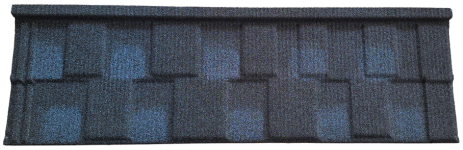

Royal Sea Blue

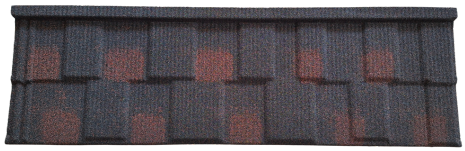

Royal Cherry Red

Bond



Bond Brick Red



Bond Charcol



Bond Coffee Brown



Bond Cherry Red



Bond Forest Green

Shake




Shake Brick Red




Shake Grey


Installation

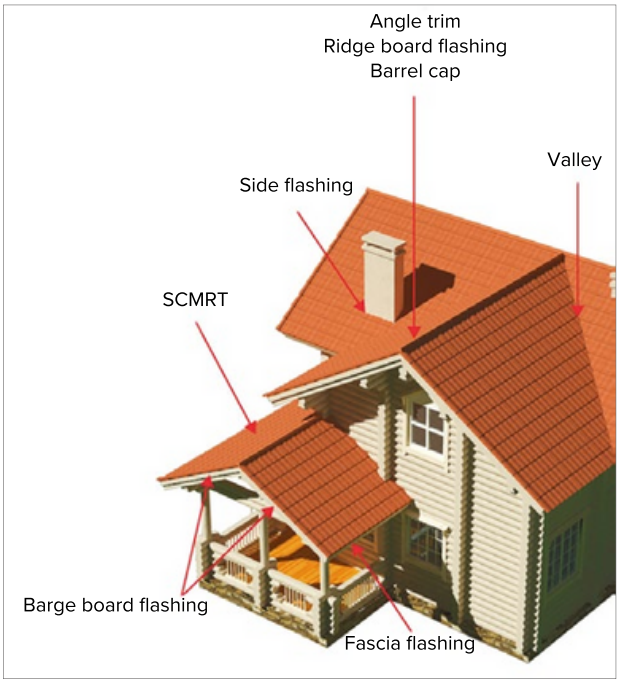


1. Installation of battens

A **50×50 mm** batten is placed directly above the fascia around the entire roof. It will serve as an eave batten. Batten spacing is crucial. They should be spaced **370 mm** apart. This applies to all battens except the distance between the first and second batten. The distance between them should be **350 mm** in order to ensure the necessary overhang of the tiles over the gutter or fascia flashing.






1.1. Installation of SCMRT

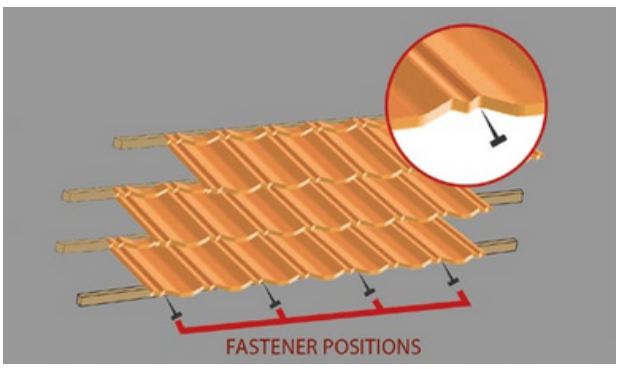


Start instalation from the ridge. Lay the first row of full panels and fasten them along the rear flange. The panels of the next row should be slipped under the panels of the upper row. The overlapping panel must cover the overlap channel.


After laying three courses, begin fastening through the nose of the panel, working down the roof.Panels must be fastened to wood battens with a minimum of four corrosion resistant common nails or four corrosion resistant screws (color coordinated). One fastener is placed near the bottom on the downturn of the panel from the overlapped edge. The remaining fasteners are evenly spaced across the panel. Care must be taken while fastening to avoid damage of the finished panel surfaces. Damaged surfaces can be repaired by using a touch-up kit. Apply the acrylic coating to the affected area and then sprinkle with matching stone granules. Touch-Up Kits are available from StoneX.



To cover areas of the roof remaining after installation of full panels the bending and cutting of tiles is used.




For tile cutter align roof tile with cutter and use force to cut evenly and easily. To make the surface smooth, cut roof tile at once.



For tile bender position the bending machine on a flat surface, and hold the roof tile firmly with controller of under bender and bend freely.

Installation of Accessories


2.1 Installation of valley




After valley flashing has been fit and secured into the valley area and full panels have been positioned up to the valley, measure for cut panels.

Panels are cut and bent down into valleys forming either an open or completely covered (closed) valley. Using the bending equipment bend the tiles downwards for valleys.

To create an open valley, mark the outline of required opening. Working on one side of the valley at a time measure, cut and bend panels starting at the bottom of the valley and working up. Bend cut edge of panels down against the up-stand of the valley metal as indicated in the drawing.






NOTE: Make sure the ends of the valley metal extend beyond the fascia or onto a lower roof area.

To create a closed valley, find and establish the center of the valley by either marking a line or following existing center rib. After valley flashing has been fit and secured into the valley area, start on one side of the valley by measuring, cutting, bending and installing panels as accurately as possible to create a clean straight line. Next, measure, cut and bend panels to fill in the other side of the valley. Make sure these panels meet the pannels from the opposing side of the valley.


2.2 Installation of barge board flashing

When using barge board flashing, install the batten above the rafter and match the top of the barge board to the top of the batten. Note that the edge of the tile is bent up under the barge cover to ensure complete weather security. Nail barge board flashing to barge board as shown nailing points for barge board covers.

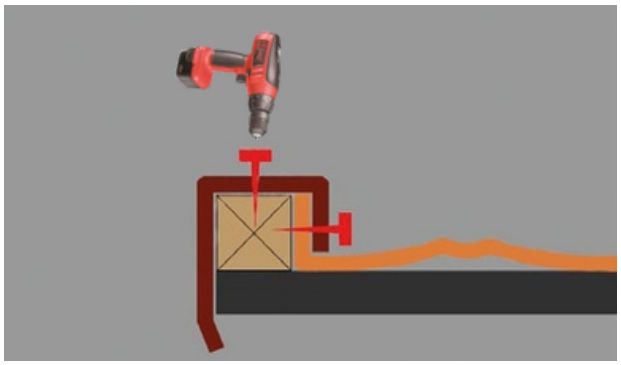

NOTE: The edge of the tile is bent up under the barge cover to ensure complete weather security.

2.4.3. Installation of angle trim, barrel cap and ridge board flashing

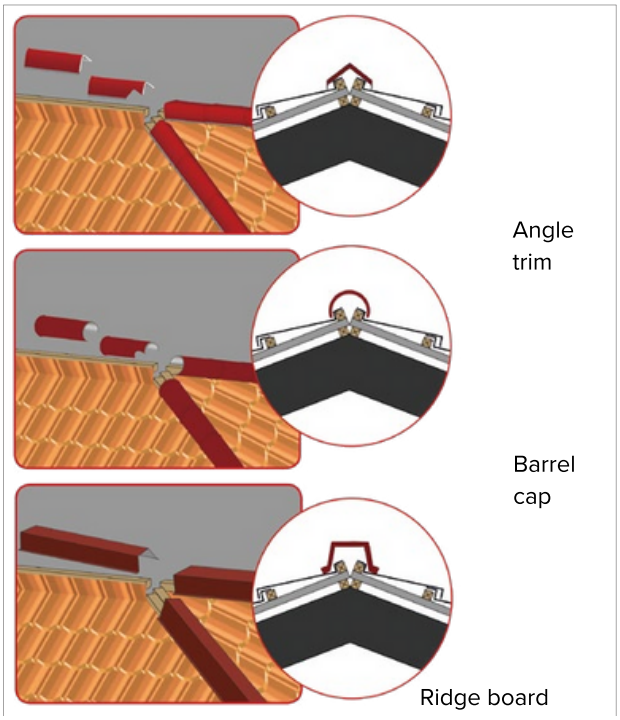

NOTE: The edge of the tile is bent up under the ridge cover to ensure complete weather security.

WHY SHOULD YOU CHOOSE US??

Superior durability

Stone Coated roofing is built to last for decades — it can withstand harsh weather conditions, including heavy rains, high winds, and intense heat

Elegant Appearance

It combines the classic look of clay tiles or shingles with the strength of metal, giving homes a premium, stylish finish that enhances property value.

Lightweight & Strong

Unlike traditional tiles, stone coated roofs are lightweight yet extremely strong. They reduce stress on the building's structure without compromising on protection.

Low Maintenance

With a protective coating and stone chips, these roofs resist fading, rusting, algae growth, and corrosion — offering long-term savings on maintenance.

Lifetime Investment

StoneX coated roofing systems come with 50 years of warranty, giving you peace of mind and a one-time investment that pays off for generations.

Contact us

+91 9544477199 , +91 9544477399

stonexroofing@gmail.com

www.stonexroofing.com

StoneX Roofing Solutions
Near SNIMS Medical College
N.kuthiathode
Eranakulam

StoneX
ROOFING SOLUTIONS