FLAT PATTERN - viewed from bend-note face (UP = toward viewer) scale 1:5

red dash-dot = BEND UP blue dash-dot = BEND DOWN green = ETCH/mark datum A = bottom-left corner of flat

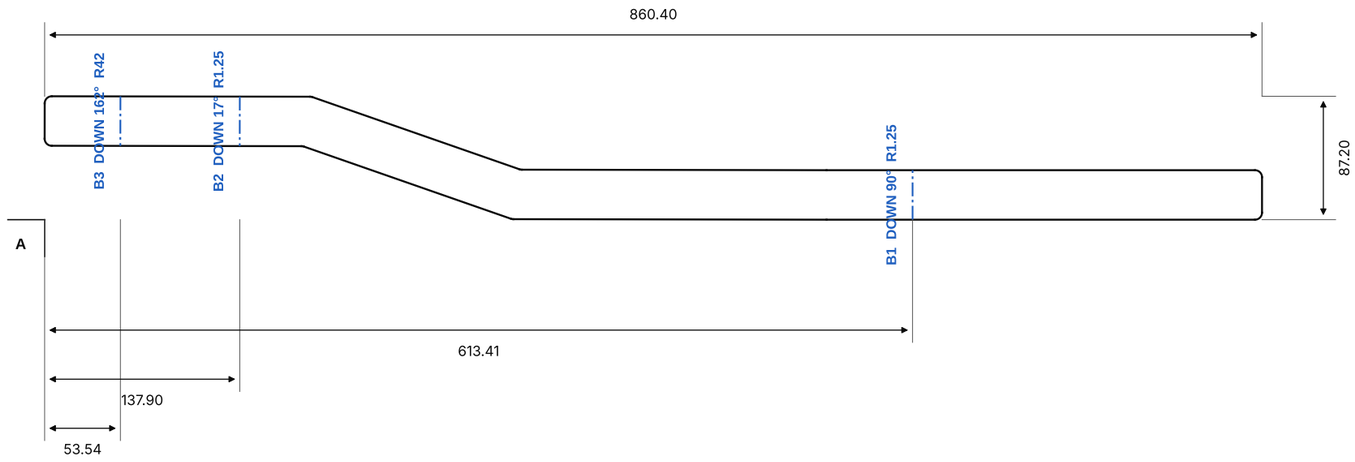

BEND TABLE

No	Dir	Angle	R in	From A	BA	BD	V-die
B1	DOWN	90°	1.25	613.41 (X)	3.41	3.09	16
B2	DOWN	17°	1.25	137.90 (X)	0.64	0.33	16
B3	DOWN	162°	42	53.54 (X)	121.35	434.26	roll

BA = bend allowance, BD = bend deduction (mm), K = 0.46, inside radius as listed. V-die = 8T opening (mm).
"From A" = bend-line centre from datum edge. 304: ~1.5x mild-steel tonnage, 2-3 deg extra springback.
WARNING: B1, B2 inside R < 1T - cracking risk in 304; use R >= 2 tooling or prove on first-off.

FORMED SECTION (neutral axis, to scale)

Flats from A: 53.5 / 84.4 / 475.5 / 247.0 mm

FORMED VIEW (reference, not to scale)

NOTES: (1) Bends confirmed by Veld Armour (source sheet 9 note "NO BENDING" is superseded). (2) B3 (162 deg, R42) wraps the R42 top radius of the upright - roll/bump-form it, then fit the strip over the upright edge; B1/B2 on the brake.

VELD ARMOUR

BUILT FOR THE VELD

CNC / PRESS-BRAKE DATA PACK

PART NO.
VA-BB-17

TITLE
Face 1 (RH trim strip) - FLAT PATTERN

MATERIAL	THICKNESS	QTY / ASSY
304 SS 2B	**2 mm**	**1**
FLAT SIZE	NET MASS	K-FACTOR
860.4 × 87.2	0.48 kg	0.46 (air bend, 304)
BENDS	SOURCE ITEM	DXF
3	#17	VA-BB-17_Face_1_2mm.dxf
TOL. LINEAR	TOL. ANGULAR	FINISH
+/- 0.5 mm	+/- 1 deg	Deburr; brush; passivate

Veld Armour (Pty) Ltd - proprietary; not for distribution without written consent