FLAT PATTERN - viewed from bend-note face (UP = toward viewer) scale 1:1

red dash-dot = BEND UP blue dash-dot = BEND DOWN green = ETCH/mark datum A = bottom-left corner of flat

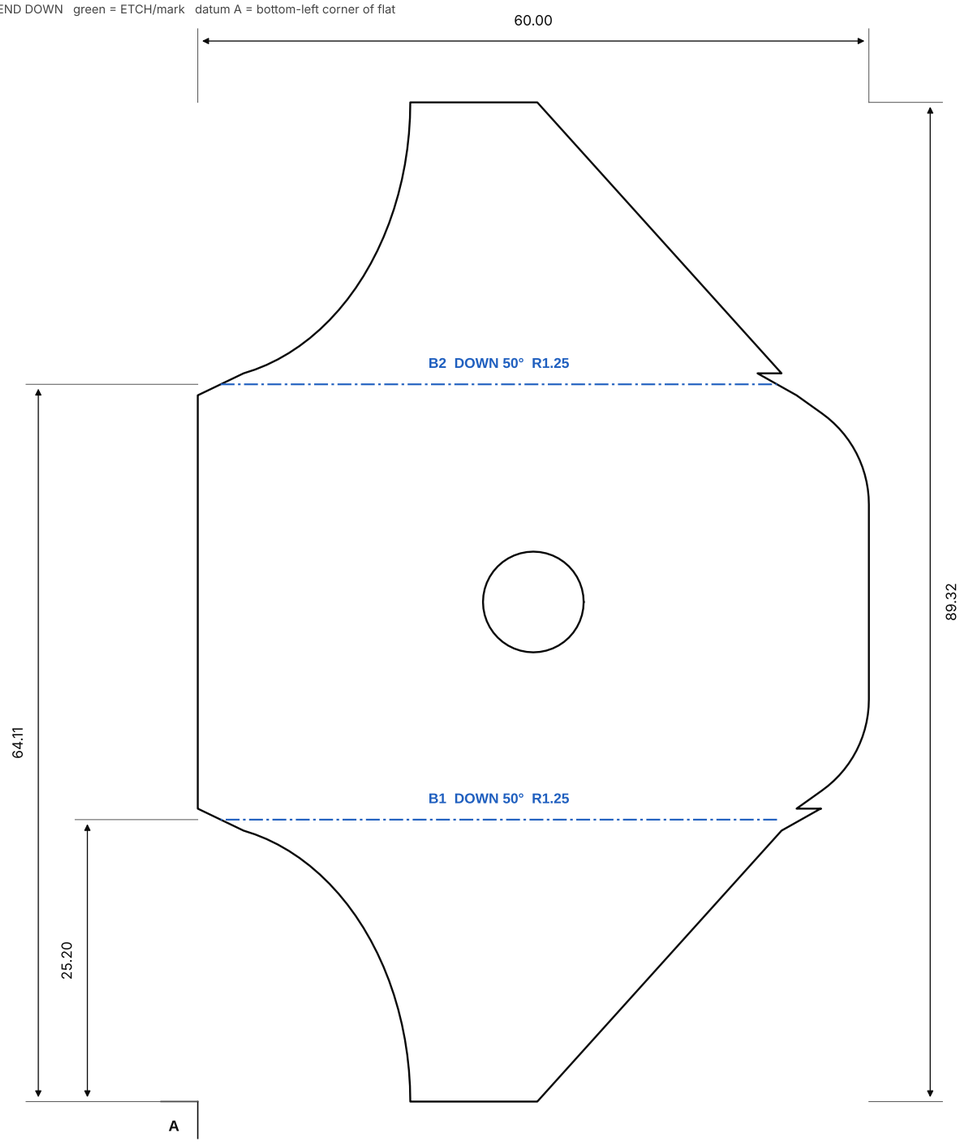

BEND TABLE

No	Dir	Angle	R in	From A	BA	BD	V-die
B1	DOWN	50°	1.25	25.20 (Y)	1.86	1.17	12
B2	DOWN	50°	1.25	64.11 (Y)	1.86	1.17	12

BA = bend allowance, BD = bend deduction (mm), K = 0.44, inside radius as listed.
V-die = recommended opening (mm). "From A" = bend-line centre from datum edge.

FORMED SECTION (neutral axis, to scale)



Flats from A: 25.2 / 38.9 / 25.2 mm

FORMED VIEW (reference, not to scale)

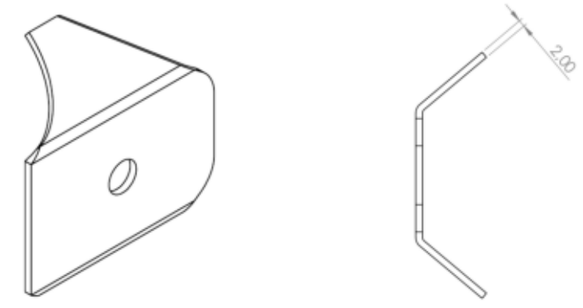

NOTES: (1) Both wings bend the same way (down) to form a saddle. Dia 9 hole for M8 spot-light stud.

VELD ARMOUR

BUILT FOR THE VELD

CNC / PRESS-BRAKE DATA PACK

PART NO.
VA-BB-11

TITLE
Spot bracket (light mount) - FLAT PATTERN

MATERIAL **S355JR**	THICKNESS **2 mm**	QTY / ASSY **2**
FLAT SIZE 60.0 x 89.3	NET MASS 0.06 kg	K-FACTOR 0.44 (air bend)
BENDS 2	SOURCE ITEM #11	DXF VA-BB-11_Spot_bracket_2mm.dxf
TOL. LINEAR +/- 0.5 mm	TOL. ANGULAR +/- 1 deg	FINISH Deburr; powder coat

Veld Armour (Pty) Ltd - proprietary; not for distribution without written consent