
FLAT PATTERN - viewed from bend-note face (UP = toward viewer) scale 1:5

red dash-dot = BEND UP blue dash-dot = BEND DOWN green = ETCH/mark datum A = bottom-left corner of flat

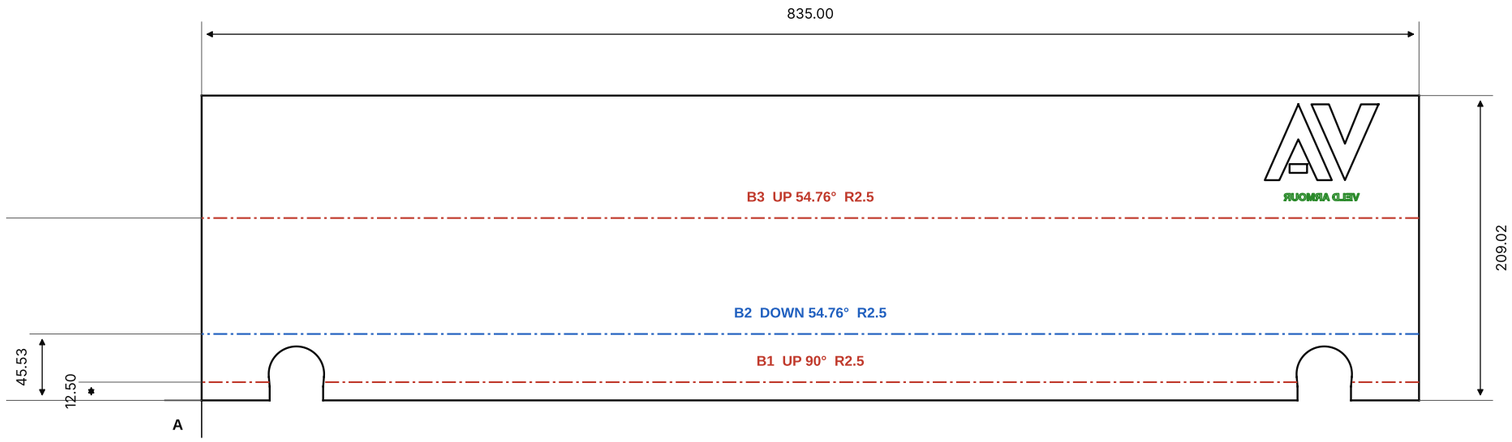


BEND TABLE

No	Dir	Angle	R in	From A	BA	BD	V-die
B1	UP	90°	2.5	12.50 (Y)	6.09	4.91	24
B2	DOWN	54.76°	2.5	45.53 (Y)	3.71	1.99	24
B3	UP	54.76°	2.5	125.04 (Y)	3.71	1.99	24


BA = bend allowance, BD = bend deduction (mm), K = 0.46, inside radius as listed. V-die = 8T opening (mm).
"From A" = bend-line centre from datum edge. 304: ~1.5x mild-steel tonnage, 2-3 deg extra springback.
WARNING: B1, B2, B3 inside R < 1T - cracking risk in 304; use R >= 3 tooling or prove on first-off.

FORMED SECTION (neutral axis, to scale)

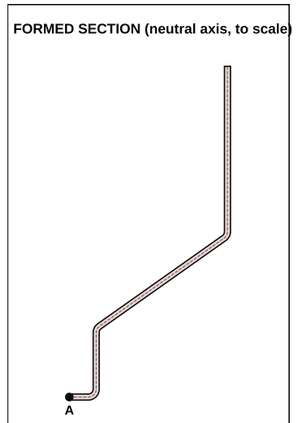

Flats from A: 12.5 / 33.0 / 79.5 / 84.0 mm

FORMED VIEW (reference, not to scale)

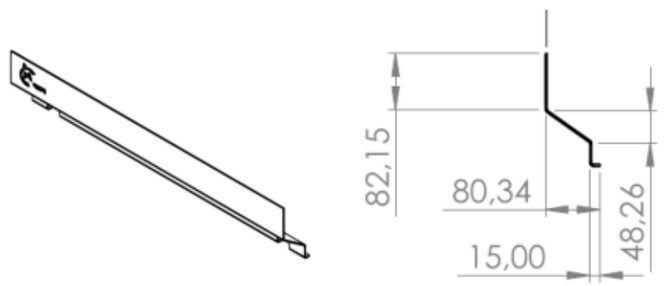

NOTES: (1) Veld Armour monogram cut through; wordmark on ETCH layer (mirrored in flat, reads correct on outside face). (2) Half-round notches clear the upright lugs - check fit-up before final bend.

VELD ARMOUR

BUILT FOR THE VELD

CNC / PRESS-BRAKE DATA PACK

PART NO.
VA-BB-01

TITLE
Centre panel - FLAT PATTERN

MATERIAL	THICKNESS	QTY / ASSY
304 SS 2B	**3 mm**	**1**
FLAT SIZE	NET MASS	K-FACTOR
835.0 x 209.0	4.05 kg	0.46 (air bend, 304)
BENDS	SOURCE ITEM	DXF
3	#1	VA-BB-01_Centre_panel_3mm.dxf
TOL. LINEAR	TOL. ANGULAR	FINISH
+/- 0.5 mm	+/- 1 deg	Deburr; brush; passivate

Veld Armour (Pty) Ltd - proprietary; not for distribution without written consent