
FLAT PATTERN - viewed from bend-note face (UP = toward viewer) scale 1:2

red dash-dot = BEND UP blue dash-dot = BEND DOWN green = ETCH/mark datum A = bottom-left corner of flat

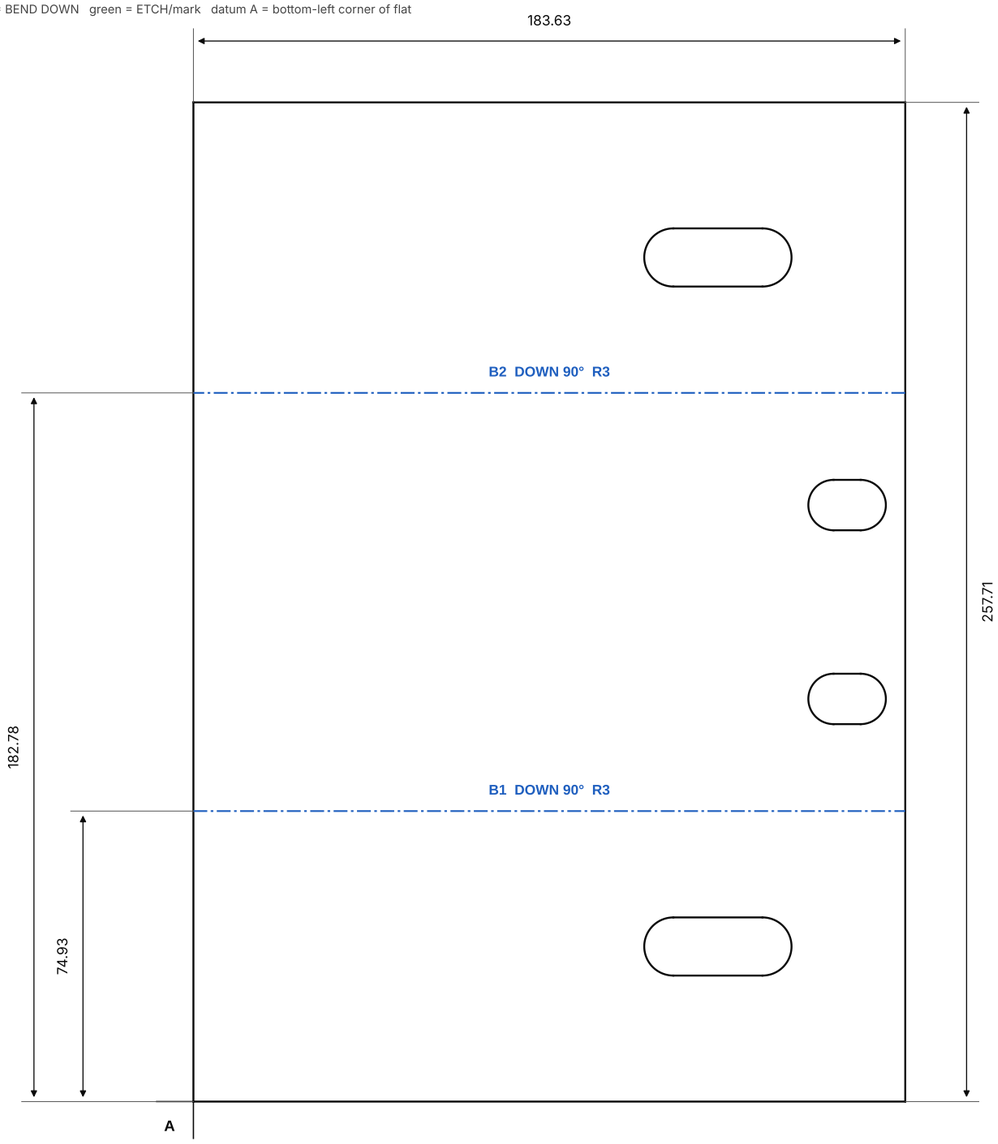


BEND TABLE

No	Dir	Angle	R in	From A	BA	BD	V-die
B1	DOWN	90°	3	74.93 (Y)	8.33	7.67	40
B2	DOWN	90°	3	182.78 (Y)	8.33	7.67	40


BA = bend allowance, BD = bend deduction (mm), K = 0.46, inside radius as listed. V-die = 8T opening (mm).
"From A" = bend-line centre from datum edge. 304: ~1.5x mild-steel tonnage, 2-3 deg extra springback.
WARNING: B1, B2 inside R < 1T - cracking risk in 304; use R >= 5 tooling or prove on first-off.

FORMED SECTION (neutral axis, to scale)



Flats from A: 74.9 / 107.9 / 74.9 mm

FORMED VIEW (reference, not to scale)



NOTES: (1) U-channel: bend both legs in the same direction. Check slot alignment to chassis rail after forming.

VELD ARMOUR

BUILT FOR THE VELD

CNC / PRESS-BRAKE DATA PACK

PART NO.
VA-BB-06

TITLE
Bracket 1 (chassis bracket) - FLAT PATTERN

MATERIAL	THICKNESS	QTY / ASSY
304 SS 2B	**5 mm**	**2**
FLAT SIZE	NET MASS	K-FACTOR
183.6 × 257.7	1.82 kg	0.46 (air bend, 304)
BENDS	SOURCE ITEM	DXF
2	#6	VA-BB-06_Bracket_1_5mm.dxf
TOL. LINEAR	TOL. ANGULAR	FINISH
+/- 0.5 mm	+/- 1 deg	Deburr; brush; passivate

Veld Armour (Pty) Ltd - proprietary; not for distribution without written consent