FLAT PATTERN - viewed from bend-note face (UP = toward viewer) scale 1:5

red dash-dot = BEND UP blue dash-dot = BEND DOWN green = ETCH/mark datum A = bottom-left corner of flat

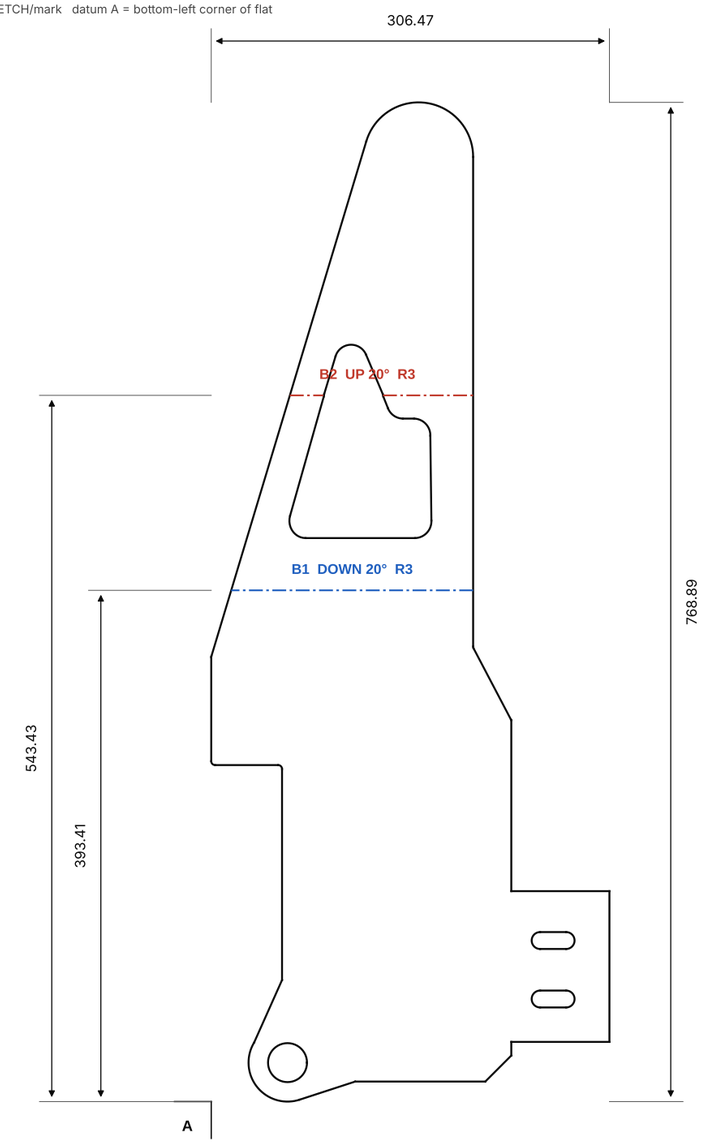

BEND TABLE

No	Dir	Angle	R in	From A	BA	BD	V-die
B1	DOWN	20°	3	393.41 (Y)	1.85	0.97	40
B2	UP	20°	3	543.43 (Y)	1.85	0.97	40

BA = bend allowance, BD = bend deduction (mm), K = 0.46, inside radius as listed. V-die = 8T opening (mm).
"From A" = bend-line centre from datum edge. 304: ~1.5x mild-steel tonnage, 2-3 deg extra springback.
WARNING: B1, B2 inside R < 1T - cracking risk in 304; use R >= 5 tooling or prove on first-off.

FORMED SECTION (neutral axis, to scale)

Flats from A: 393.4 / 150.0 / 225.5 mm

FORMED VIEW (reference, not to scale)

NOTES: (1) Two opposed 20 deg bends form a joggle - set back gauge from the slotted foot (datum edge A). (2) Lug (VA-BB-07) welds over the dia 30 hole; R30 boss on this part matches lug outer radius.

VELD ARMOUR

BUILT FOR THE VELD

CNC / PRESS-BRAKE DATA PACK

PART NO.
VA-BB-03

TITLE
Upright RH - FLAT PATTERN

MATERIAL	THICKNESS	QTY / ASSY
304 SS 2B	**5 mm**	**1**
FLAT SIZE	NET MASS	K-FACTOR
306.5 × 768.9	4.66 kg	0.46 (air bend, 304)
BENDS	SOURCE ITEM	DXF
2	#3	VA-BB-03_Upright_RH_5mm.dxf
TOL. LINEAR	TOL. ANGULAR	FINISH
+/- 0.5 mm	+/- 1 deg	Deburr; brush; passivate

Veld Armour (Pty) Ltd - proprietary; not for distribution without written consent