FLAT PATTERN - viewed from bend-note face (UP = toward viewer) scale 1:1

red dash-dot = BEND UP blue dash-dot = BEND DOWN green = ETCH/mark datum A = bottom-left corner of flat

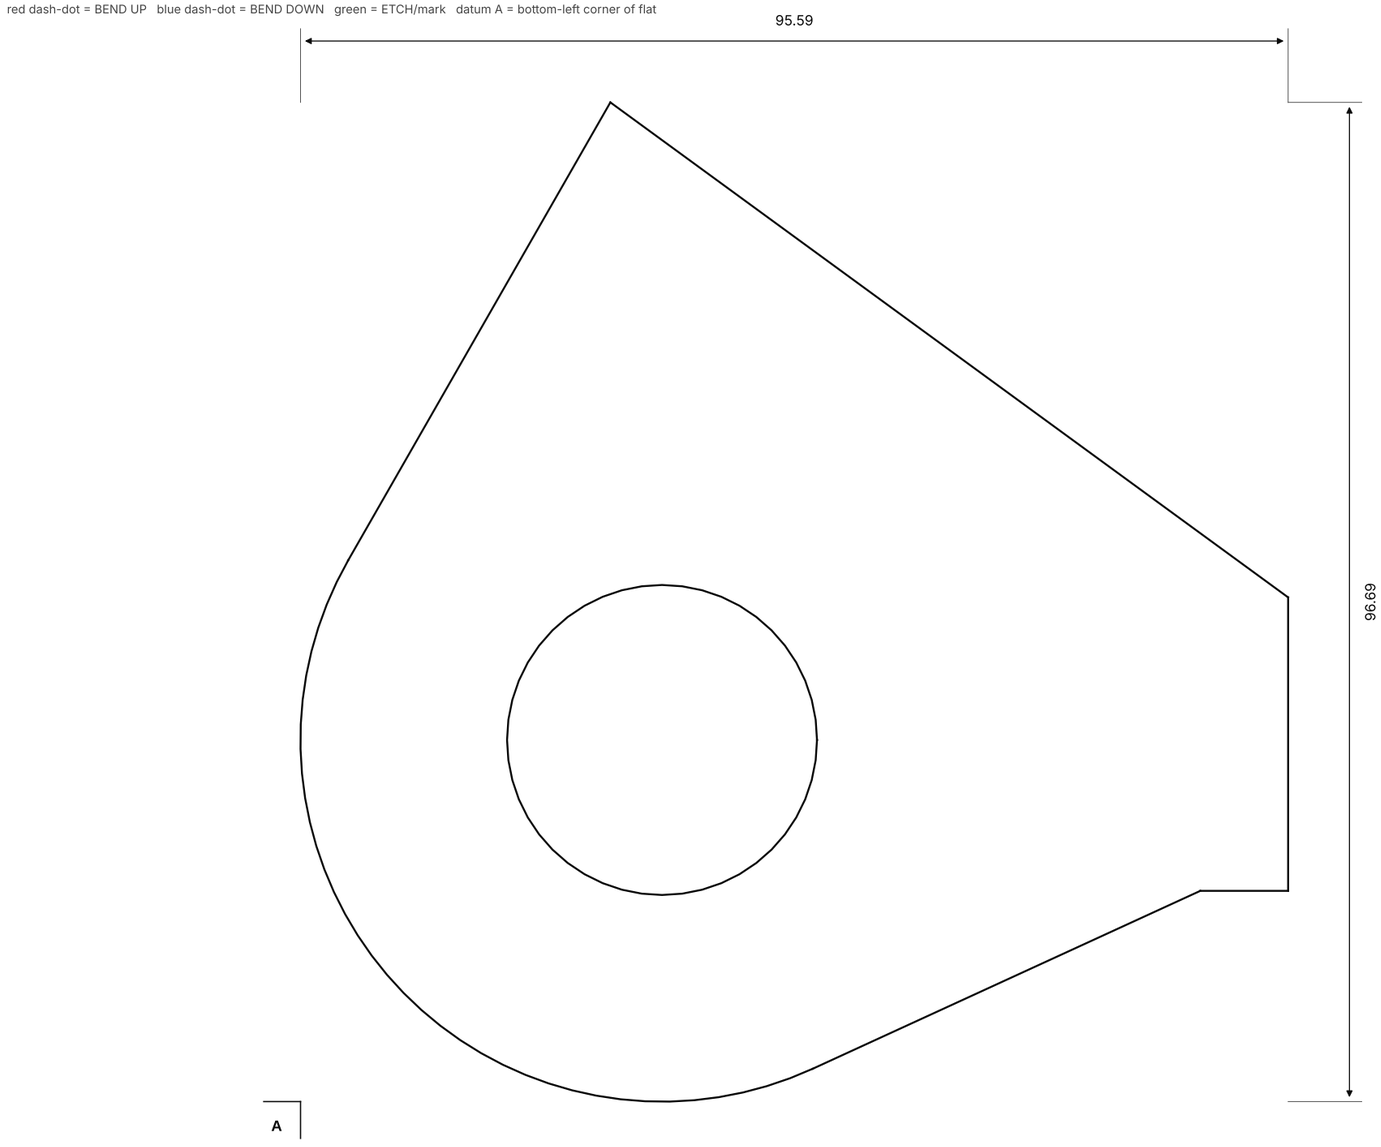

BEND TABLE

No	Dir	Angle	R in	From A	BA	BD	V-die
No bends - flat laser-cut part.							

BA = bend allowance, BD = bend deduction (mm), K = 0.46, inside radius as listed. V-die = 8T opening (mm).
"From A" = bend-line centre from datum edge. 304: ~1.5x mild-steel tonnage, 2-3 deg extra springback.

FORMED SECTION (neutral axis, to scale)

Flat part - no section.

FORMED VIEW (reference, not to scale)



NOTES: (1) Redrawn from assembly drawing sheet 8 (no flat supplied in source). Dia 30 hole. Uprated from the source 8 mm / R30 to 12 mm / R35 boss (20 mm ligament); boss overhangs the upright R30 by 5 mm. (2) Laser cut 12 mm with nitrogen; dress the hole for a 30 mm pin / shackle bow. Weld through to the chassis bracket, not only to the 3 mm end panel.

VELD ARMOUR

BUILT FOR THE VELD

CNC / PRESS-BRAKE DATA PACK

PART NO.
VA-BB-07

TITLE
Recovery lug - FLAT PATTERN

MATERIAL	THICKNESS	QTY / ASSY
304 SS 2B	**12 mm**	**4**
FLAT SIZE	NET MASS	K-FACTOR
95.6 × 96.7	0.50 kg	0.46 (air bend, 304)
BENDS	SOURCE ITEM	DXF
0	#7	VA-BB-07_Recovery_lug_12mm.dxf
TOL. LINEAR	TOL. ANGULAR	FINISH
+/- 0.5 mm	+/- 1 deg	Deburr; brush; passivate

Veld Armour (Pty) Ltd - proprietary; not for distribution without written consent