
FLAT PATTERN - viewed from bend-note face (UP = toward viewer) scale 1:1

red dash-dot = BEND UP blue dash-dot = BEND DOWN green = ETCH/mark datum A = bottom-left corner of flat

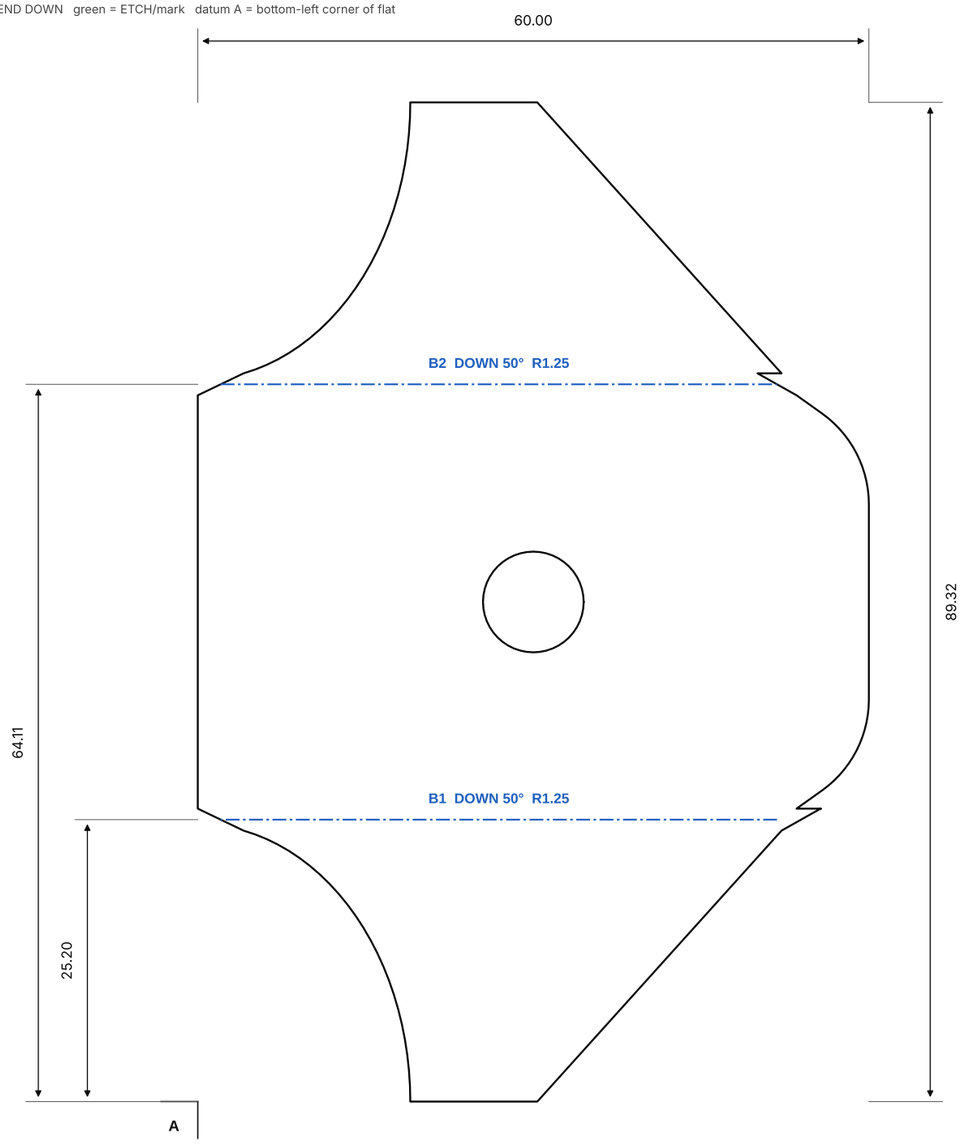


BEND TABLE

No	Dir	Angle	R in	From A	BA	BD	V-die
B1	DOWN	50°	1.25	25.20 (Y)	1.89	1.14	16
B2	DOWN	50°	1.25	64.11 (Y)	1.89	1.14	16


BA = bend allowance, BD = bend deduction (mm), K = 0.46, inside radius as listed. V-die = 8T opening (mm).
"From A" = bend-line centre from datum edge. 304: ~1.5x mild-steel tonnage, 2-3 deg extra springback.
WARNING: B1, B2 inside R < 1T - cracking risk in 304; use R >= 2 tooling or prove on first-off.

FORMED SECTION (neutral axis, to scale)



Flats from A: 25.2 / 38.9 / 25.2 mm

FORMED VIEW (reference, not to scale)

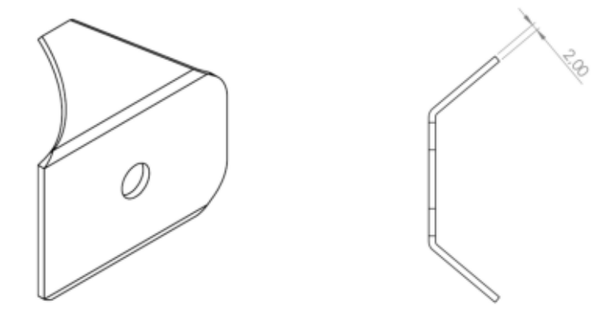

NOTES: (1) Both wings bend the same way (down) to form a saddle. Dia 9 hole for M8 spot-light stud.

VELD ARMOUR

BUILT FOR THE VELD

CNC / PRESS-BRAKE DATA PACK

PART NO.
VA-BB-11

TITLE
Spot bracket (light mount) - FLAT PATTERN

MATERIAL **304 SS 2B**	THICKNESS **2 mm**	QTY / ASSY **2**
FLAT SIZE 60.0 x 89.3	NET MASS 0.06 kg	K-FACTOR 0.46 (air bend, 304)
BENDS 2	SOURCE ITEM #11	DXF VA-BB-11_Spot_bracket_2mm.dxf
TOL. LINEAR +/- 0.5 mm	TOL. ANGULAR +/- 1 deg	FINISH Deburr; brush; passivate

Veld Armour (Pty) Ltd - proprietary; not for distribution without written consent