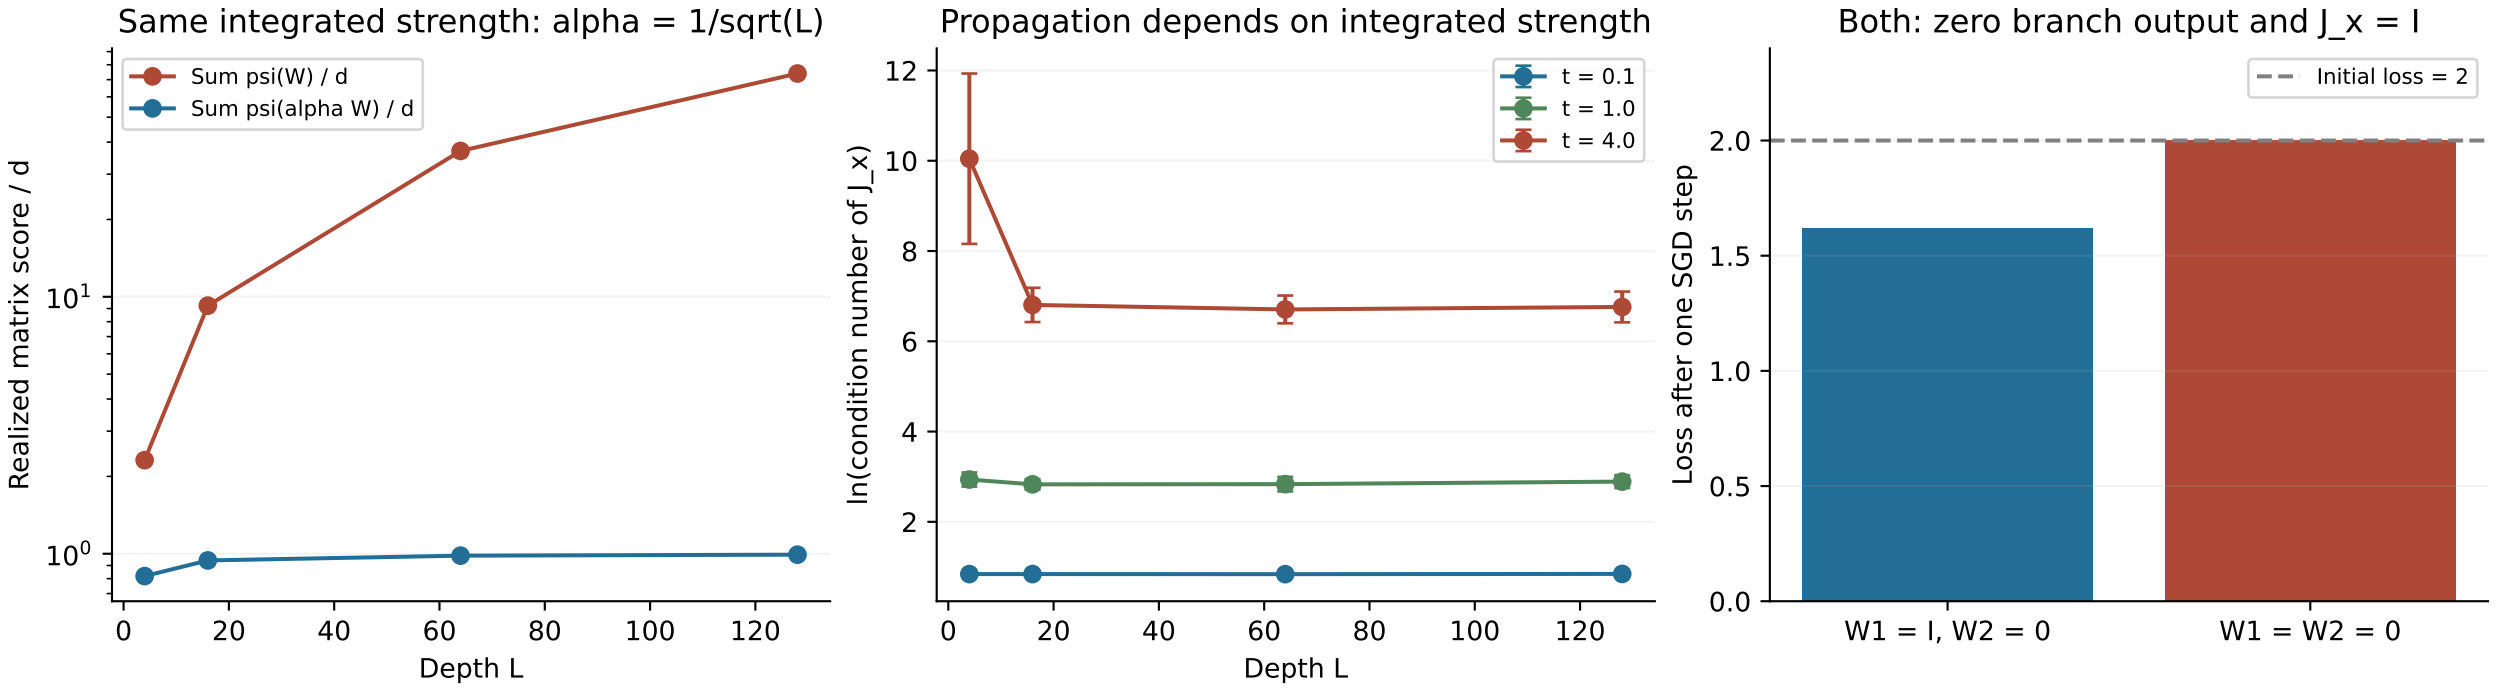
Same integrated strength: alpha = 1/sqrt(L)
Sum psi(W) / d
Sum psi(alpha W) / d
Realized matrix score / d
10^1
10^0
0
20
40
60
80
100
120
Depth L
Propagation depends on integrated strength
t = 0.1
t = 1.0
t = 4.0
ln(condition number of J_x)
12
10
8
6
4
2
0
20
40
60
80
100
120
Depth L
Both: zero branch output and J_x = I
Initial loss = 2
Loss after one SGD step
2.0
1.5
1.0
0.5
0.0
W1 = I, W2 = 0
W1 = W2 = 0