
# SSS-FAA-006-01-0

6" FAA Airport "0" - kit SSS-FAA-006-01, traced from 1-800-Stencil image, 1.5 W x 6 H

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:4)

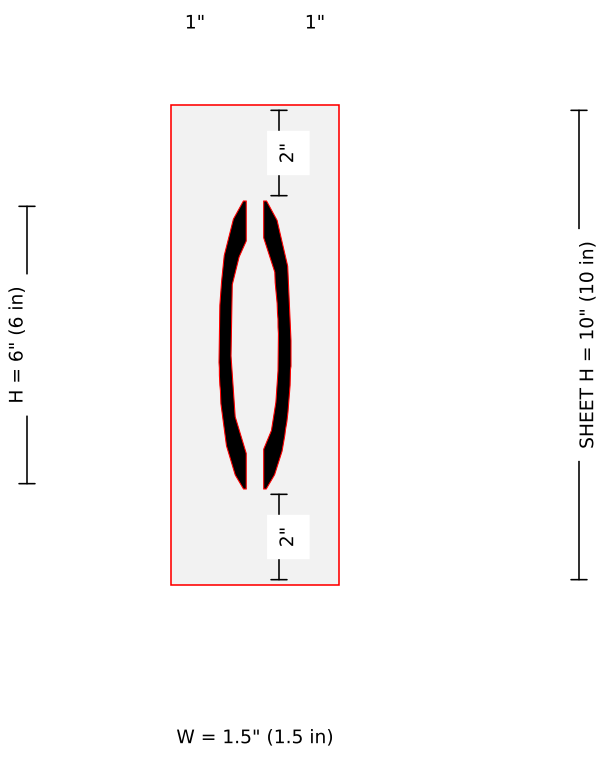


SHEET W = 3.5" (3.5 in)


Pieces: 1 · sheet 3.5 x 10 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-0060-6in-FAA-Airport-Number-0-2.jpg: width 1.5 from image scale (1.67); NOT the kit listing width; kit sheet 4 x 10 (side margin 1).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.02 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-006-01-1

6" FAA Airport "1" - kit SSS-FAA-006-01, traced from 1-800-Stencil image, 0.5 W x 6 H

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:4)

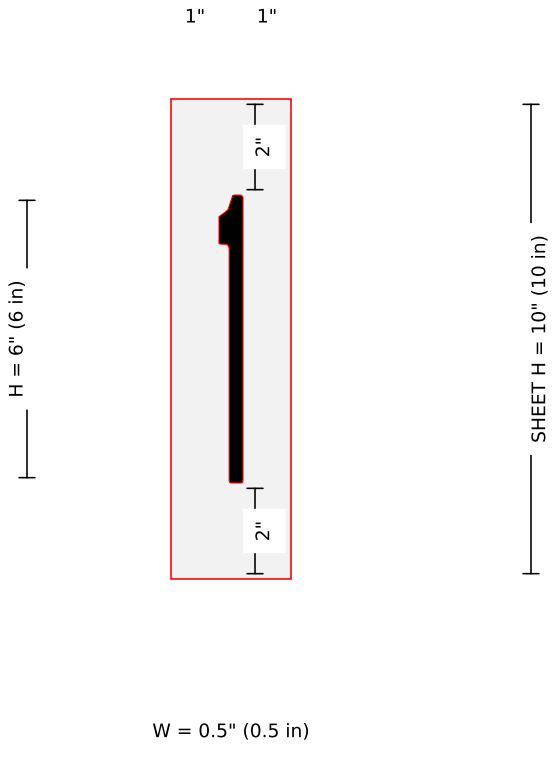


SHEET W = 2.5" (2.5 in)


Pieces: 1 · sheet 2.5 x 10 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0060-0721-6in-FAA-Airport-Number-1-2.jpg: width 0.5 from image scale (0.49); NOT the kit listing width; kit sheet 4 x 10 (side margin 1).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.02 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-006-01-2

6" FAA Airport "2" - kit SSS-FAA-006-01, traced from 1-800-Stencil image, 1.5 W x 6 H

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:4)

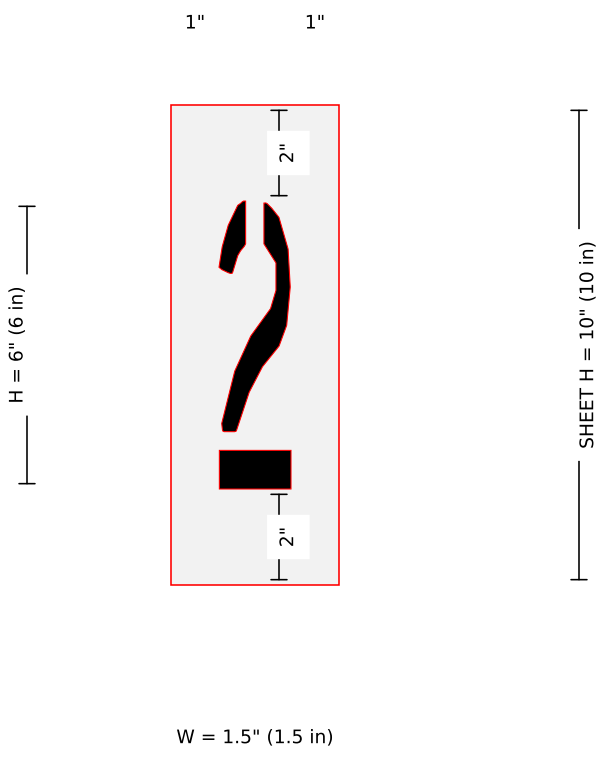


SHEET W = 3.5" (3.5 in)


Pieces: 1 · sheet 3.5 x 10 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-0062-6in-FAA-Airport-Number-2-2.jpg: width 1.5 from image scale (1.57); NOT the kit listing width; kit sheet 4 x 10 (side margin 1).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.02 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-006-01-3

6" FAA Airport "3" - kit SSS-FAA-006-01, traced from 1-800-Stencil image, 1.5 W x 6 H

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:4)

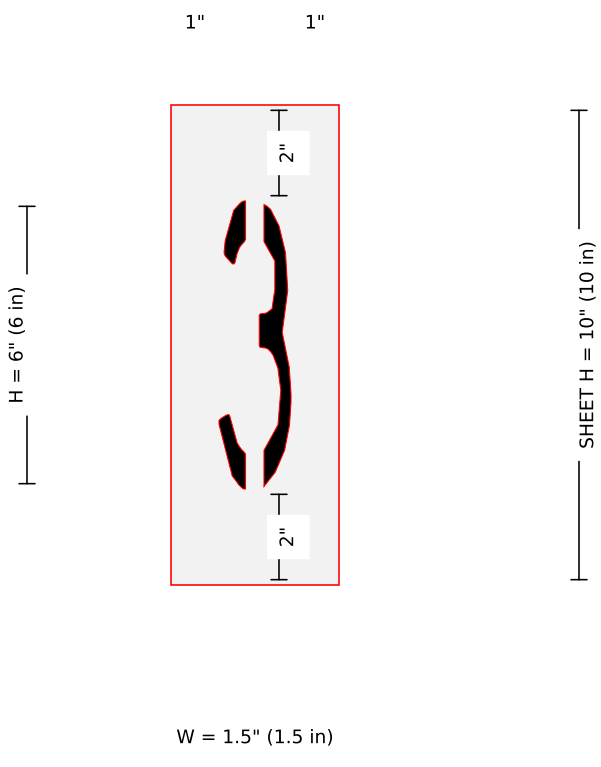


SHEET W = 3.5" (3.5 in)


Pieces: 1 · sheet 3.5 x 10 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-0063-6in-FAA-Airport-Number-3-2.jpg: width 1.5 from image scale (1.54); NOT the kit listing width; kit sheet 4 x 10 (side margin 1).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.02 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-006-01-4

6" FAA Airport "4" - kit SSS-FAA-006-01, traced from 1-800-Stencil image, 1.5 W x 6 H

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:4)

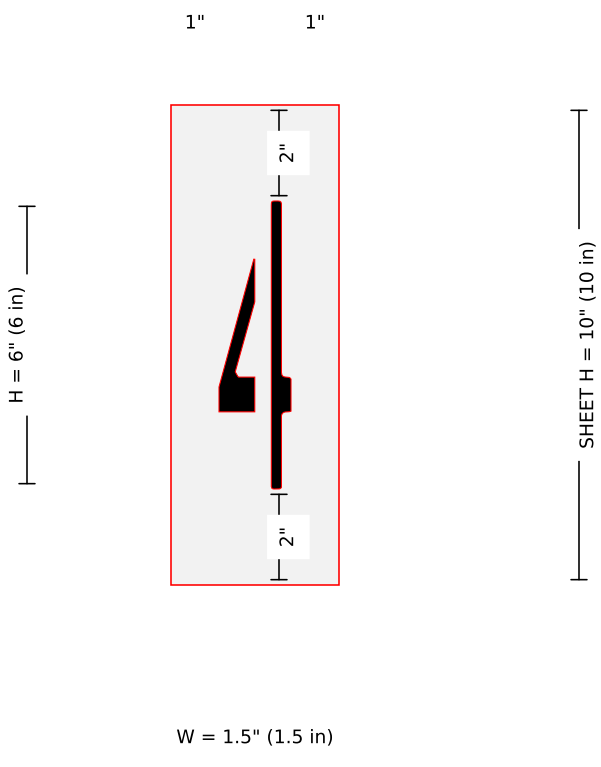


SHEET W = 3.5" (3.5 in)


Pieces: 1 · sheet 3.5 x 10 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-0064-6in-FAA-Airport-Number-4-2.jpg: width 1.5 from image scale (1.72); NOT the kit listing width; kit sheet 4 x 10 (side margin 1).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.02 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-006-01-5

6" FAA Airport "5" - kit SSS-FAA-006-01, traced from 1-800-Stencil image, 1.5 W x 6 H

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:4)

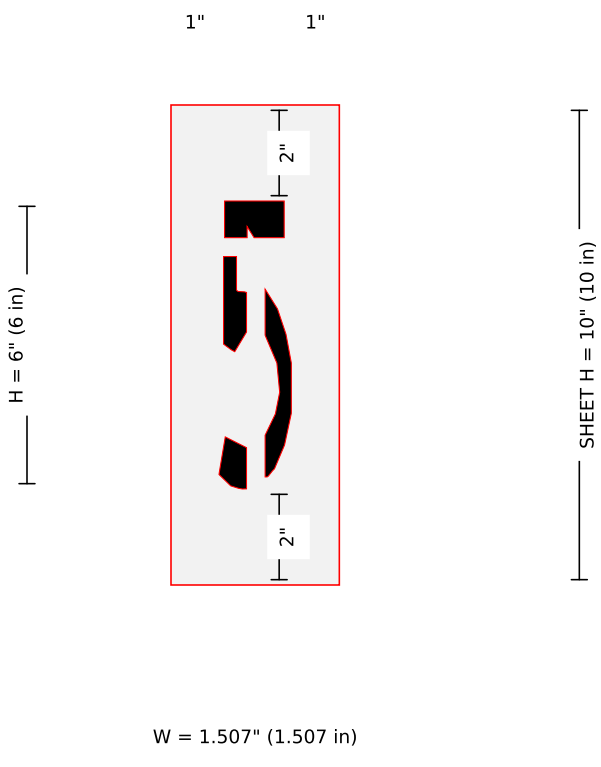


SHEET W = 3.507" (3.507 in)


Pieces: 1 · sheet 3.507 x 10 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-0065-6in-FAA-Airport-Number-5-2.jpg: width 1.5 from image scale (1.53); NOT the kit listing width; kit sheet 4 x 10 (side margin 1).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.02 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-006-01-6

6" FAA Airport "6" - kit SSS-FAA-006-01, traced from 1-800-Stencil image, 1.5 W x 6 H

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:4)

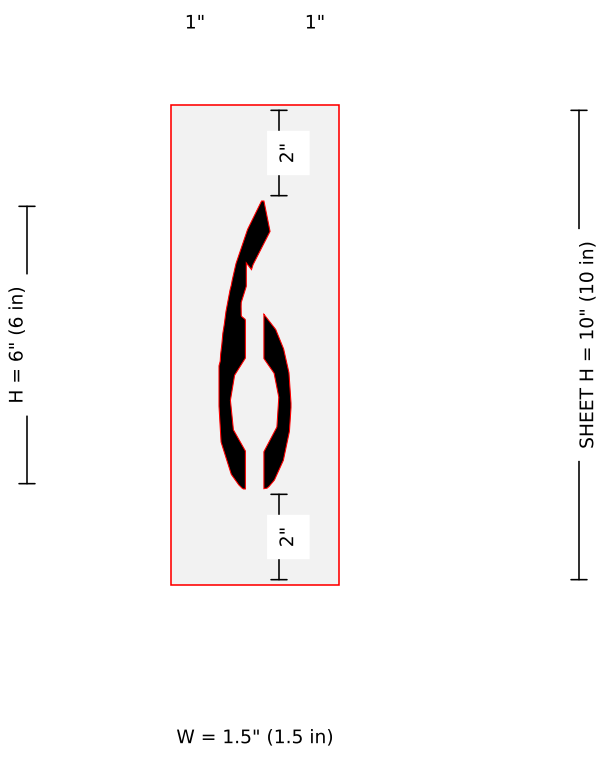


SHEET W = 3.5" (3.5 in)


Pieces: 1 · sheet 3.5 x 10 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-0066-6in-FAA-Airport-Number-6-2.jpg: width 1.5 from image scale (1.60); NOT the kit listing width; kit sheet 4 x 10 (side margin 1).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.02 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-006-01-7

6" FAA Airport "7" - kit SSS-FAA-006-01, traced from 1-800-Stencil image, 1.5 W x 6 H

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:4)

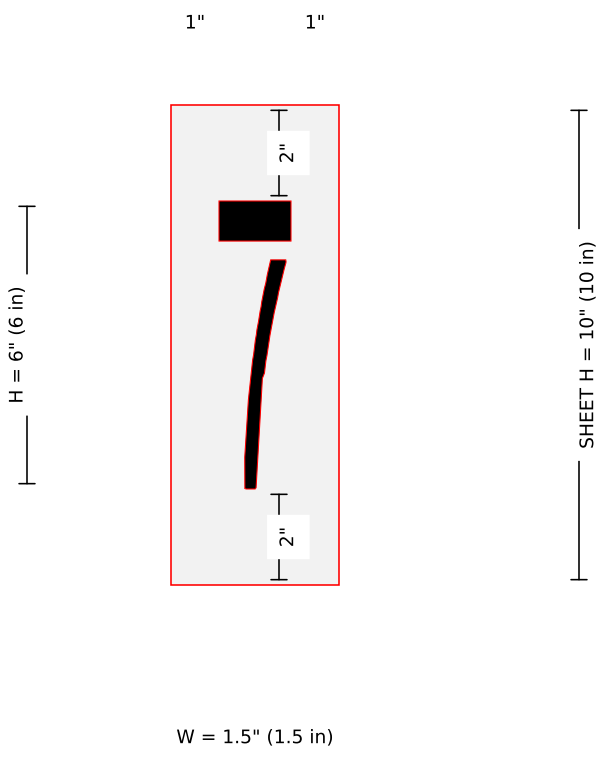


SHEET W = 3.5" (3.5 in)


Pieces: 1 · sheet 3.5 x 10 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-0067-6in-FAA-Airport-Number-7-2.jpg: width 1.5 from image scale (1.54); NOT the kit listing width; kit sheet 4 x 10 (side margin 1).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.02 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-006-01-8

6" FAA Airport "8" - kit SSS-FAA-006-01, traced from 1-800-Stencil image, 1.5 W x 6 H

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:4)

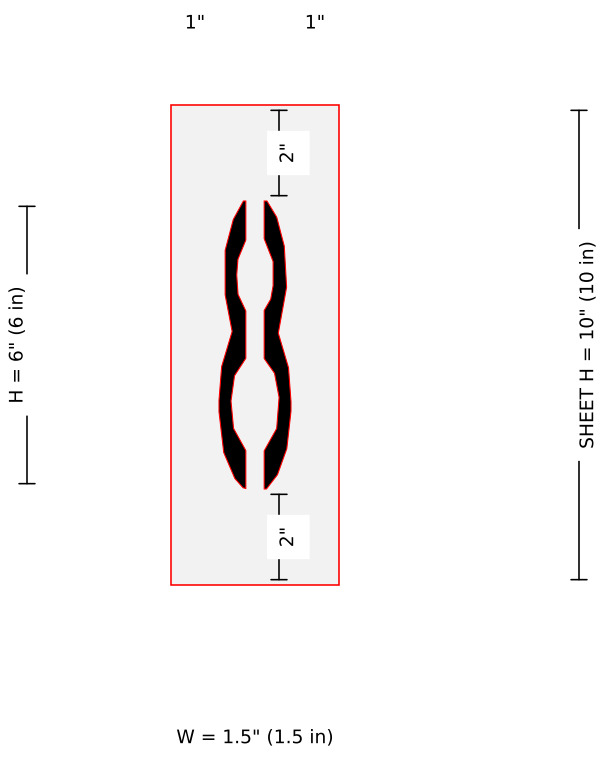


SHEET W = 3.5" (3.5 in)


Pieces: 1 · sheet 3.5 x 10 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-0068-6in-FAA-Airport-Number-8-2.jpg: width 1.5 from image scale (1.59); NOT the kit listing width; kit sheet 4 x 10 (side margin 1).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.02 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-006-01-9

6" FAA Airport "9" - kit SSS-FAA-006-01, traced from 1-800-Stencil image, 1.5 W x 6 H

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:4)

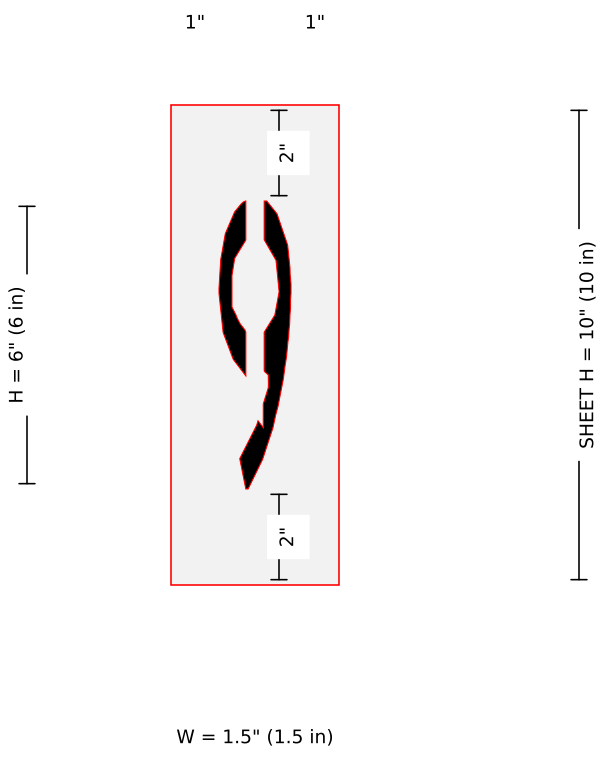


SHEET W = 3.5" (3.5 in)


Pieces: 1 · sheet 3.5 x 10 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-0069-6in-FAA-Airport-Number-9-2.jpg: width 1.5 from image scale (1.60); NOT the kit listing width; kit sheet 4 x 10 (side margin 1).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.02 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-006-01-A

6" FAA Airport "A" - kit SSS-FAA-006-01, traced from 1-800-Stencil image, 2 W x 6 H

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:4)

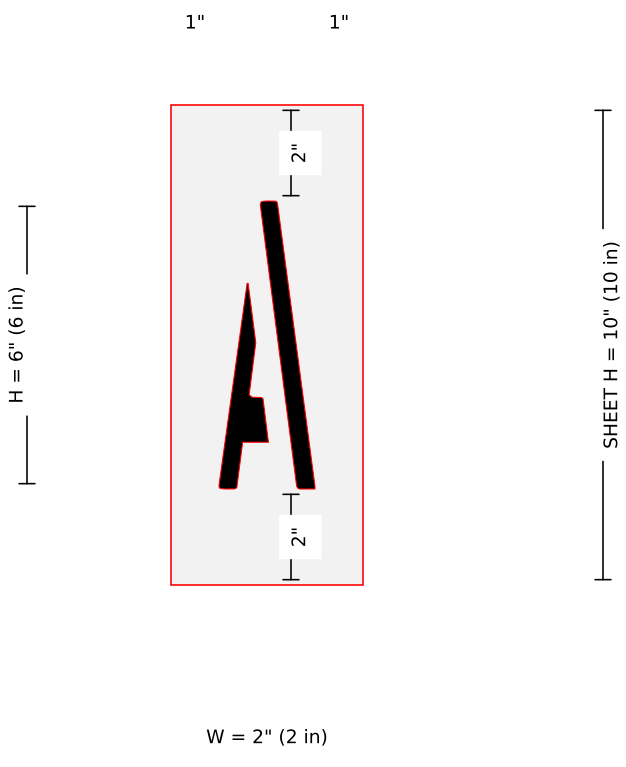


SHEET W = 4" (4 in)


Pieces: 1 · sheet 4 x 10 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-006A-6in-FAA-Airport-Letter-A-2.jpg: width 2 from image scale (1.88); NOT the kit listing width; kit sheet 4 x 10 (side margin 1).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.02 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-006-01-B

6" FAA Airport "B" - kit SSS-FAA-006-01, traced from 1-800-Stencil image, 1.5 W x 6 H

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:4)

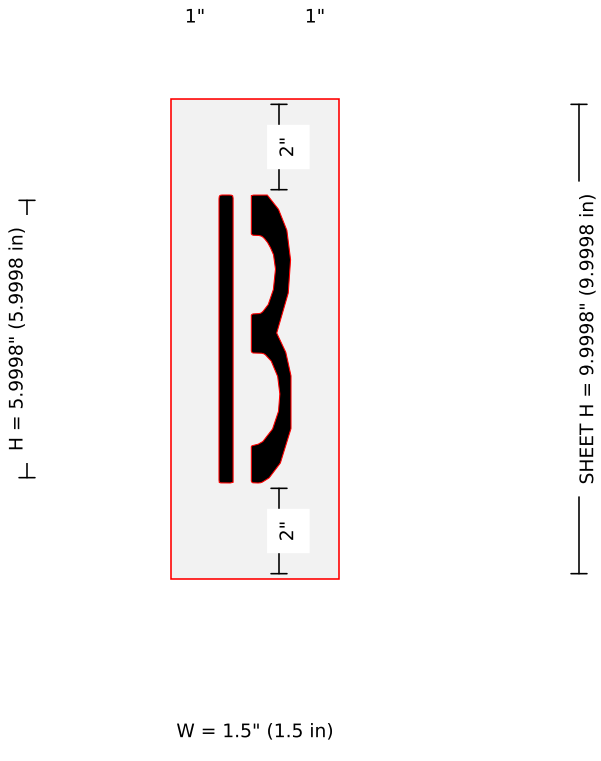


SHEET W = 3.5" (3.5 in)


Pieces: 1 · sheet 3.5 x 10 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-006B-6in-FAA-Airport-Letter-B-2.jpg: width 1.5 from image scale (1.54); NOT the kit listing width; kit sheet 4 x 10 (side margin 1).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.02 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-006-01-C

6" FAA Airport "C" - kit SSS-FAA-006-01, traced from 1-800-Stencil image, 1.5 W x 6 H

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:4)

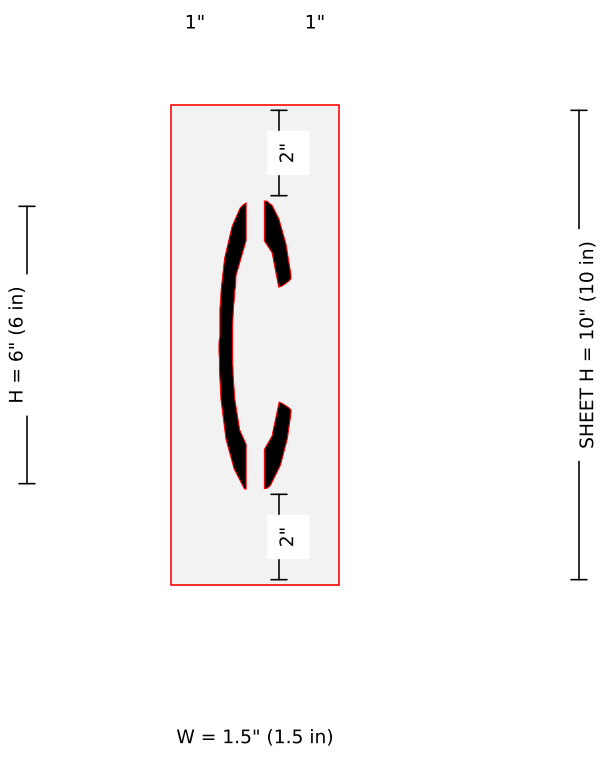


SHEET W = 3.5" (3.5 in)


Pieces: 1 · sheet 3.5 x 10 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-006C-6in-FAA-Airport-Letter-C-2.jpg: width 1.5 from image scale (1.59); NOT the kit listing width; kit sheet 4 x 10 (side margin 1).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.02 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-006-01-D

6" FAA Airport "D" - kit SSS-FAA-006-01, traced from 1-800-Stencil image, 1.5 W x 6 H

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:4)

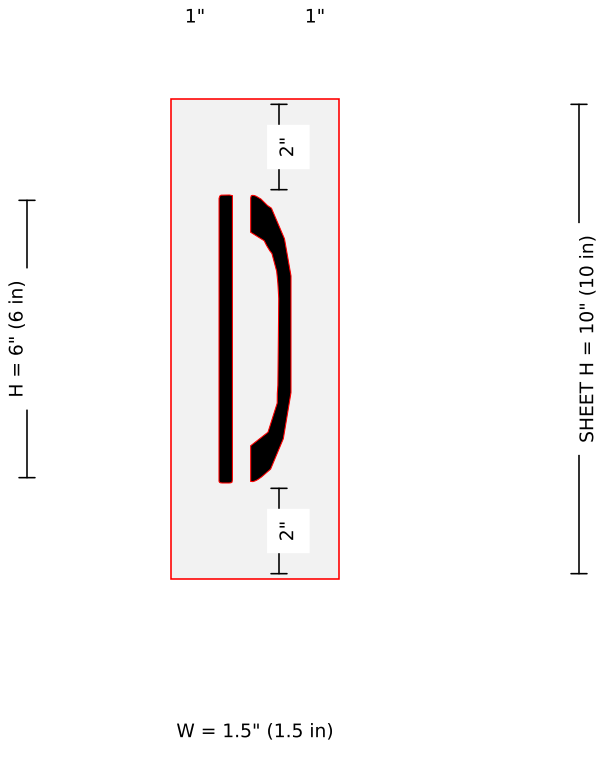


SHEET W = 3.5" (3.5 in)


Pieces: 1 · sheet 3.5 x 10 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-006D-6in-FAA-Airport-Letter-D-2.jpg: width 1.5 from image scale (1.56); NOT the kit listing width; kit sheet 4 x 10 (side margin 1).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.02 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-006-01-E

6" FAA Airport "E" - kit SSS-FAA-006-01, traced from 1-800-Stencil image, 1.5 W x 6 H

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:4)

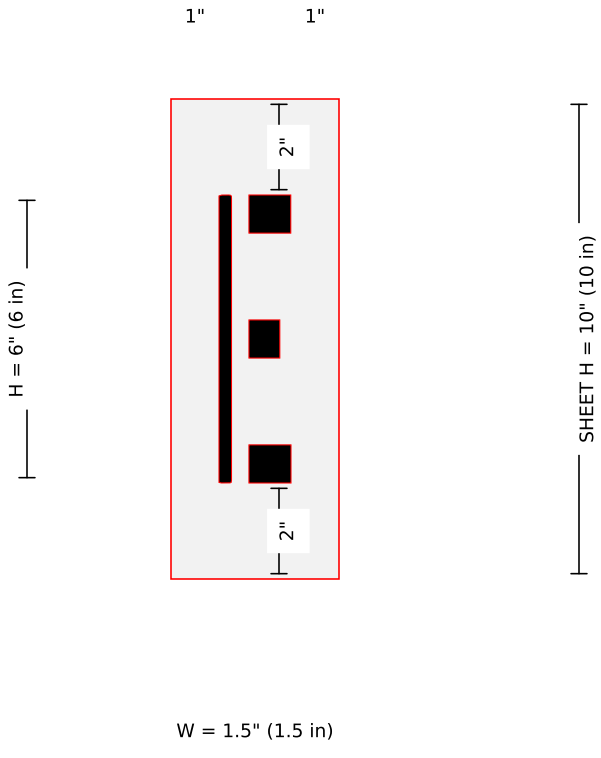


SHEET W = 3.5" (3.5 in)


Pieces: 1 · sheet 3.5 x 10 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-006E-6in-FAA-Airport-Letter-E-2.jpg: width 1.5 from image scale (1.62); NOT the kit listing width; kit sheet 4 x 10 (side margin 1).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.02 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-006-01-F

6" FAA Airport "F" - kit SSS-FAA-006-01, traced from 1-800-Stencil image, 1.5 W x 6 H

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:4)

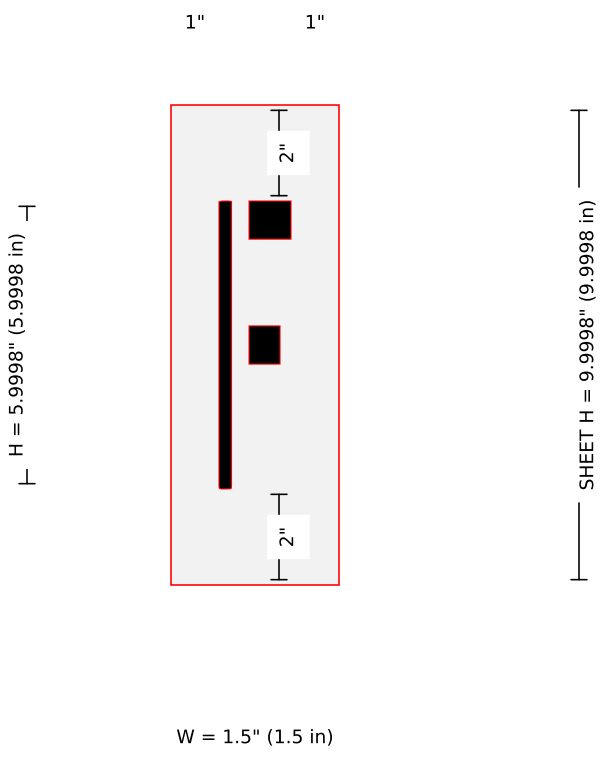


SHEET W = 3.5" (3.5 in)


Pieces: 1 · sheet 3.5 x 10 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-006F-6in-FAA-Airport-Letter-F-2.jpg: width 1.5 from image scale (1.62); NOT the kit listing width; kit sheet 4 x 10 (side margin 1).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.02 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-006-01-G

6" FAA Airport "G" - kit SSS-FAA-006-01, traced from 1-800-Stencil image, 1.5 W x 6 H

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:4)

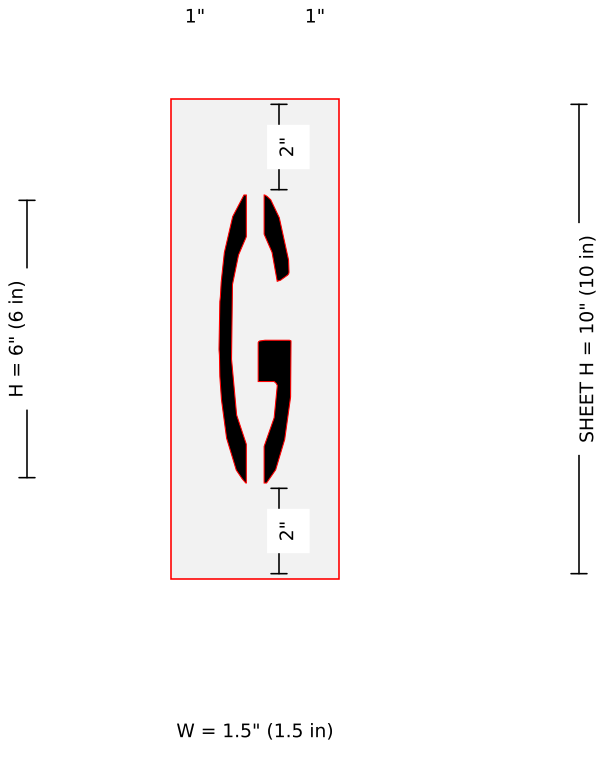


SHEET W = 3.5" (3.5 in)


Pieces: 1 · sheet 3.5 x 10 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-006G-6in-FAA-Airport-Letter-G-2.jpg: width 1.5 from image scale (1.65); NOT the kit listing width; kit sheet 4 x 10 (side margin 1).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.02 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-006-01-H

6" FAA Airport "H" - kit SSS-FAA-006-01, traced from 1-800-Stencil image, 1.5 W x 6 H

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:4)

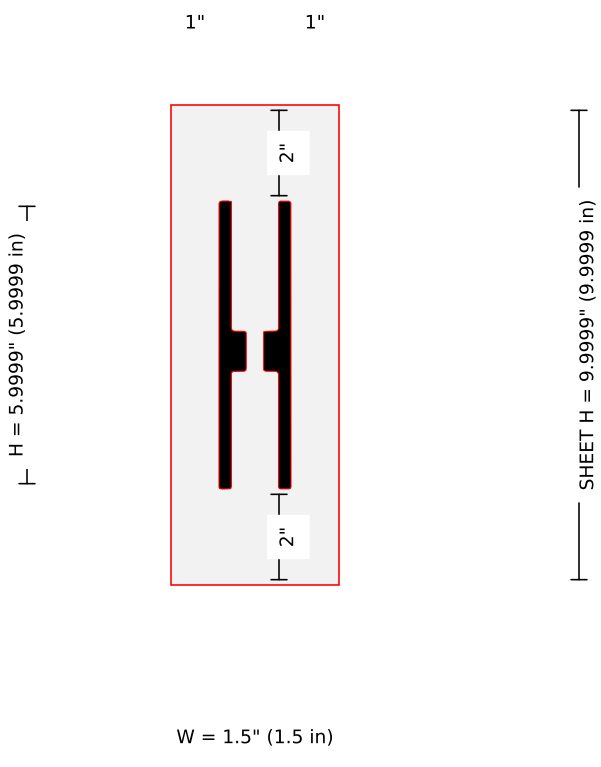


SHEET W = 3.5" (3.5 in)


Pieces: 1 · sheet 3.5 x 10 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-006H-6in-FAA-Airport-Letter-H-2.jpg: width 1.5 from image scale (1.62); NOT the kit listing width; kit sheet 4 x 10 (side margin 1).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.02 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-006-01-J

6" FAA Airport "J" - kit SSS-FAA-006-01, traced from 1-800-Stencil image, 1.5 W x 6 H

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:4)

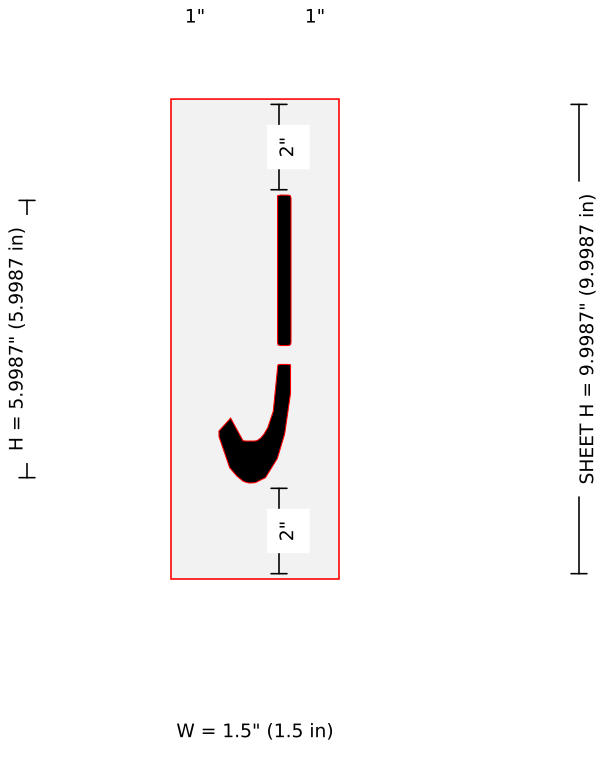


SHEET W = 3.5" (3.5 in)


Pieces: 1 · sheet 3.5 x 9.999 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-006J-6in-FAA-Airport-Letter-J-2.jpg: width 1.5 from image scale (1.46); NOT the kit listing width; kit sheet 4 x 10 (side margin 1).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.02 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-006-01-K

6" FAA Airport "K" - kit SSS-FAA-006-01, traced from 1-800-Stencil image, 1.5 W x 6 H

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:4)

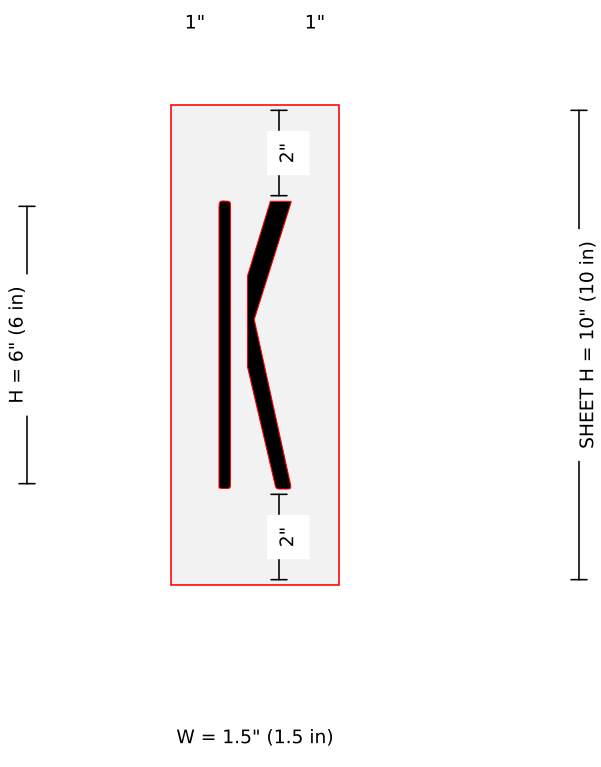


SHEET W = 3.5" (3.5 in)


Pieces: 1 · sheet 3.5 x 10 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-006K-6in-FAA-Airport-Letter-K-2.jpg: width 1.5 from image scale (1.65); NOT the kit listing width; kit sheet 4 x 10 (side margin 1).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.02 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-006-01-L

6" FAA Airport "L" - kit SSS-FAA-006-01, traced from 1-800-Stencil image, 1.5 W x 6 H

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:4)

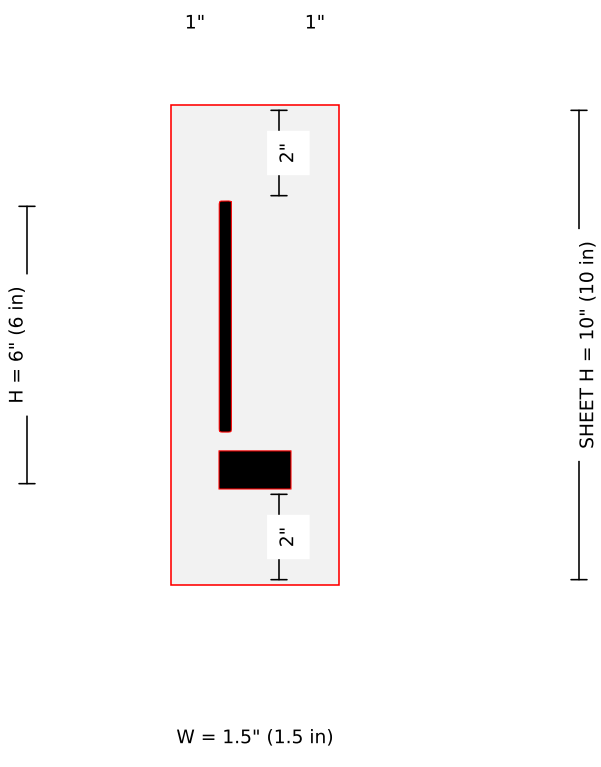


SHEET W = 3.5" (3.5 in)


Pieces: 1 · sheet 3.5 x 10 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-006L-6in-FAA-Airport-Letter-L-2.jpg: width 1.5 from image scale (1.62); NOT the kit listing width; kit sheet 4 x 10 (side margin 1).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.02 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-006-01-M

6" FAA Airport "M" - kit SSS-FAA-006-01, traced from 1-800-Stencil image, 2 W x 6 H

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:4)

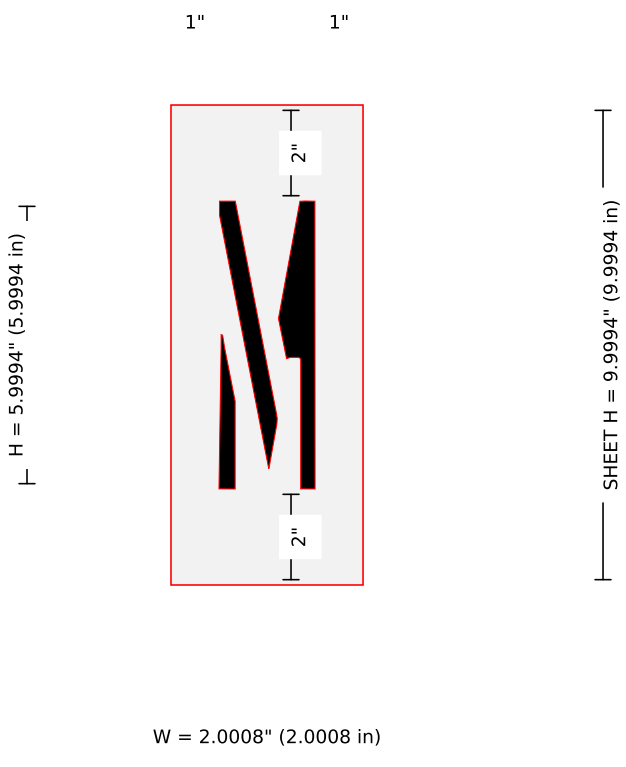


SHEET W = 4.0008" (4.0008 in)


Pieces: 1 · sheet 4.001 x 9.999 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-006M-6in-FAA-Airport-Letter-M-2.jpg: width 2 from image scale (1.86); NOT the kit listing width; kit sheet 4 x 10 (side margin 1).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.02 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 3 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-006-01-N

6" FAA Airport "N" - kit SSS-FAA-006-01, traced from 1-800-Stencil image, 1.5 W x 6 H

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:4)

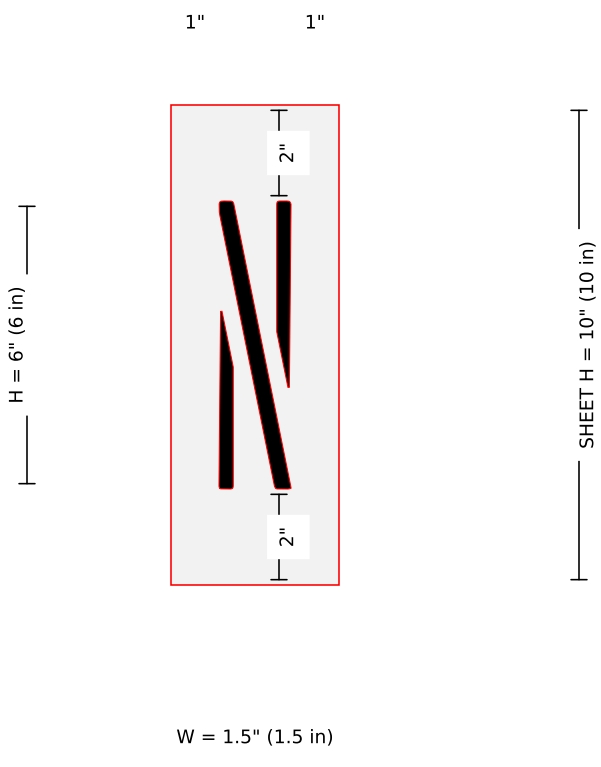


SHEET W = 3.5" (3.5 in)


Pieces: 1 · sheet 3.5 x 10 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-006N-6in-FAA-Airport-Letter-N-2.jpg: width 1.5 from image scale (1.68); NOT the kit listing width; kit sheet 4 x 10 (side margin 1).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.02 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-006-01-O

6" FAA Airport "O" - kit SSS-FAA-006-01, traced from 1-800-Stencil image, 1.5 W x 6 H

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:4)

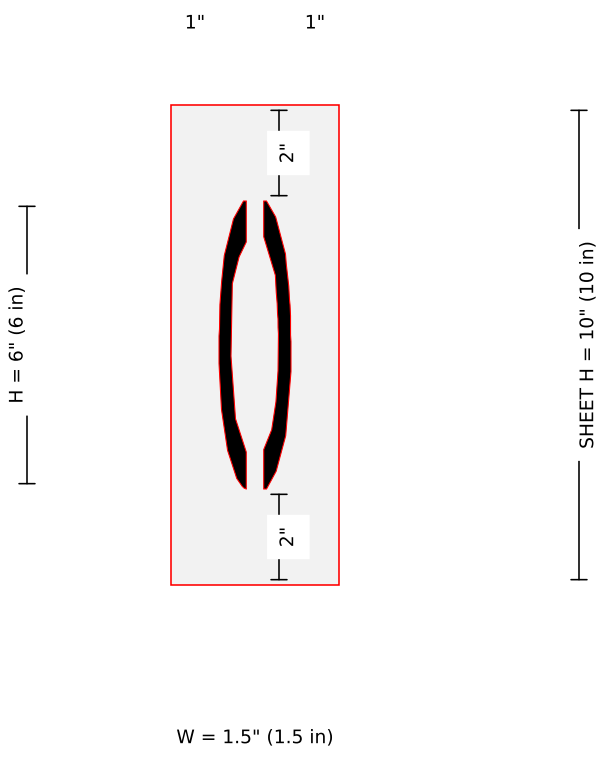


SHEET W = 3.5" (3.5 in)


Pieces: 1 · sheet 3.5 x 10 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-006O-6in-FAA-Airport-Letter-O-2.jpg: width 1.5 from image scale (1.67); NOT the kit listing width; kit sheet 4 x 10 (side margin 1).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.02 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-006-01-P

6" FAA Airport "P" - kit SSS-FAA-006-01, traced from 1-800-Stencil image, 1.5 W x 6 H

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:4)

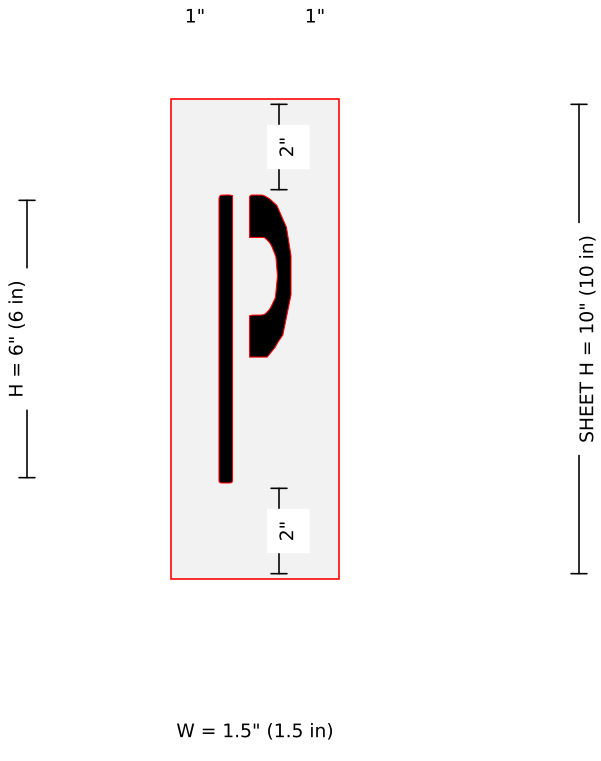


SHEET W = 3.5" (3.5 in)


Pieces: 1 · sheet 3.5 x 10 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-006P-6in-FAA-Airport-Letter-P-2.jpg: width 1.5 from image scale (1.66); NOT the kit listing width; kit sheet 4 x 10 (side margin 1).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.02 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-006-01-Q

6" FAA Airport "Q" - kit SSS-FAA-006-01, traced from 1-800-Stencil image, 2 W x 6 H

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:4)

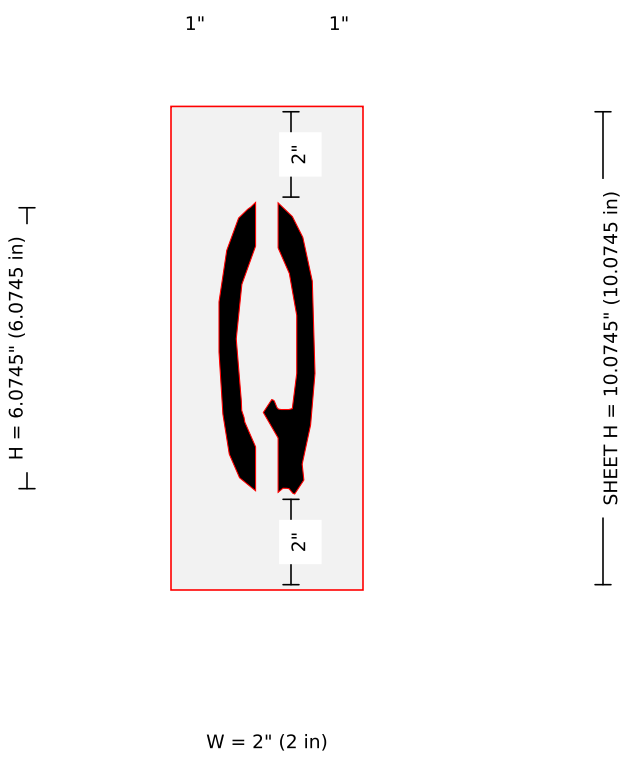


SHEET W = 4" (4 in)


Pieces: 1 · sheet 4 x 10.075 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-006Q-6in-FAA-Airport-Letter-Q-2.jpg: width 2 from image scale (1.75); NOT the kit listing width; kit sheet 4 x 10 (side margin 1).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.02 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 1 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-006-01-R

6" FAA Airport "R" - kit SSS-FAA-006-01, traced from 1-800-Stencil image, 1.5 W x 6 H

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:4)

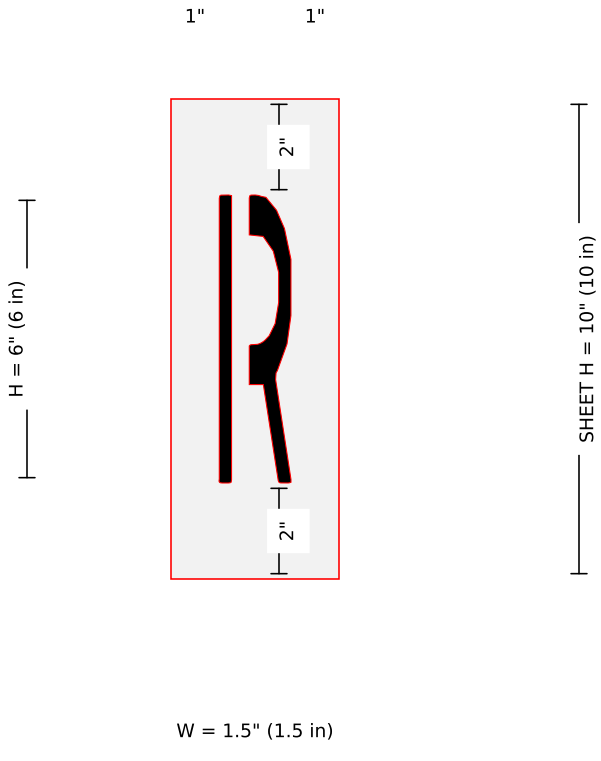


SHEET W = 3.5" (3.5 in)


Pieces: 1 · sheet 3.5 x 10 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-006R-6in-FAA-Airport-Letter-R-2.jpg: width 1.5 from image scale (1.60); NOT the kit listing width; kit sheet 4 x 10 (side margin 1).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.02 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-006-01-S

6" FAA Airport "S" - kit SSS-FAA-006-01, traced from 1-800-Stencil image, 1.5 W x 6 H

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:4)

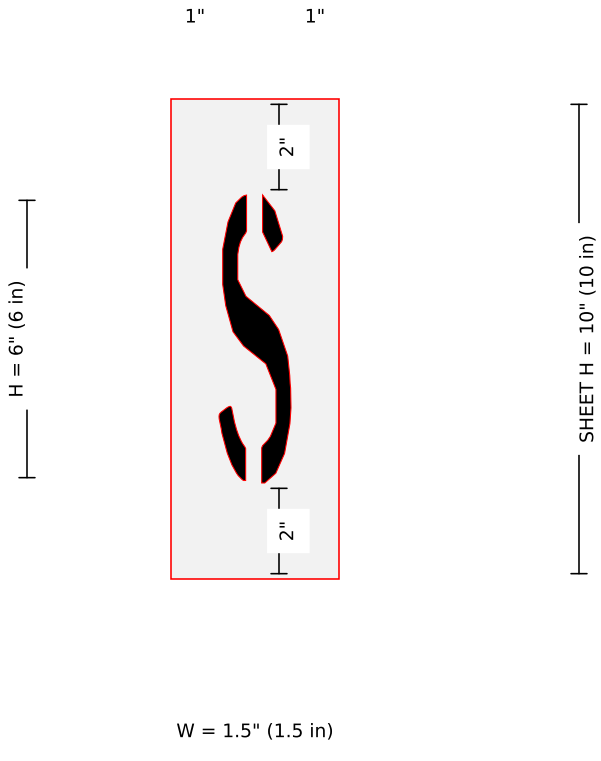


SHEET W = 3.5" (3.5 in)


Pieces: 1 · sheet 3.5 x 10 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-006S-6in-FAA-Airport-Letter-S-2.jpg: width 1.5 from image scale (1.64); NOT the kit listing width; kit sheet 4 x 10 (side margin 1).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.02 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-006-01-T

6" FAA Airport "T" - kit SSS-FAA-006-01, traced from 1-800-Stencil image, 1.5 W x 6 H

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:4)

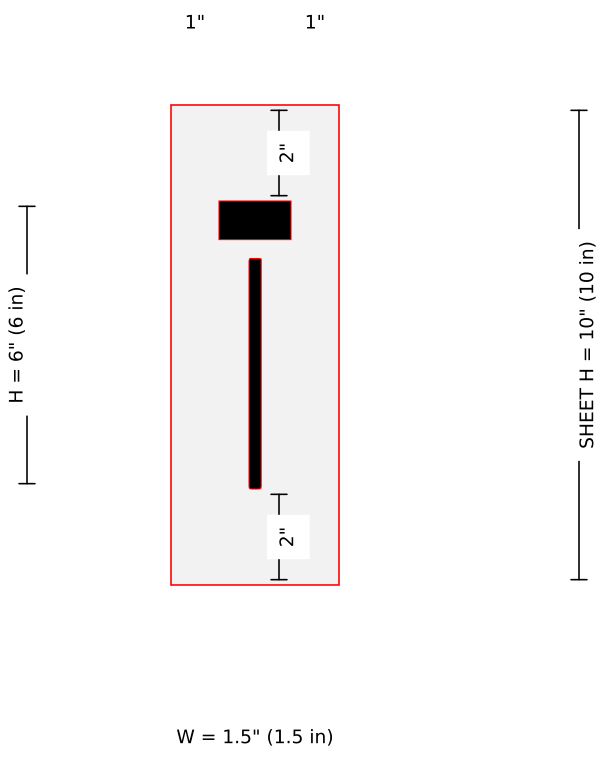


SHEET W = 3.5" (3.5 in)


Pieces: 1 · sheet 3.5 x 10 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-006T-6in-FAA-Airport-Letter-T-2.jpg: width 1.5 from image scale (1.50); NOT the kit listing width; kit sheet 4 x 10 (side margin 1).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.02 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-006-01-U

6" FAA Airport "U" - kit SSS-FAA-006-01, traced from 1-800-Stencil image, 2 W x 6 H

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:4)

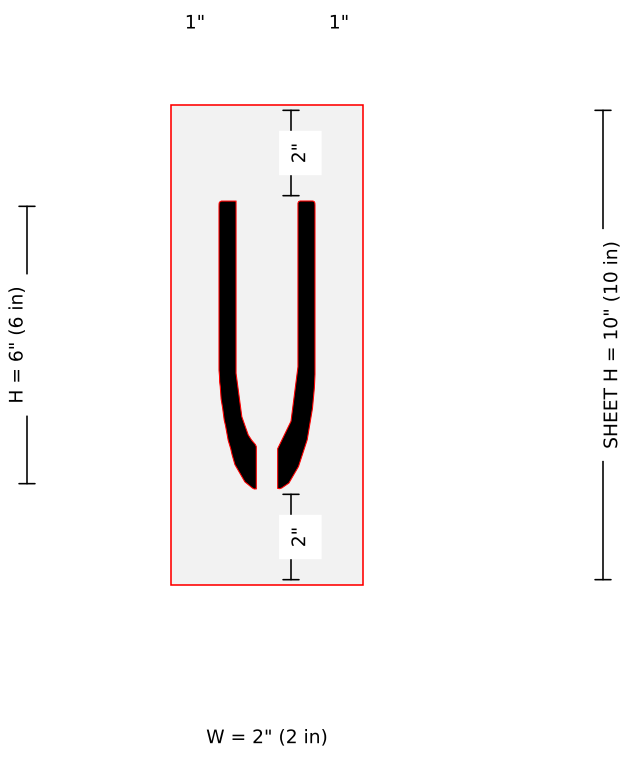


SHEET W = 4" (4 in)


Pieces: 1 · sheet 4 x 10 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-006U-6in-FAA-Airport-Letter-U-2.jpg: width 2 from image scale (1.77); NOT the kit listing width; kit sheet 4 x 10 (side margin 1).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.02 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-006-01-V

6" FAA Airport "V" - kit SSS-FAA-006-01, traced from 1-800-Stencil image, 2 W x 6 H

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:4)

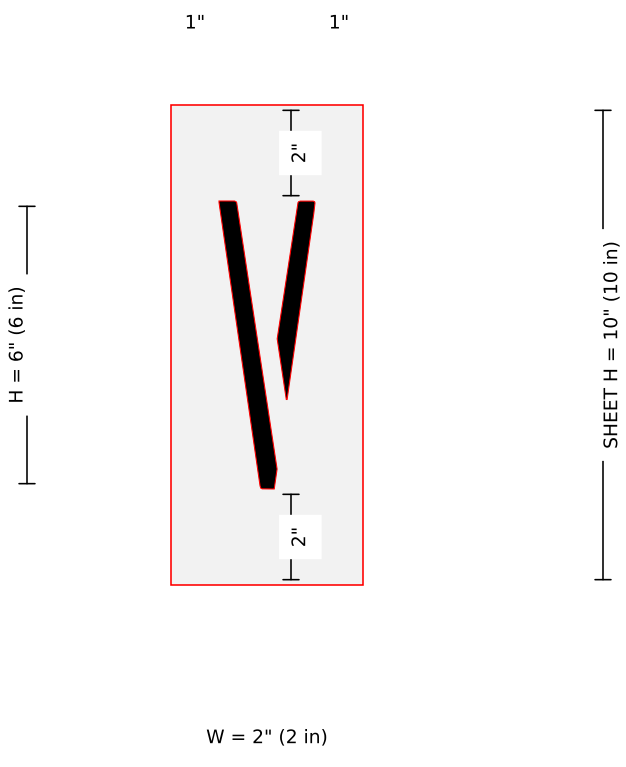


SHEET W = 4" (4 in)


Pieces: 1 · sheet 4 x 10 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-006V-6in-FAA-Airport-Letter-V-2.jpg: width 2 from image scale (1.92); NOT the kit listing width; kit sheet 4 x 10 (side margin 1).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.02 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-006-01-W

6" FAA Airport "W" - kit SSS-FAA-006-01, traced from 1-800-Stencil image, 2 W x 6 H

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:4)

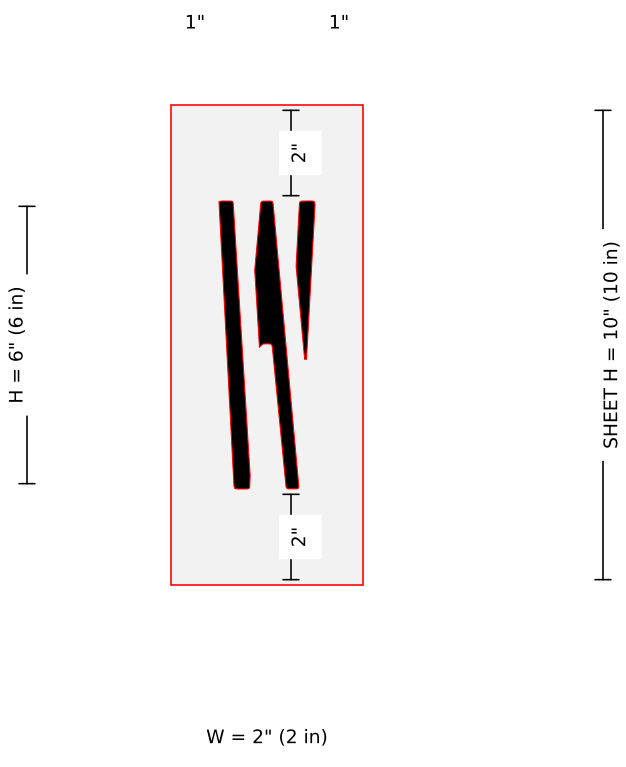


SHEET W = 4" (4 in)


Pieces: 1 · sheet 4 x 10 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-006W-6in-FAA-Airport-Letter-W-2.jpg: width 2 from image scale (2.16); NOT the kit listing width; kit sheet 4 x 10 (side margin 1).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.02 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-006-01-X

6" FAA Airport "X" - kit SSS-FAA-006-01, traced from 1-800-Stencil image, 1.5 W x 6 H

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:4)

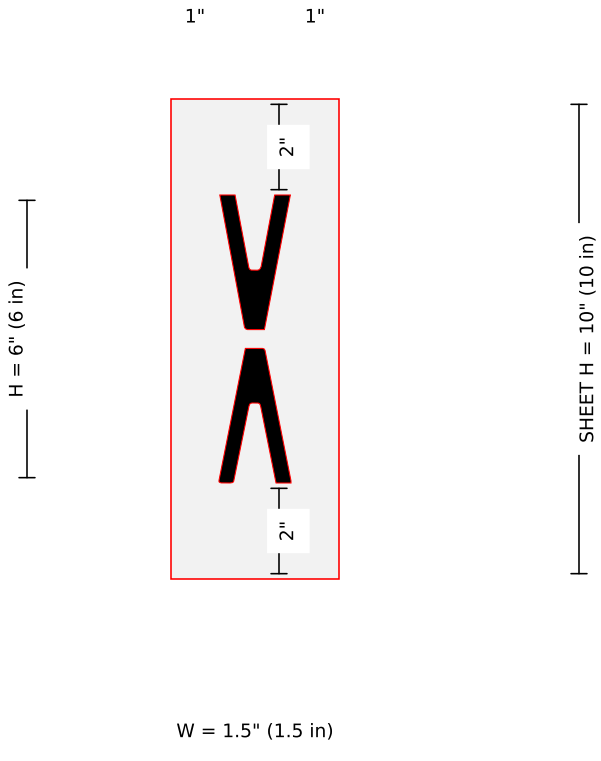


SHEET W = 3.5" (3.5 in)


Pieces: 1 · sheet 3.5 x 10 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-006X-6in-FAA-Airport-Letter-X-2.jpg: width 1.5 from image scale (1.58); NOT the kit listing width; kit sheet 4 x 10 (side margin 1).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.02 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-006-01-Y

6" FAA Airport "Y" - kit SSS-FAA-006-01, traced from 1-800-Stencil image, 2 W x 6 H

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:4)

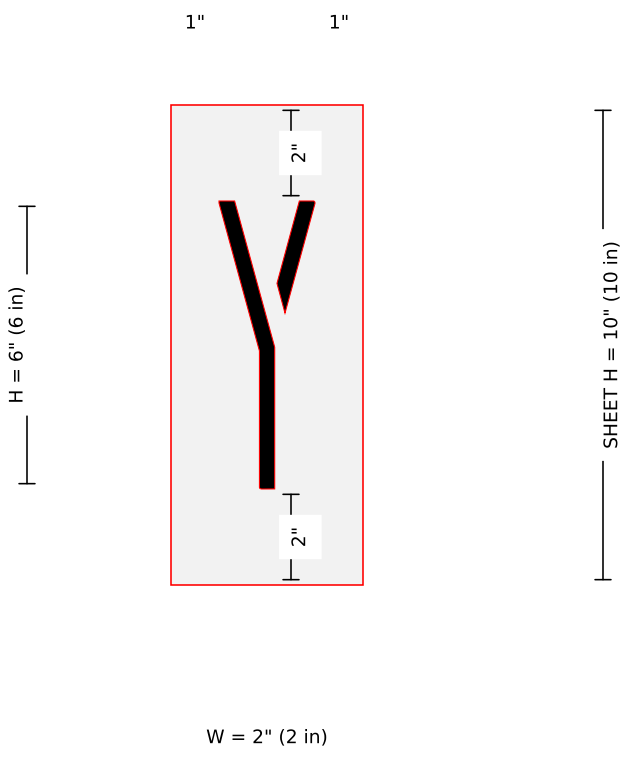


SHEET W = 4" (4 in)


Pieces: 1 · sheet 4 x 10 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-006Y-6in-FAA-Airport-Letter-Y-2.jpg: width = kit listing 2 (image-scale 1.96); kit sheet 4 x 10 (side margin 1).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.02 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-006-01-Z

6" FAA Airport "Z" - kit SSS-FAA-006-01, traced from 1-800-Stencil image, 1.5 W x 6 H

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:4)

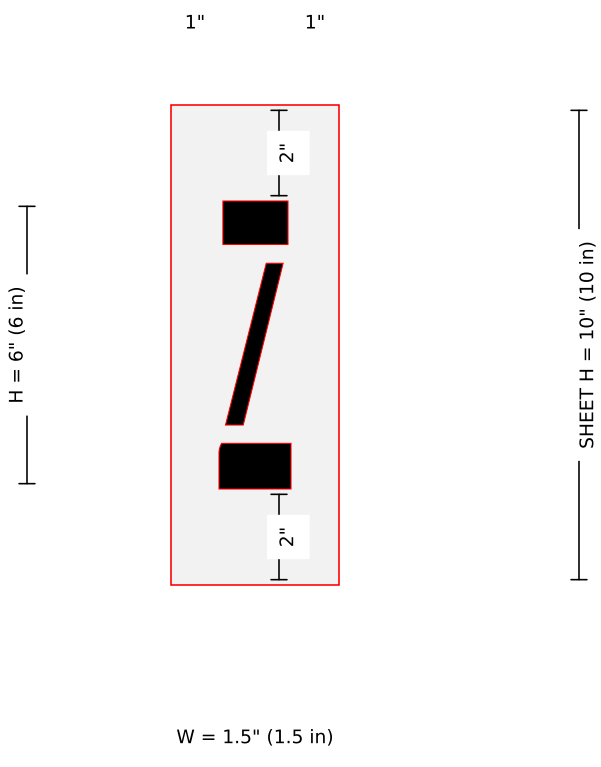


SHEET W = 3.5" (3.5 in)


Pieces: 1 · sheet 3.5 x 10 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-006Z-6in-FAA-Airport-Letter-Z-2.jpg: width 1.5 from image scale (1.57); NOT the kit listing width; kit sheet 4 x 10 (side margin 1).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.02 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-006-01-I

6" FAA Airport "I" - kit SSS-FAA-006-01, traced from 1-800-Stencil image, 0.3 W x 6 H

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:4)

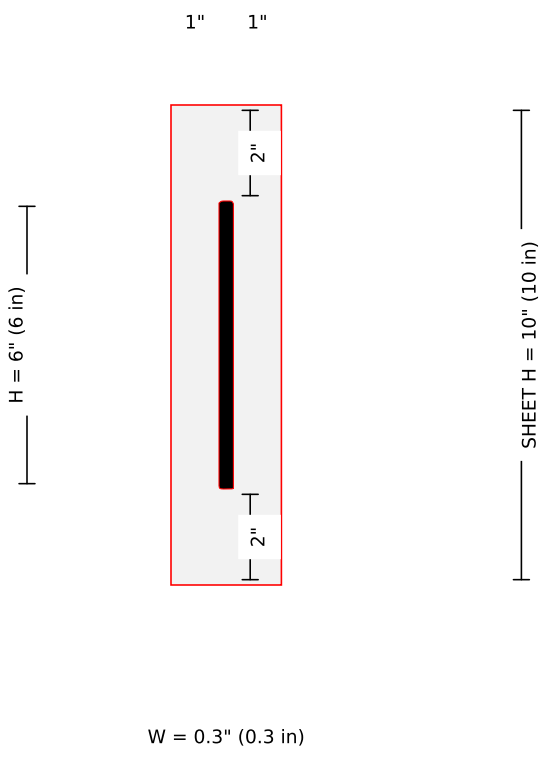


SHEET W = 2.3" (2.3 in)

Pieces: 1 · sheet 2.3 x 10 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-006I-6in-FAA-Airport-Letter-I-2.jpg: width = 1-800 image width label 0.3 in (image-scale 0.29); kit sheet 4 x 10 (side margin 1).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.02 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.