
SSS-FAA-024-01-A

24" FAA Airport Letter "A" (kit SSS-FAA-024-01), FAA AC 150/5340-1M App B, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

12 in (at 1:6)

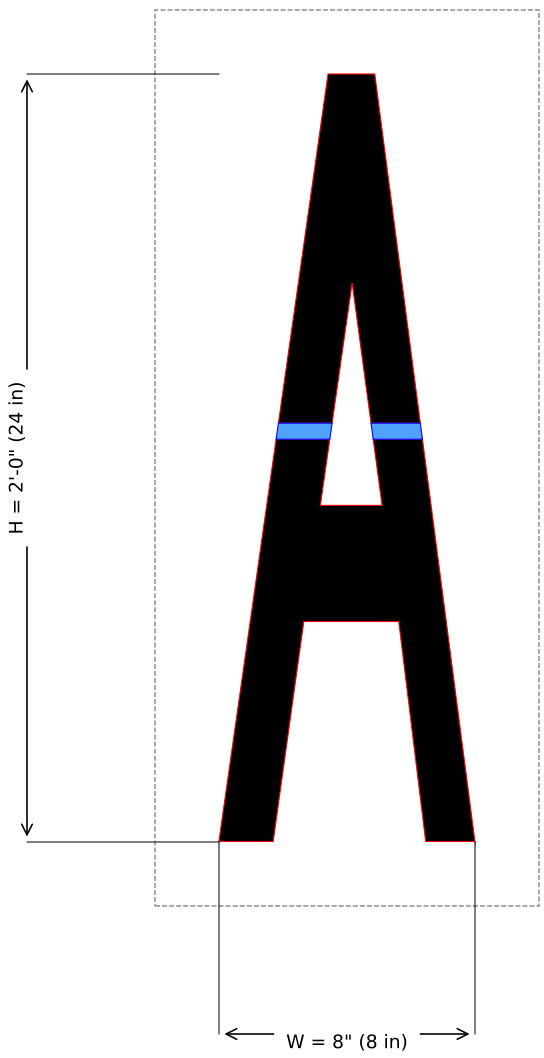


Pieces: 1 · blank 12 x 28 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p147).
Size per 1-800-Stencil kit image (ref/SSS-FAA-024-01): letter 8 W x 24 H, sheet 12 x 32. Margin set to 2 in sides (sheet width match); blank height 28 vs 1-800 32.
App B natural width at 24 H = 8.36 in; x-stretch -4.3%.
Bridges: R cross 1.54" w=0.5"; L cross 1.678" w=0.5"

SSS-FAA-024-01-B

24" FAA Airport Letter "B" (kit SSS-FAA-024-01), FAA AC 150/5340-1M App B, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

12 in (at 1:6)

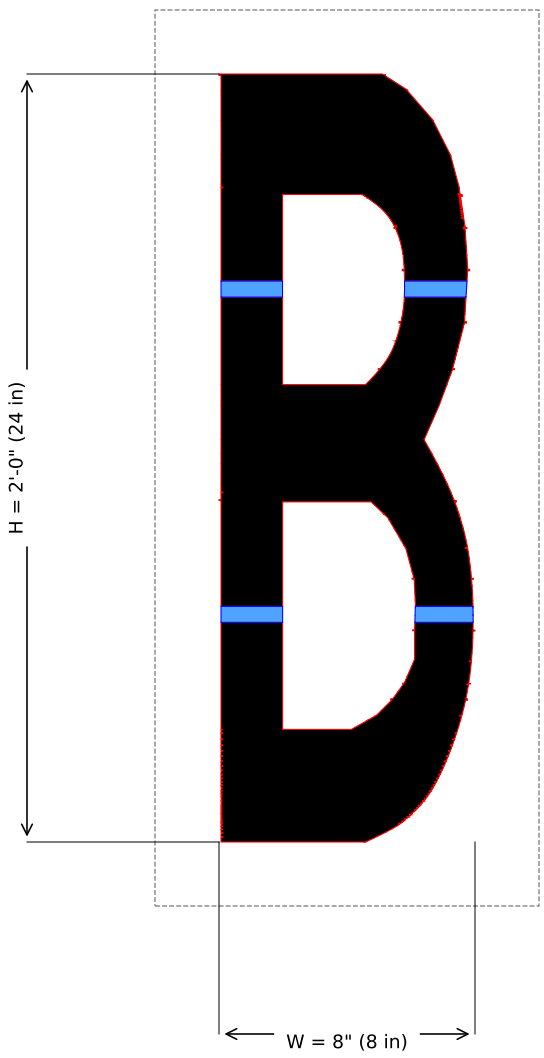


Pieces: 1 · blank 12 x 28 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p147).
Size per 1-800-Stencil kit image (ref/SSS-FAA-024-01): letter 8 W x 24 H, sheet 12 x 32. Margin set to 2 in sides (sheet width match); blank height 28 vs 1-800 32.
App B natural width at 24 H = 6.46 in; x-stretch +23.8%.
Bridges: R cross 1.814" w=0.5"; L cross 1.926" w=0.5"; L cross 1.923" w=0.5"; R cross 1.937" w=0.5"

SSS-FAA-024-01-C

24" FAA Airport Letter "C" (kit SSS-FAA-024-01), FAA AC 150/5340-1M App B, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

12 in (at 1:6)

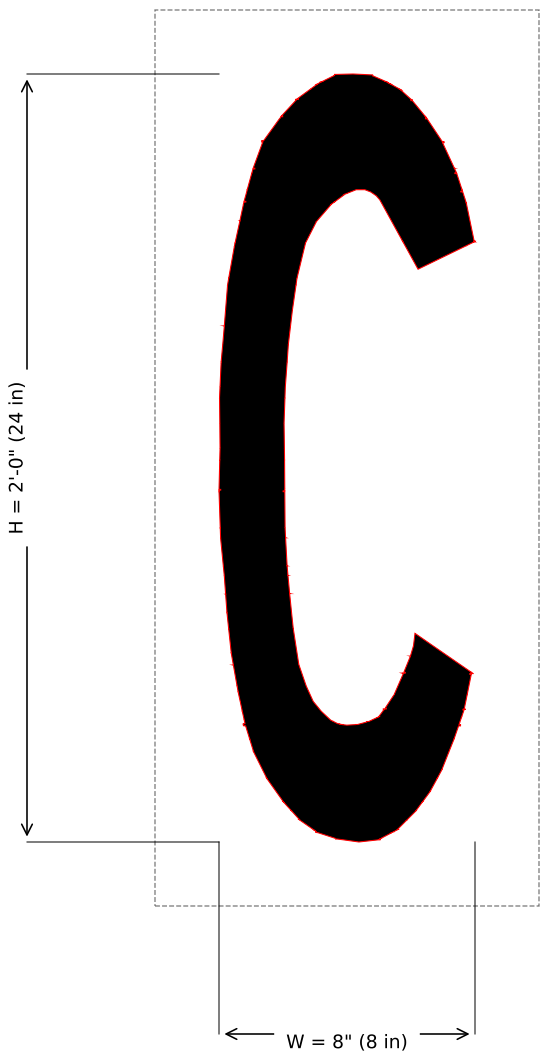


Pieces: 1 · blank 12 x 28 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p147).
Size per 1-800-Stencil kit image (ref/SSS-FAA-024-01): letter 8 W x 24 H, sheet 12 x 32. Margin set to 2 in sides (sheet width match); blank height 28 vs 1-800 32.
App B natural width at 24 H = 6.37 in; x-stretch +25.6%.
No islands, no bridges.

SSS-FAA-024-01-D

24" FAA Airport Letter "D" (kit SSS-FAA-024-01), FAA AC 150/5340-1M App B, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

12 in (at 1:6)

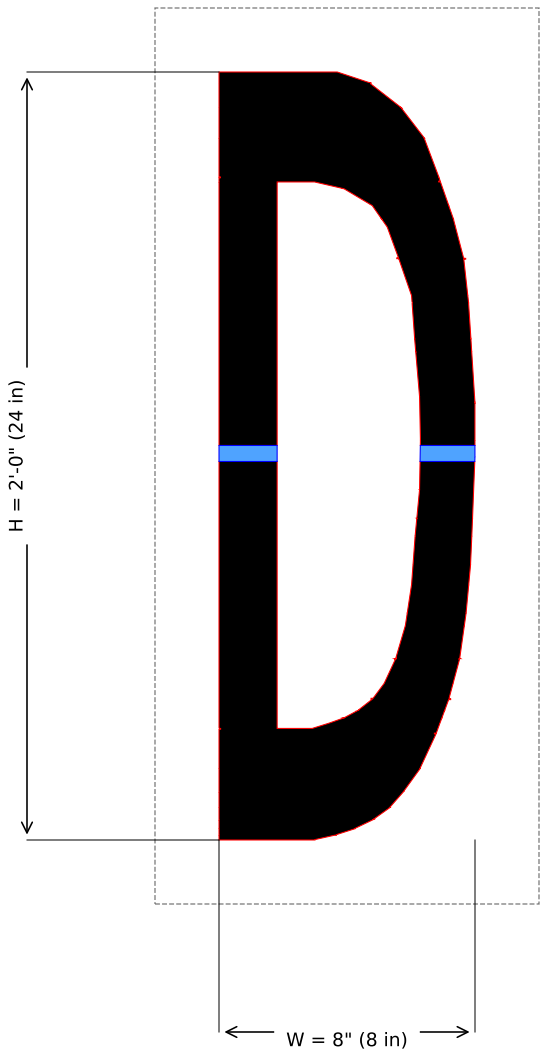


Pieces: 1 · blank 12 x 28 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p147).
Size per 1-800-Stencil kit image (ref/SSS-FAA-024-01): letter 8 W x 24 H, sheet 12 x 32. Margin set to 2 in sides (sheet width match); blank height 28 vs 1-800 32.
App B natural width at 24 H = 6.50 in; x-stretch +23.0%.
Bridges: R cross 1.711" w=0.5"; L cross 1.817" w=0.5"

SSS-FAA-024-01-E

24" FAA Airport Letter "E" (kit SSS-FAA-024-01), FAA AC 150/5340-1M App B, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

12 in (at 1:6)

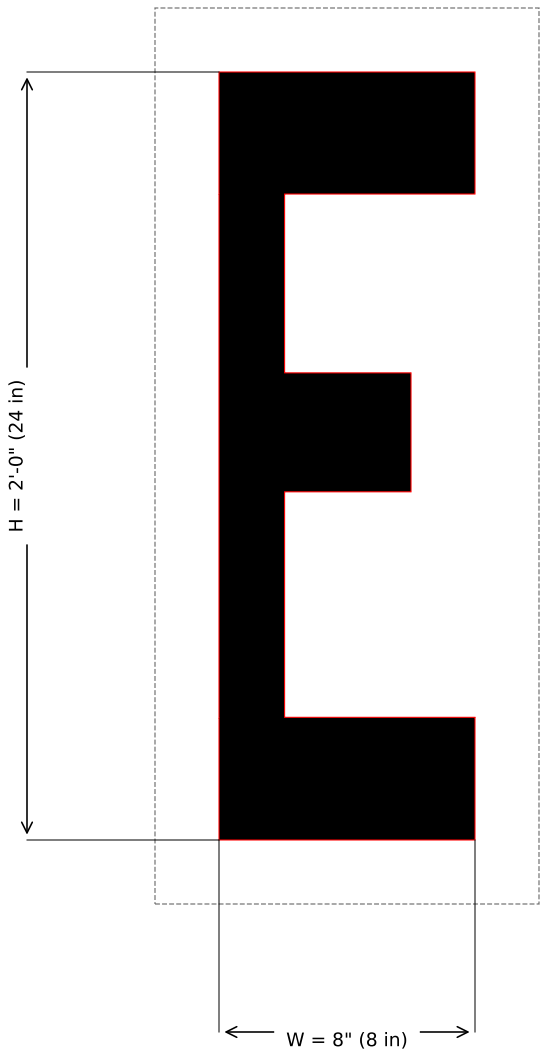


Pieces: 1 · blank 12 x 28 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p147).
Size per 1-800-Stencil kit image (ref/SSS-FAA-024-01): letter 8 W x 24 H, sheet 12 x 32. Margin set to 2 in sides (sheet width match); blank height 28 vs 1-800 32.
App B natural width at 24 H = 5.87 in; x-stretch +36.4%.
No islands, no bridges.

SSS-FAA-024-01-F

24" FAA Airport Letter "F" (kit SSS-FAA-024-01), FAA AC 150/5340-1M App B, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

12 in (at 1:6)

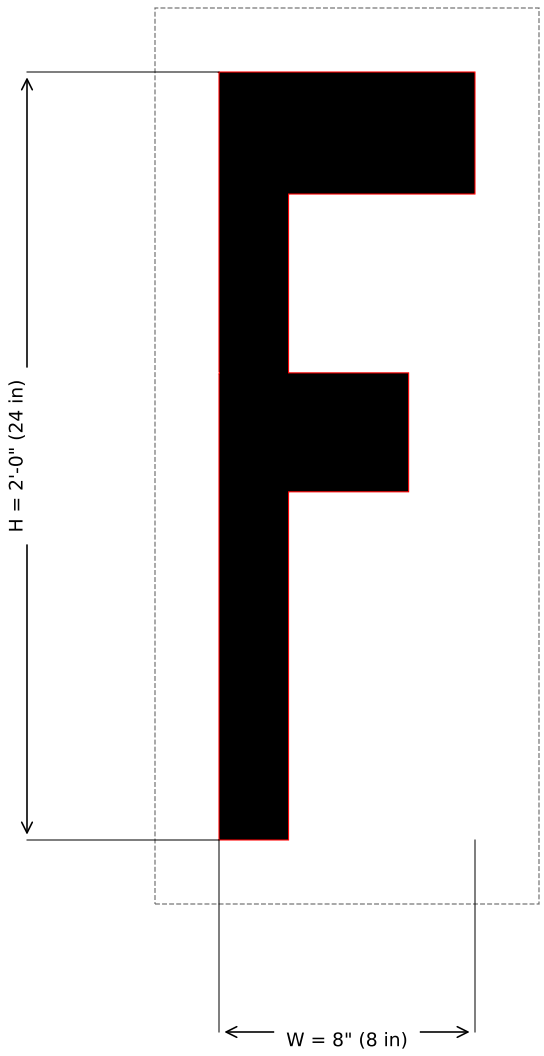


Pieces: 1 · blank 12 x 28 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p147).
Size per 1-800-Stencil kit image (ref/SSS-FAA-024-01): letter 8 W x 24 H, sheet 12 x 32. Margin set to 2 in sides (sheet width match); blank height 28 vs 1-800 32.
App B natural width at 24 H = 5.94 in; x-stretch +34.7%.
No islands, no bridges.

SSS-FAA-024-01-G

24" FAA Airport Letter "G" (kit SSS-FAA-024-01), FAA AC 150/5340-1M App B, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

12 in (at 1:6)

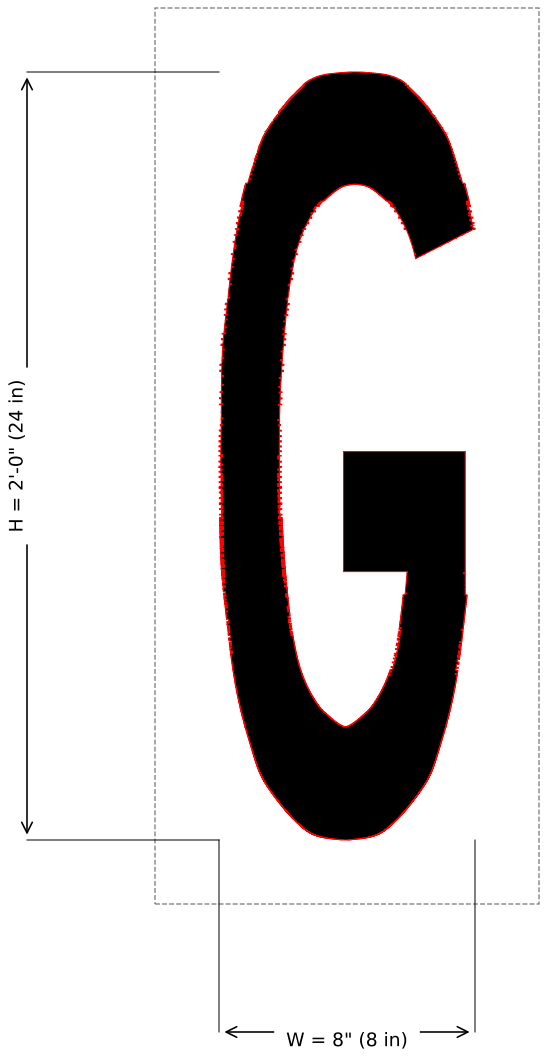


Pieces: 1 · blank 12 x 28 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p147).
Size per 1-800-Stencil kit image (ref/SSS-FAA-024-01): letter 8 W x 24 H, sheet 12 x 32. Margin set to 2 in sides (sheet width match); blank height 28 vs 1-800 32.
App B natural width at 24 H = 6.85 in; x-stretch +16.7%.
No islands, no bridges.

SSS-FAA-024-01-H

24" FAA Airport Letter "H" (kit SSS-FAA-024-01), FAA AC 150/5340-1M App B, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

12 in (at 1:6)

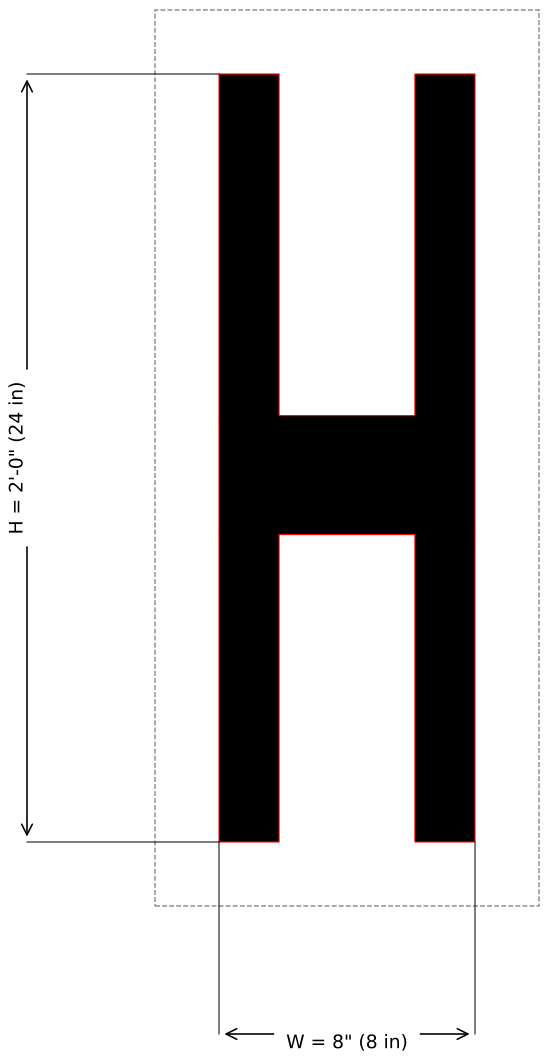


Pieces: 1 · blank 12 x 28 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p147).
Size per 1-800-Stencil kit image (ref/SSS-FAA-024-01): letter 8 W x 24 H, sheet 12 x 32. Margin set to 2 in sides (sheet width match); blank height 28 vs 1-800 32.
App B natural width at 24 H = 6.56 in; x-stretch +22.0%.
No islands, no bridges.

SSS-FAA-024-01-I

24" FAA Airport Letter "I" (kit SSS-FAA-024-01), FAA AC 150/5340-1M App B, 2 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

12 in (at 1:6)

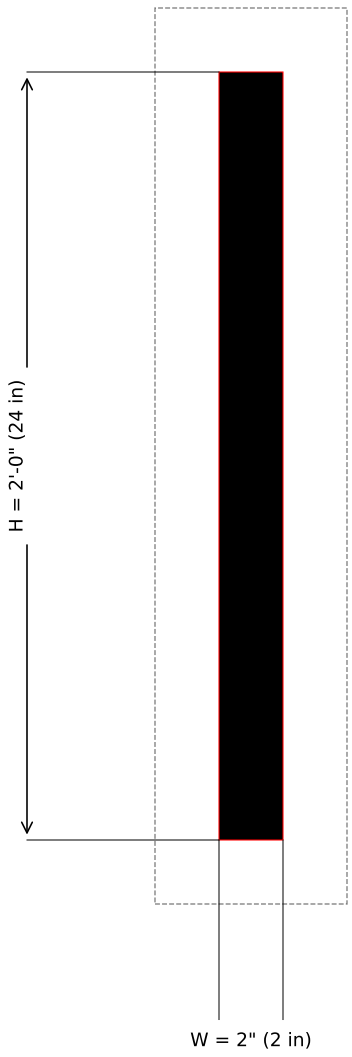


Pieces: 1 · blank 6 x 28 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p148).
Size per 1-800-Stencil kit image (ref/SSS-FAA-024-01): letter 2 W x 24 H, sheet 12 x 32. Margin set to 2 in sides (sheet width match); blank height 28 vs 1-800 32.
App B natural width at 24 H = 1.62 in; x-stretch +23.6%.
No islands, no bridges.

SSS-FAA-024-01-J

24" FAA Airport Letter "J" (kit SSS-FAA-024-01), FAA AC 150/5340-1M App B, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

12 in (at 1:6)

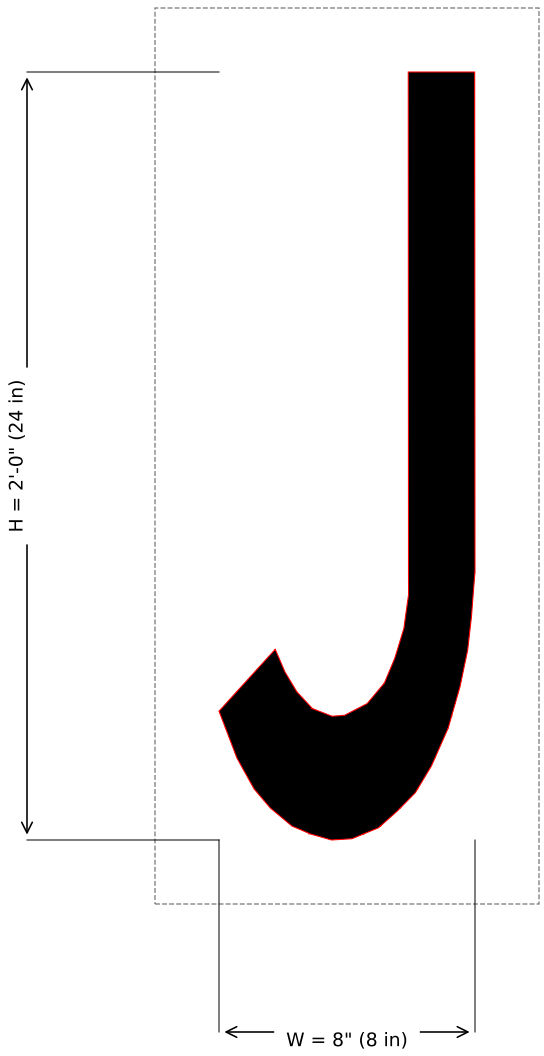


Pieces: 1 · blank 12 x 28 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p148).
Size per 1-800-Stencil kit image (ref/SSS-FAA-024-01): letter 8 W x 24 H, sheet 12 x 32. Margin set to 2 in sides (sheet width match); blank height 28 vs 1-800 32.
App B natural width at 24 H = 6.24 in; x-stretch +28.3%.
No islands, no bridges.

SSS-FAA-024-01-K

24" FAA Airport Letter "K" (kit SSS-FAA-024-01), FAA AC 150/5340-1M App B, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

12 in (at 1:6)

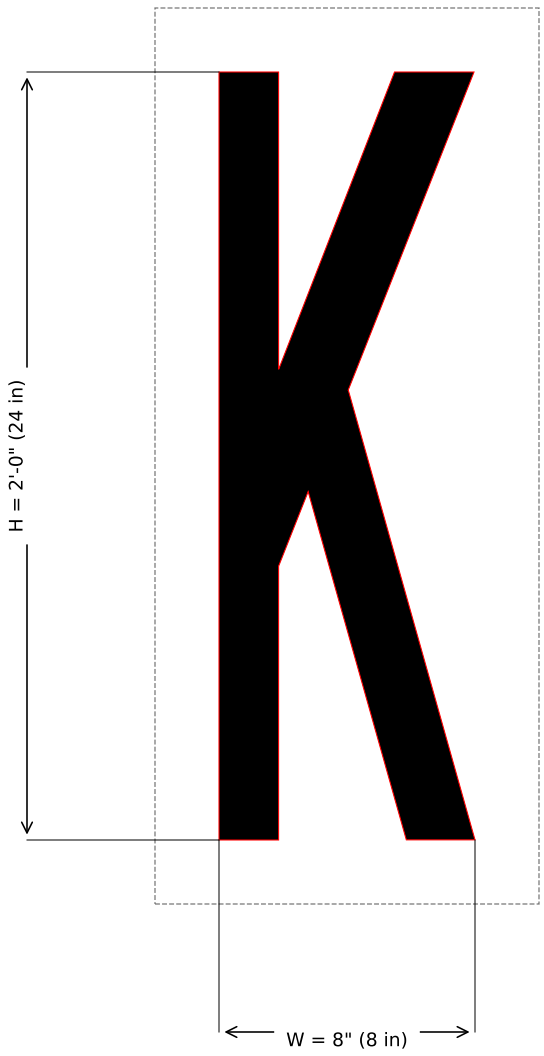


Pieces: 1 · blank 12 x 28 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p148).
Size per 1-800-Stencil kit image (ref/SSS-FAA-024-01): letter 8 W x 24 H, sheet 12 x 32. Margin set to 2 in sides (sheet width match); blank height 28 vs 1-800 32.
App B natural width at 24 H = 6.85 in; x-stretch +16.9%.
No islands, no bridges.

SSS-FAA-024-01-L

24" FAA Airport Letter "L" (kit SSS-FAA-024-01), FAA AC 150/5340-1M App B, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

12 in (at 1:6)

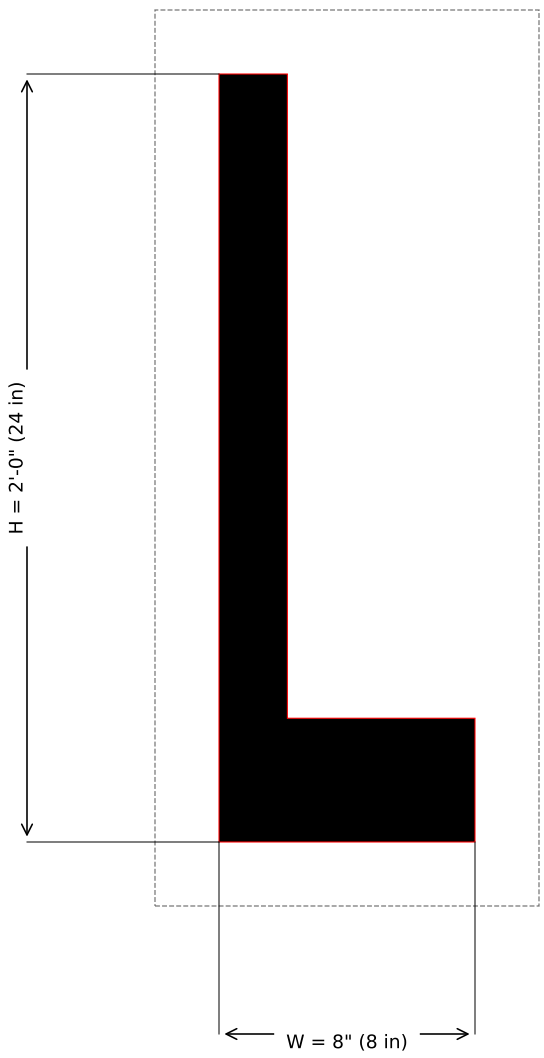


Pieces: 1 · blank 12 x 28 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p148).
Size per 1-800-Stencil kit image (ref/SSS-FAA-024-01): letter 8 W x 24 H, sheet 12 x 32. Margin set to 2 in sides (sheet width match); blank height 28 vs 1-800 32.
App B natural width at 24 H = 6.06 in; x-stretch +32.0%.
No islands, no bridges.

SSS-FAA-024-01-M

24" FAA Airport Letter "M" (kit SSS-FAA-024-01), FAA AC 150/5340-1M App B, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

12 in (at 1:6)

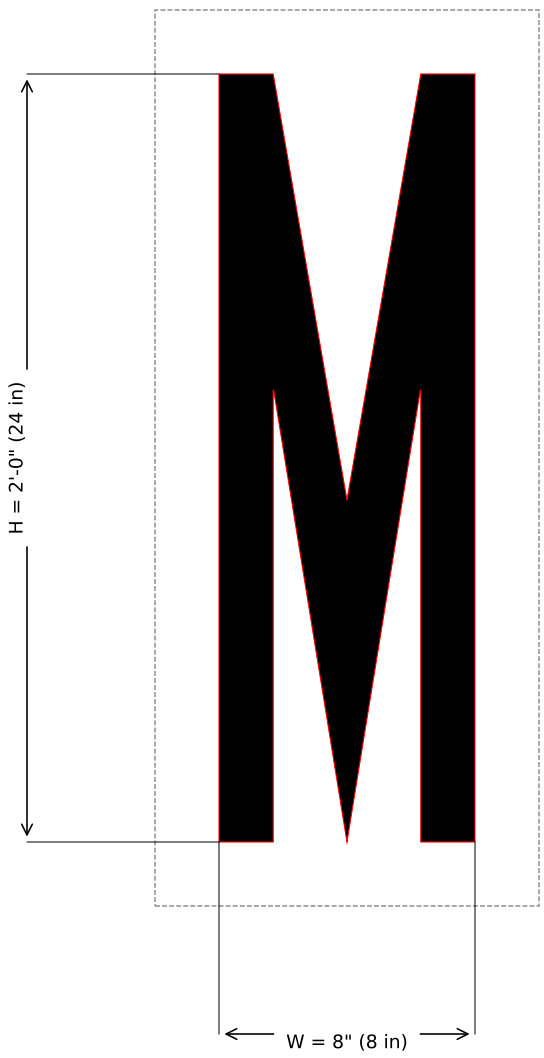


Pieces: 1 · blank 12 x 28 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p148).
Size per 1-800-Stencil kit image (ref/SSS-FAA-024-01): letter 8 W x 24 H, sheet 12 x 32. Margin set to 2 in sides (sheet width match); blank height 28 vs 1-800 32.
App B natural width at 24 H = 7.64 in; x-stretch +4.7%.
No islands, no bridges.

SSS-FAA-024-01-N

24" FAA Airport Letter "N" (kit SSS-FAA-024-01), FAA AC 150/5340-1M App B, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

12 in (at 1:6)

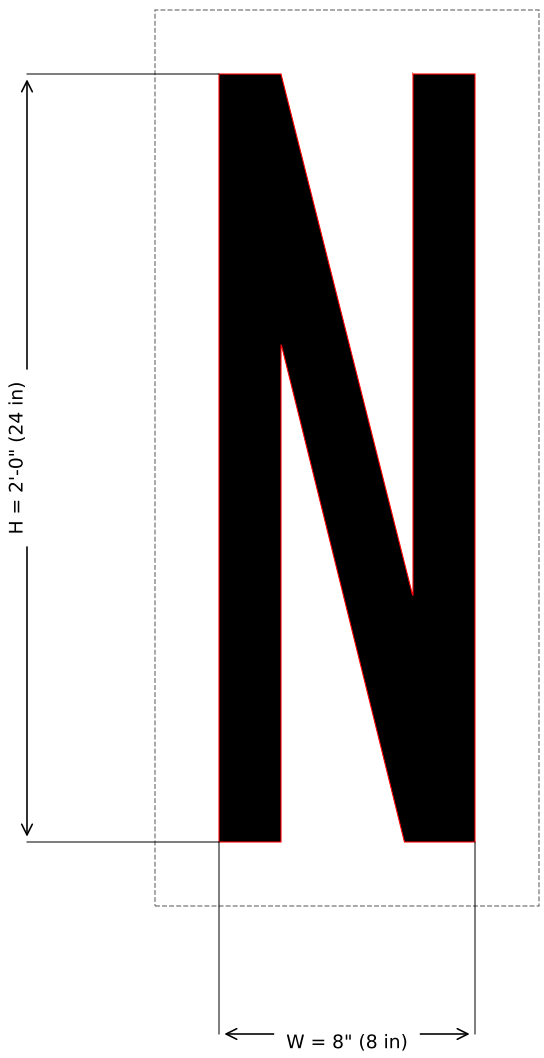


Pieces: 1 · blank 12 x 28 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p148).
Size per 1-800-Stencil kit image (ref/SSS-FAA-024-01): letter 8 W x 24 H, sheet 12 x 32. Margin set to 2 in sides (sheet width match); blank height 28 vs 1-800 32.
App B natural width at 24 H = 6.69 in; x-stretch +19.6%.
No islands, no bridges.

SSS-FAA-024-01-O

24" FAA Airport Letter "O" (kit SSS-FAA-024-01), FAA AC 150/5340-1M App B, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

12 in (at 1:6)

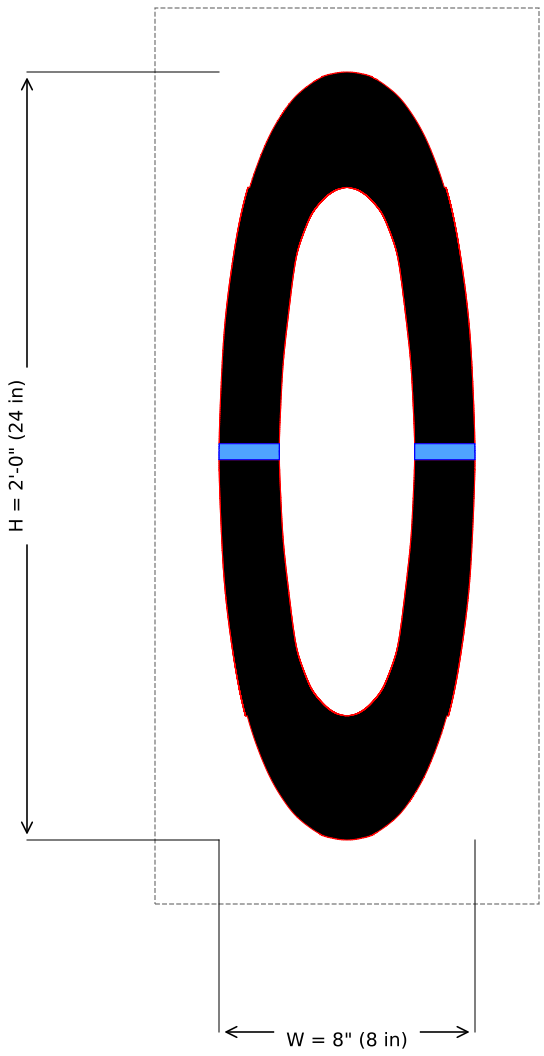


Pieces: 1 · blank 12 x 28 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p148).
Size per 1-800-Stencil kit image (ref/SSS-FAA-024-01): letter 8 W x 24 H, sheet 12 x 32. Margin set to 2 in sides (sheet width match); blank height 28 vs 1-800 32.
App B natural width at 24 H = 7.06 in; x-stretch +13.3%.
Bridges: R cross 1.884" w=0.5"; L cross 1.884" w=0.5"

SSS-FAA-024-01-P

24" FAA Airport Letter "P" (kit SSS-FAA-024-01), FAA AC 150/5340-1M App B, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

12 in (at 1:6)

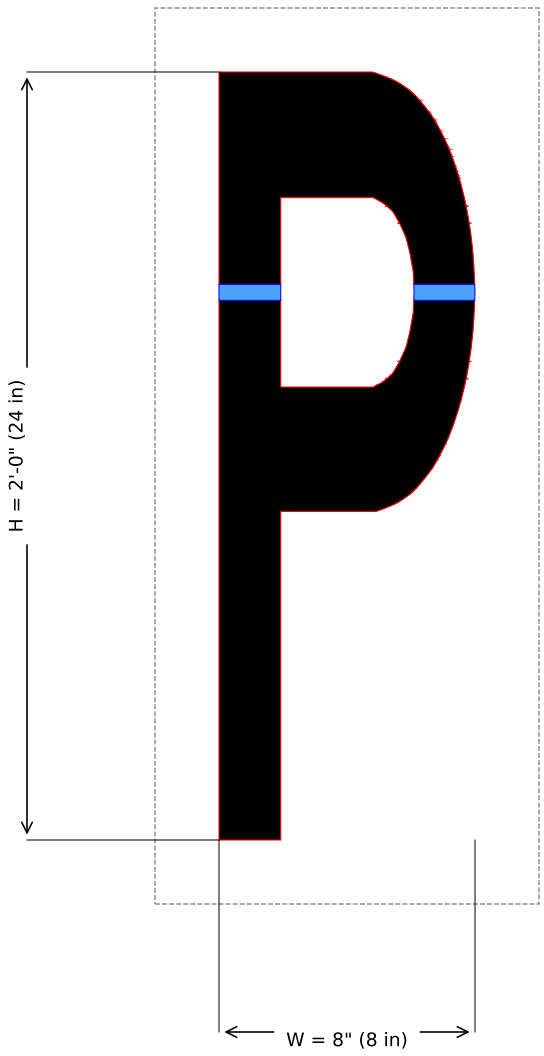


Pieces: 1 · blank 12 x 28 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p148).
Size per 1-800-Stencil kit image (ref/SSS-FAA-024-01): letter 8 W x 24 H, sheet 12 x 32. Margin set to 2 in sides (sheet width match); blank height 28 vs 1-800 32.
App B natural width at 24 H = 6.71 in; x-stretch +19.2%.
Bridges: R cross 1.903" w=0.5"; L cross 1.929" w=0.5"

SSS-FAA-024-01-Q

24" FAA Airport Letter "Q" (kit SSS-FAA-024-01), FAA AC 150/5340-1M App B, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

12 in (at 1:6)

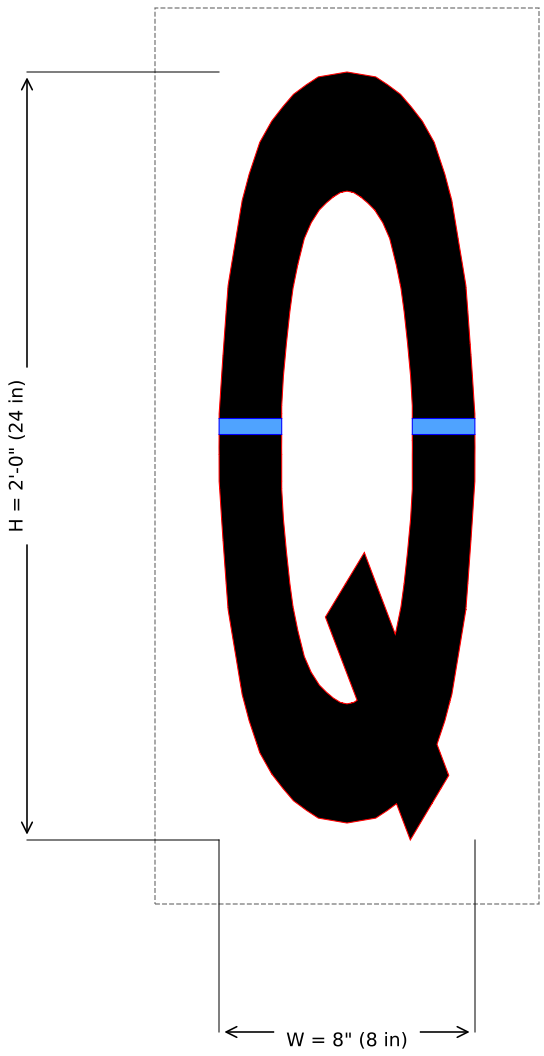


Pieces: 1 · blank 12 x 28 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p149).
Size per 1-800-Stencil kit image (ref/SSS-FAA-024-01): letter 8 W x 24 H, sheet 12 x 32. Margin set to 2 in sides (sheet width match); blank height 28 vs 1-800 32.
App B natural width at 24 H = 6.81 in; x-stretch +17.4%.
Bridges: R cross 1.956" w=0.5"; L cross 1.956" w=0.5"

SSS-FAA-024-01-R

24" FAA Airport Letter "R" (kit SSS-FAA-024-01), FAA AC 150/5340-1M App B, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

12 in (at 1:6)

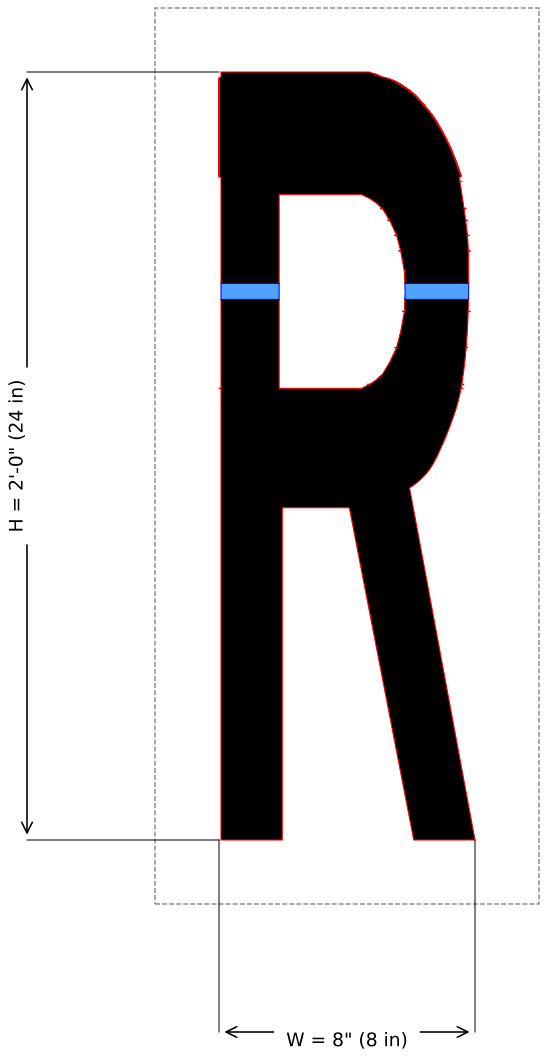


Pieces: 1 · blank 12 x 28 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p149).
Size per 1-800-Stencil kit image (ref/SSS-FAA-024-01): letter 8 W x 24 H, sheet 12 x 32. Margin set to 2 in sides (sheet width match); blank height 28 vs 1-800 32.
App B natural width at 24 H = 6.47 in; x-stretch +23.6%.
Bridges: L cross 1.817" w=0.5"; R cross 1.982" w=0.5"

SSS-FAA-024-01-S

24" FAA Airport Letter "S" (kit SSS-FAA-024-01), FAA AC 150/5340-1M App B, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

12 in (at 1:6)

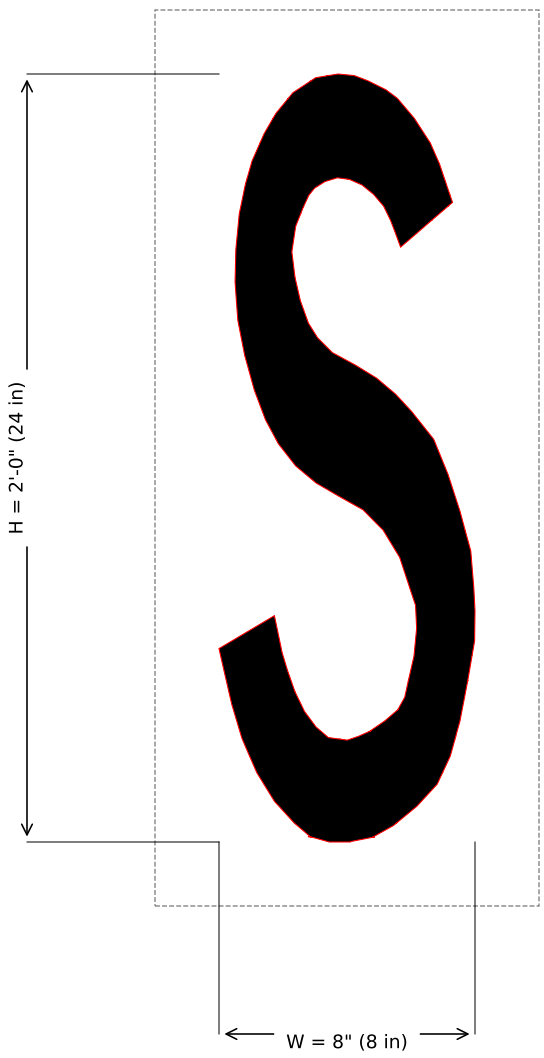


Pieces: 1 · blank 12 x 28 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p149).
Size per 1-800-Stencil kit image (ref/SSS-FAA-024-01): letter 8 W x 24 H, sheet 12 x 32. Margin set to 2 in sides (sheet width match); blank height 28 vs 1-800 32.
App B natural width at 24 H = 6.50 in; x-stretch +23.1%.
No islands, no bridges.

SSS-FAA-024-01-T

24" FAA Airport Letter "T" (kit SSS-FAA-024-01), FAA AC 150/5340-1M App B, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

12 in (at 1:6)

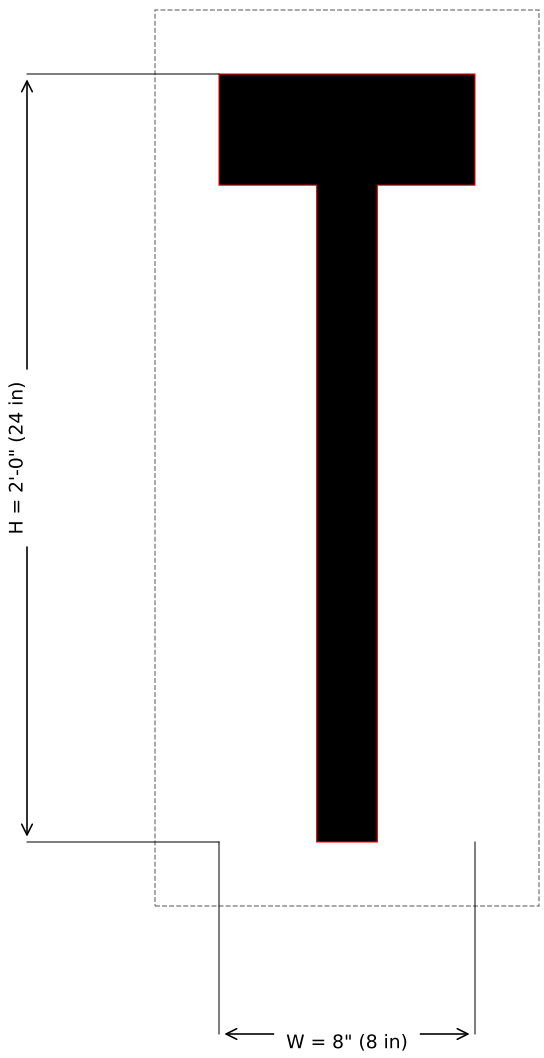


Pieces: 1 · blank 12 x 28 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p149).
Size per 1-800-Stencil kit image (ref/SSS-FAA-024-01): letter 8 W x 24 H, sheet 12 x 32. Margin set to 2 in sides (sheet width match); blank height 28 vs 1-800 32.
App B natural width at 24 H = 6.09 in; x-stretch +31.4%.
No islands, no bridges.

SSS-FAA-024-01-U

24" FAA Airport Letter "U" (kit SSS-FAA-024-01), FAA AC 150/5340-1M App B, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

12 in (at 1:6)

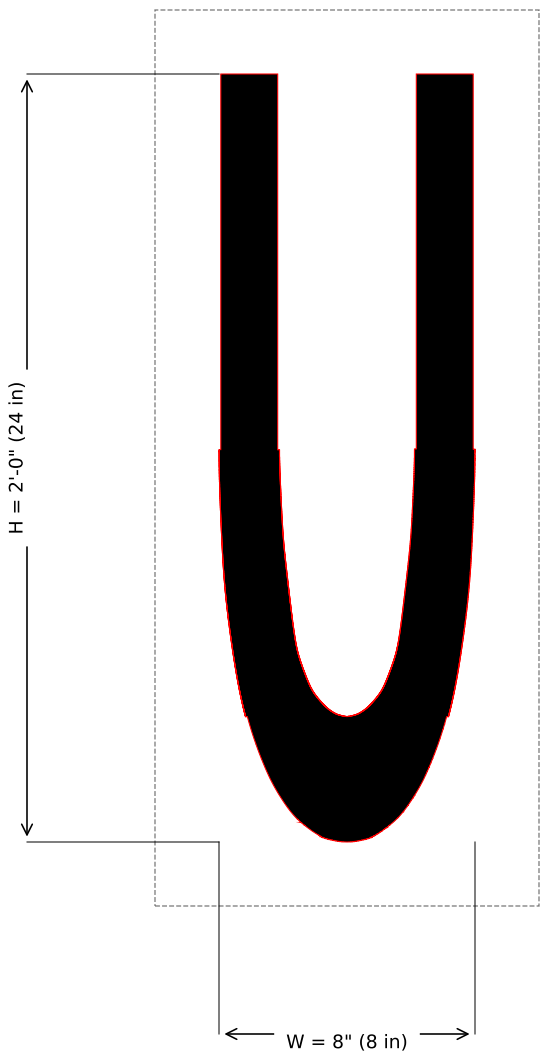


Pieces: 1 · blank 12 x 28 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p149).
Size per 1-800-Stencil kit image (ref/SSS-FAA-024-01): letter 8 W x 24 H, sheet 12 x 32. Margin set to 2 in sides (sheet width match); blank height 28 vs 1-800 32.
App B natural width at 24 H = 7.15 in; x-stretch +11.9%.
No islands, no bridges.

SSS-FAA-024-01-V

24" FAA Airport Letter "V" (kit SSS-FAA-024-01), FAA AC 150/5340-1M App B, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

12 in (at 1:6)

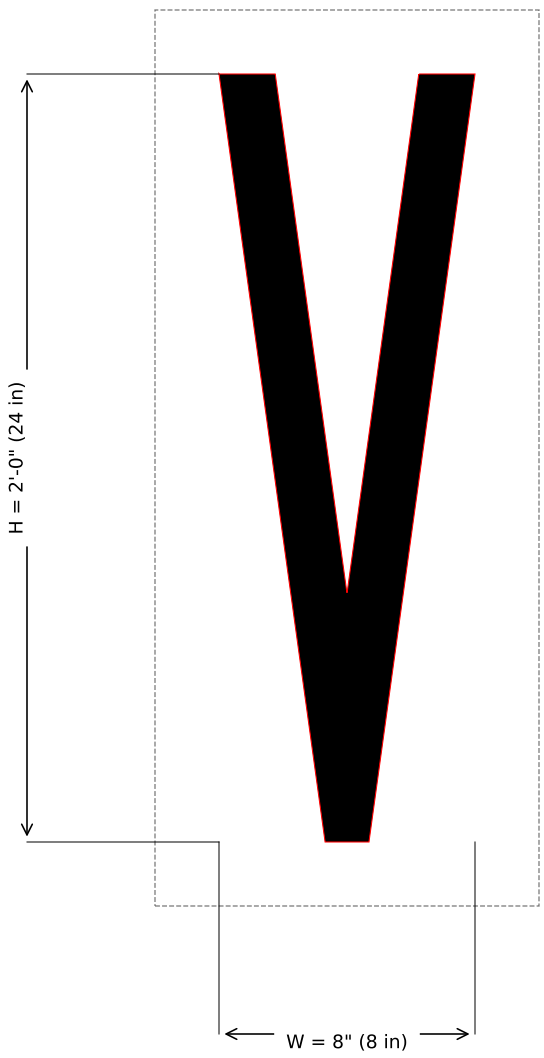


Pieces: 1 · blank 12 x 28 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p149).
Size per 1-800-Stencil kit image (ref/SSS-FAA-024-01): letter 8 W x 24 H, sheet 12 x 32. Margin set to 2 in sides (sheet width match); blank height 28 vs 1-800 32.
App B natural width at 24 H = 7.71 in; x-stretch +3.8%.
No islands, no bridges.

SSS-FAA-024-01-W

24" FAA Airport Letter "W" (kit SSS-FAA-024-01), FAA AC 150/5340-1M App B, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

12 in (at 1:6)

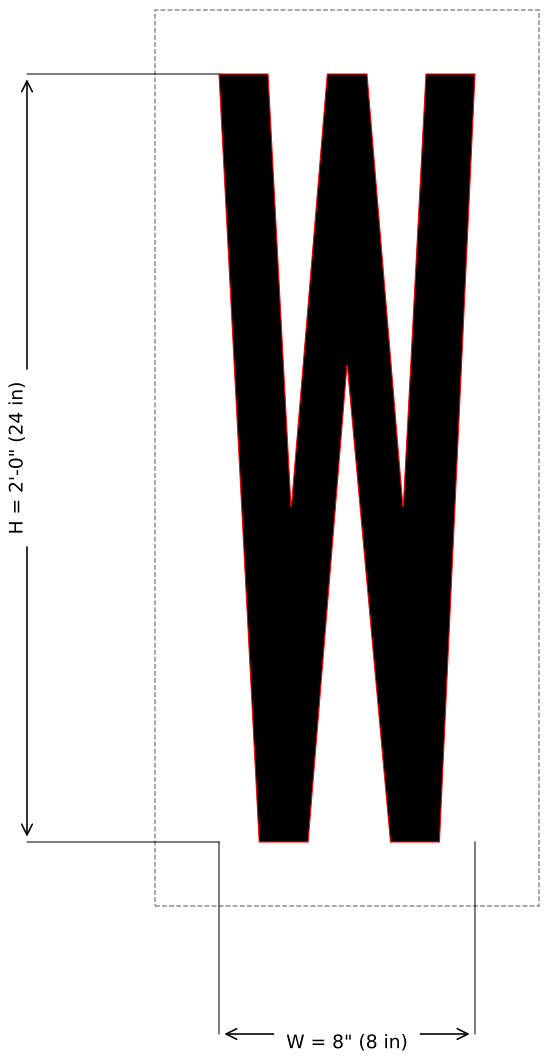


Pieces: 1 · blank 12 x 28 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p149).
Size per 1-800-Stencil kit image (ref/SSS-FAA-024-01): letter 8 W x 24 H, sheet 12 x 32. Margin set to 2 in sides (sheet width match); blank height 28 vs 1-800 32.
App B natural width at 24 H = 8.65 in; x-stretch -7.5%.
No islands, no bridges.

SSS-FAA-024-01-X

24" FAA Airport Letter "X" (kit SSS-FAA-024-01), FAA AC 150/5340-1M App B, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

12 in (at 1:6)

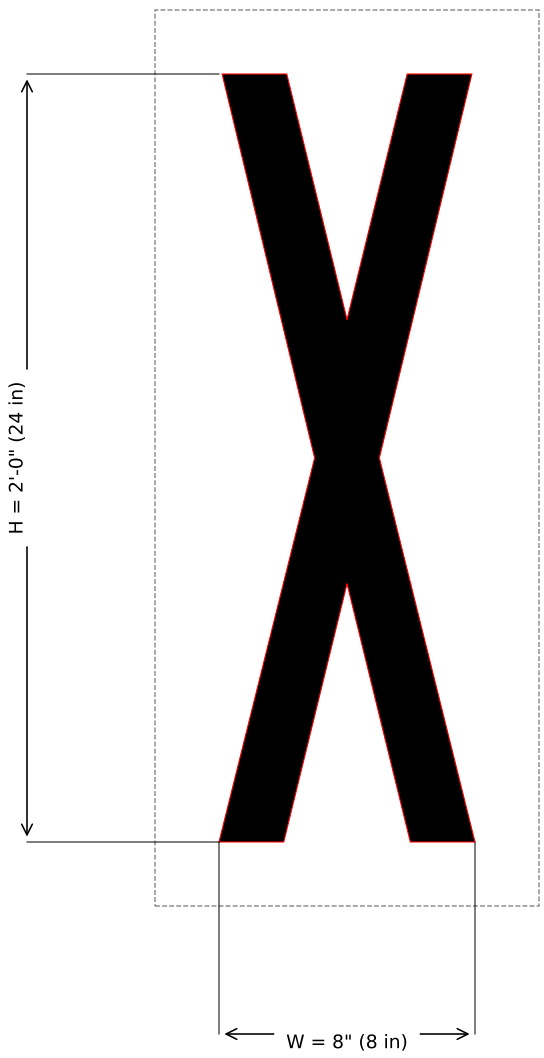


Pieces: 1 · blank 12 x 28 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p149).
Size per 1-800-Stencil kit image (ref/SSS-FAA-024-01): letter 8 W x 24 H, sheet 12 x 32. Margin set to 2 in sides (sheet width match); blank height 28 vs 1-800 32.
App B natural width at 24 H = 6.55 in; x-stretch +22.2%.
No islands, no bridges.

SSS-FAA-024-01-Y

24" FAA Airport Letter "Y" (kit SSS-FAA-024-01), FAA AC 150/5340-1M App B, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

12 in (at 1:6)

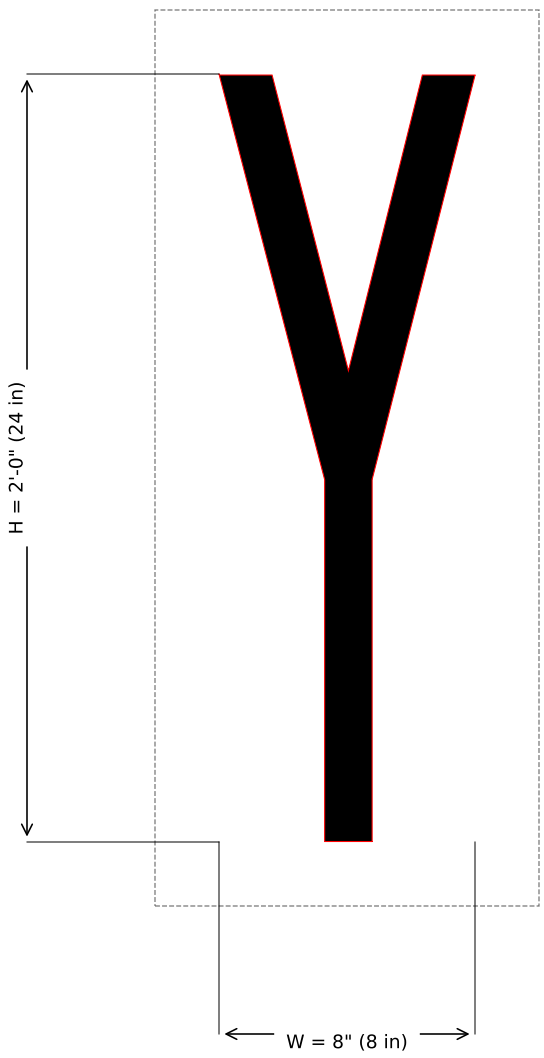


Pieces: 1 · blank 12 x 28 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p150).
Size per 1-800-Stencil kit image (ref/SSS-FAA-024-01): letter 8 W x 24 H, sheet 12 x 32. Margin set to 2 in sides (sheet width match); blank height 28 vs 1-800 32.
App B natural width at 24 H = 8.45 in; x-stretch -5.4%.
No islands, no bridges.

SSS-FAA-024-01-Z

24" FAA Airport Letter "Z" (kit SSS-FAA-024-01), FAA AC 150/5340-1M App B, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

12 in (at 1:6)

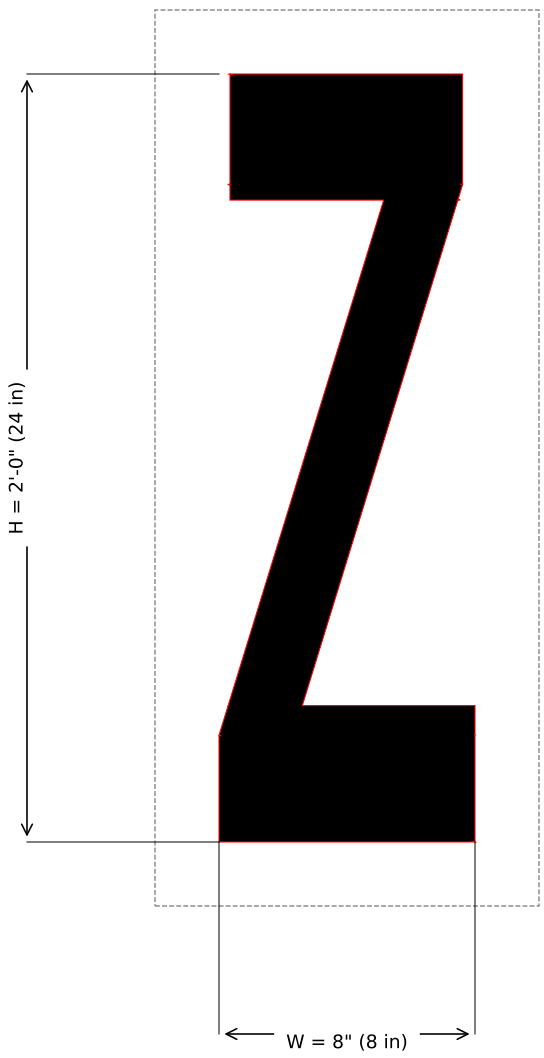


Pieces: 1 · blank 12 x 28 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p150).
Size per 1-800-Stencil kit image (ref/SSS-FAA-024-01): letter 8 W x 24 H, sheet 12 x 32. Margin set to 2 in sides (sheet width match); blank height 28 vs 1-800 32.
App B natural width at 24 H = 6.73 in; x-stretch +18.9%.
No islands, no bridges.

SSS-FAA-024-01-0

24" FAA Airport "0" - kit SSS-FAA-024-01, traced from 1-800-Stencil image, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

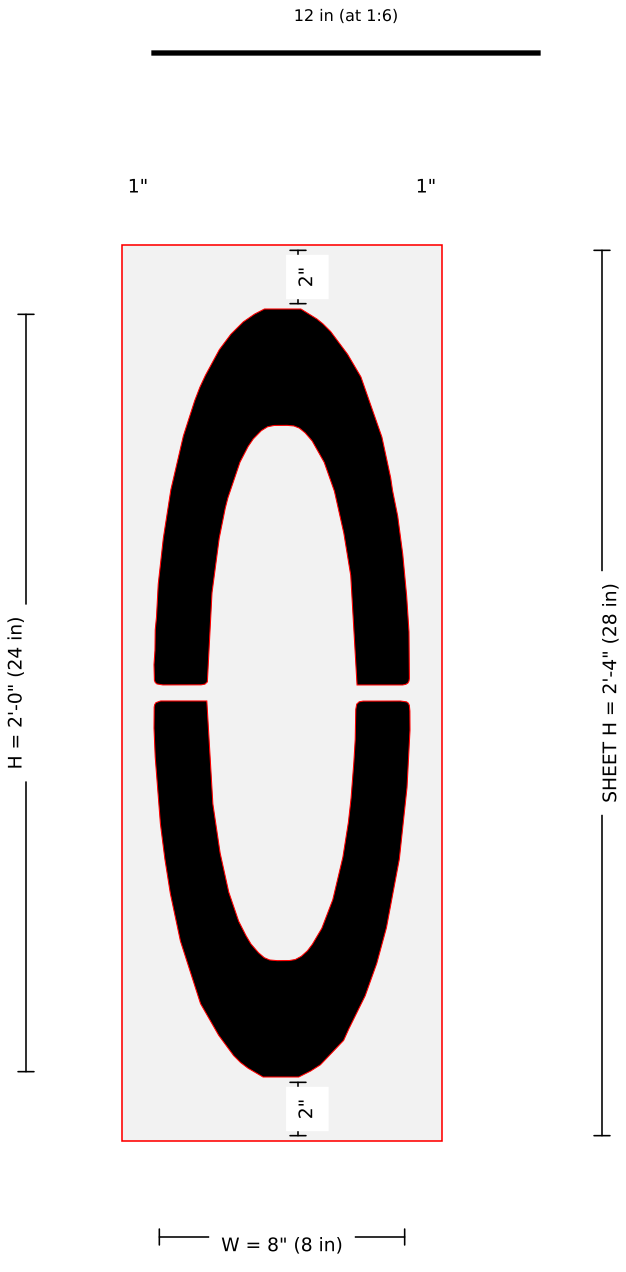

SHEET W = 10" (10 in)


Pieces: 1 · sheet 10 x 28 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-0240-24in-FAA-Airport-Letter-0-Stencil-32x12-2.jpg: width = kit listing 8 (image-scale 7.84); kit sheet 12 x 32 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.10 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-024-01-1

24" FAA Airport "1" - kit SSS-FAA-024-01, traced from 1-800-Stencil image, 2 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:6)

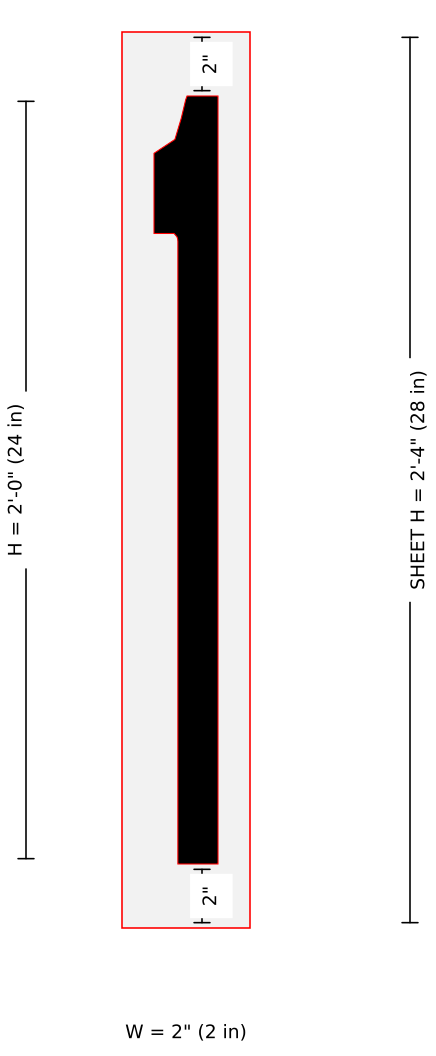


SHEET W = 4" (4 in)

Pieces: 1 · sheet 4 x 28 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-0241-24in-FAA-Airport-Letter-1-Stencil-32x7-2.jpg: width 2 from image scale (2.25); NOT the kit listing width; kit sheet 12 x 32 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.05 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-024-01-2

24" FAA Airport "2" - kit SSS-FAA-024-01, traced from 1-800-Stencil image, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

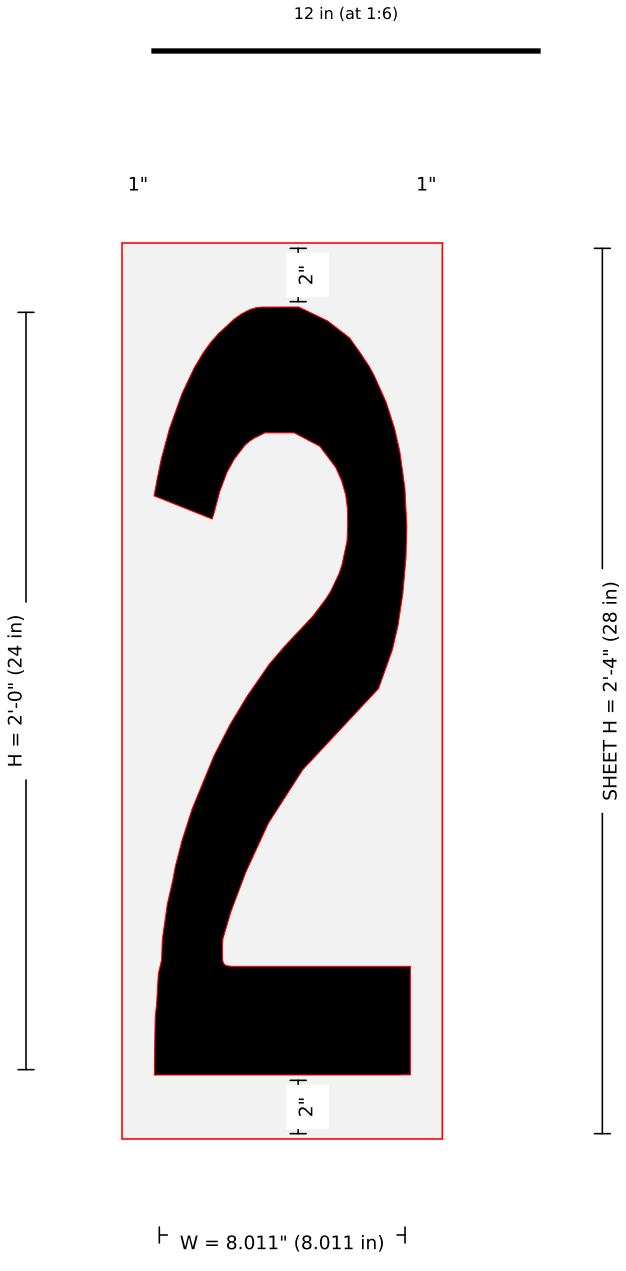

SHEET W = 10.011" (10.011 in)


Pieces: 1 · sheet 10.011 x 28 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-0242-24in-FAA-Airport-Letter-2-Stencil-32x12-2.jpg: width = kit listing 8 (image-scale 7.83); kit sheet 12 x 32 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.10 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-024-01-3

24" FAA Airport "3" - kit SSS-FAA-024-01, traced from 1-800-Stencil image, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:6)

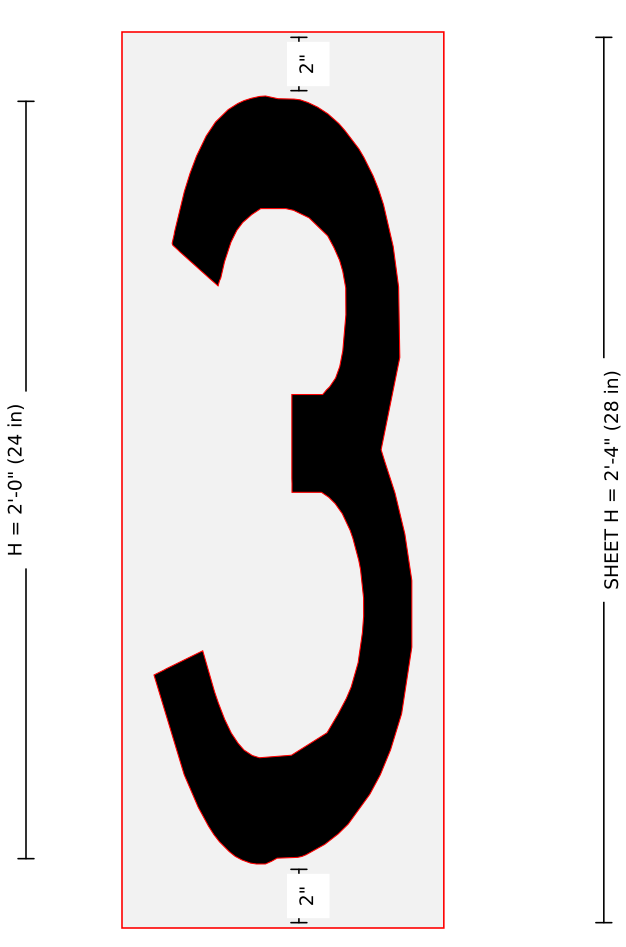


SHEET W = 10.0571" (10.0571 in)

Pieces: 1 · sheet 10.057 x 28 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-0243-24in-FAA-Airport-Letter-3-Stencil-32x12-2.jpg: width = kit listing 8 (image-scale 7.79); kit sheet 12 x 32 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.10 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-024-01-4

24" FAA Airport "4" - kit SSS-FAA-024-01, traced from 1-800-Stencil image, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

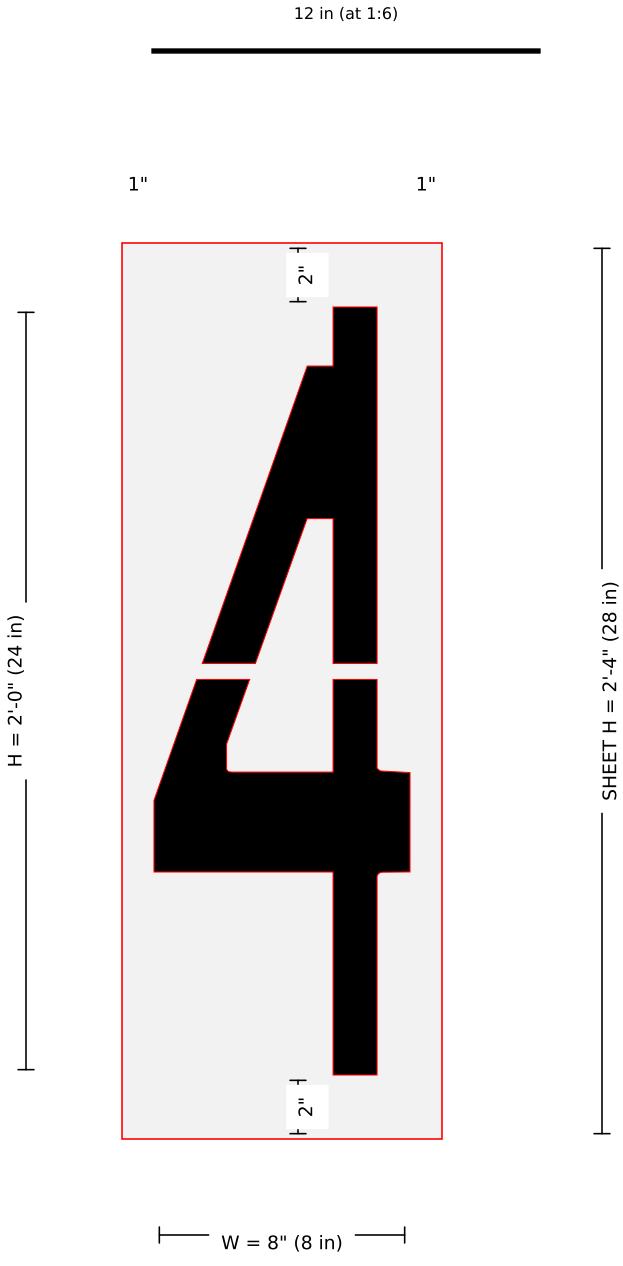

SHEET W = 10" (10 in)


Pieces: 1 · sheet 10 x 28 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-0244-24in-FAA-Airport-Letter-4-Stencil-32x12-2.jpg: width = kit listing 8 (image-scale 7.82); kit sheet 12 x 32 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.10 in (smoothing level 0.5); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-024-01-5

24" FAA Airport "5" - kit SSS-FAA-024-01, traced from 1-800-Stencil image, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:6)

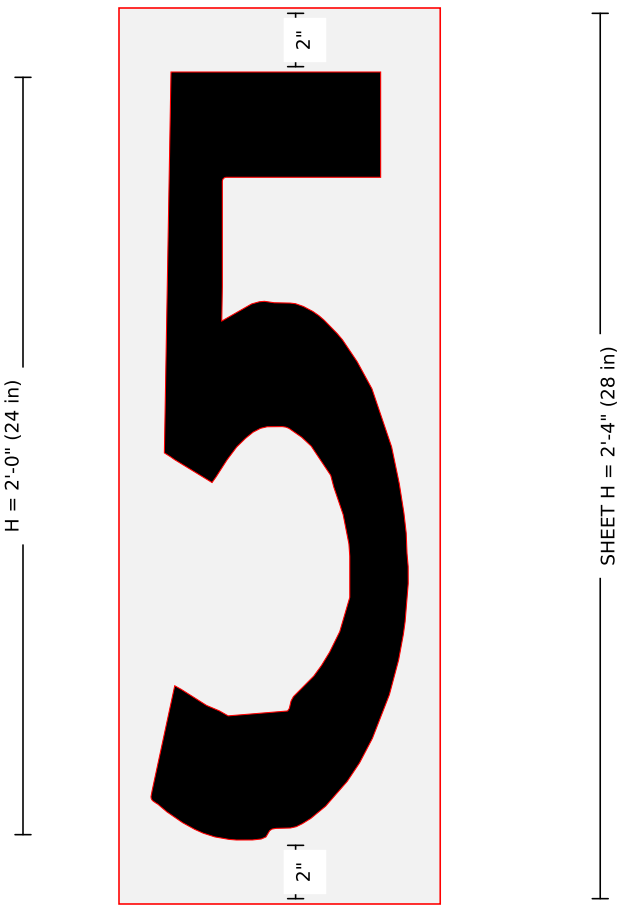


SHEET W = 10.0384" (10.0384 in)


Pieces: 1 · sheet 10.038 x 28 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-0245-24in-FAA-Airport-Letter-5-Stencil-32x12-2.jpg: width = kit listing 8 (image-scale 7.79); kit sheet 12 x 32 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.10 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 1 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-024-01-6

24" FAA Airport "6" - kit SSS-FAA-024-01, traced from 1-800-Stencil image, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

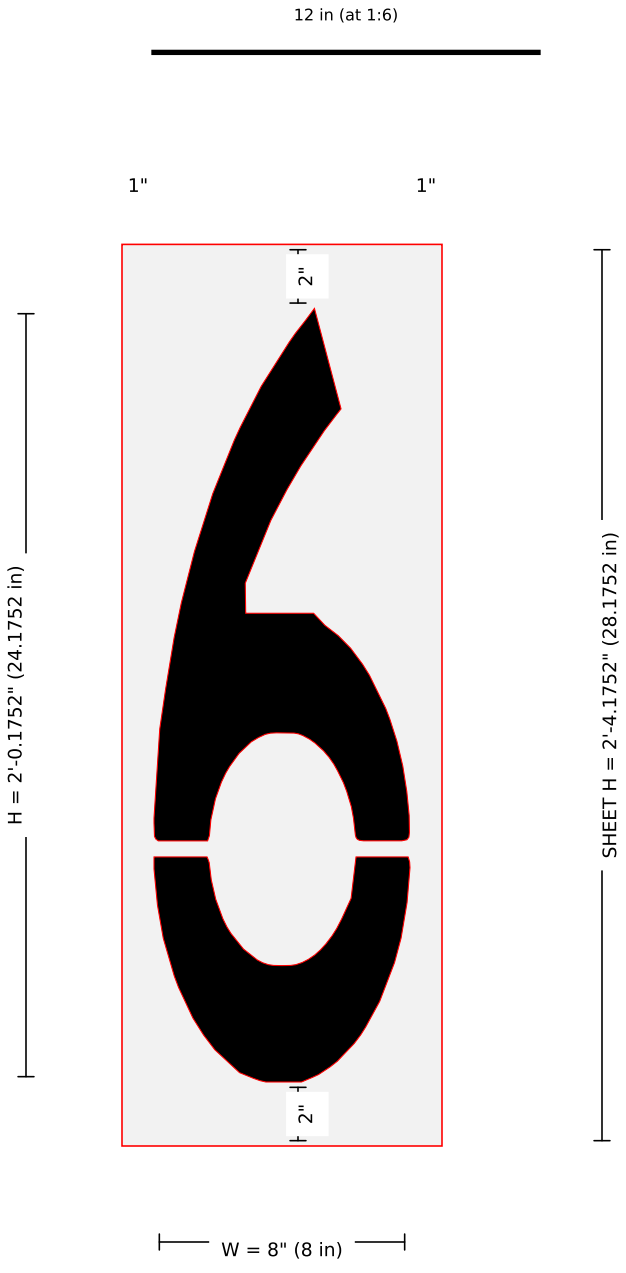




Pieces: 1 · sheet 10 x 28.175 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-0246-24in-FAA-Airport-Letter-6-Stencil-32x12-2.jpg: width = kit listing 8 (image-scale 7.90); kit sheet 12 x 32 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.10 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-024-01-7

24" FAA Airport "7" - kit SSS-FAA-024-01, traced from 1-800-Stencil image, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:6)

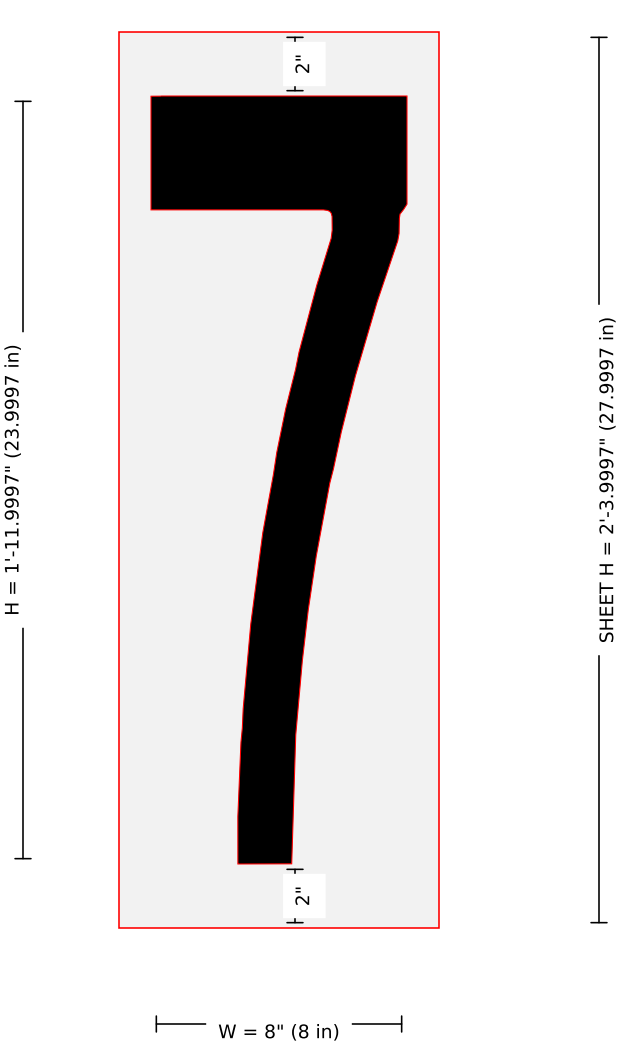


SHEET W = 10" (10 in)

Pieces: 1 · sheet 10 x 28 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-0247-24in-FAA-Airport-Letter-7-Stencil-32x12-2.jpg: width = kit listing 8 (image-scale 7.82); kit sheet 12 x 32 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.10 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-024-01-8

24" FAA Airport "8" - kit SSS-FAA-024-01, traced from 1-800-Stencil image, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

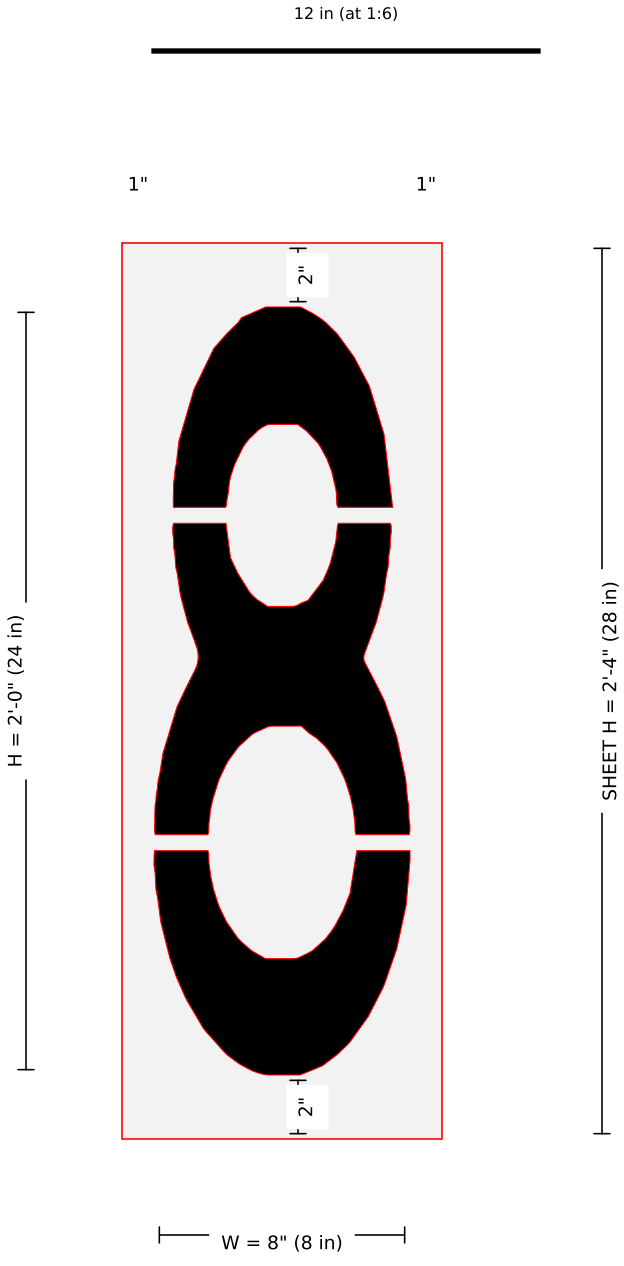


SHEET W = 10" (10 in)

Pieces: 1 · sheet 10 x 28 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-0248-24in-FAA-Airport-Letter-8-Stencil-32x12-2.jpg: width = kit listing 8 (image-scale 7.84); kit sheet 12 x 32 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.10 in (smoothing level 0.5); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 4 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-024-01-9

24" FAA Airport "9" - kit SSS-FAA-024-01, traced from 1-800-Stencil image, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

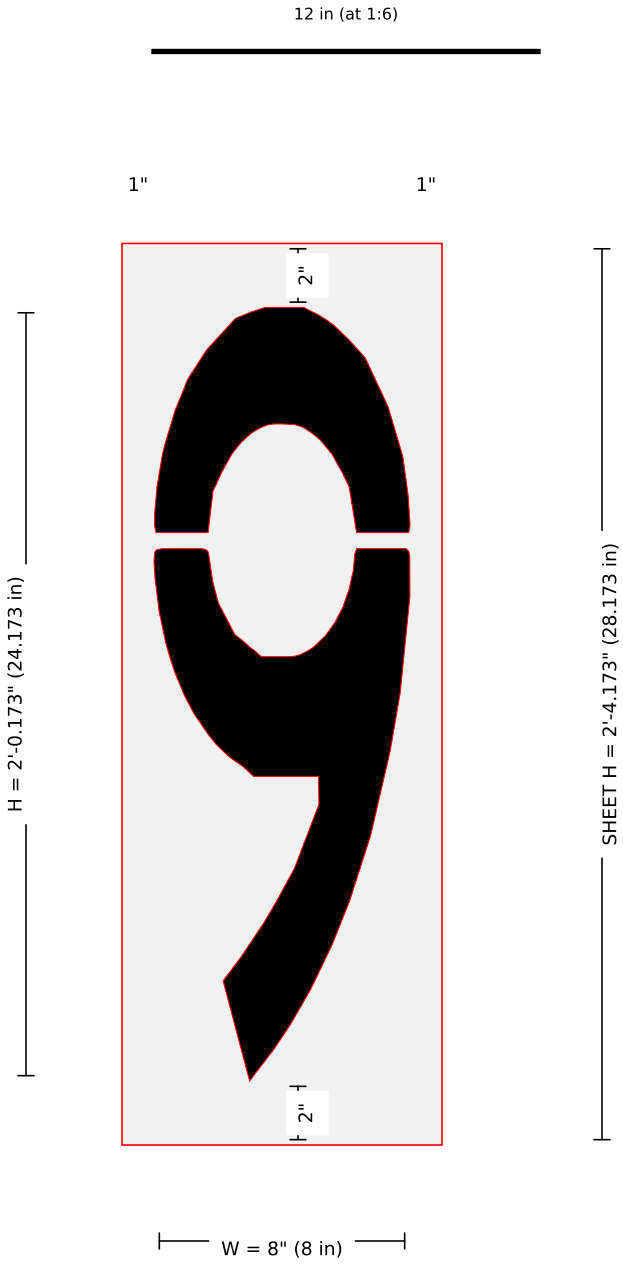


SHEET W = 10" (10 in)

Pieces: 1 · sheet 10 x 28.173 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-0249-24in-FAA-Airport-Letter-9-Stencil-32x12-2.jpg: width = kit listing 8 (image-scale 7.90); kit sheet 12 x 32 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.10 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-024-01-A

24" FAA Airport "A" - kit SSS-FAA-024-01, traced from 1-800-Stencil image, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

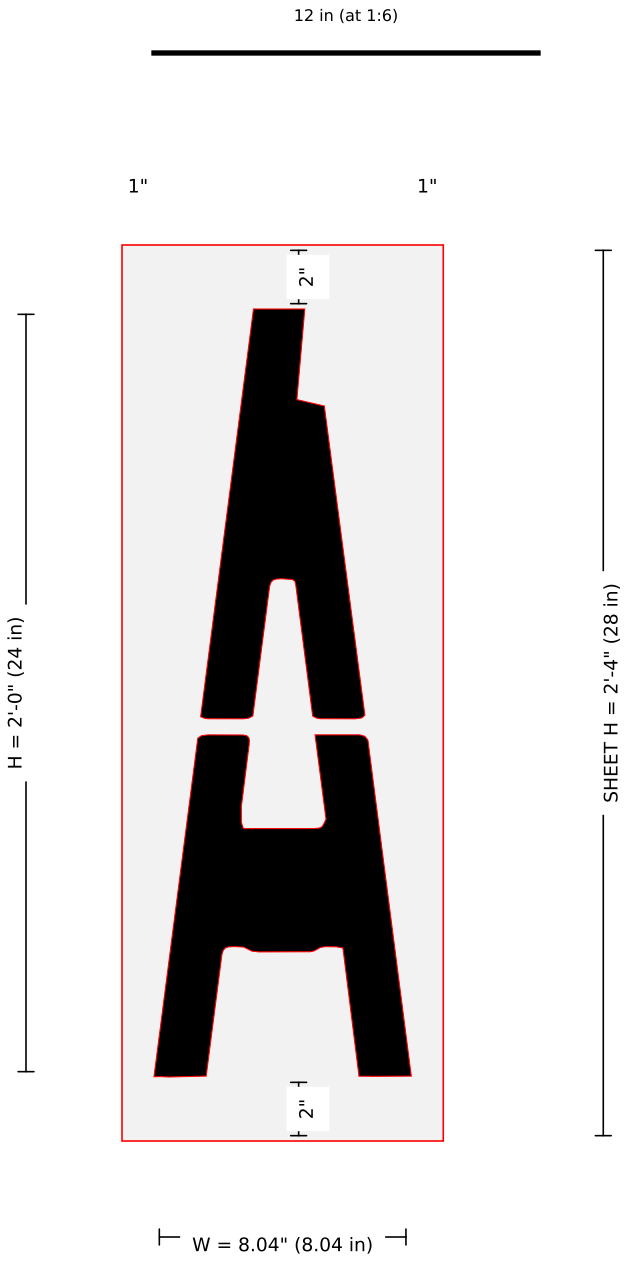


Pieces: 1 · sheet 10.04 x 28 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-024A-24in-FAA-Airport-Letter-A-Stencil-32x12-2.jpg: width = kit listing 8 (image-scale 7.73); kit sheet 12 x 32 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.10 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-024-01-B

24" FAA Airport "B" - kit SSS-FAA-024-01, traced from 1-800-Stencil image, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

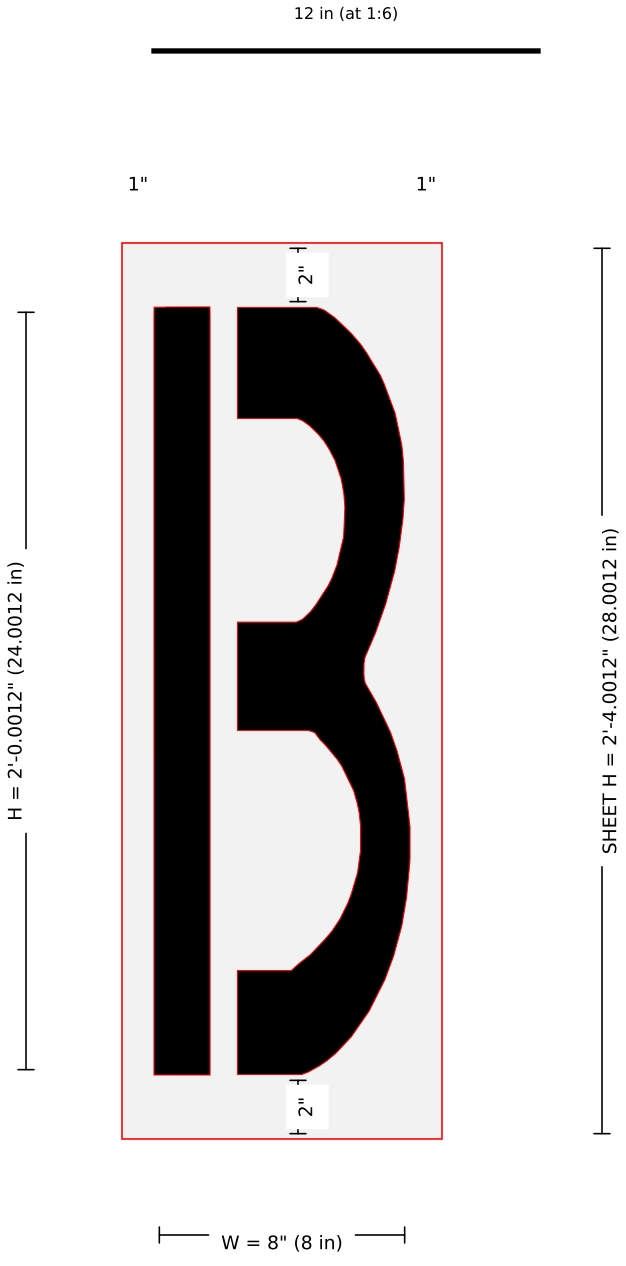

SHEET W = 10" (10 in)


Pieces: 1 · sheet 10 x 28.001 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-024B-24in-FAA-Airport-Letter-B-Stencil-32x12-2.jpg: width = kit listing 8 (image-scale 7.80); kit sheet 12 x 32 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.10 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-024-01-C

24" FAA Airport "C" - kit SSS-FAA-024-01, traced from 1-800-Stencil image, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:6)

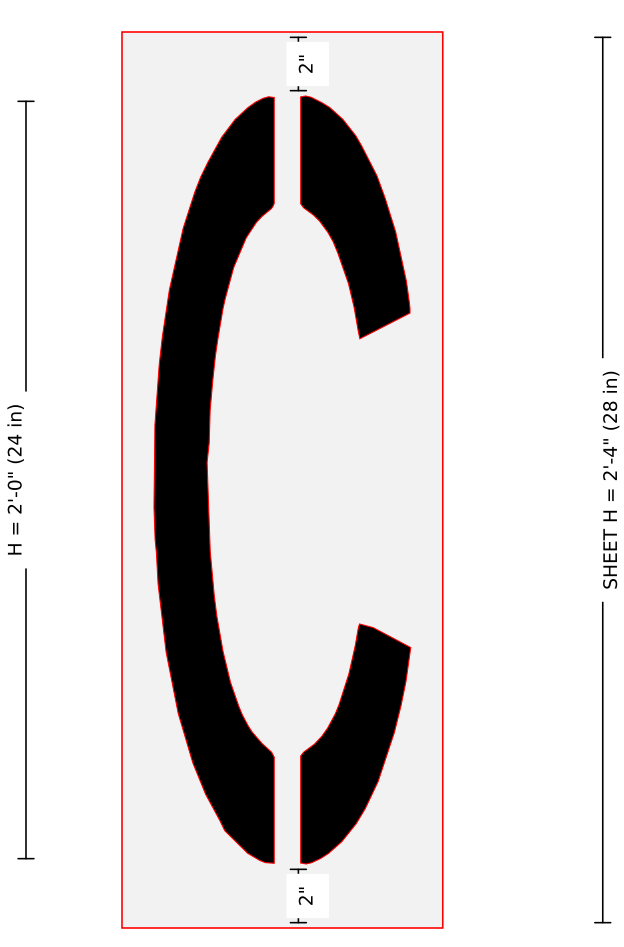

SHEET W = 10.0239" (10.0239 in)


Pieces: 1 · sheet 10.024 x 28 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-024C-24in-FAA-Airport-Letter-C-Stencil-32x12-2.jpg: width = kit listing 8 (image-scale 7.81); kit sheet 12 x 32 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.10 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-024-01-D

24" FAA Airport "D" - kit SSS-FAA-024-01, traced from 1-800-Stencil image, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:6)

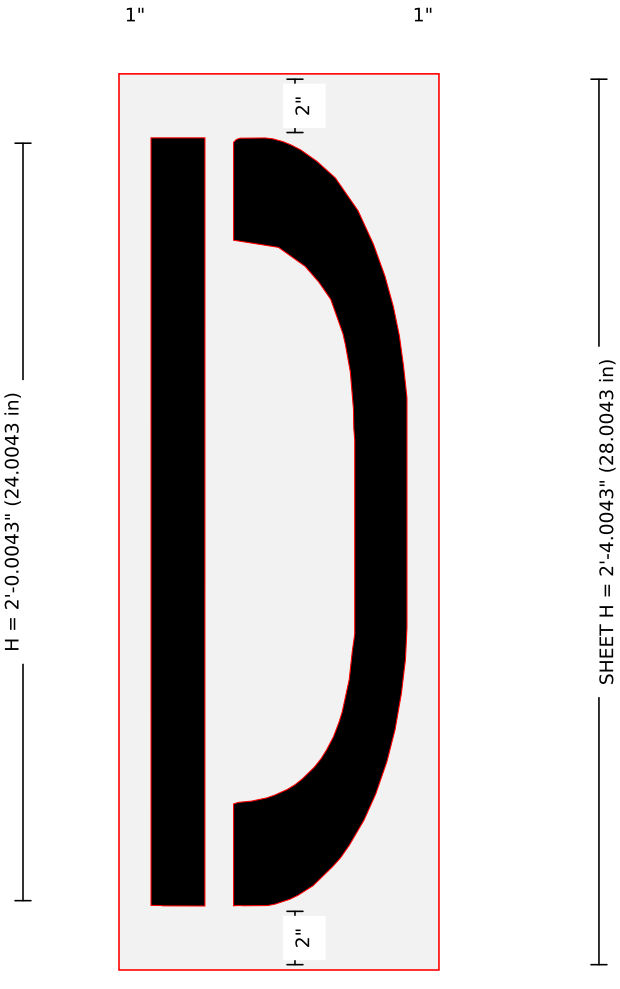


SHEET W = 9.9987" (9.9987 in)

Pieces: 1 · sheet 9.999 x 28.004 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-024D-24in-FAA-Airport-Letter-D-Stencil-32x12-2.jpg: width = kit listing 8 (image-scale 7.80); kit sheet 12 x 32 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.10 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-024-01-E

24" FAA Airport "E" - kit SSS-FAA-024-01, traced from 1-800-Stencil image, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

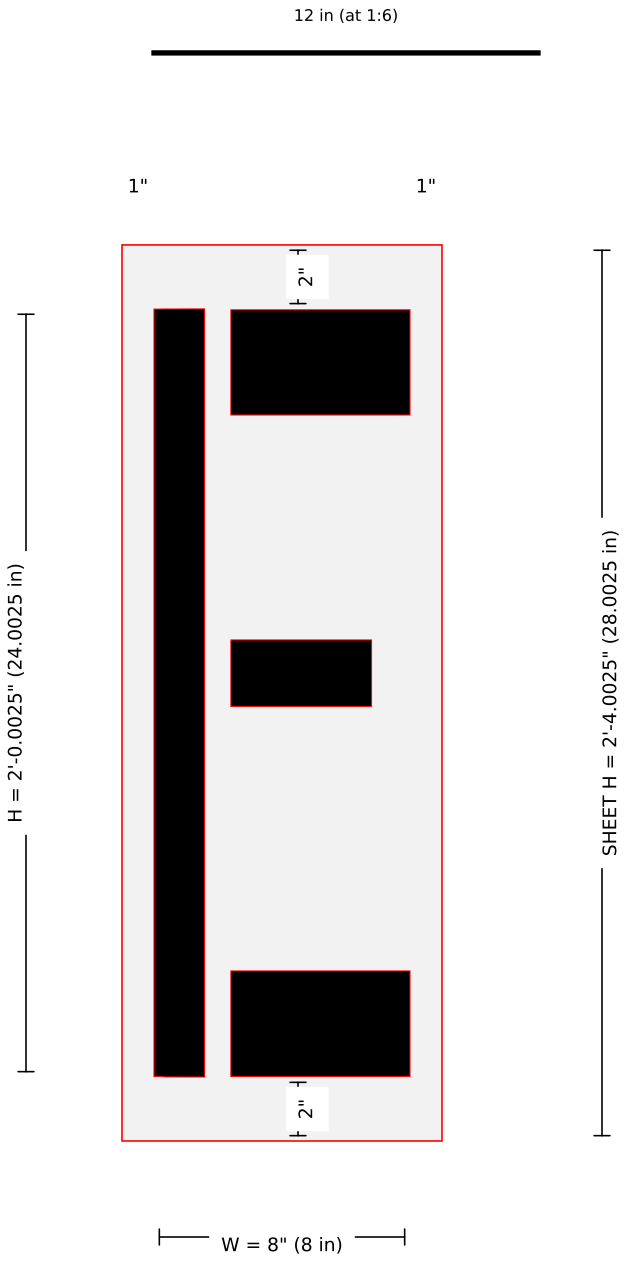


SHEET W = 10" (10 in)

Pieces: 1 · sheet 10 x 28.002 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-024E-24in-FAA-Airport-Letter-E-Stencil-32x12-2.jpg: width = kit listing 8 (image-scale 7.80); kit sheet 12 x 32 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.05 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-024-01-F

24" FAA Airport "F" - kit SSS-FAA-024-01, traced from 1-800-Stencil image, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

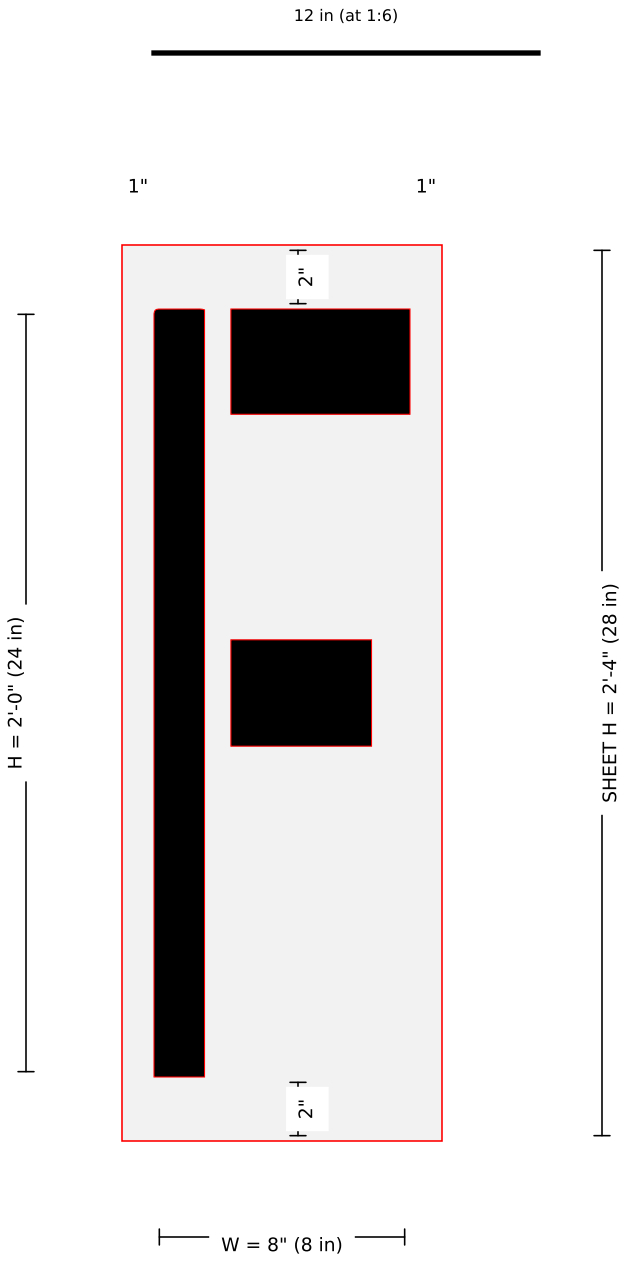

SHEET W = 10" (10 in)


Pieces: 1 · sheet 10 x 28 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-024F-24in-FAA-Airport-Letter-F-Stencil-32x12-2.jpg: width = kit listing 8 (image-scale 7.82); kit sheet 12 x 32 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.05 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-024-01-G

24" FAA Airport "G" - kit SSS-FAA-024-01, traced from 1-800-Stencil image, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:6)

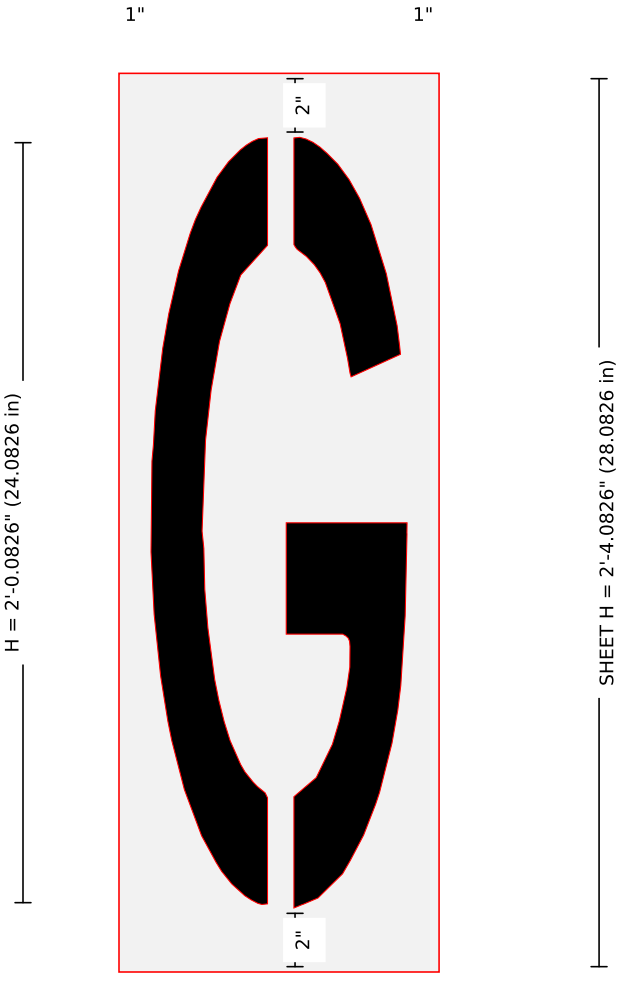


SHEET W = 10.0023" (10.0023 in)

Pieces: 1 · sheet 10.002 x 28.083 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-024G-24in-FAA-Airport-Letter-G-Stencil-32x12-2.jpg: width = kit listing 8 (image-scale 7.84); kit sheet 12 x 32 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.10 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-024-01-H

24" FAA Airport "H" - kit SSS-FAA-024-01, traced from 1-800-Stencil image, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

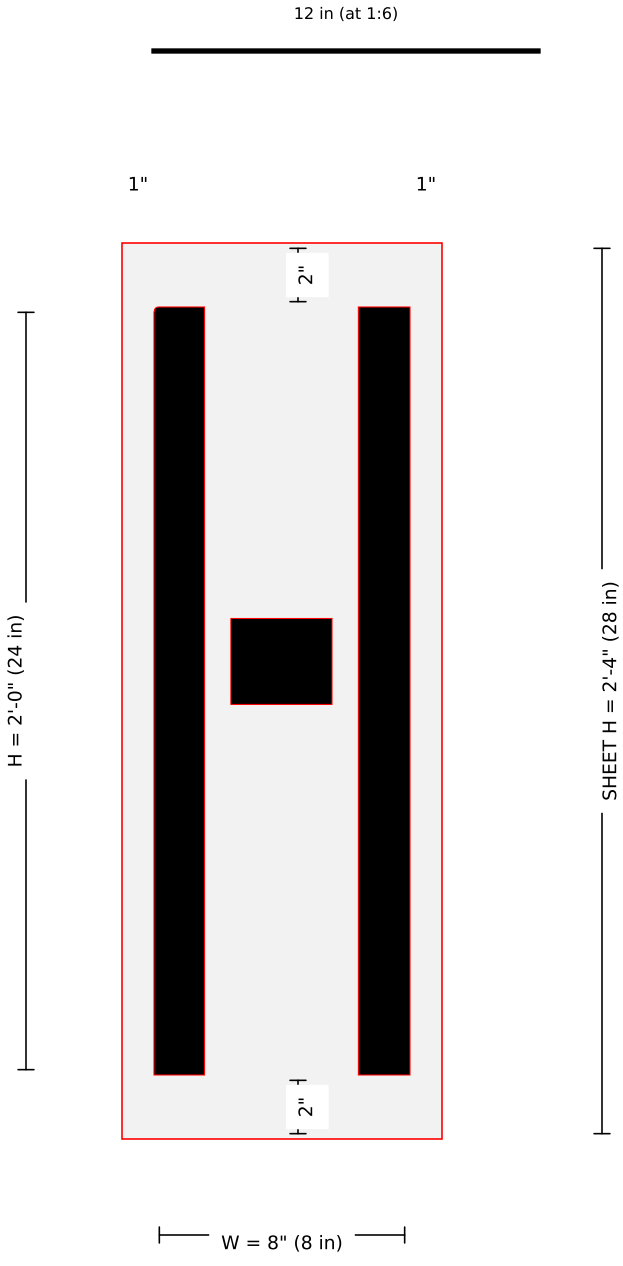


SHEET W = 10" (10 in)

Pieces: 1 · sheet 10 x 28 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-024H-24in-FAA-Airport-Letter-H-Stencil-32x12-2.jpg: width = kit listing 8 (image-scale 7.82); kit sheet 12 x 32 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.05 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-024-01-I

24" FAA Airport "I" - kit SSS-FAA-024-01, traced from 1-800-Stencil image, 2 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

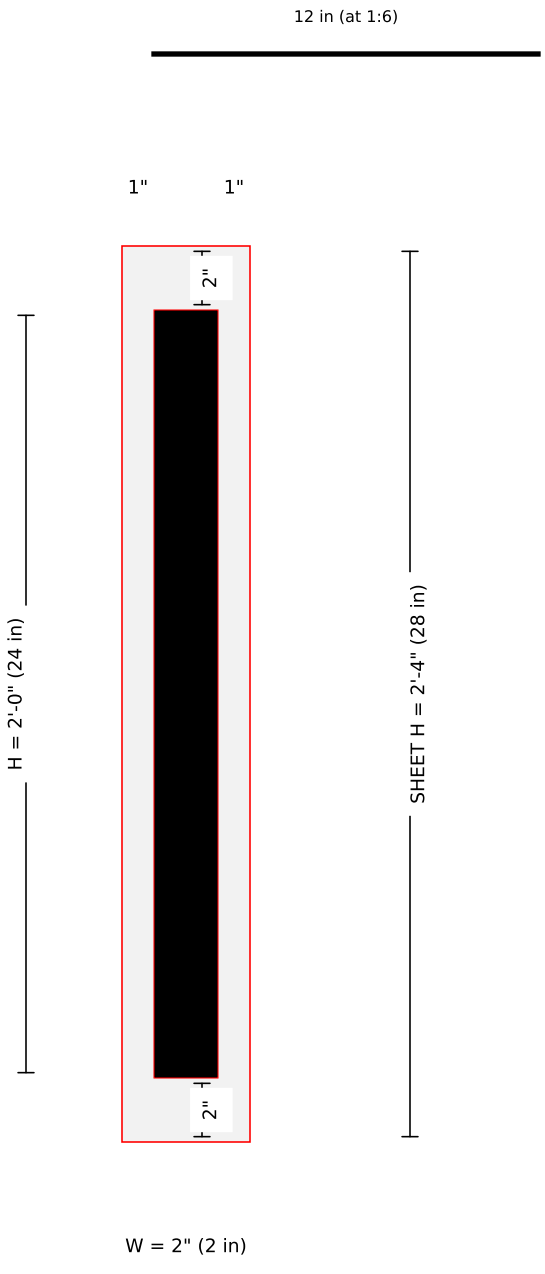


Pieces: 1 · sheet 4 x 28 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-024I-24in-FAA-Airport-Letter-I-Stencil-32x6-2.jpg: width 2 from image scale (1.78); NOT the kit listing width; kit sheet 12 x 32 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.05 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-024-01-J

24" FAA Airport "J" - kit SSS-FAA-024-01, traced from 1-800-Stencil image, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

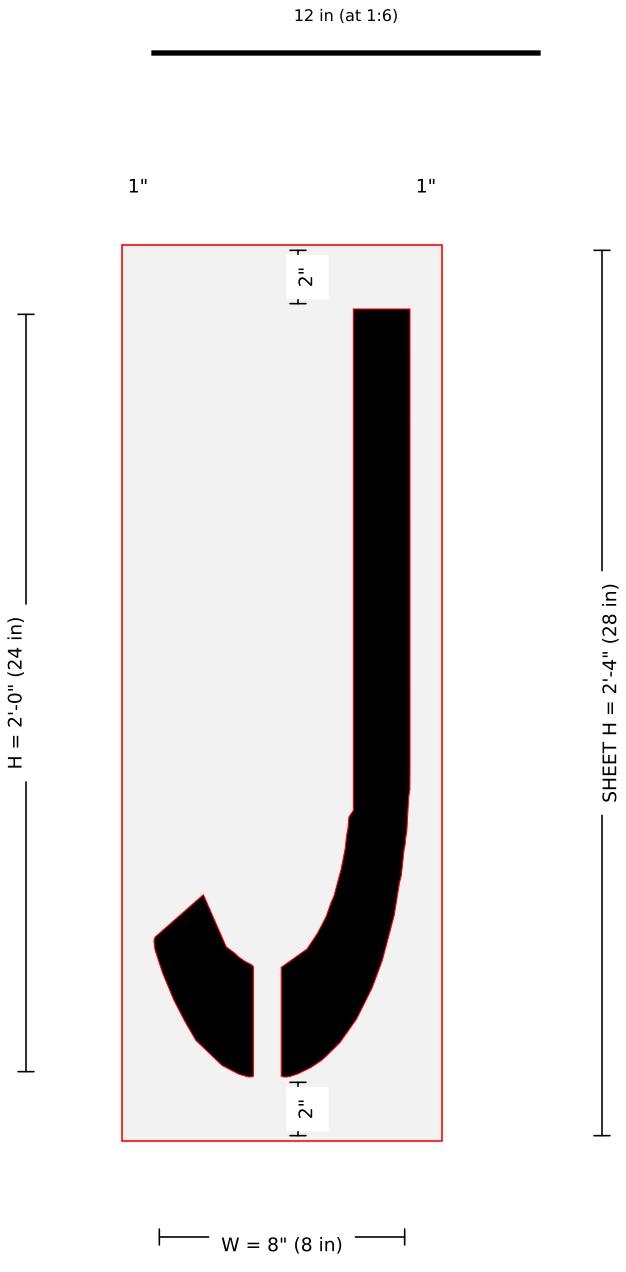


SHEET W = 10" (10 in)

Pieces: 1 · sheet 10 x 28 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-024J-24in-FAA-Airport-Letter-J-Stencil-32x12-2.jpg: width = kit listing 8 (image-scale 7.80); kit sheet 12 x 32 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.05 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-024-01-K

24" FAA Airport "K" - kit SSS-FAA-024-01, traced from 1-800-Stencil image, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

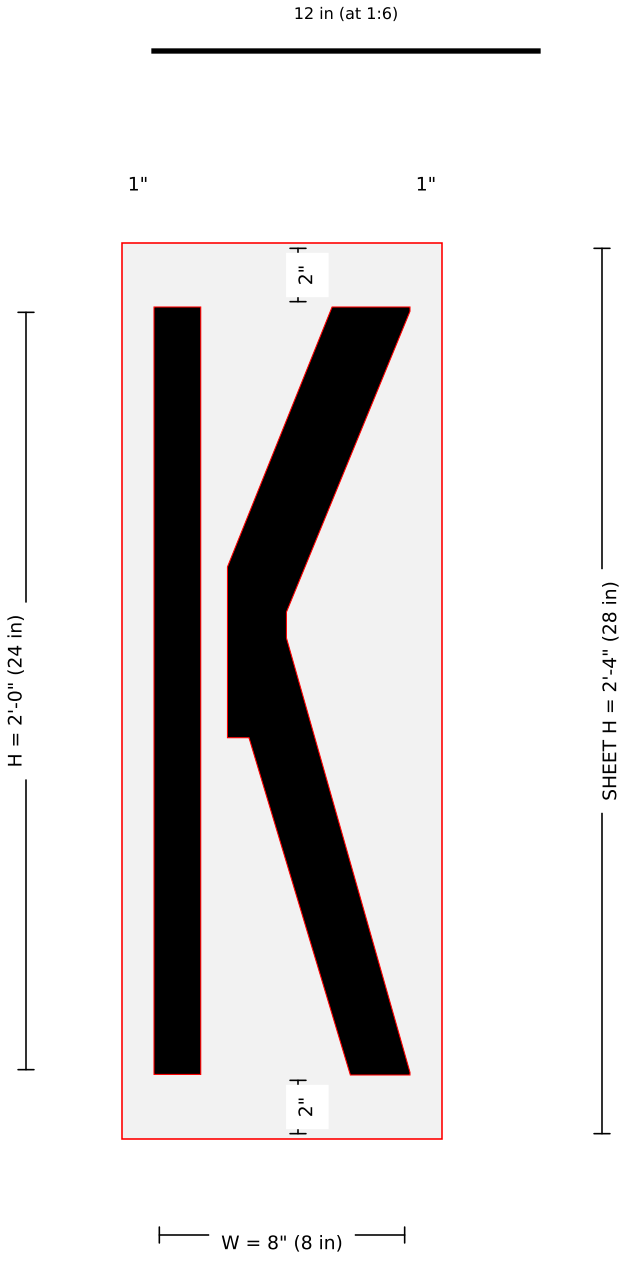


Pieces: 1 · sheet 10 x 28 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-024K-24in-FAA-Airport-Letter-K-Stencil-32x12-2.jpg: width = kit listing 8 (image-scale 7.72); kit sheet 12 x 32 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.05 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-024-01-L

24" FAA Airport "L" - kit SSS-FAA-024-01, traced from 1-800-Stencil image, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

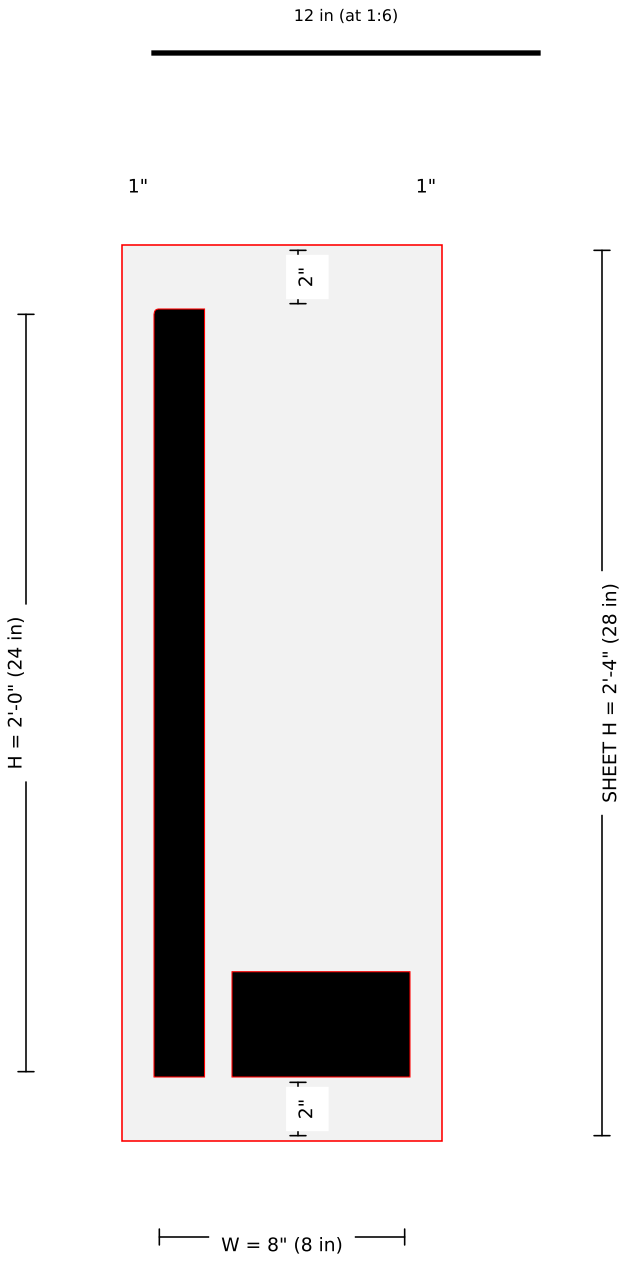


Pieces: 1 · sheet 10 x 28 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-024L-24in-FAA-Airport-Letter-L-Stencil-32x12-2.jpg: width = kit listing 8 (image-scale 7.82); kit sheet 12 x 32 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.05 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-024-01-M

24" FAA Airport "M" - kit SSS-FAA-024-01, traced from 1-800-Stencil image, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:6)

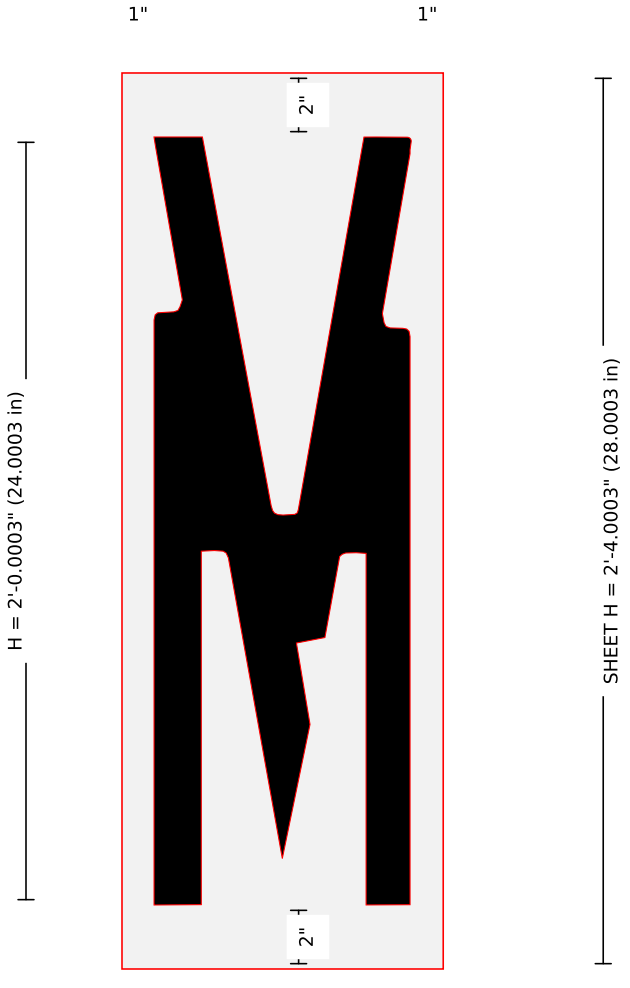

SHEET W = 10.0384" (10.0384 in)


Pieces: 1 · sheet 10.038 x 28 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-024M-24in-FAA-Airport-Letter-M-Stencil-32x12-2.jpg: width = kit listing 8 (image-scale 7.82); kit sheet 12 x 32 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.10 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-024-01-N

24" FAA Airport "N" - kit SSS-FAA-024-01, traced from 1-800-Stencil image, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:6)

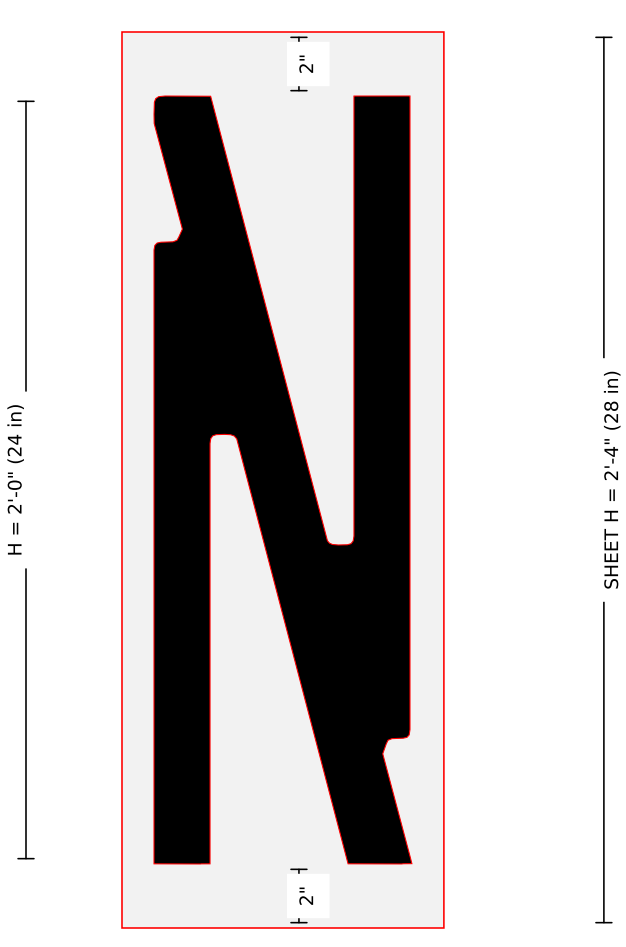


SHEET W = 10.0593" (10.0593 in)

Pieces: 1 · sheet 10.059 x 28 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-024N-24in-FAA-Airport-Letter-N-Stencil-32x12-2.jpg: width = kit listing 8 (image-scale 7.82); kit sheet 12 x 32 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.10 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-024-01-O

24" FAA Airport "O" - kit SSS-FAA-024-01, traced from 1-800-Stencil image, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

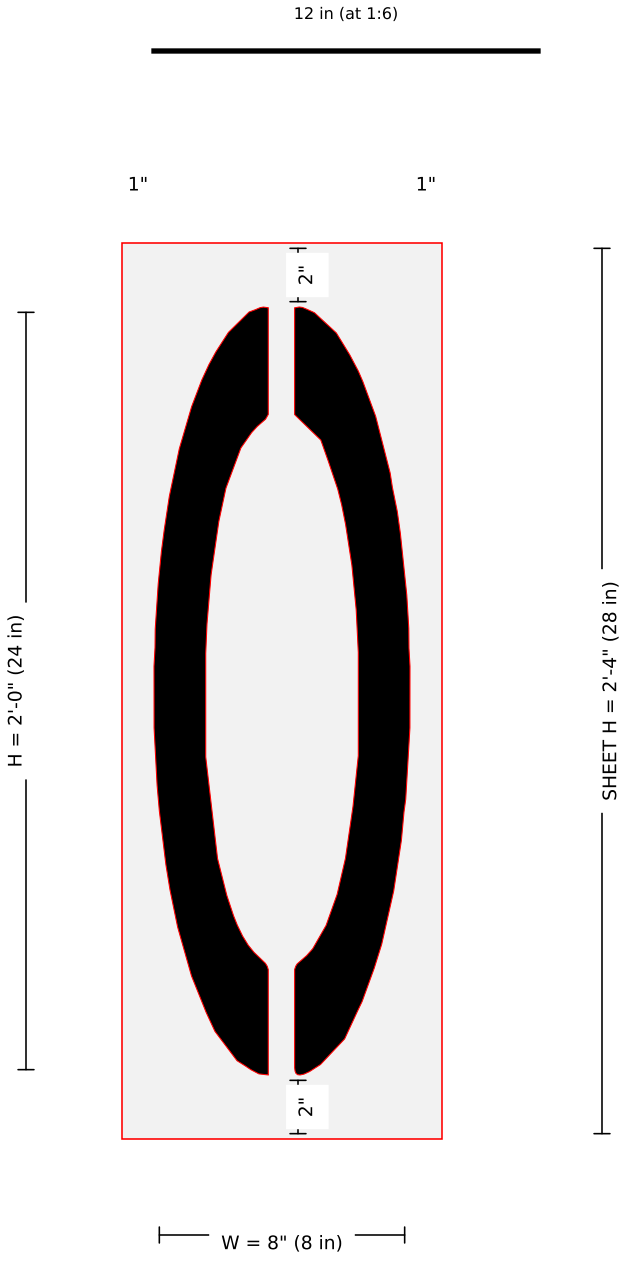


Pieces: 1 · sheet 10 x 28 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-024O-24in-FAA-Airport-Letter-O-Stencil-32x12-2.jpg: width = kit listing 8 (image-scale 7.86); kit sheet 12 x 32 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.10 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-024-01-P

24" FAA Airport "P" - kit SSS-FAA-024-01, traced from 1-800-Stencil image, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

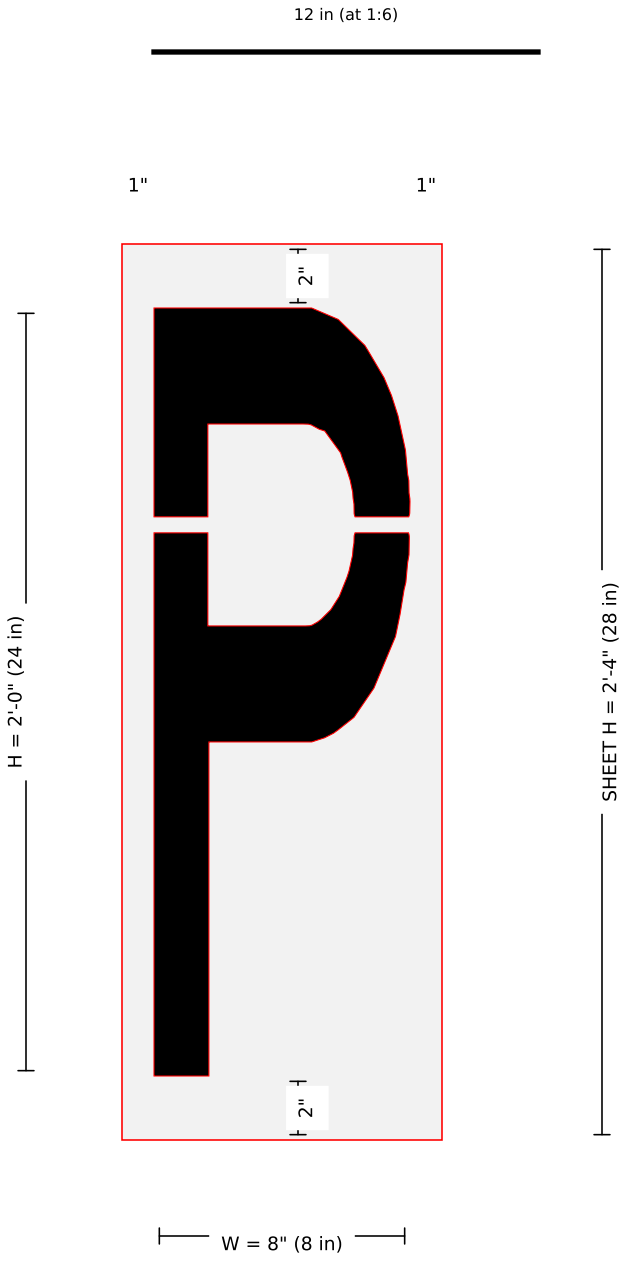


SHEET W = 10" (10 in)

Pieces: 1 · sheet 10 x 28 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-024P-24in-FAA-Airport-Letter-P-Stencil-32x12-2.jpg: width = kit listing 8 (image-scale 7.82); kit sheet 12 x 32 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.05 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-024-01-Q

24" FAA Airport "Q" - kit SSS-FAA-024-01, traced from 1-800-Stencil image, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

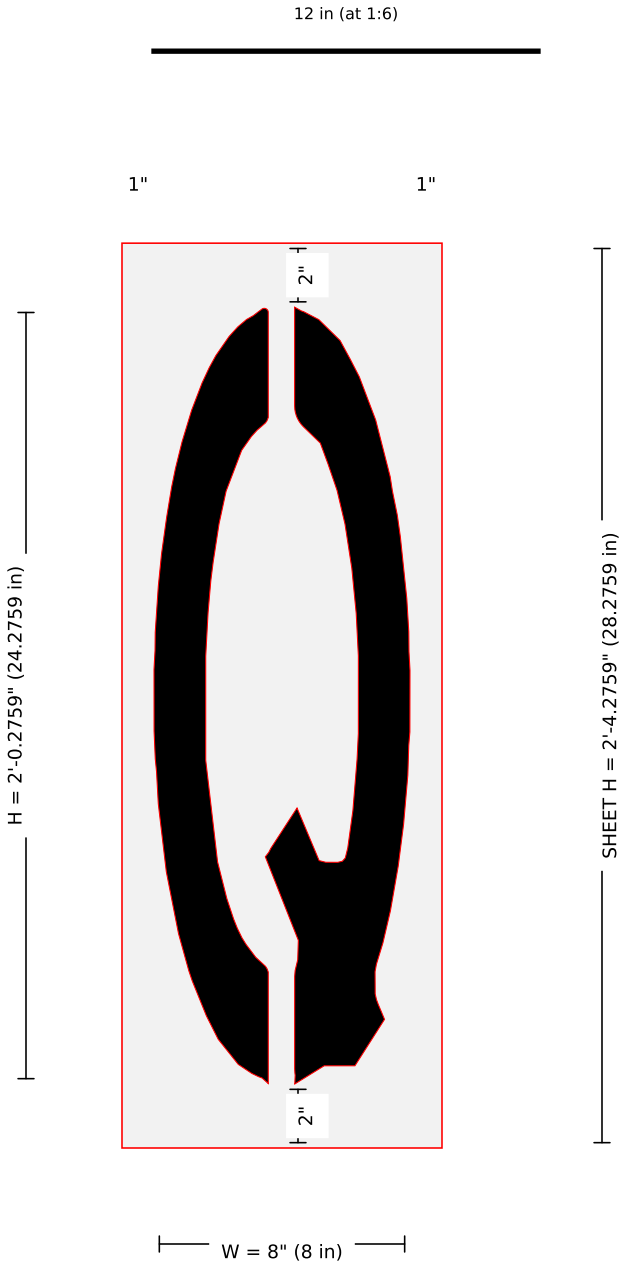


Pieces: 1 · sheet 10 x 28.276 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-024Q-24in-FAA-Airport-Letter-Q-Stencil-32x12-2.jpg: width = kit listing 8 (image-scale 7.86); kit sheet 12 x 32 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.10 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 6 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-024-01-R

24" FAA Airport "R" - kit SSS-FAA-024-01, traced from 1-800-Stencil image, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:6)

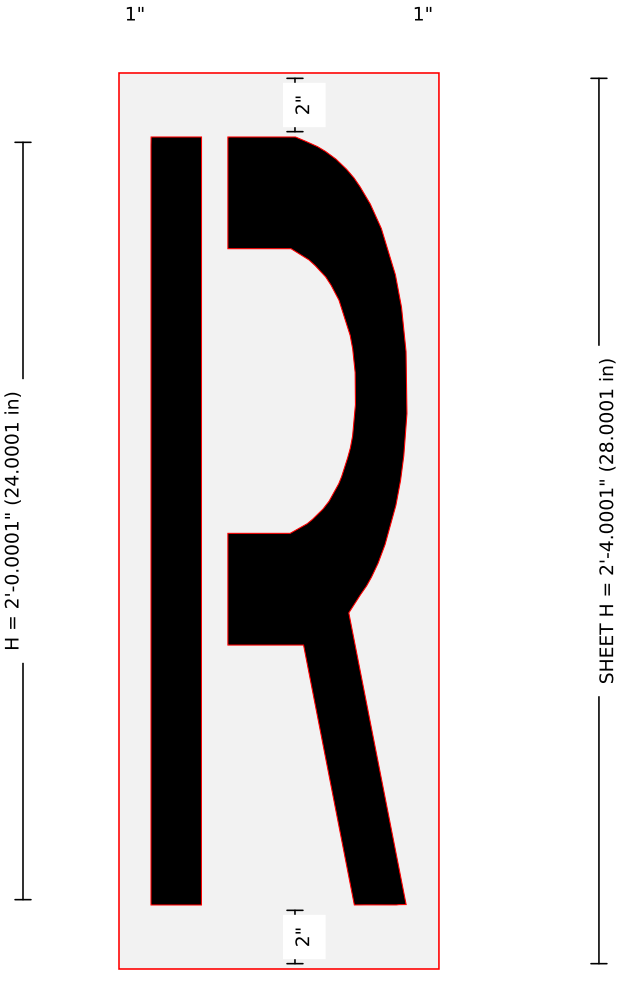

SHEET W = 9.9983" (9.9983 in)


Pieces: 1 · sheet 9.998 x 28 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-024R-24in-FAA-Airport-Letter-R-Stencil-32x12-2.jpg: width = kit listing 8 (image-scale 7.82); kit sheet 12 x 32 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.10 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 1 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-024-01-S

24" FAA Airport "S" - kit SSS-FAA-024-01, traced from 1-800-Stencil image, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:6)

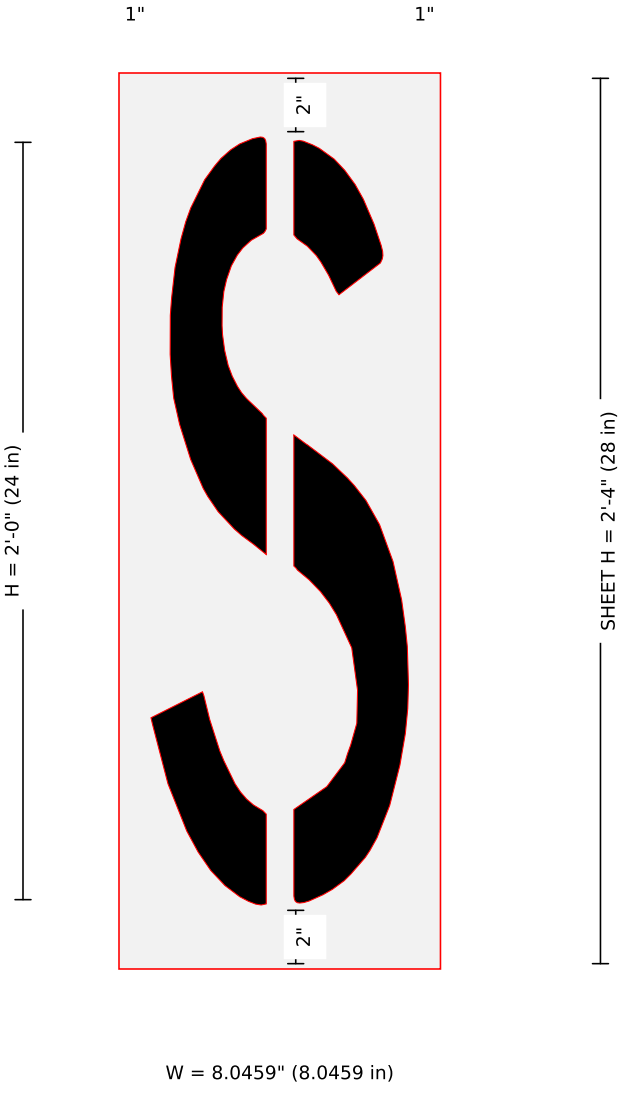


SHEET W = 10.0459" (10.0459 in)

Pieces: 1 · sheet 10.046 x 28 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-024S-24in-FAA-Airport-Letter-S-Stencil-32x12-2.jpg: width = kit listing 8 (image-scale 7.81); kit sheet 12 x 32 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.10 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-024-01-T

24" FAA Airport "T" - kit SSS-FAA-024-01, traced from 1-800-Stencil image, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

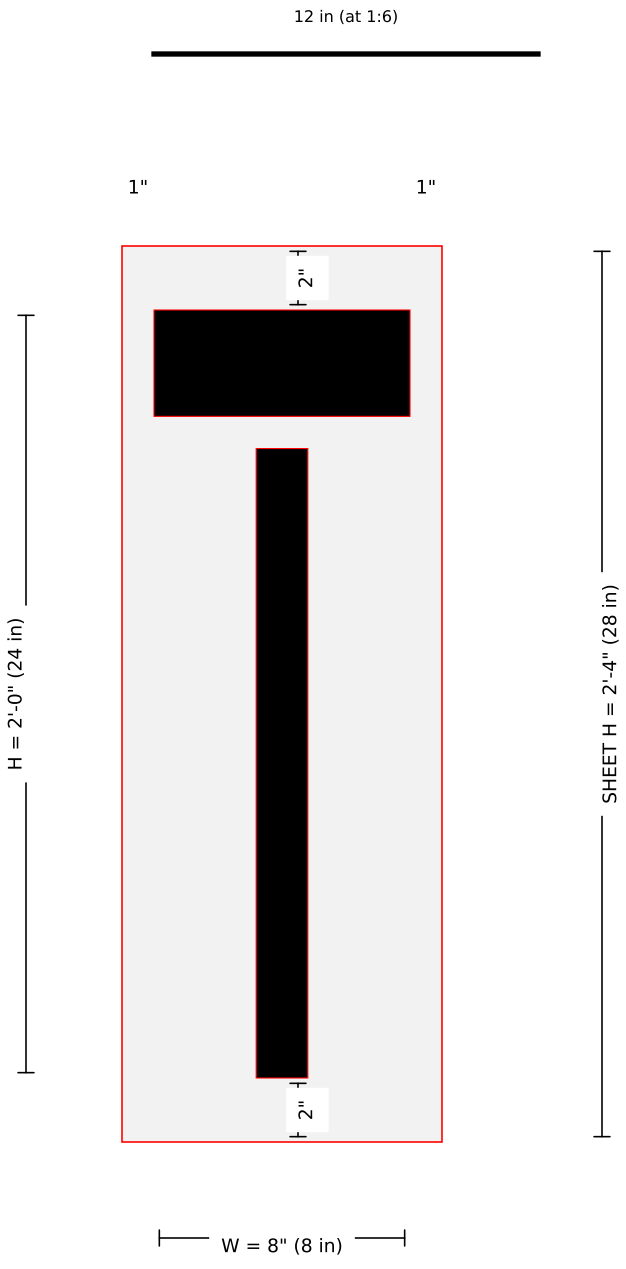


Pieces: 1 · sheet 10 x 28 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-024T-24in-FAA-Airport-Letter-T-Stencil-32x12-2.jpg: width = kit listing 8 (image-scale 7.82); kit sheet 12 x 32 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.05 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-024-01-U

24" FAA Airport "U" - kit SSS-FAA-024-01, traced from 1-800-Stencil image, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

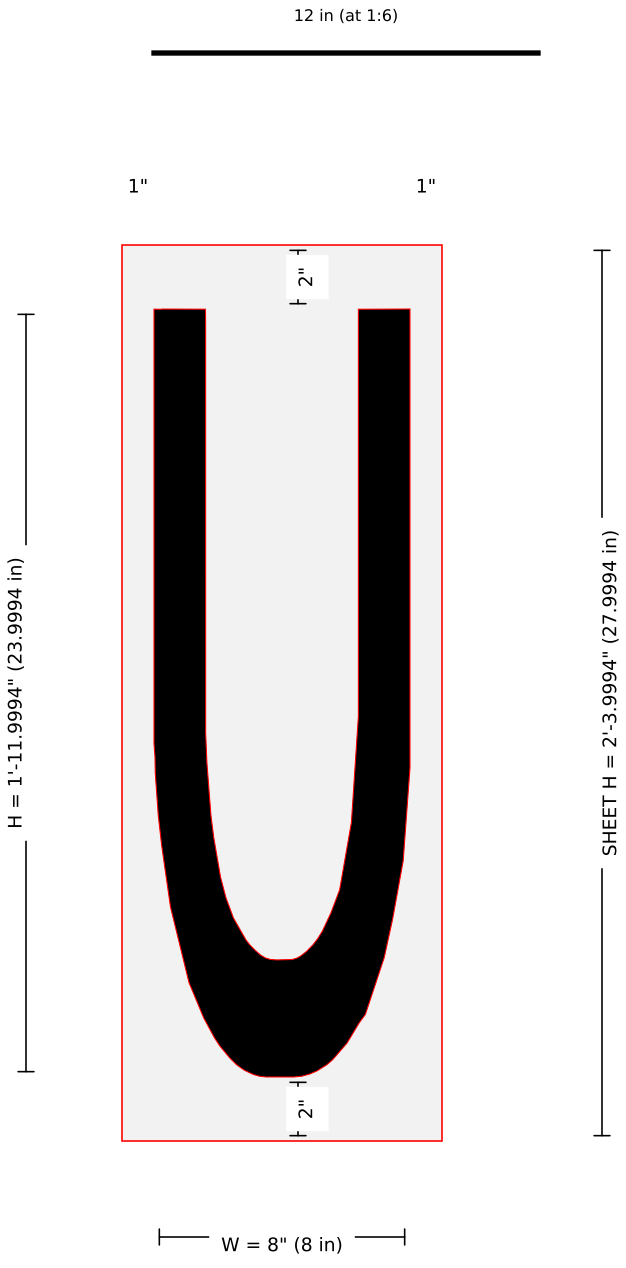

SHEET W = 10" (10 in)


Pieces: 1 · sheet 10 x 27.999 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-024U-24in-FAA-Airport-Letter-U-Stencil-32x12-2.jpg: width = kit listing 8 (image-scale 7.82); kit sheet 12 x 32 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.10 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-024-01-V

24" FAA Airport "V" - kit SSS-FAA-024-01, traced from 1-800-Stencil image, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:6)

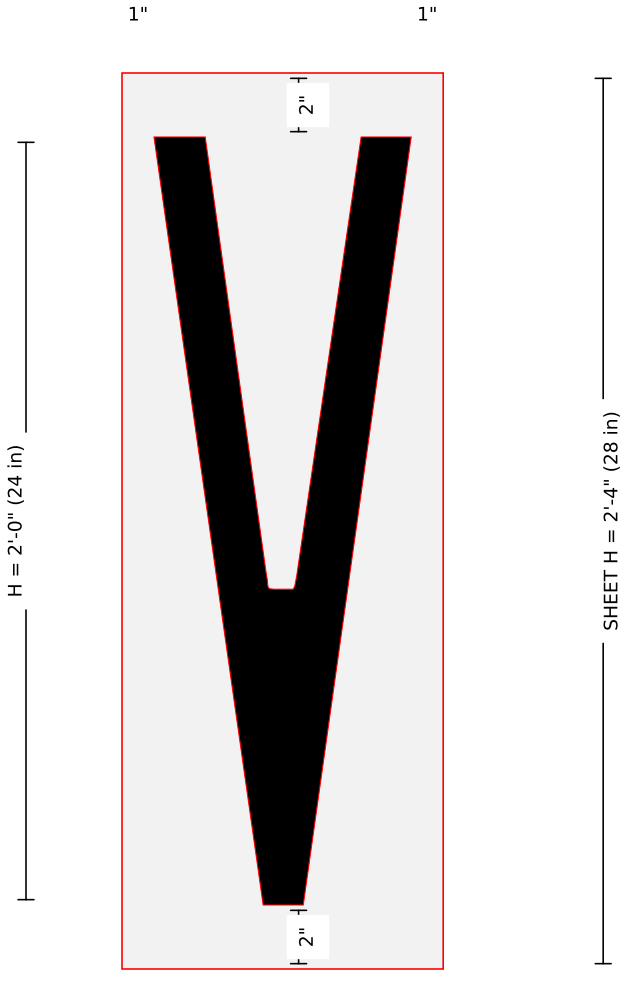


SHEET W = 10.0374" (10.0374 in)

Pieces: 1 · sheet 10.037 x 28 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-024V-24in-FAA-Airport-Letter-V-Stencil-32x12-2.jpg: width = kit listing 8 (image-scale 7.75); kit sheet 12 x 32 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.10 in (smoothing level 0.5); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-024-01-W

24" FAA Airport "W" - kit SSS-FAA-024-01, traced from 1-800-Stencil image, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

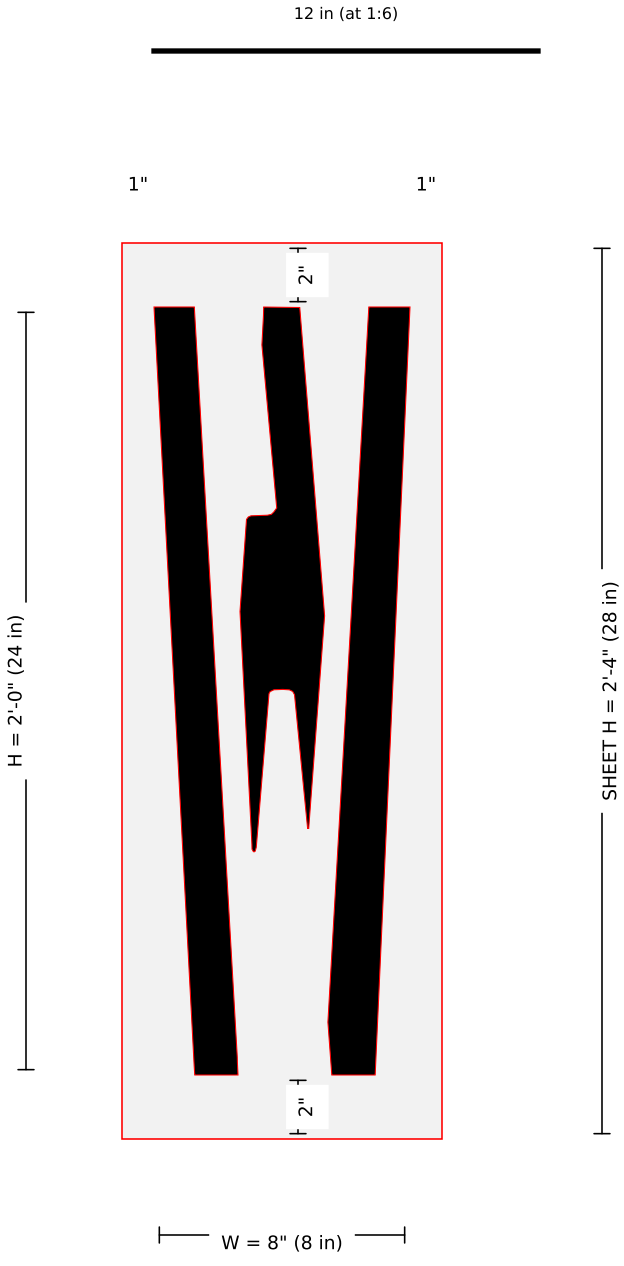


Pieces: 1 · sheet 10 x 28 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-024W-24in-FAA-Airport-Letter-W-Stencil-32x12-2.jpg: width = kit listing 8 (image-scale 7.82); kit sheet 12 x 32 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.10 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-024-01-X

24" FAA Airport "X" - kit SSS-FAA-024-01, traced from 1-800-Stencil image, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:6)

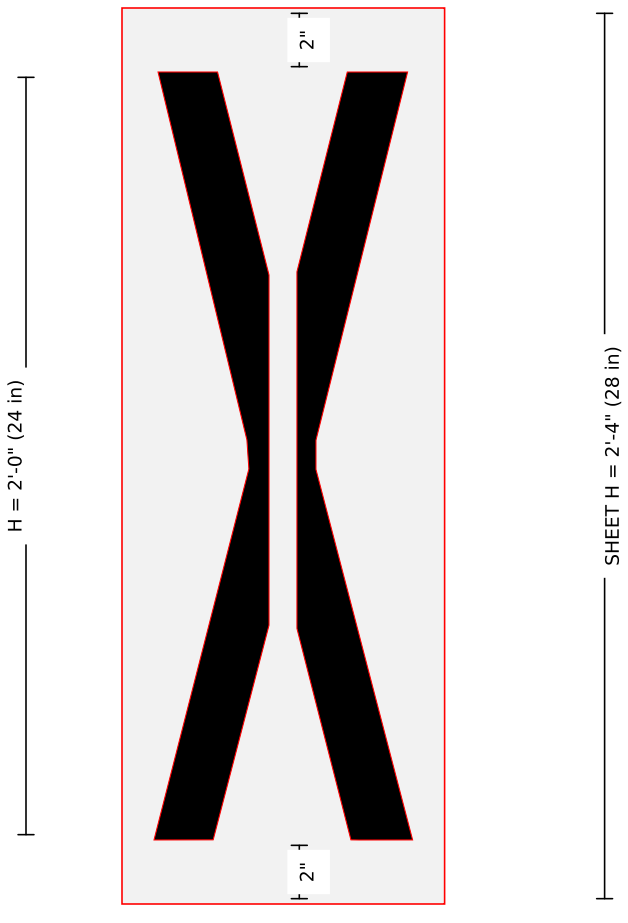

SHEET W = 10.0816" (10.0816 in)


Pieces: 1 · sheet 10.082 x 28 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-024X-24in-FAA-Airport-Letter-X-Stencil-32x12-2.jpg: width = kit listing 8 (image-scale 7.69); kit sheet 12 x 32 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.10 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-024-01-Y

24" FAA Airport "Y" - kit SSS-FAA-024-01, traced from 1-800-Stencil image, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:6)

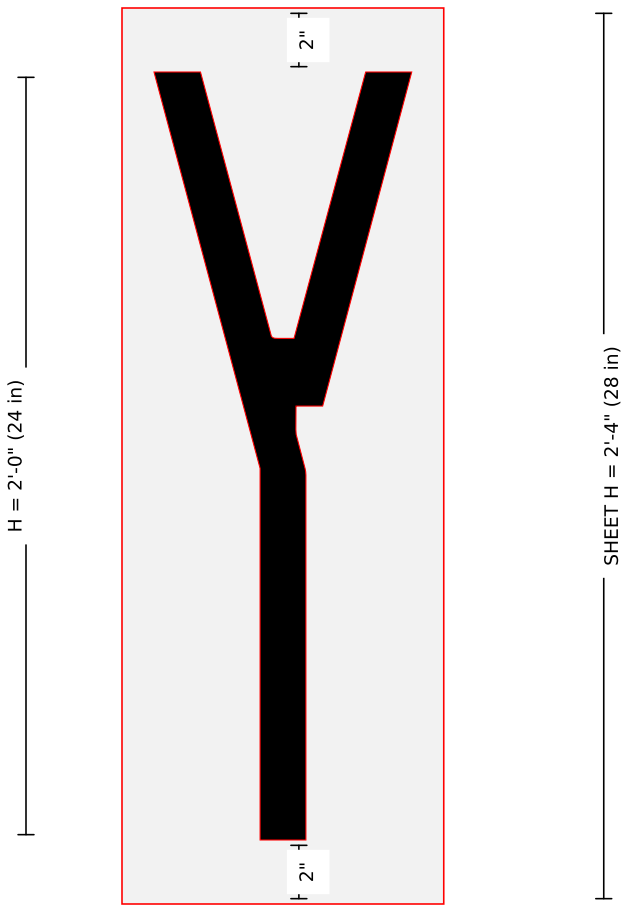

SHEET W = 10.0547" (10.0547 in)


Pieces: 1 · sheet 10.055 x 28 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-024Y-24in-FAA-Airport-Letter-Y-Stencil-32x12-2.jpg: width = kit listing 8 (image-scale 7.69); kit sheet 12 x 32 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.05 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-024-01-Z

24" FAA Airport "Z" - kit SSS-FAA-024-01, traced from 1-800-Stencil image, 8 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

12 in (at 1:6)

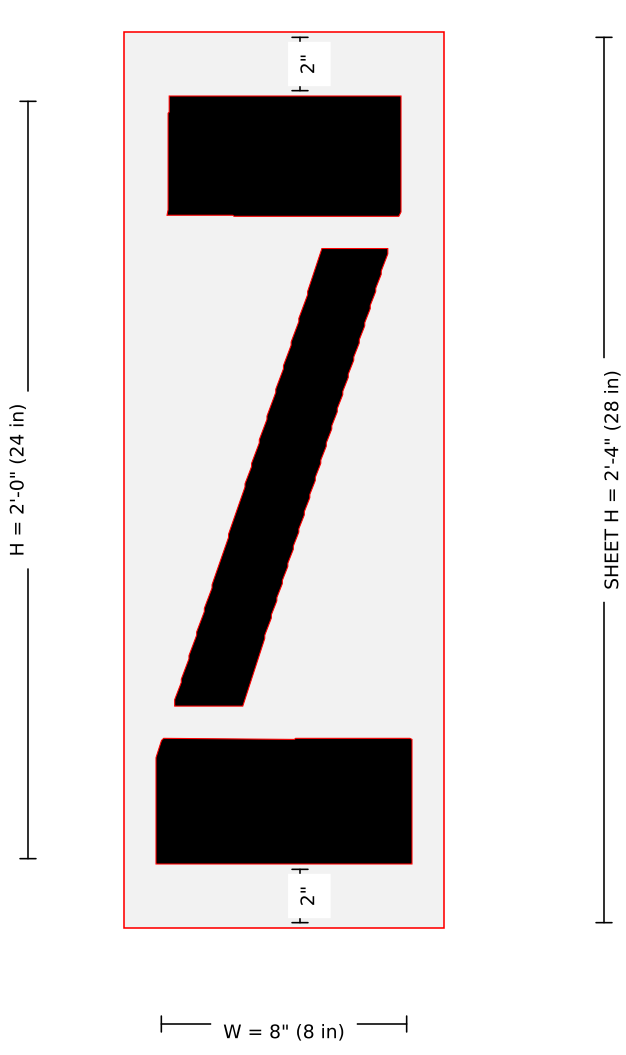


SHEET W = 10" (10 in)

Pieces: 1 · sheet 10 x 28 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-024Z-24in-FAA-Airport-Letter-Z-Stencil-32x12-2.jpg: width = kit listing 8 (image-scale 7.82); kit sheet 12 x 32 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-024-01-Z

24" FAA Airport "Z" - kit SSS-FAA-024-01, traced from 1-800-Stencil image, 7 W x 24 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

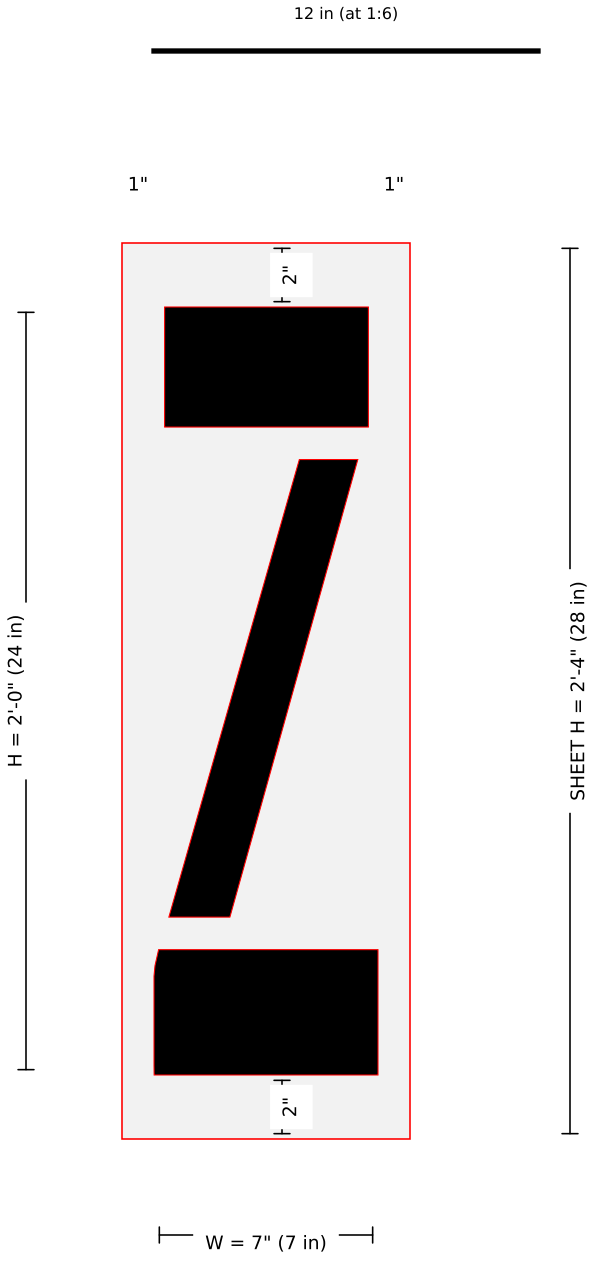

Pieces: 1 · sheet 9 x 28 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-024Z-24in-FAA-Airport-Letter-Z-Stencil-32x12-2.jpg: width = 1-800 image width label 7 in (image-scale 7.82); kit sheet 12 x 32 (side margin 2).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.10 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.