
# SSS-FAA-036-01-A

36" FAA Airport Letter "A" (kit SSS-FAA-036-01), FAA AC 150/5340-1M App B, 12 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

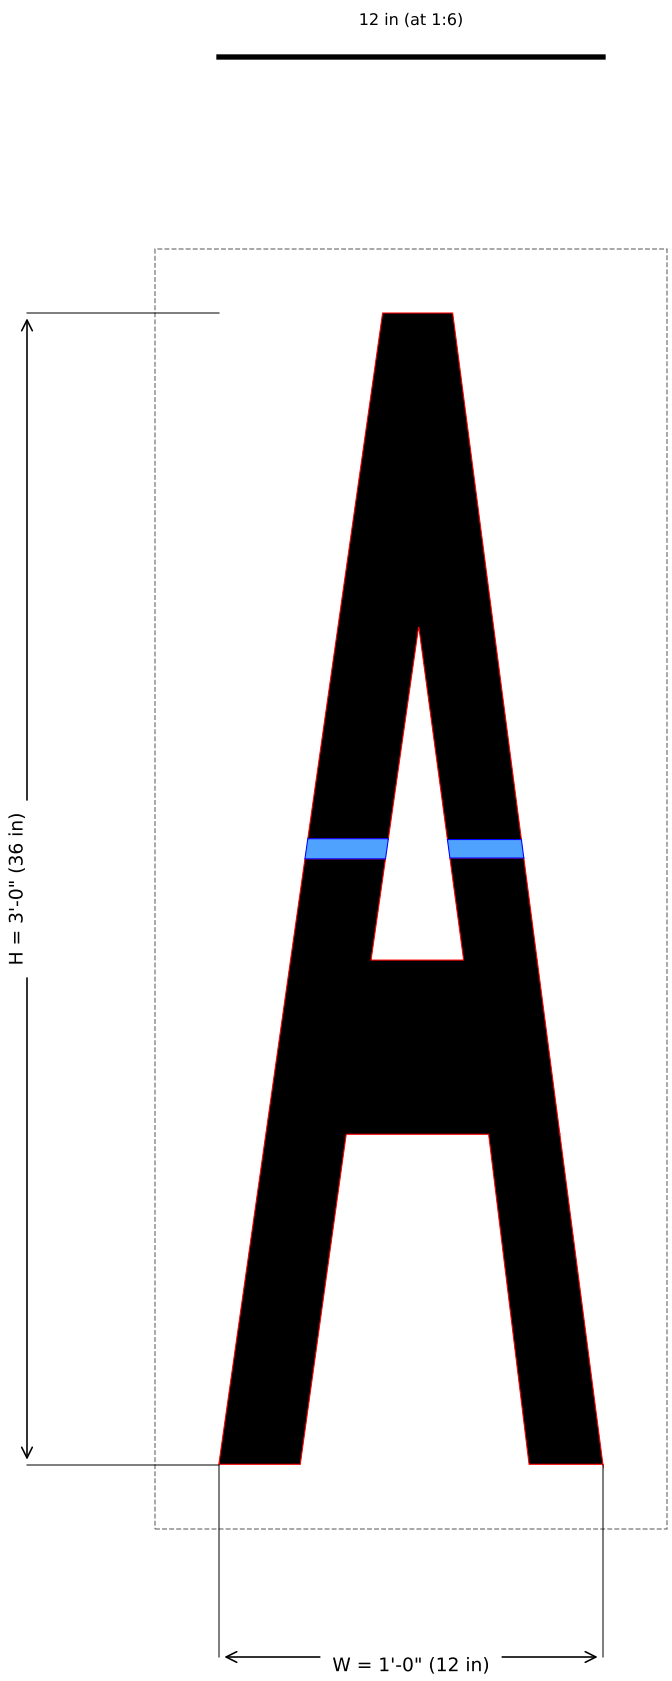



Pieces: 1 · blank 16 x 40 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p147).
Size per 1-800-Stencil kit image (ref/SSS-FAA-036-01): letter 12 W x 36 H, sheet 16 x 42. Margin set to 2 in sides (sheet width match); blank height 40 vs 1-800 42.
App B natural width at 36 H = 12.53 in; x-stretch -4.3%.
Bridges: R cross 2.311" w=0.578"; L cross 2.518" w=0.629"

# SSS-FAA-036-01-B

36" FAA Airport Letter "B" (kit SSS-FAA-036-01), FAA AC 150/5340-1M App B, 12 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

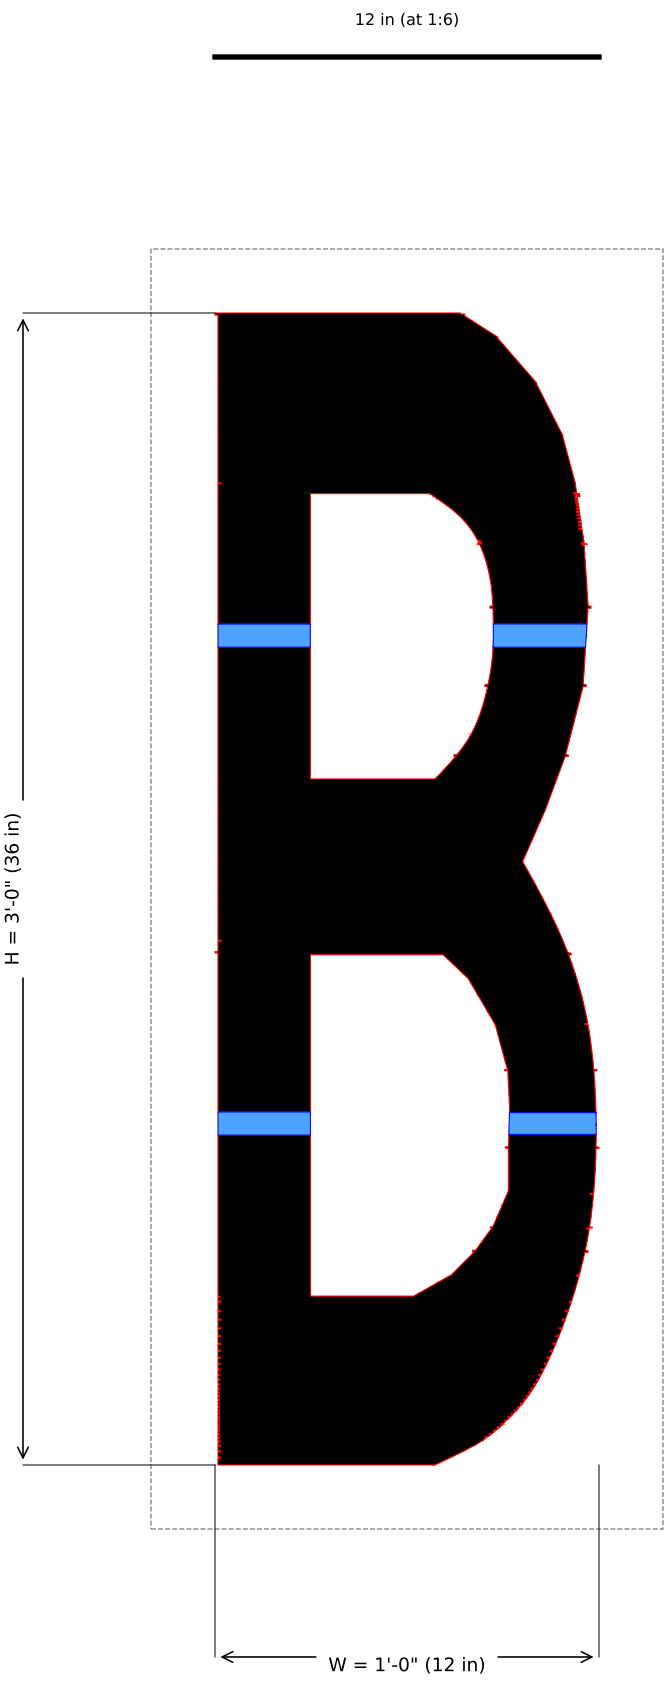



Pieces: 1 · blank 16 x 40 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p147).
Size per 1-800-Stencil kit image (ref/SSS-FAA-036-01): letter 12 W x 36 H, sheet 16 x 42. Margin set to 2 in sides (sheet width match); blank height 40 vs 1-800 42.
App B natural width at 36 H = 9.70 in; x-stretch +23.8%.
Bridges: R cross 2.721" w=0.68"; L cross 2.889" w=0.722"; L cross 2.885" w=0.721"; R cross 2.906" w=0.727"

# SSS-FAA-036-01-C

36" FAA Airport Letter "C" (kit SSS-FAA-036-01), FAA AC 150/5340-1M App B, 12 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

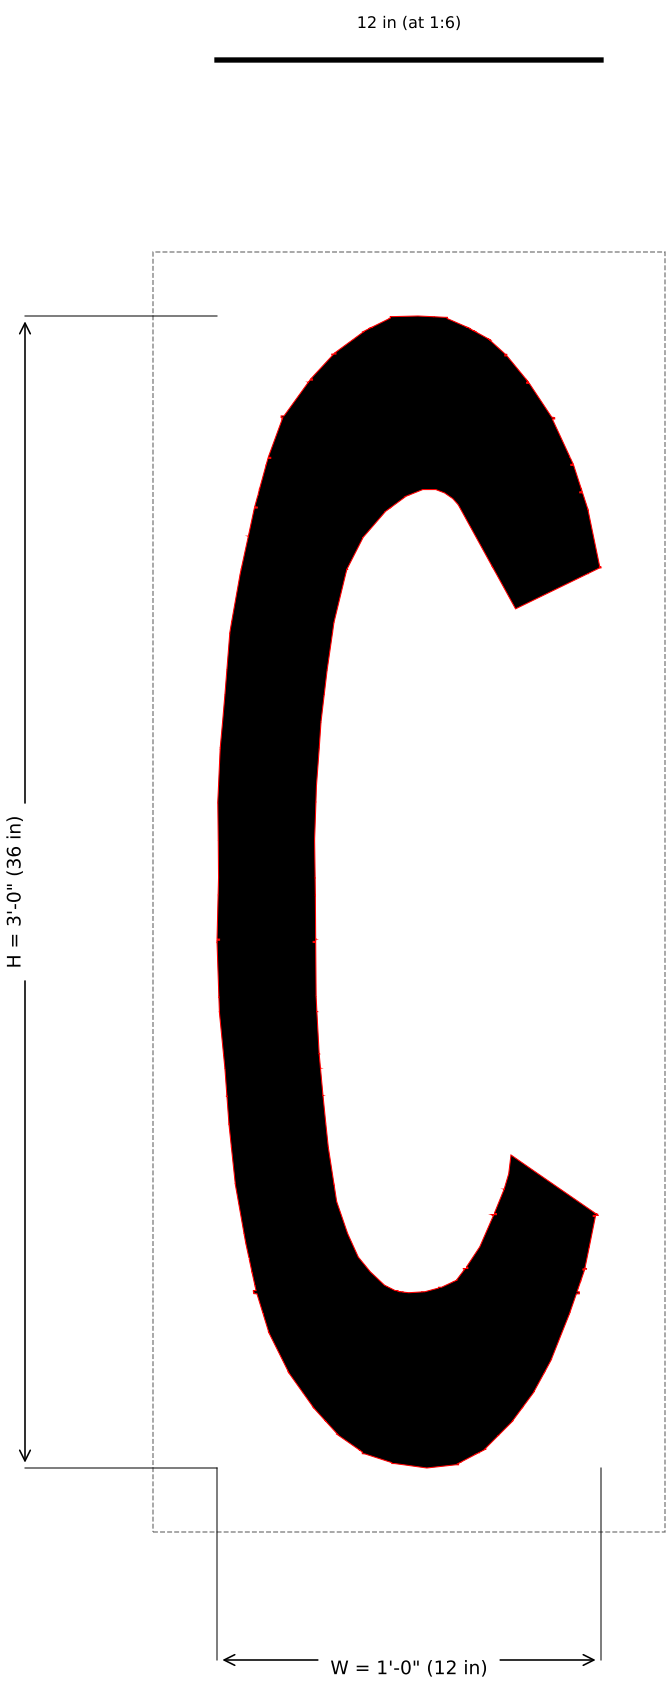



Pieces: 1 · blank 16 x 40 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p147).
Size per 1-800-Stencil kit image (ref/SSS-FAA-036-01): letter 12 W x 36 H, sheet 16 x 42. Margin set to 2 in sides (sheet width match); blank height 40 vs 1-800 42.
App B natural width at 36 H = 9.55 in; x-stretch +25.6%.
No islands, no bridges.

# SSS-FAA-036-01-D

36" FAA Airport Letter "D" (kit SSS-FAA-036-01), FAA AC 150/5340-1M App B, 12 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

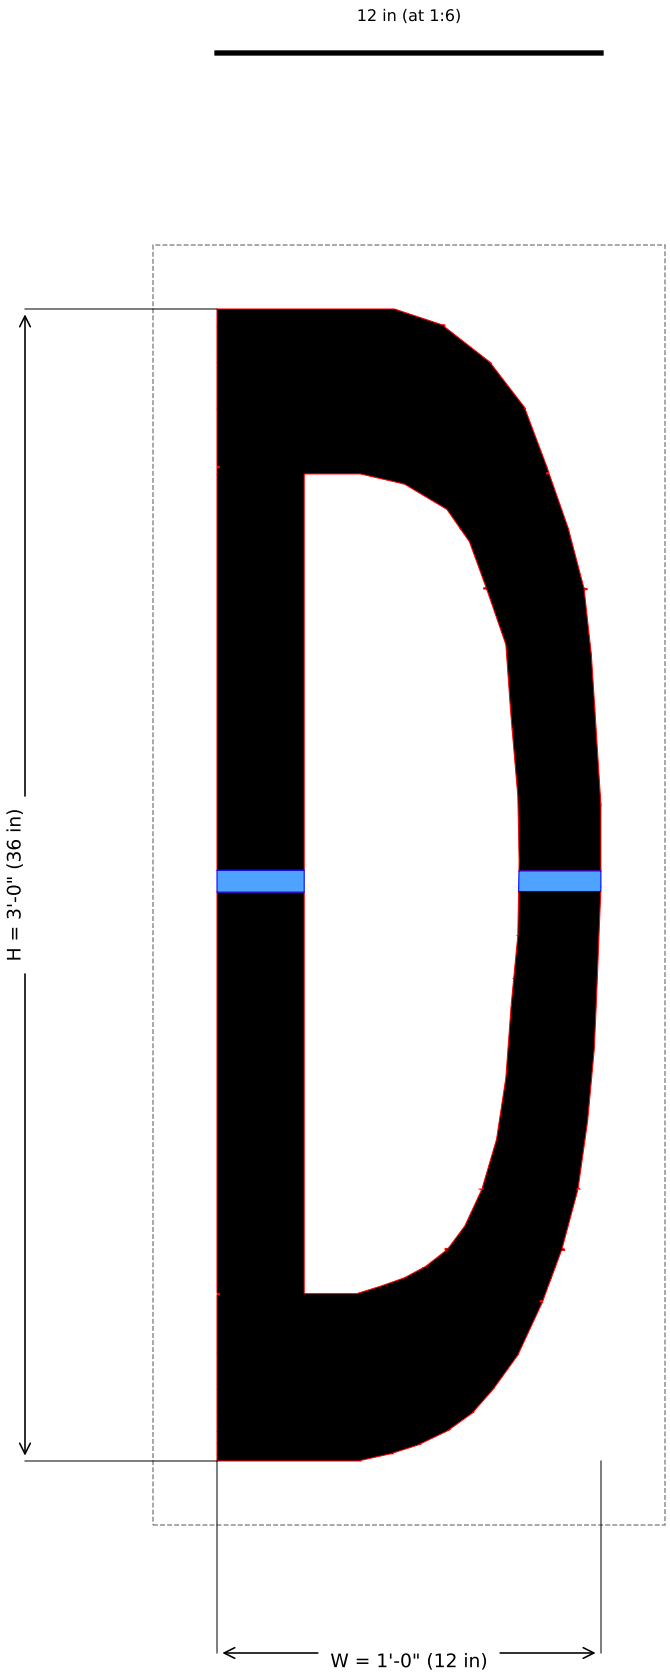



Pieces: 1 · blank 16 x 40 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p147).
Size per 1-800-Stencil kit image (ref/SSS-FAA-036-01): letter 12 W x 36 H, sheet 16 x 42. Margin set to 2 in sides (sheet width match); blank height 40 vs 1-800 42.
App B natural width at 36 H = 9.76 in; x-stretch +23.0%.
Bridges: R cross 2.566" w=0.642"; L cross 2.725" w=0.681"

# SSS-FAA-036-01-E

36" FAA Airport Letter "E" (kit SSS-FAA-036-01), FAA AC 150/5340-1M App B, 12 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

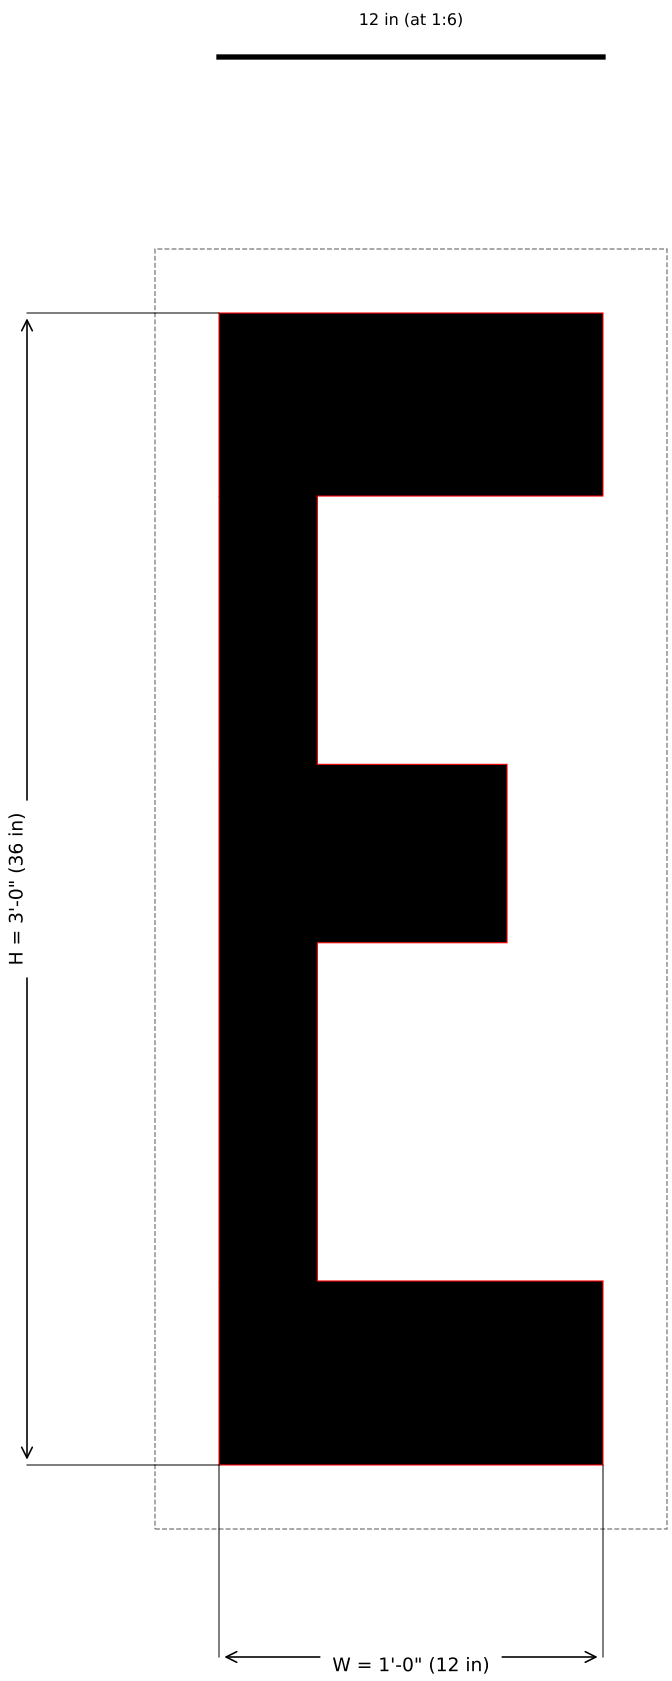



Pieces: 1 · blank 16 x 40 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p147).
Size per 1-800-Stencil kit image (ref/SSS-FAA-036-01): letter 12 W x 36 H, sheet 16 x 42. Margin set to 2 in sides (sheet width match); blank height 40 vs 1-800 42.
App B natural width at 36 H = 8.80 in; x-stretch +36.4%.
No islands, no bridges.

# SSS-FAA-036-01-F

36" FAA Airport Letter "F" (kit SSS-FAA-036-01), FAA AC 150/5340-1M App B, 12 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

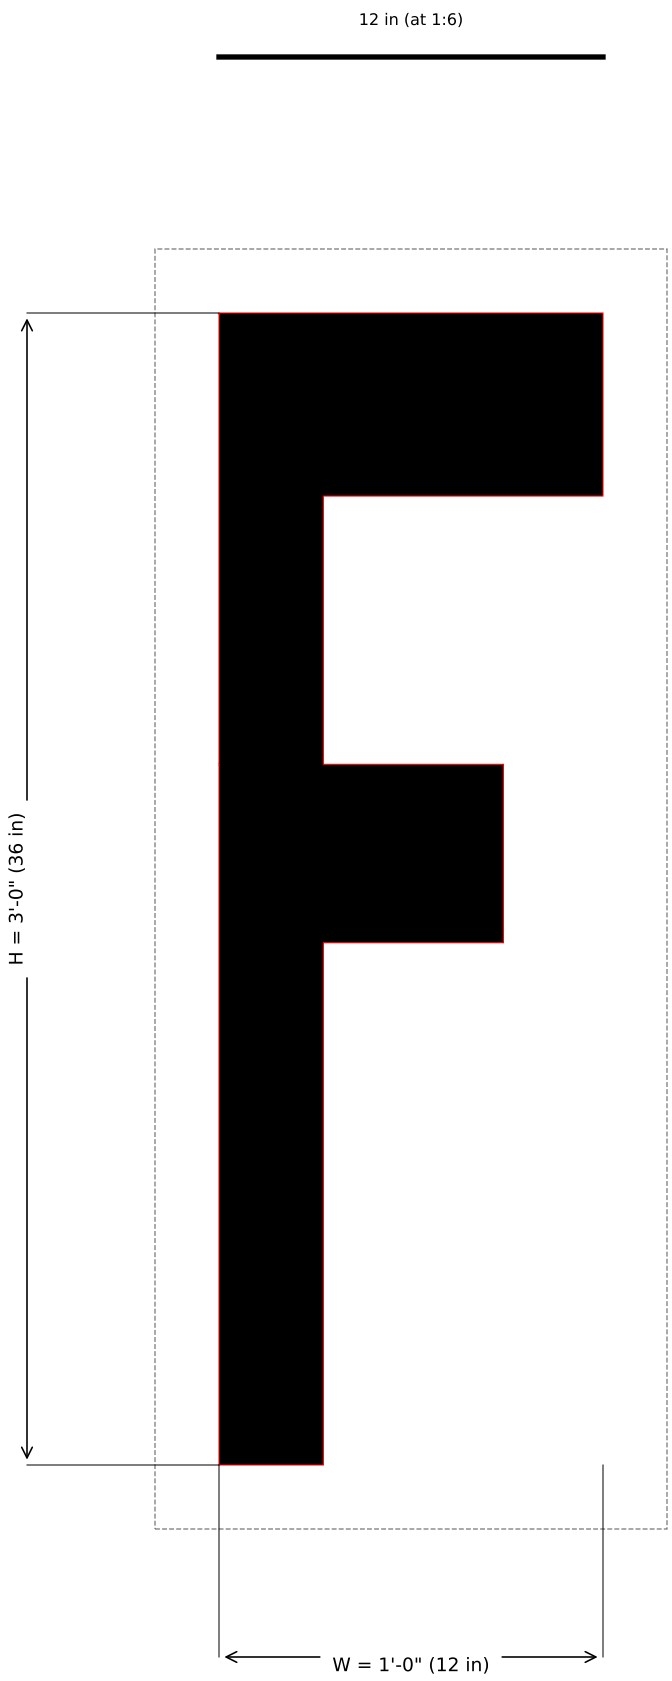



Pieces: 1 · blank 16 x 40 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p147).
Size per 1-800-Stencil kit image (ref/SSS-FAA-036-01): letter 12 W x 36 H, sheet 16 x 42. Margin set to 2 in sides (sheet width match); blank height 40 vs 1-800 42.
App B natural width at 36 H = 8.91 in; x-stretch +34.7%.
No islands, no bridges.

# SSS-FAA-036-01-G

36" FAA Airport Letter "G" (kit SSS-FAA-036-01), FAA AC 150/5340-1M App B, 12 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

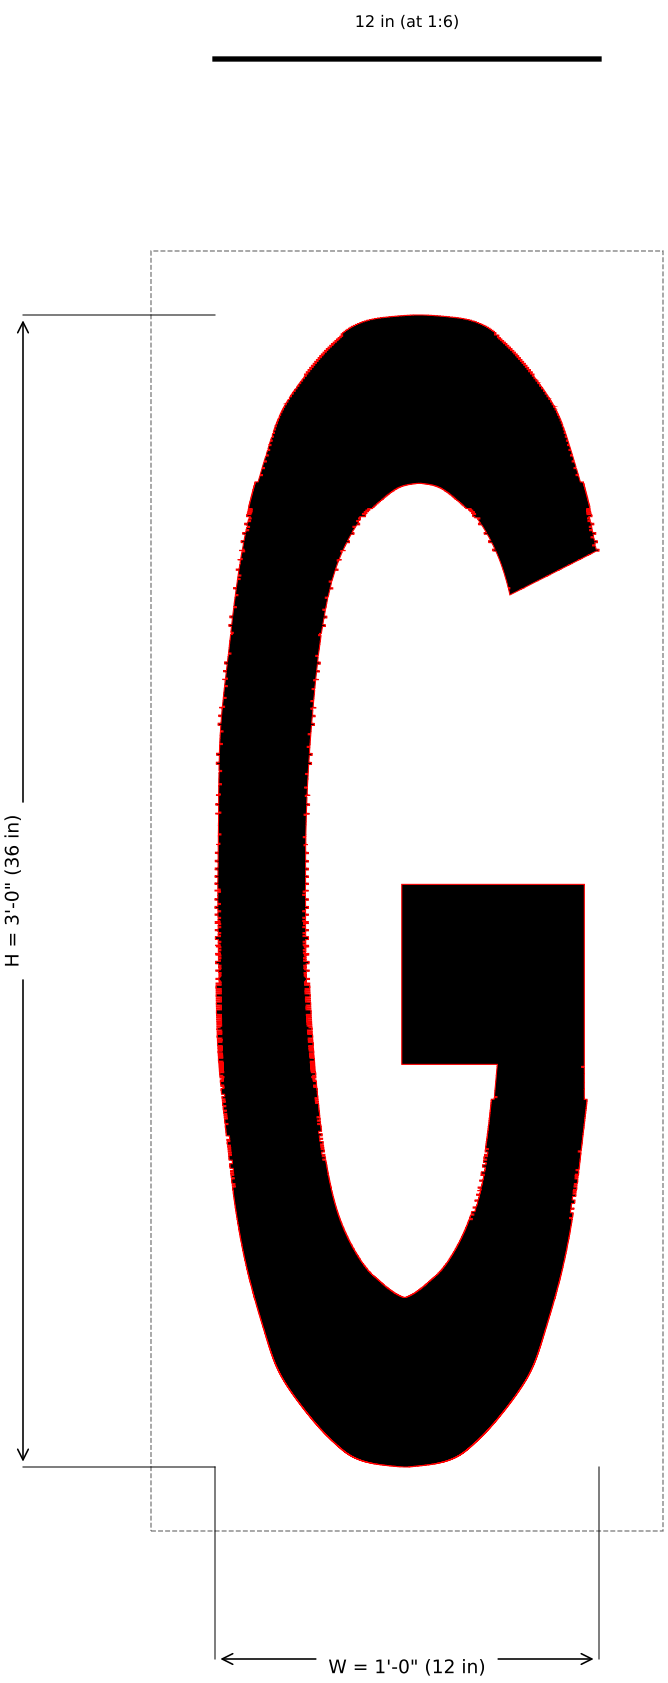



Pieces: 1 · blank 16 x 40 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p147).
Size per 1-800-Stencil kit image (ref/SSS-FAA-036-01): letter 12 W x 36 H, sheet 16 x 42. Margin set to 2 in sides (sheet width match); blank height 40 vs 1-800 42.
App B natural width at 36 H = 10.28 in; x-stretch +16.7%.
No islands, no bridges.

# SSS-FAA-036-01-H

36" FAA Airport Letter "H" (kit SSS-FAA-036-01), FAA AC 150/5340-1M App B, 12 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

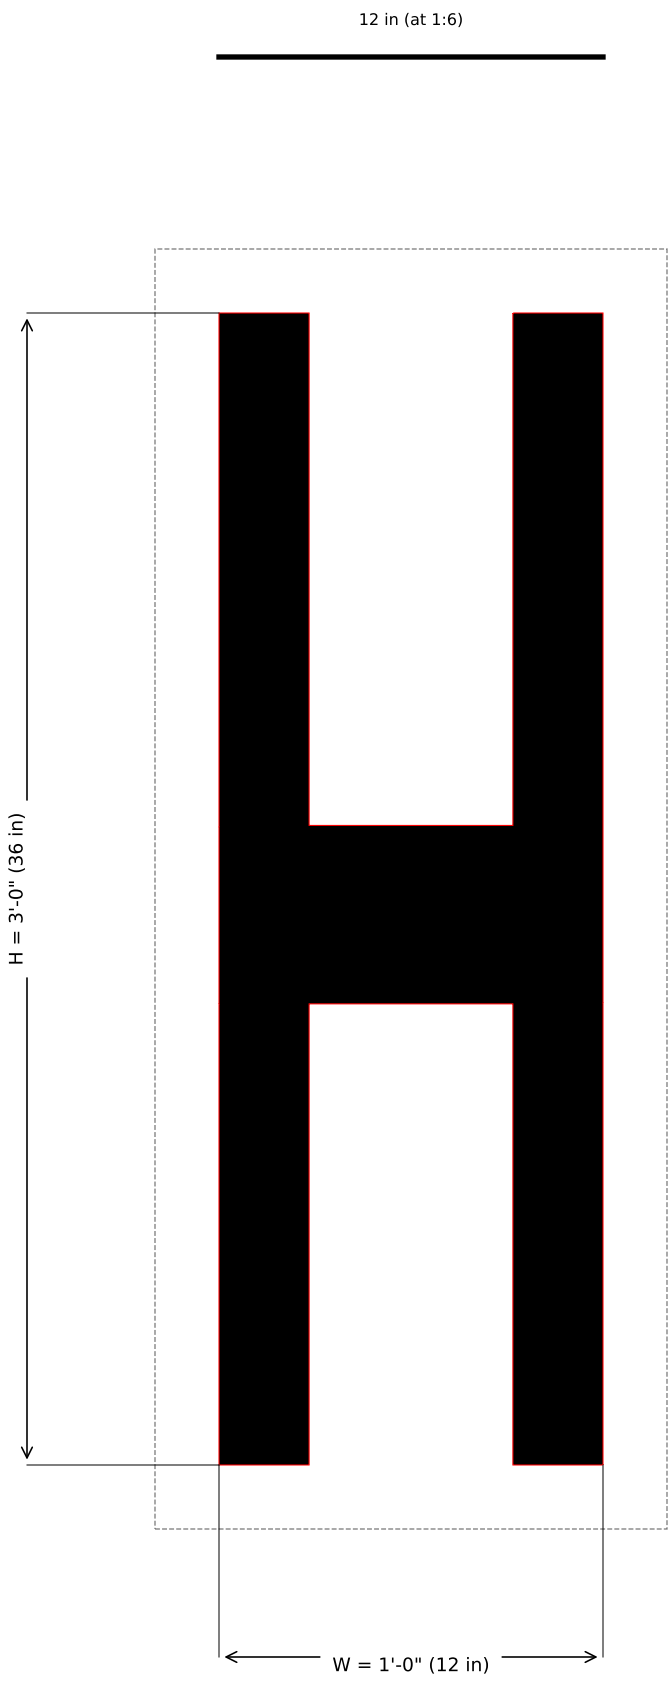



Pieces: 1 · blank 16 x 40 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p147).
Size per 1-800-Stencil kit image (ref/SSS-FAA-036-01): letter 12 W x 36 H, sheet 16 x 42. Margin set to 2 in sides (sheet width match); blank height 40 vs 1-800 42.
App B natural width at 36 H = 9.84 in; x-stretch +22.0%.
No islands, no bridges.

# SSS-FAA-036-01-I

36" FAA Airport Letter "I" (kit SSS-FAA-036-01), FAA AC 150/5340-1M App B, 4 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

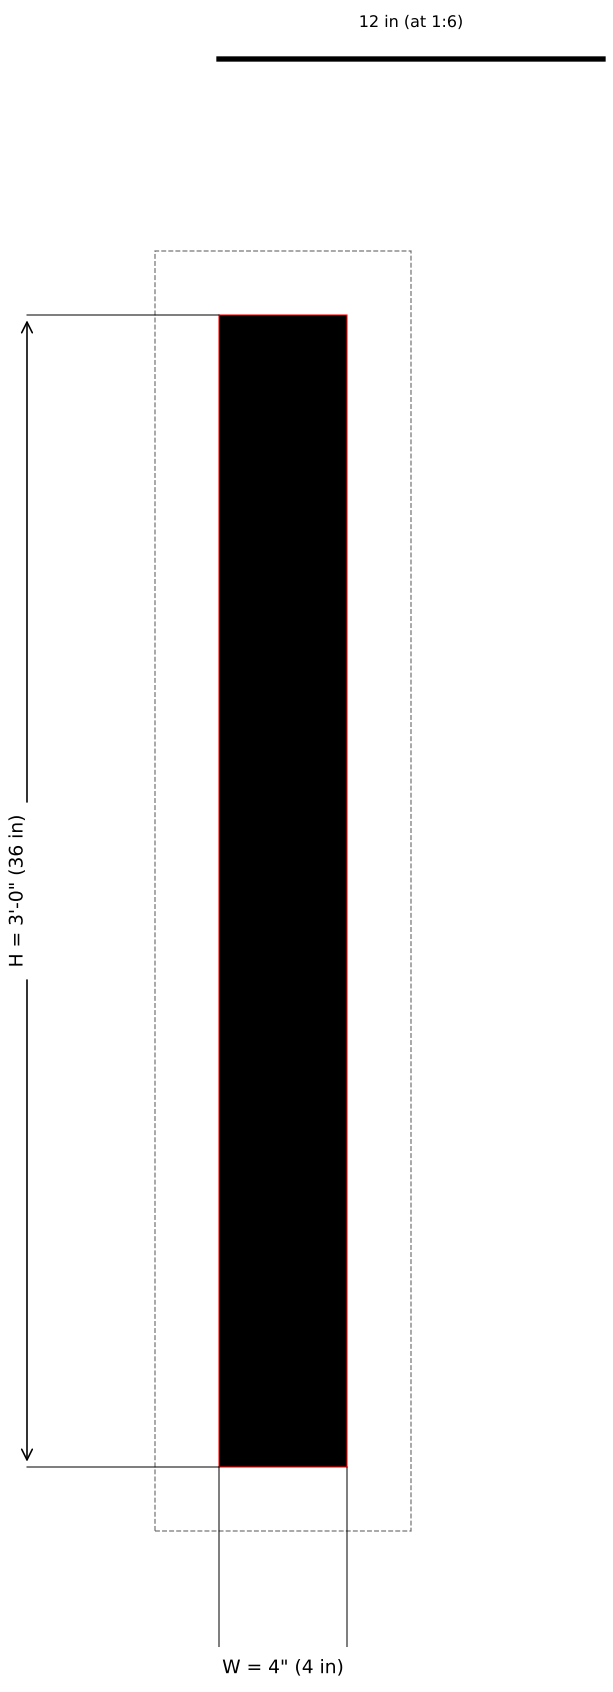



Pieces: 1 · blank 8 x 40 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p148).
Size per 1-800-Stencil kit image (ref/SSS-FAA-036-01): letter 4 W x 36 H, sheet 16 x 42. Margin set to 2 in sides (sheet width match); blank height 40 vs 1-800 42.
App B natural width at 36 H = 2.43 in; x-stretch +64.8%.
No islands, no bridges.

# SSS-FAA-036-01-J

36" FAA Airport Letter "J" (kit SSS-FAA-036-01), FAA AC 150/5340-1M App B, 12 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

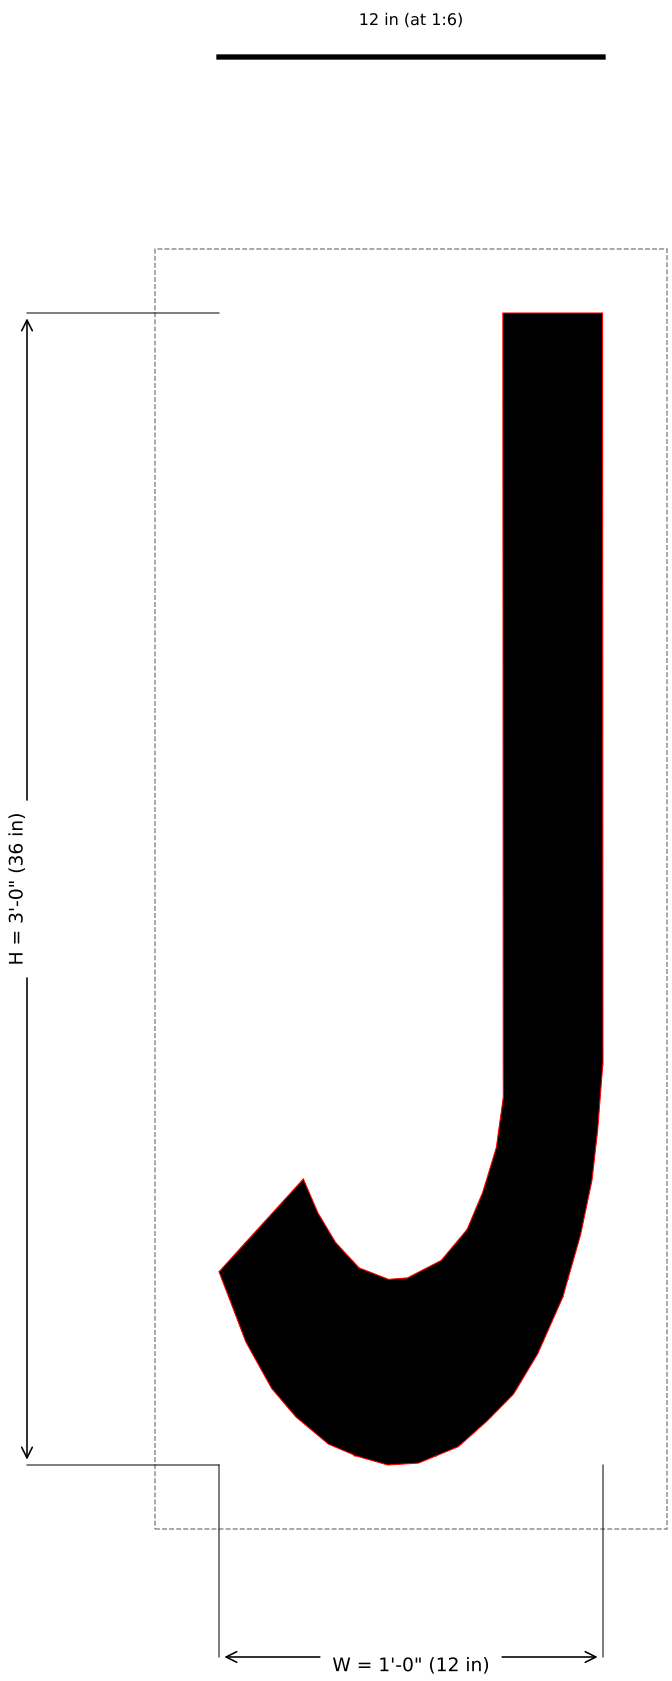



Pieces: 1 · blank 16 x 40 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p148).
Size per 1-800-Stencil kit image (ref/SSS-FAA-036-01): letter 12 W x 36 H, sheet 16 x 42. Margin set to 2 in sides (sheet width match); blank height 40 vs 1-800 42.
App B natural width at 36 H = 9.36 in; x-stretch +28.3%.
No islands, no bridges.

# SSS-FAA-036-01-K

36" FAA Airport Letter "K" (kit SSS-FAA-036-01), FAA AC 150/5340-1M App B, 12 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

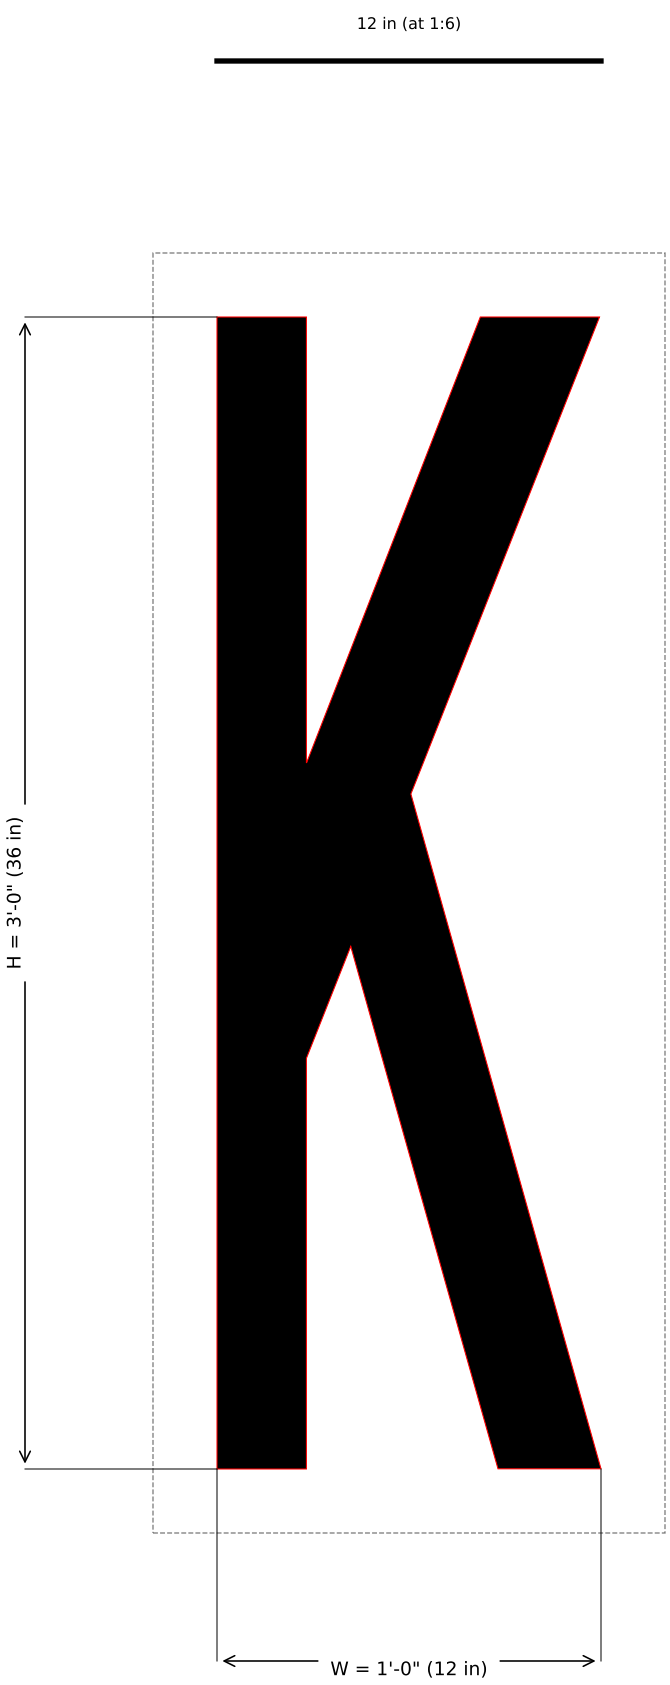



Pieces: 1 · blank 16 x 40 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p148).
Size per 1-800-Stencil kit image (ref/SSS-FAA-036-01): letter 12 W x 36 H, sheet 16 x 42. Margin set to 2 in sides (sheet width match); blank height 40 vs 1-800 42.
App B natural width at 36 H = 10.27 in; x-stretch +16.9%.
No islands, no bridges.

# SSS-FAA-036-01-L

36" FAA Airport Letter "L" (kit SSS-FAA-036-01), FAA AC 150/5340-1M App B, 12 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

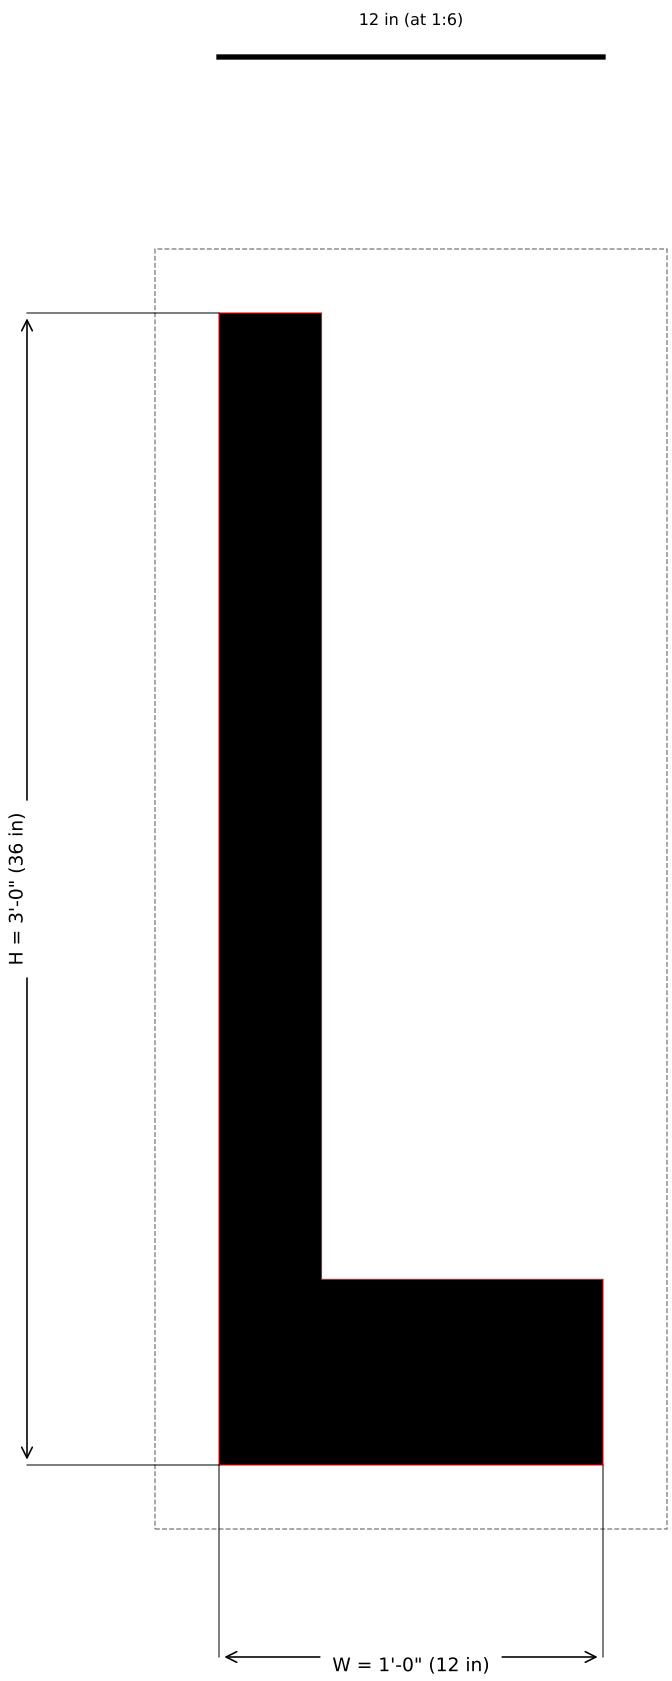



Pieces: 1 · blank 16 x 40 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p148).
Size per 1-800-Stencil kit image (ref/SSS-FAA-036-01): letter 12 W x 36 H, sheet 16 x 42. Margin set to 2 in sides (sheet width match); blank height 40 vs 1-800 42.
App B natural width at 36 H = 9.09 in; x-stretch +32.0%.
No islands, no bridges.

# SSS-FAA-036-01-M

36" FAA Airport Letter "M" (kit SSS-FAA-036-01), FAA AC 150/5340-1M App B, 12 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

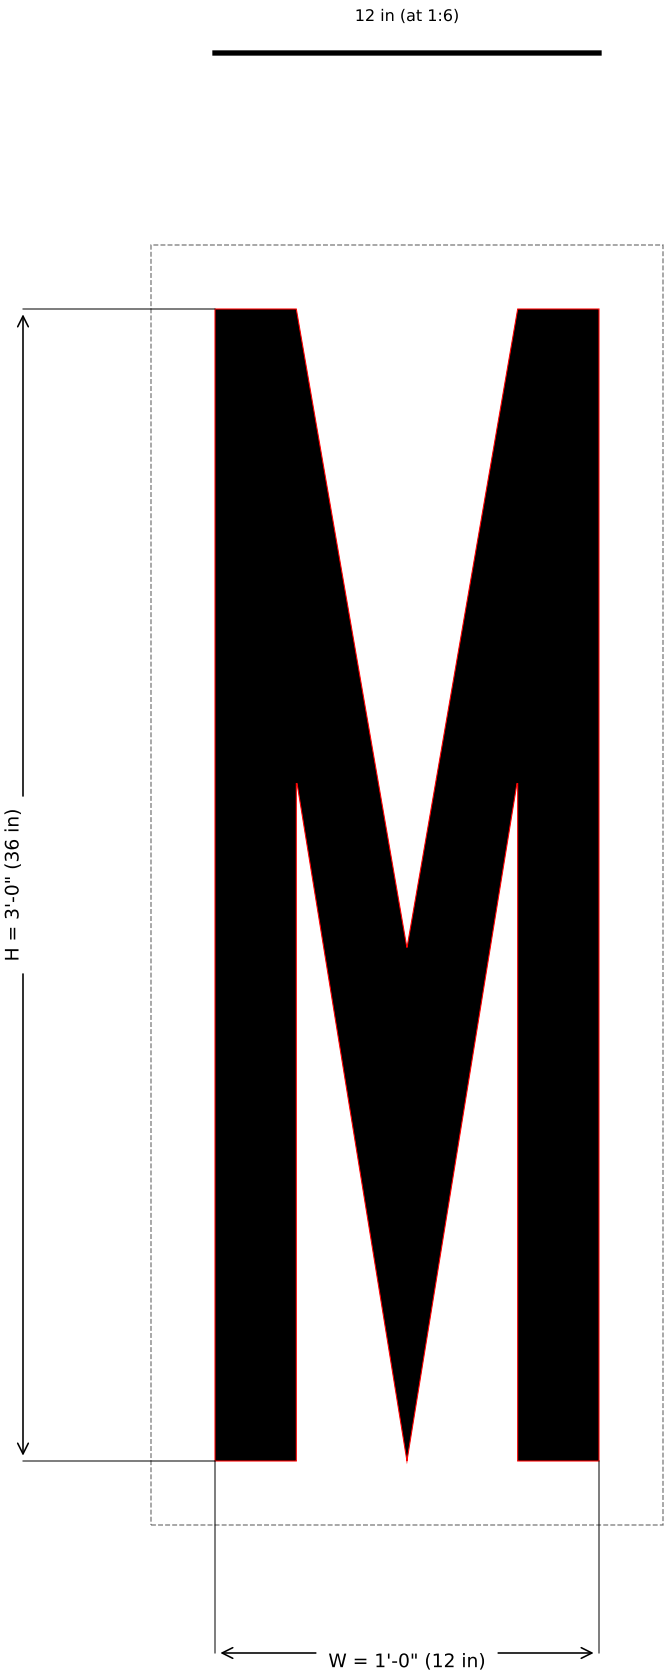



Pieces: 1 · blank 16 x 40 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p148).
Size per 1-800-Stencil kit image (ref/SSS-FAA-036-01): letter 12 W x 36 H, sheet 16 x 42. Margin set to 2 in sides (sheet width match); blank height 40 vs 1-800 42.
App B natural width at 36 H = 11.46 in; x-stretch +4.7%.
No islands, no bridges.

# SSS-FAA-036-01-N

36" FAA Airport Letter "N" (kit SSS-FAA-036-01), FAA AC 150/5340-1M App B, 12 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

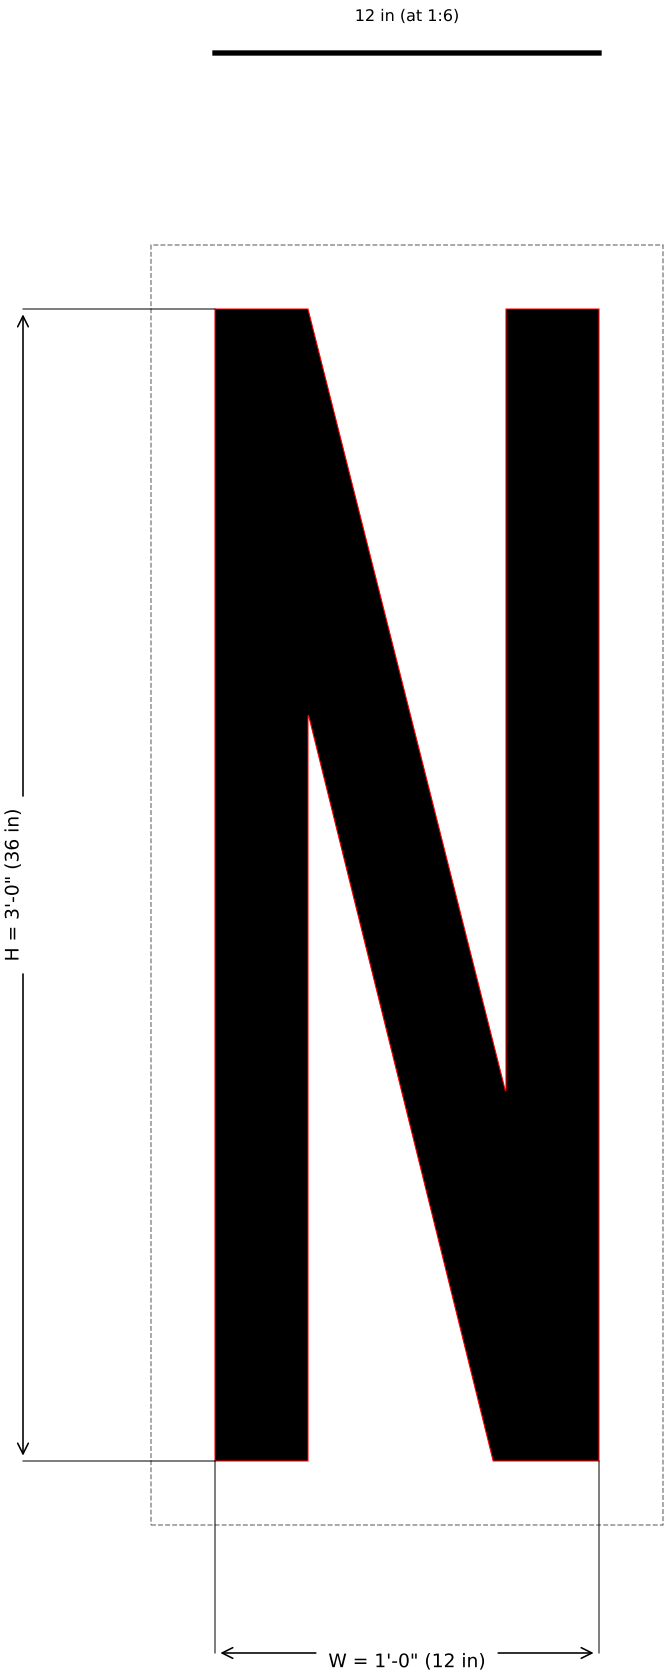



Pieces: 1 · blank 16 x 40 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p148).
Size per 1-800-Stencil kit image (ref/SSS-FAA-036-01): letter 12 W x 36 H, sheet 16 x 42. Margin set to 2 in sides (sheet width match); blank height 40 vs 1-800 42.
App B natural width at 36 H = 10.03 in; x-stretch +19.6%.
No islands, no bridges.

# SSS-FAA-036-01-O

36" FAA Airport Letter "O" (kit SSS-FAA-036-01), FAA AC 150/5340-1M App B, 12 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

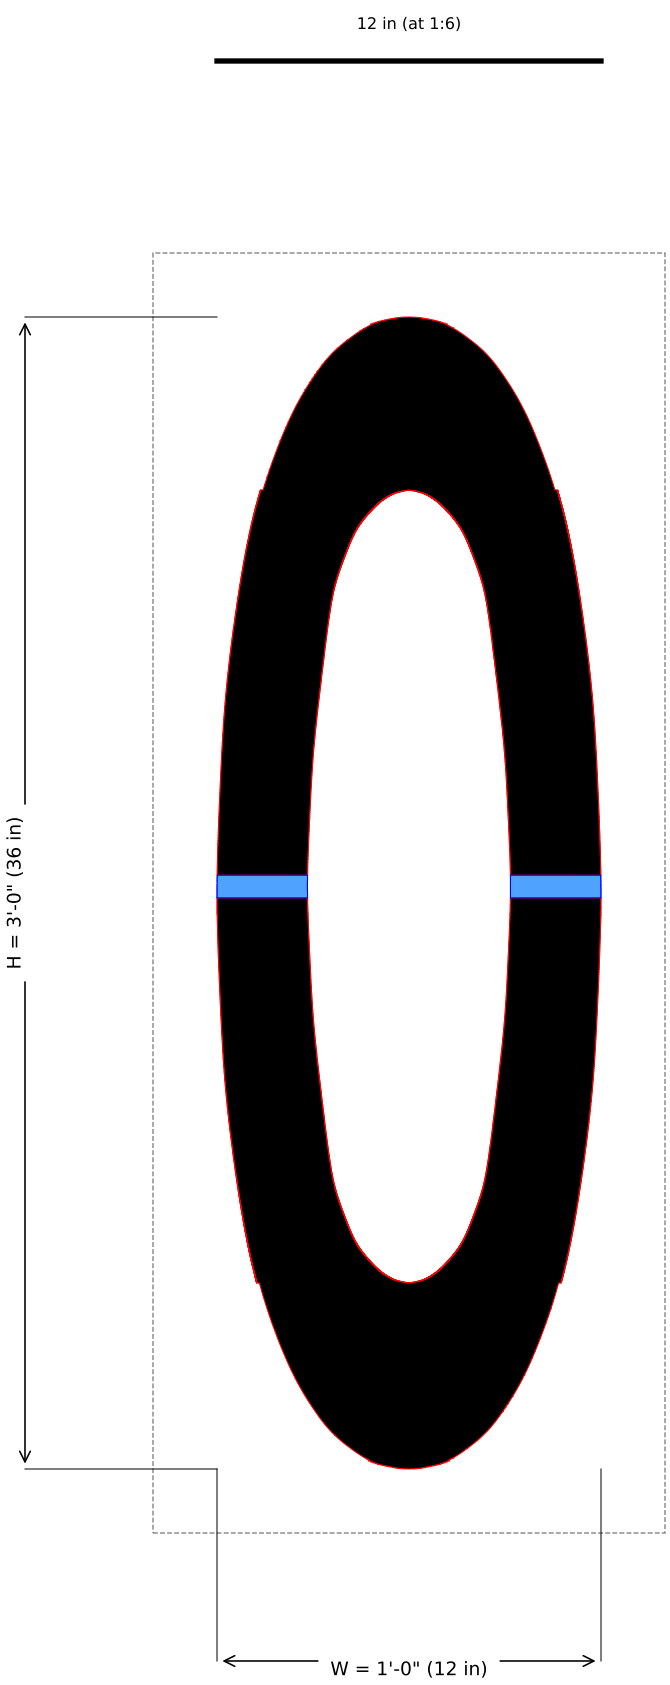



Pieces: 1 · blank 16 x 40 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p148).
Size per 1-800-Stencil kit image (ref/SSS-FAA-036-01): letter 12 W x 36 H, sheet 16 x 42. Margin set to 2 in sides (sheet width match); blank height 40 vs 1-800 42.
App B natural width at 36 H = 10.59 in; x-stretch +13.3%.
Bridges: R cross 2.826" w=0.706"; L cross 2.826" w=0.706"

# SSS-FAA-036-01-P

36" FAA Airport Letter "P" (kit SSS-FAA-036-01), FAA AC 150/5340-1M App B, 12 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

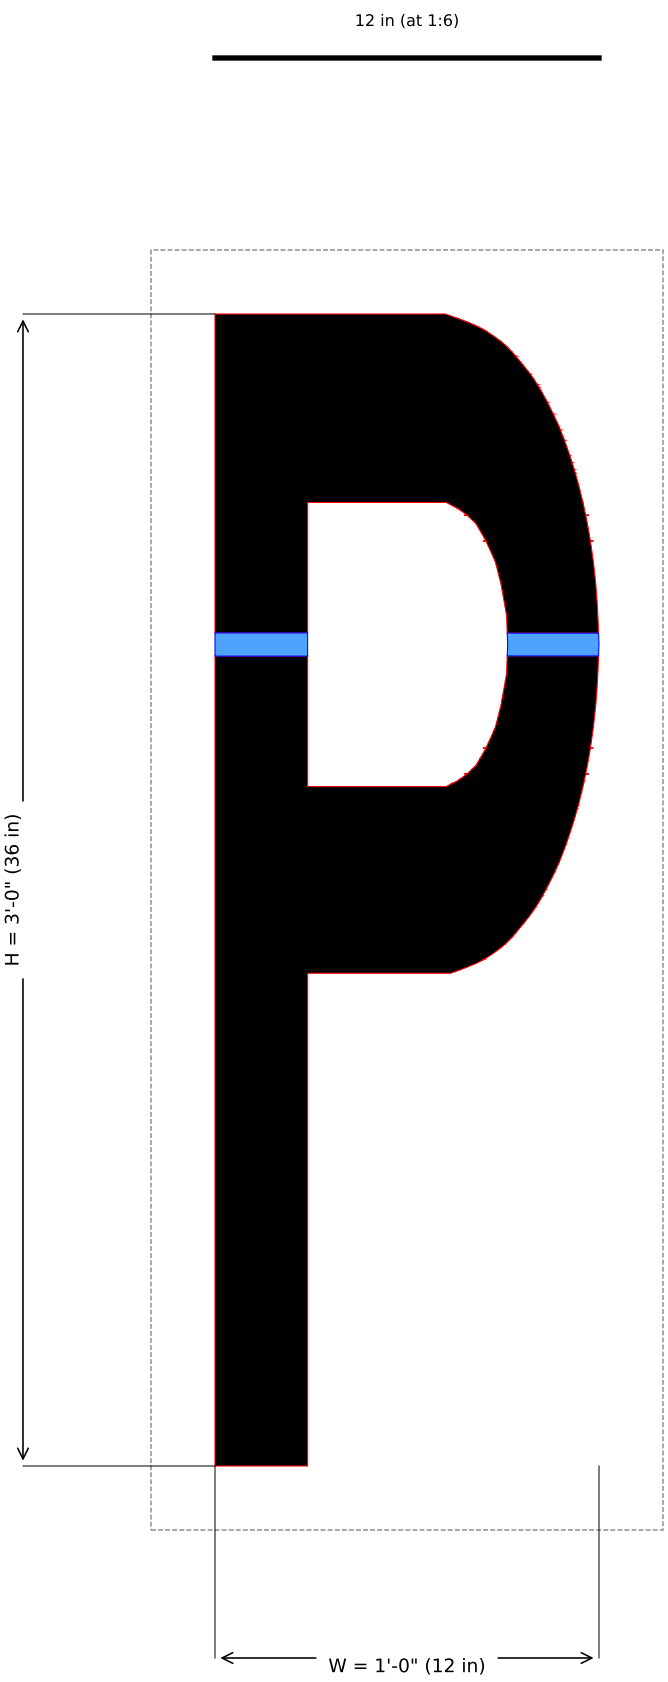



Pieces: 1 · blank 16 x 40 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p148).
Size per 1-800-Stencil kit image (ref/SSS-FAA-036-01): letter 12 W x 36 H, sheet 16 x 42. Margin set to 2 in sides (sheet width match); blank height 40 vs 1-800 42.
App B natural width at 36 H = 10.07 in; x-stretch +19.2%.
Bridges: R cross 2.854" w=0.713"; L cross 2.894" w=0.724"

# SSS-FAA-036-01-Q

36" FAA Airport Letter "Q" (kit SSS-FAA-036-01), FAA AC 150/5340-1M App B, 12 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

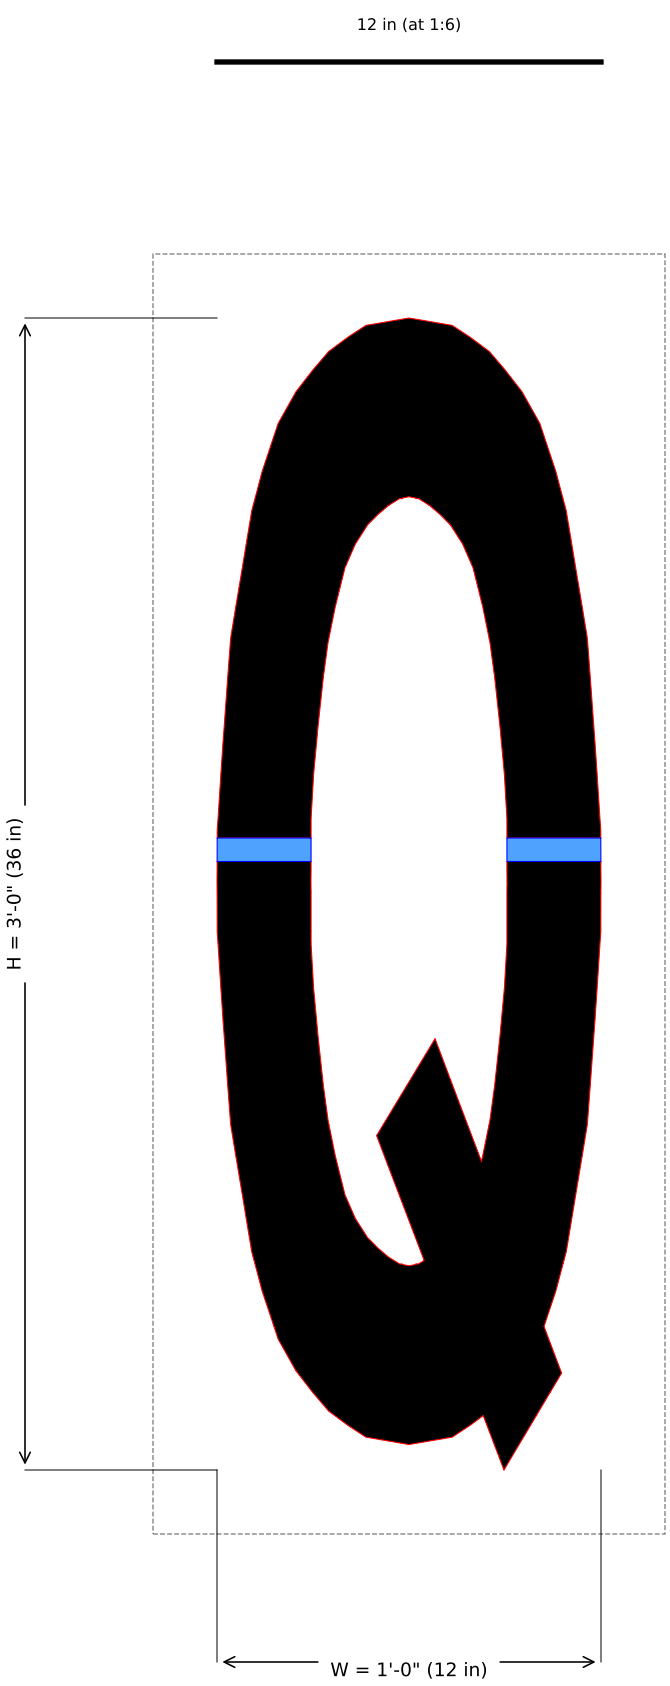



Pieces: 1 · blank 16 x 40 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p149).
Size per 1-800-Stencil kit image (ref/SSS-FAA-036-01): letter 12 W x 36 H, sheet 16 x 42. Margin set to 2 in sides (sheet width match); blank height 40 vs 1-800 42.
App B natural width at 36 H = 10.22 in; x-stretch +17.4%.
Bridges: R cross 2.935" w=0.734"; L cross 2.935" w=0.734"

# SSS-FAA-036-01-R

36" FAA Airport Letter "R" (kit SSS-FAA-036-01), FAA AC 150/5340-1M App B, 12 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

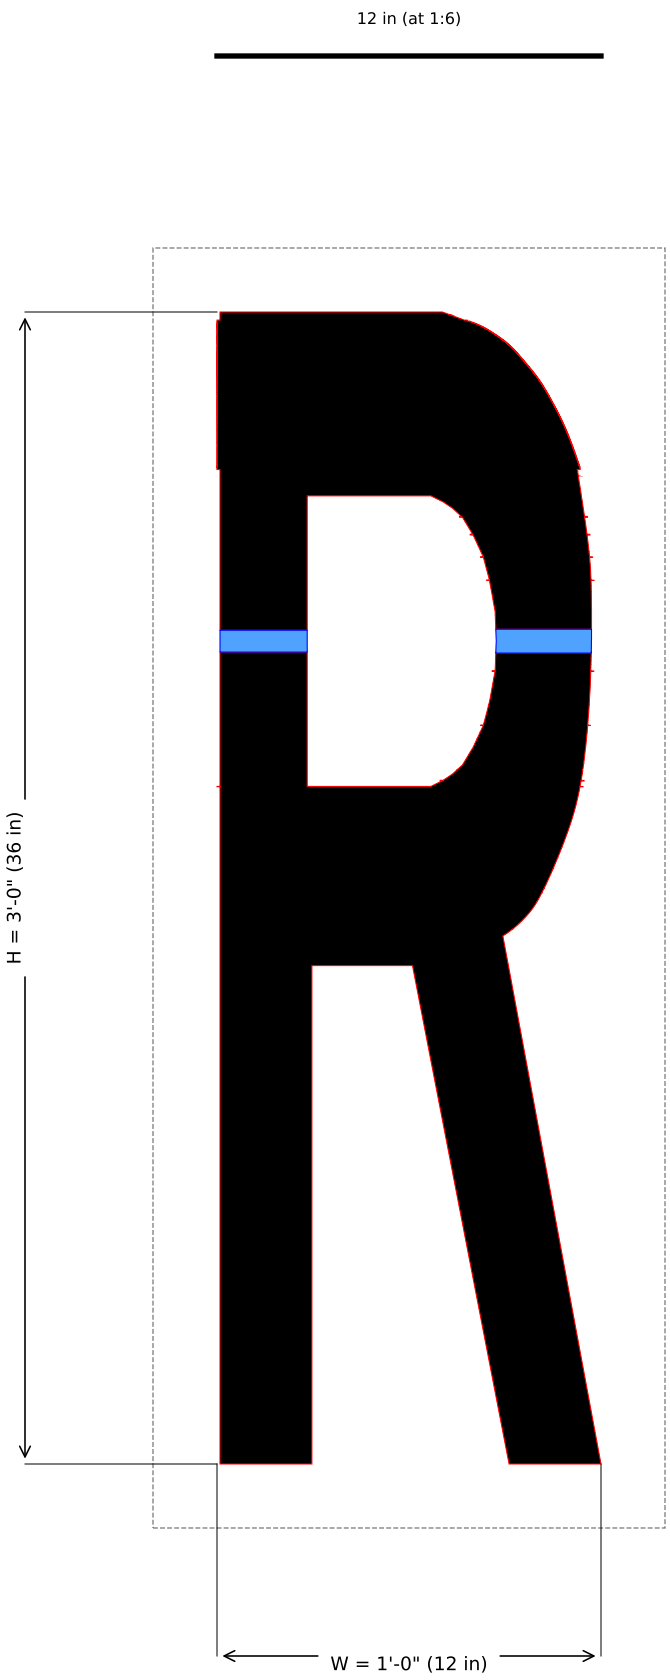



Pieces: 1 · blank 16 x 40 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p149).
Size per 1-800-Stencil kit image (ref/SSS-FAA-036-01): letter 12 W x 36 H, sheet 16 x 42. Margin set to 2 in sides (sheet width match); blank height 40 vs 1-800 42.
App B natural width at 36 H = 9.71 in; x-stretch +23.6%.
Bridges: L cross 2.726" w=0.681"; R cross 2.973" w=0.743"

# SSS-FAA-036-01-S

36" FAA Airport Letter "S" (kit SSS-FAA-036-01), FAA AC 150/5340-1M App B, 12 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

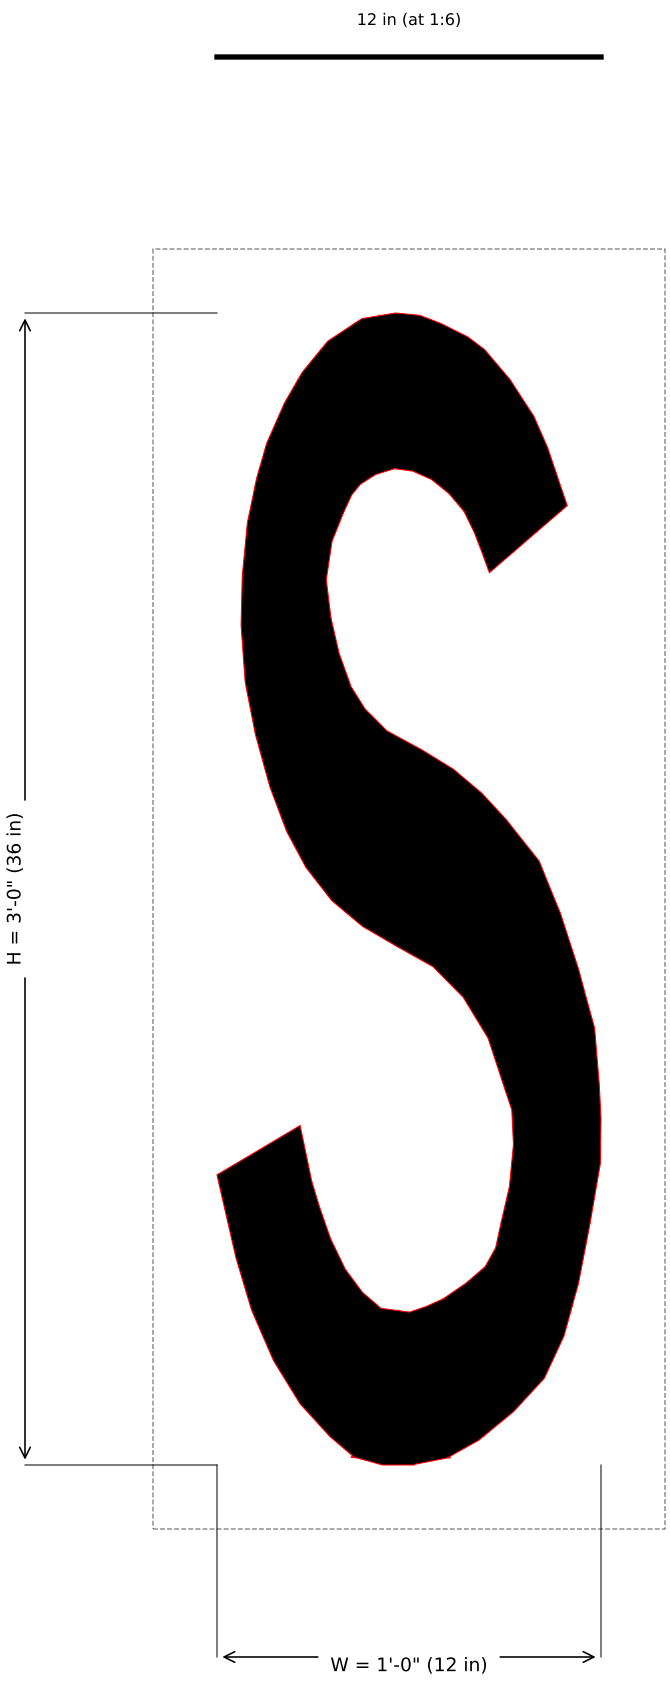



Pieces: 1 · blank 16 x 40 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p149).
Size per 1-800-Stencil kit image (ref/SSS-FAA-036-01): letter 12 W x 36 H, sheet 16 x 42. Margin set to 2 in sides (sheet width match); blank height 40 vs 1-800 42.
App B natural width at 36 H = 9.74 in; x-stretch +23.1%.
No islands, no bridges.

# SSS-FAA-036-01-T

36" FAA Airport Letter "T" (kit SSS-FAA-036-01), FAA AC 150/5340-1M App B, 12 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

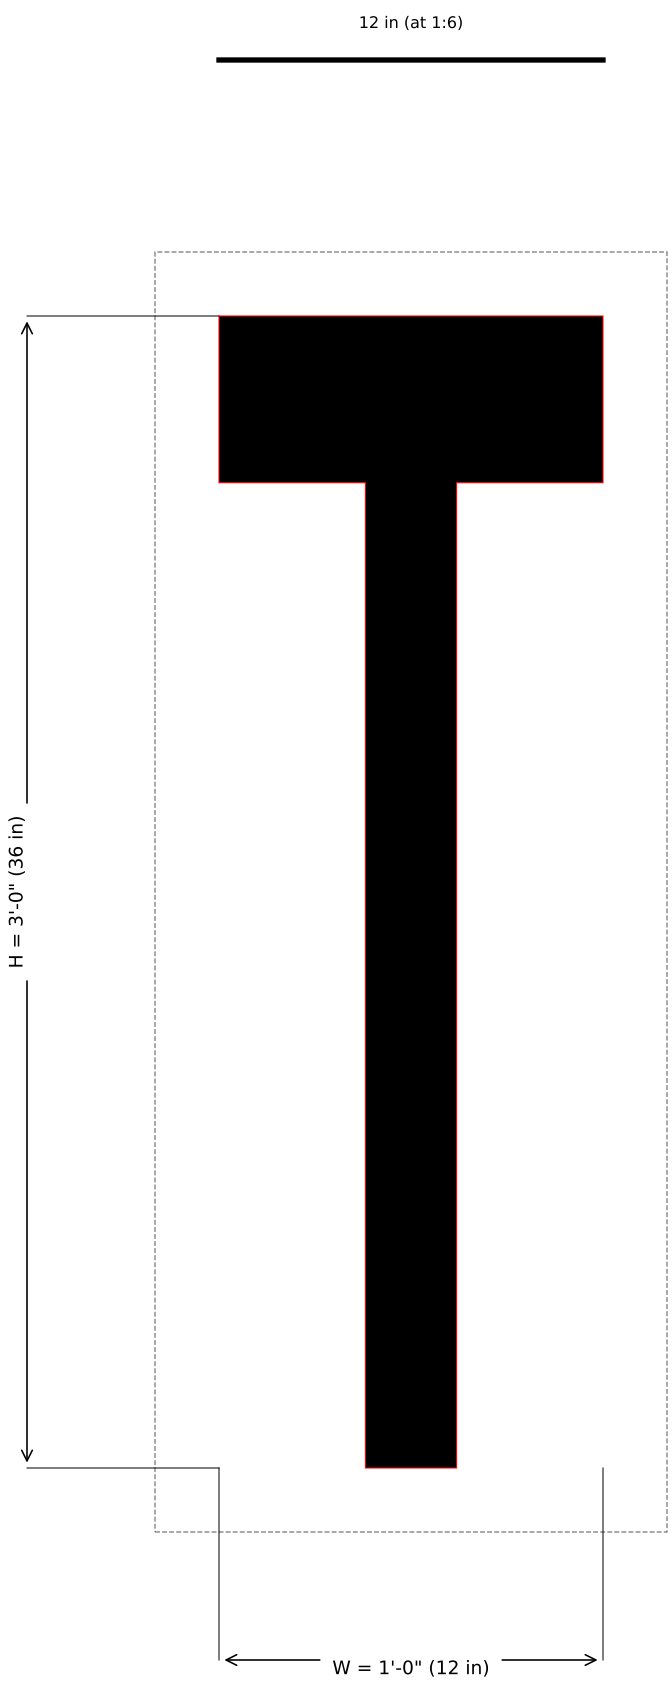



Pieces: 1 · blank 16 x 40 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p149).
Size per 1-800-Stencil kit image (ref/SSS-FAA-036-01): letter 12 W x 36 H, sheet 16 x 42. Margin set to 2 in sides (sheet width match); blank height 40 vs 1-800 42.
App B natural width at 36 H = 9.13 in; x-stretch +31.4%.
No islands, no bridges.

# SSS-FAA-036-01-U

36" FAA Airport Letter "U" (kit SSS-FAA-036-01), FAA AC 150/5340-1M App B, 12 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

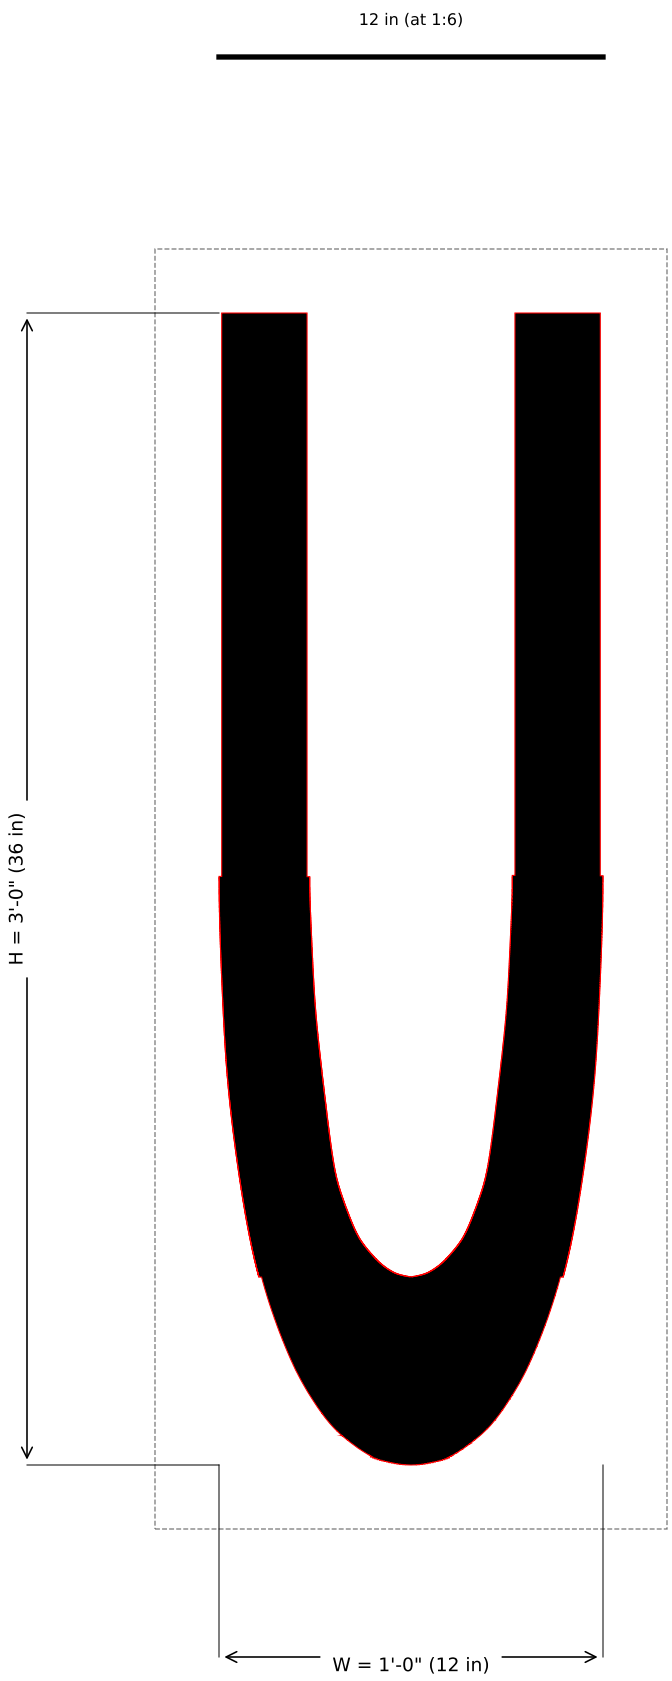



Pieces: 1 · blank 16 x 40 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p149).
Size per 1-800-Stencil kit image (ref/SSS-FAA-036-01): letter 12 W x 36 H, sheet 16 x 42. Margin set to 2 in sides (sheet width match); blank height 40 vs 1-800 42.
App B natural width at 36 H = 10.73 in; x-stretch +11.9%.
No islands, no bridges.

# SSS-FAA-036-01-V

36" FAA Airport Letter "V" (kit SSS-FAA-036-01), FAA AC 150/5340-1M App B, 12 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

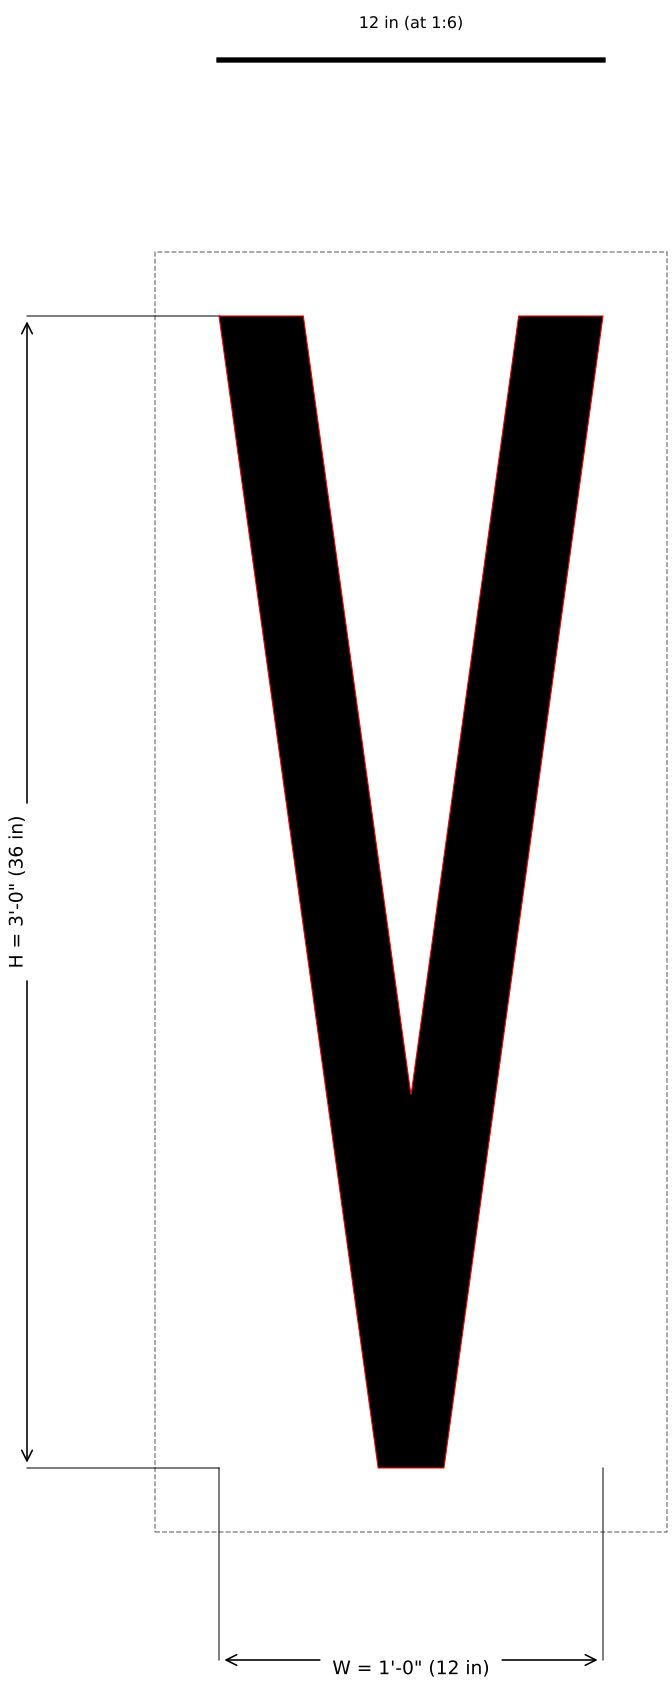



Pieces: 1 · blank 16 x 40 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p149).
Size per 1-800-Stencil kit image (ref/SSS-FAA-036-01): letter 12 W x 36 H, sheet 16 x 42. Margin set to 2 in sides (sheet width match); blank height 40 vs 1-800 42.
App B natural width at 36 H = 11.56 in; x-stretch +3.8%.
No islands, no bridges.

# SSS-FAA-036-01-W

36" FAA Airport Letter "W" (kit SSS-FAA-036-01), FAA AC 150/5340-1M App B, 12 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

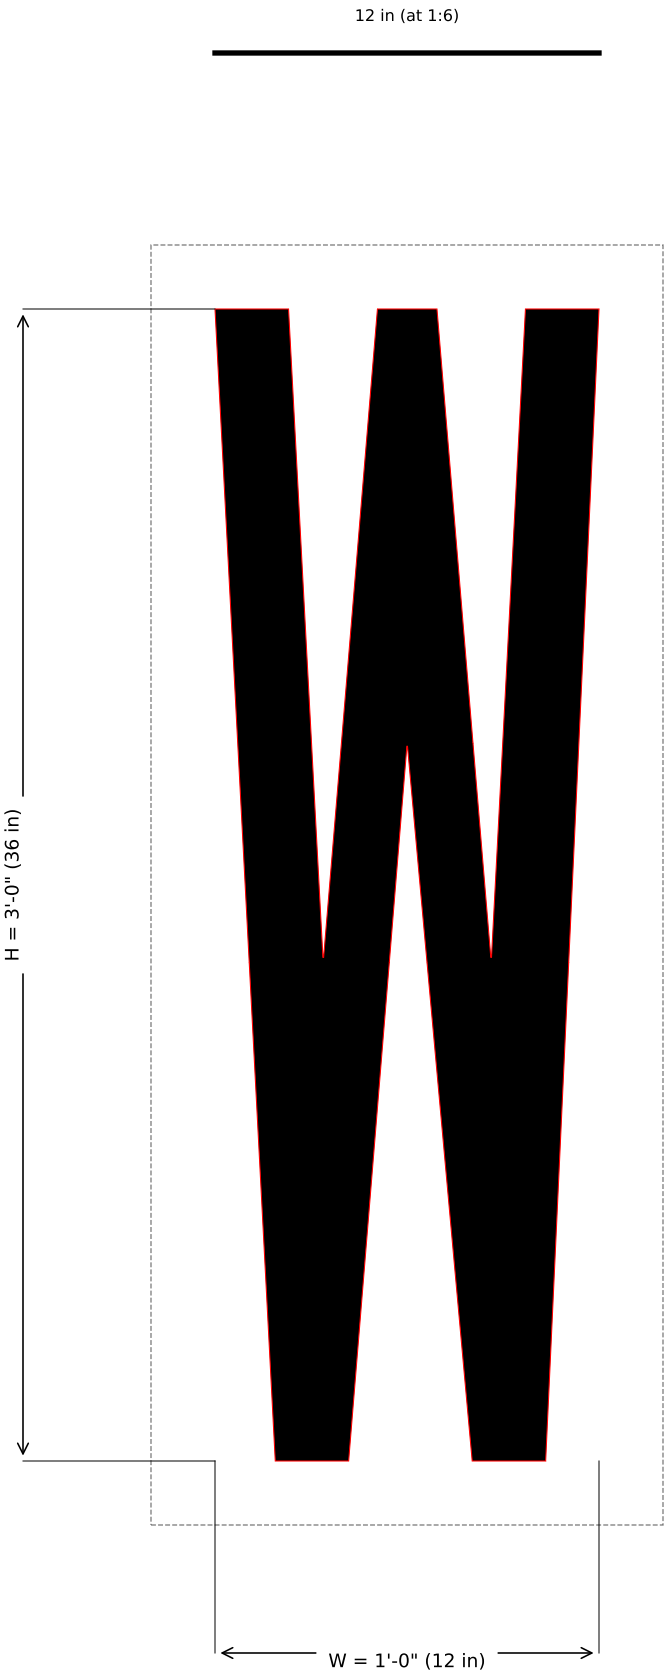



Pieces: 1 · blank 16 x 40 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p149).
Size per 1-800-Stencil kit image (ref/SSS-FAA-036-01): letter 12 W x 36 H, sheet 16 x 42. Margin set to 2 in sides (sheet width match); blank height 40 vs 1-800 42.
App B natural width at 36 H = 12.97 in; x-stretch -7.5%.
No islands, no bridges.

# SSS-FAA-036-01-X

36" FAA Airport Letter "X" (kit SSS-FAA-036-01), FAA AC 150/5340-1M App B, 12 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

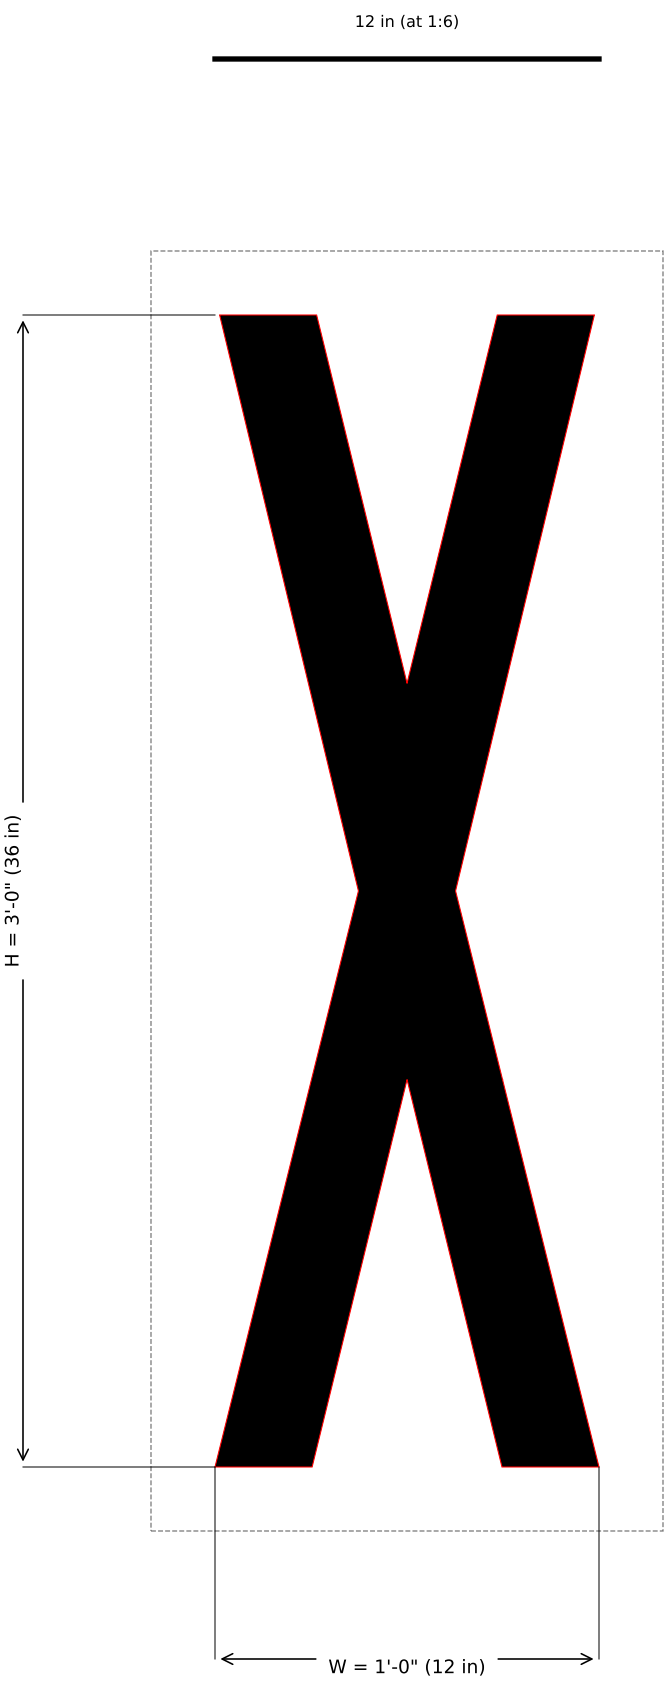



Pieces: 1 · blank 16 x 40 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p149).
Size per 1-800-Stencil kit image (ref/SSS-FAA-036-01): letter 12 W x 36 H, sheet 16 x 42. Margin set to 2 in sides (sheet width match); blank height 40 vs 1-800 42.
App B natural width at 36 H = 9.82 in; x-stretch +22.2%.
No islands, no bridges.

# SSS-FAA-036-01-Y

36" FAA Airport Letter "Y" (kit SSS-FAA-036-01), FAA AC 150/5340-1M App B, 12 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

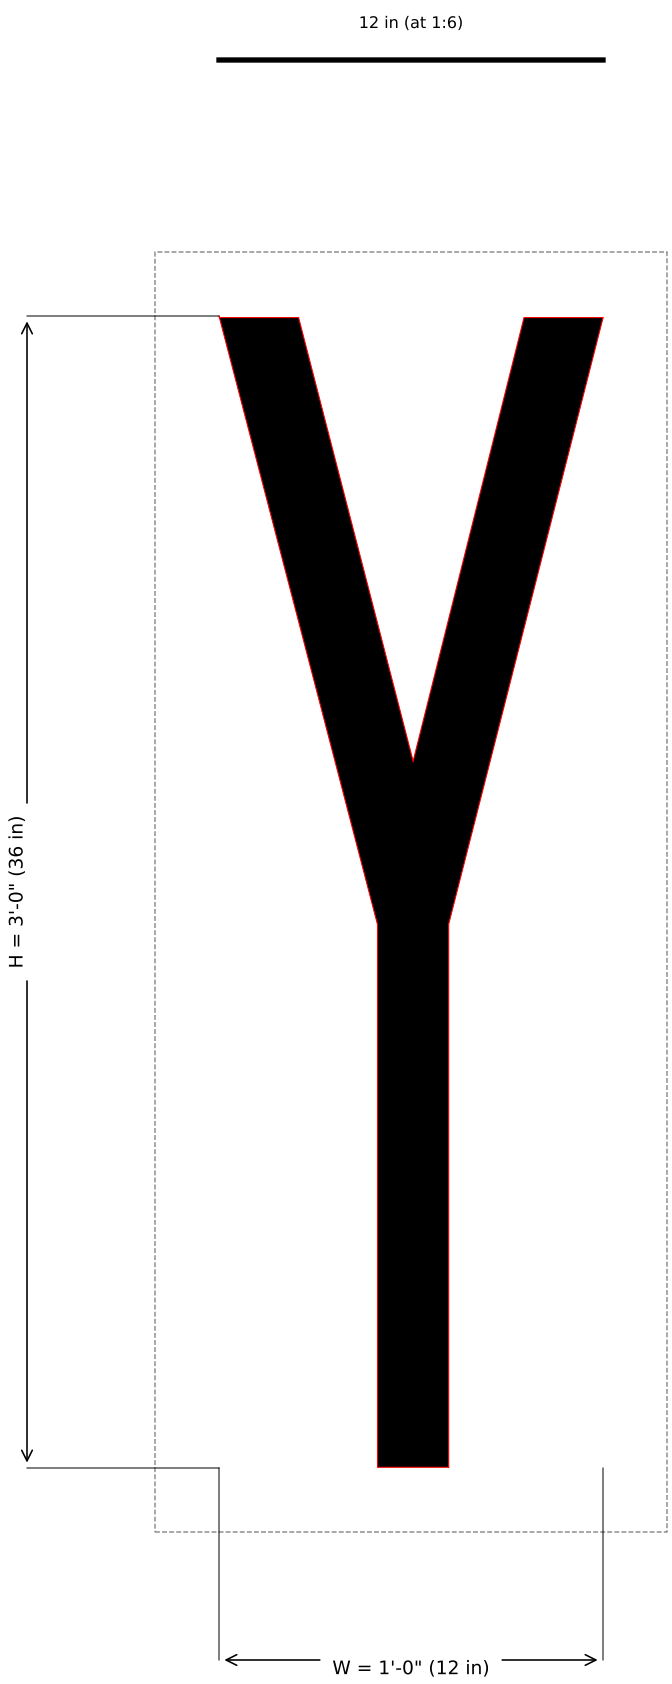



Pieces: 1 · blank 16 x 40 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p150).
Size per 1-800-Stencil kit image (ref/SSS-FAA-036-01): letter 12 W x 36 H, sheet 16 x 42. Margin set to 2 in sides (sheet width match); blank height 40 vs 1-800 42.
App B natural width at 36 H = 12.68 in; x-stretch -5.4%.
No islands, no bridges.

# SSS-FAA-036-01-Z

36" FAA Airport Letter "Z" (kit SSS-FAA-036-01), FAA AC 150/5340-1M App B, 12 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black = cut opening, blue = bridge, dashed = blank

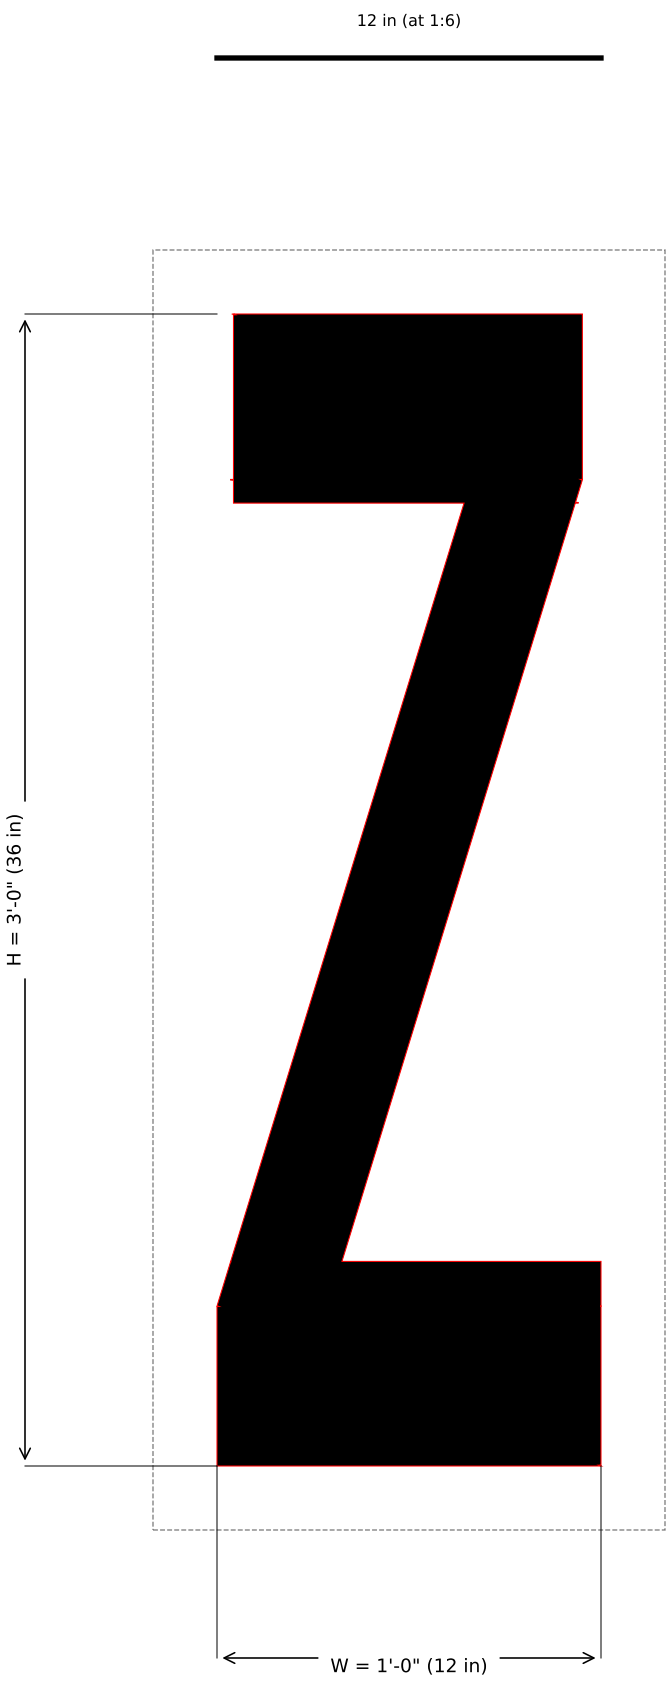



Pieces: 1 · blank 16 x 40 in (3 in margin)
Primary shape: AC 150/5340-1M App B Fig B-1..B-4 vector fills, merged per letter (ac.pdf p150).
Size per 1-800-Stencil kit image (ref/SSS-FAA-036-01): letter 12 W x 36 H, sheet 16 x 42. Margin set to 2 in sides (sheet width match); blank height 40 vs 1-800 42.
App B natural width at 36 H = 10.09 in; x-stretch +18.9%.
No islands, no bridges.

# SSS-FAA-036-01-0

36" FAA Airport "0" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 10.5 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

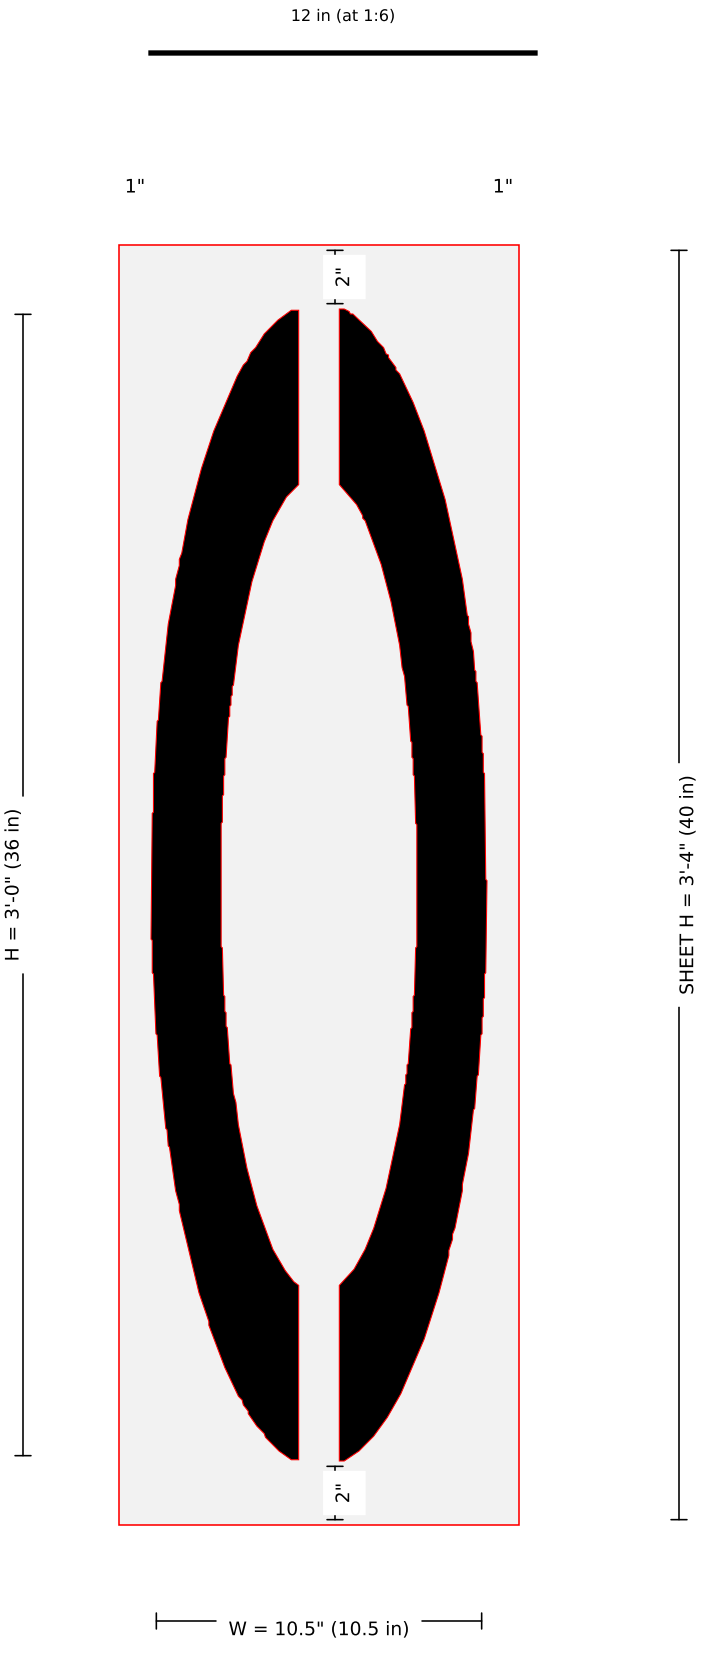



Pieces: 1 · sheet 12.5 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-0360-36in-FAA-Airport-Number-0-Stencil-42x16-2.jpg: width 10.5 from image scale (10.62); NOT the kit listing width; kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-2

36" FAA Airport "2" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 9.5 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

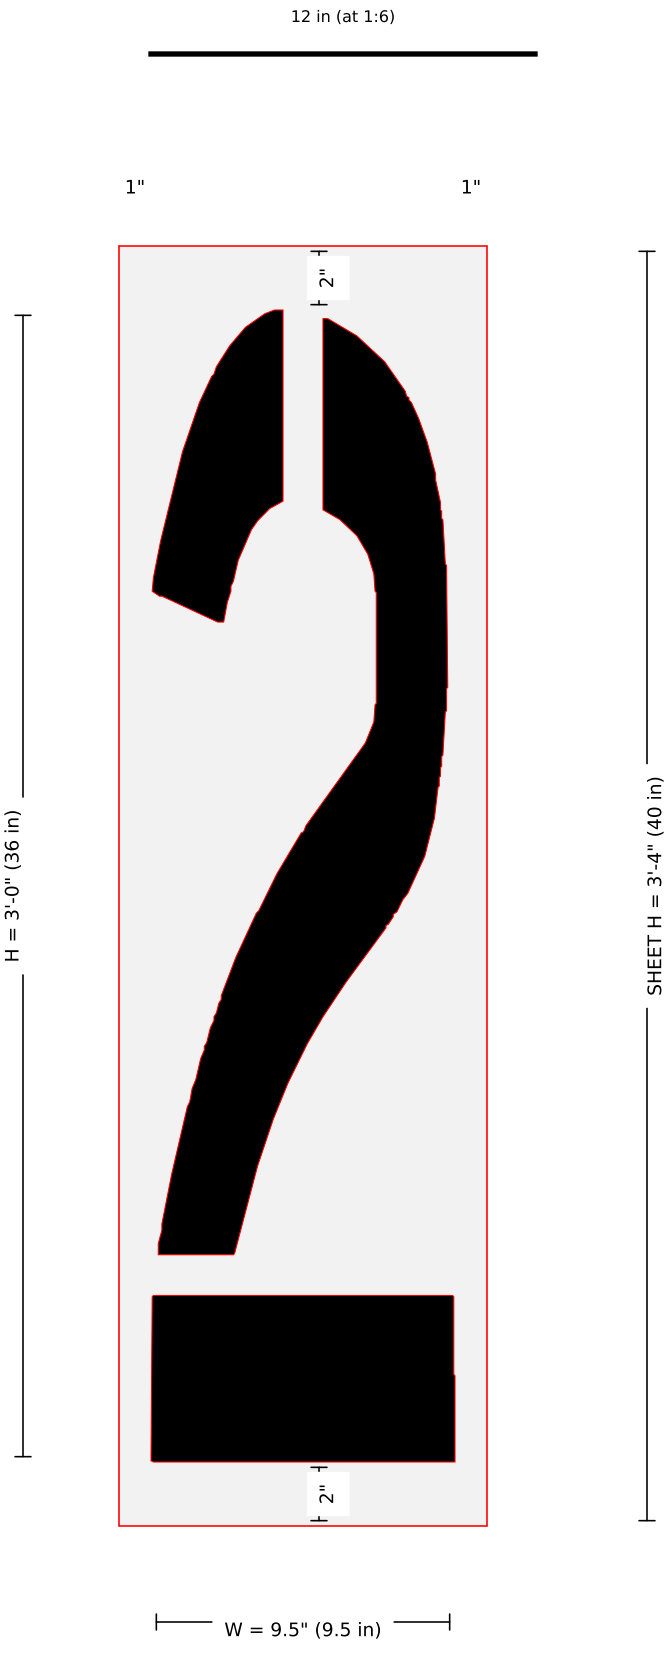



SHEET W = 11.5" (11.5 in)

Pieces: 1 · sheet 11.5 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-0362-36in-FAA-Airport-Number-2-Stencil-42x16-2.jpg: width 9.5 from image scale (9.67); NOT the kit listing width; kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-3

36" FAA Airport "3" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 10 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

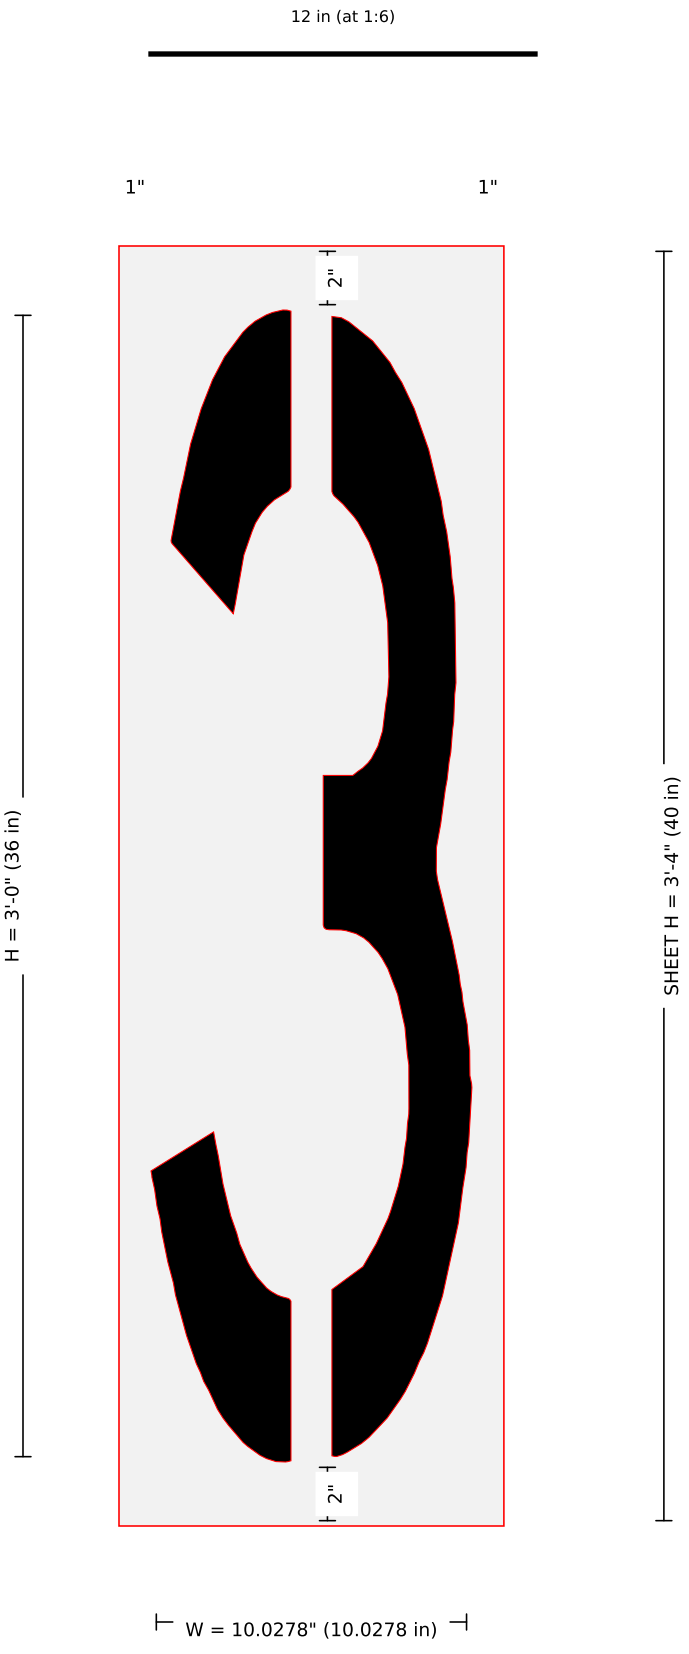



Pieces: 1 · sheet 12.028 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-0363-36in-FAA-Airport-Number-3-Stencil-42x16-2.jpg: width 10 from image scale (9.95); NOT the kit listing width; kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 0.5); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-4

36" FAA Airport "4" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 10.5 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

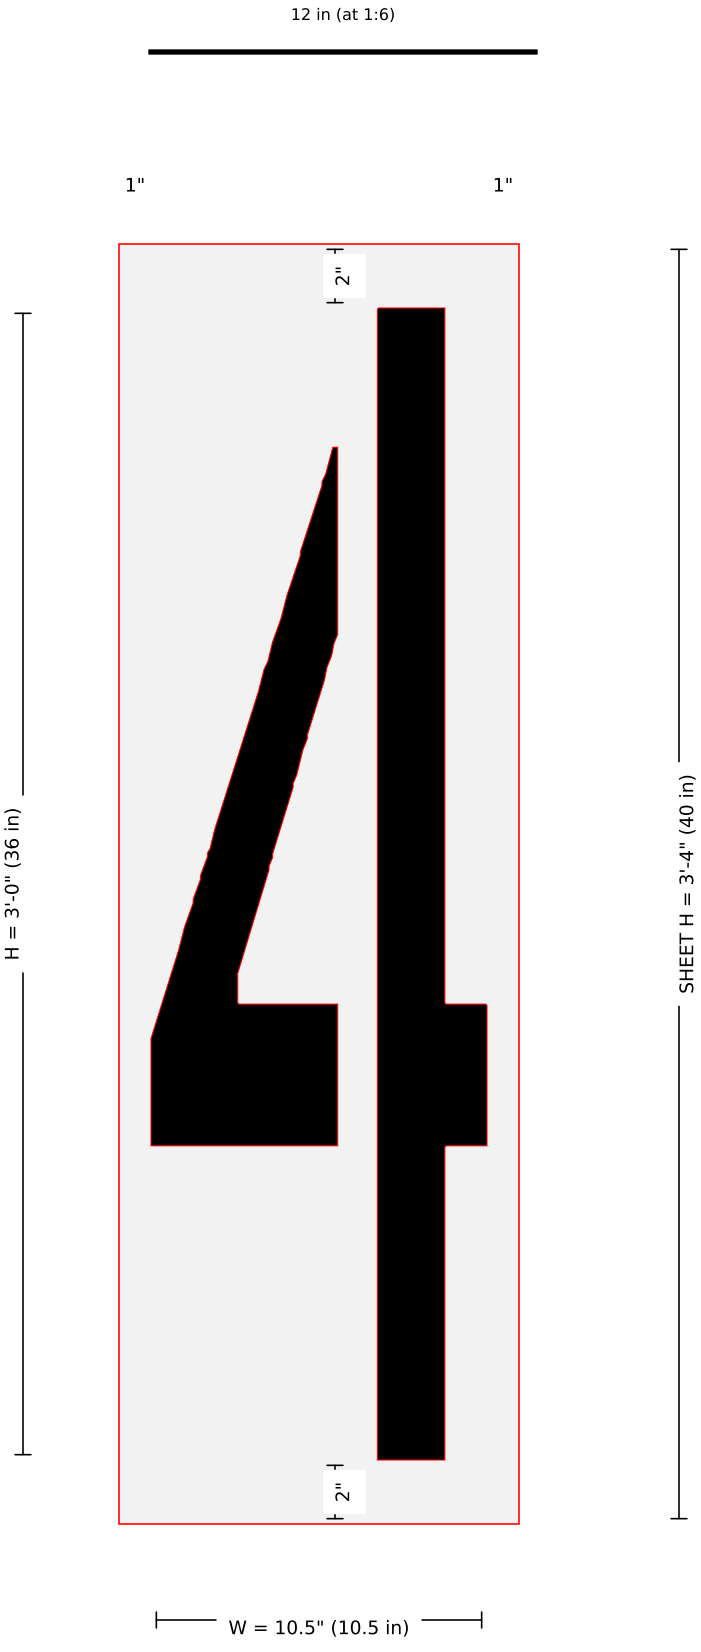



Pieces: 1 · sheet 12.5 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-0364-36in-FAA-Airport-Number-4-Stencil-42x16-2.jpg: width 10.5 from image scale (10.74); NOT the kit listing width; kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-5

36" FAA Airport "5" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 9.5 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

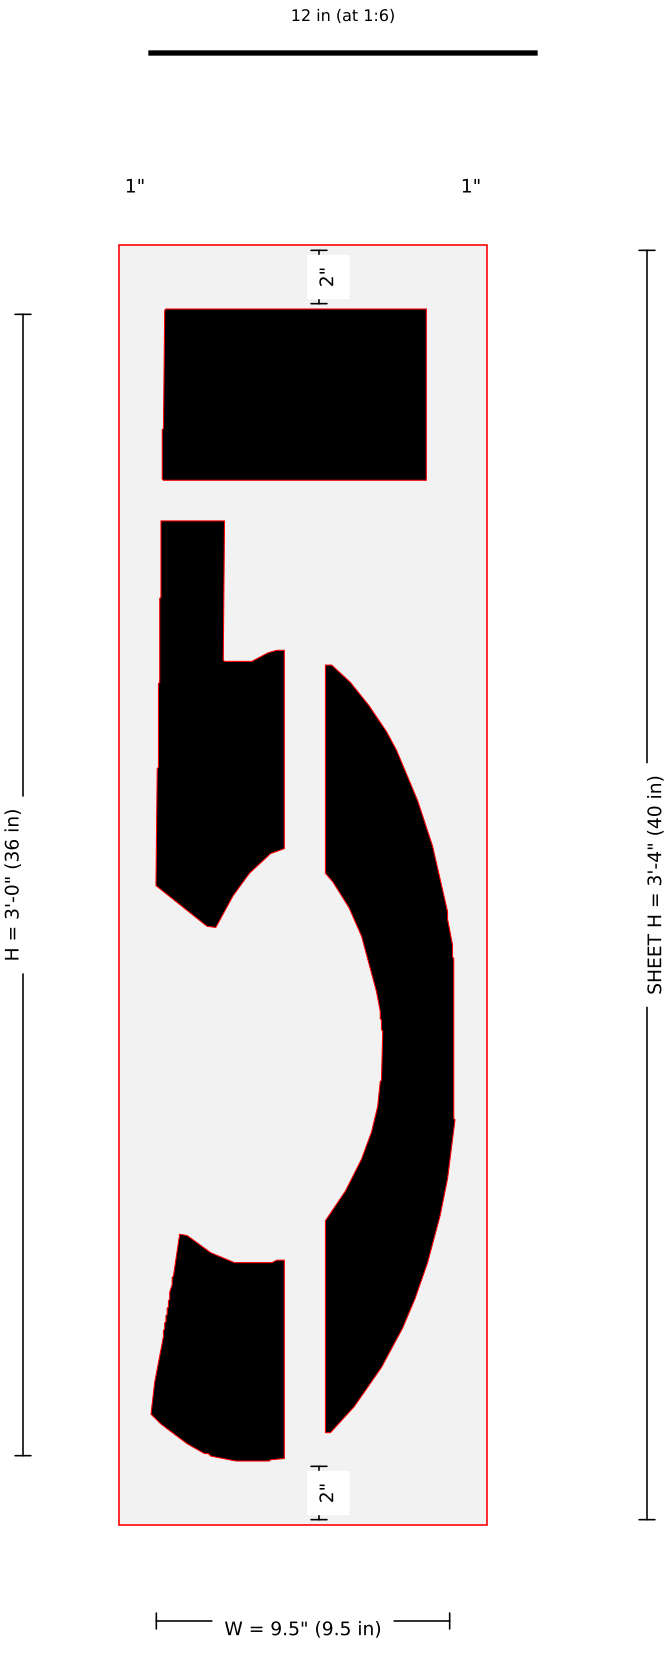



SHEET W = 11.5" (11.5 in)

Pieces: 1 · sheet 11.5 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-0365-36in-FAA-Airport-Number-5-Stencil-42x16-2.jpg: width 9.5 from image scale (9.39); NOT the kit listing width; kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-6

36" FAA Airport "6" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 9.5 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

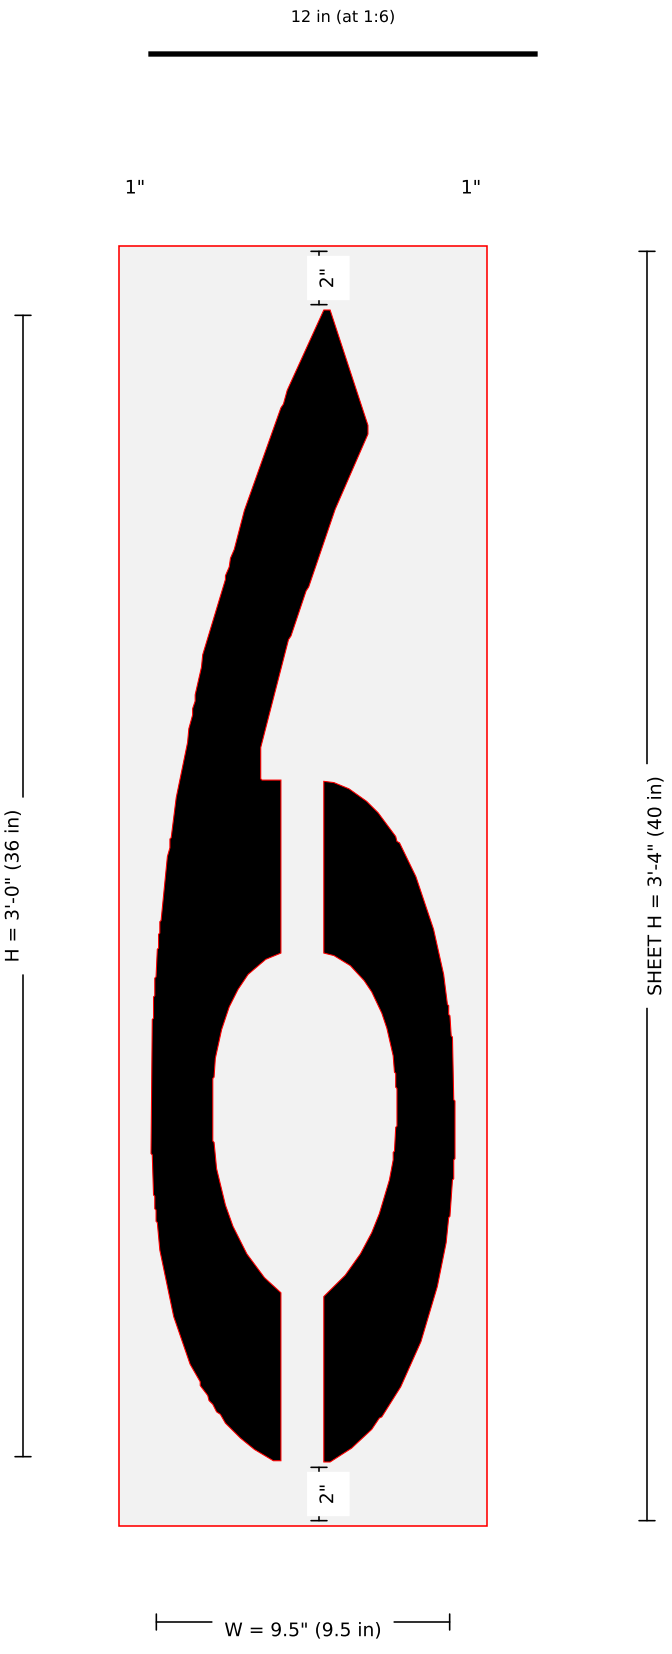



SHEET W = 11.5" (11.5 in)

Pieces: 1 · sheet 11.5 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-0366-36in-FAA-Airport-Number-6-Stencil-42x16-2.jpg: width 9.5 from image scale (9.44); NOT the kit listing width; kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-7

36" FAA Airport "7" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 9.5 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

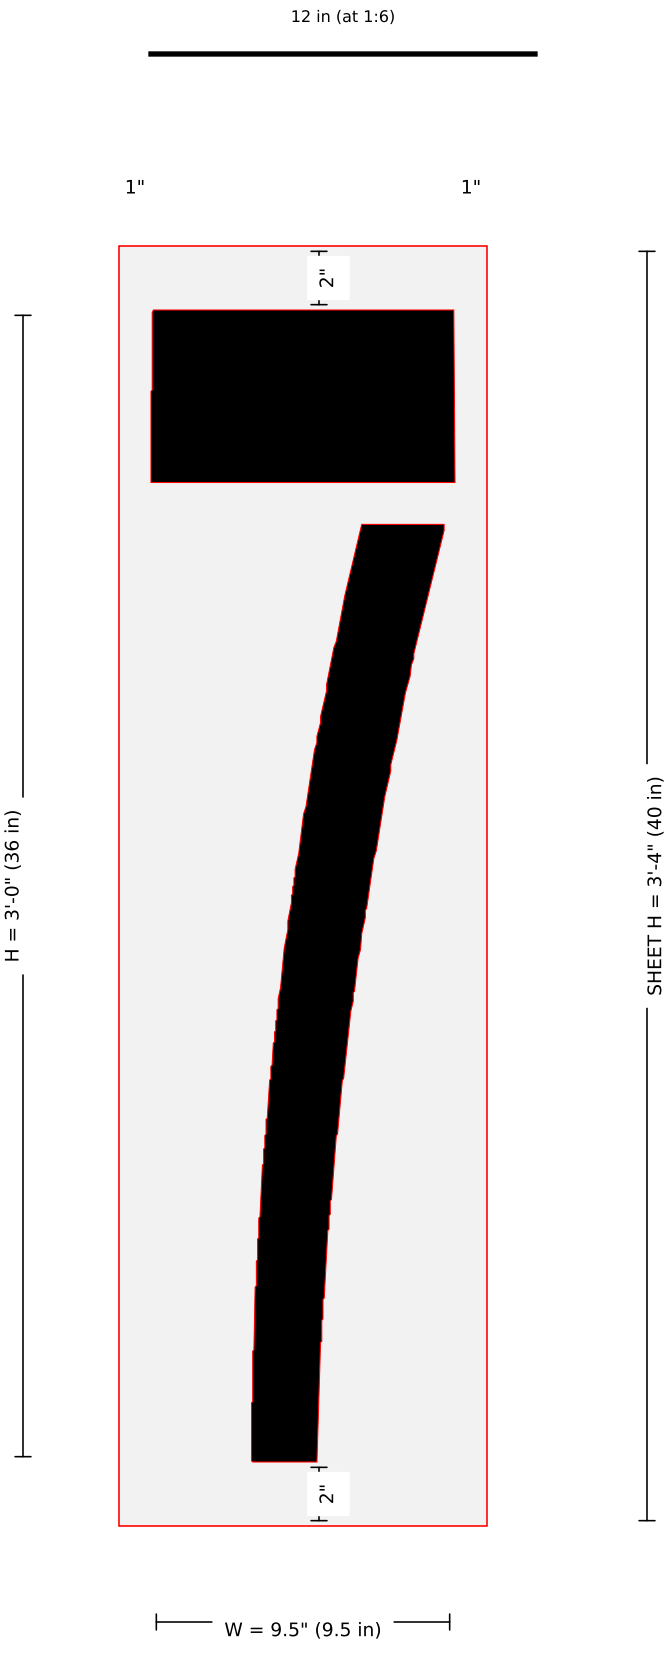



SHEET W = 11.5" (11.5 in)

Pieces: 1 · sheet 11.5 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-0367-36in-FAA-Airport-Number-7-Stencil-42x16-2.jpg: width 9.5 from image scale (9.66); NOT the kit listing width; kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-8

36" FAA Airport "8" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 10 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

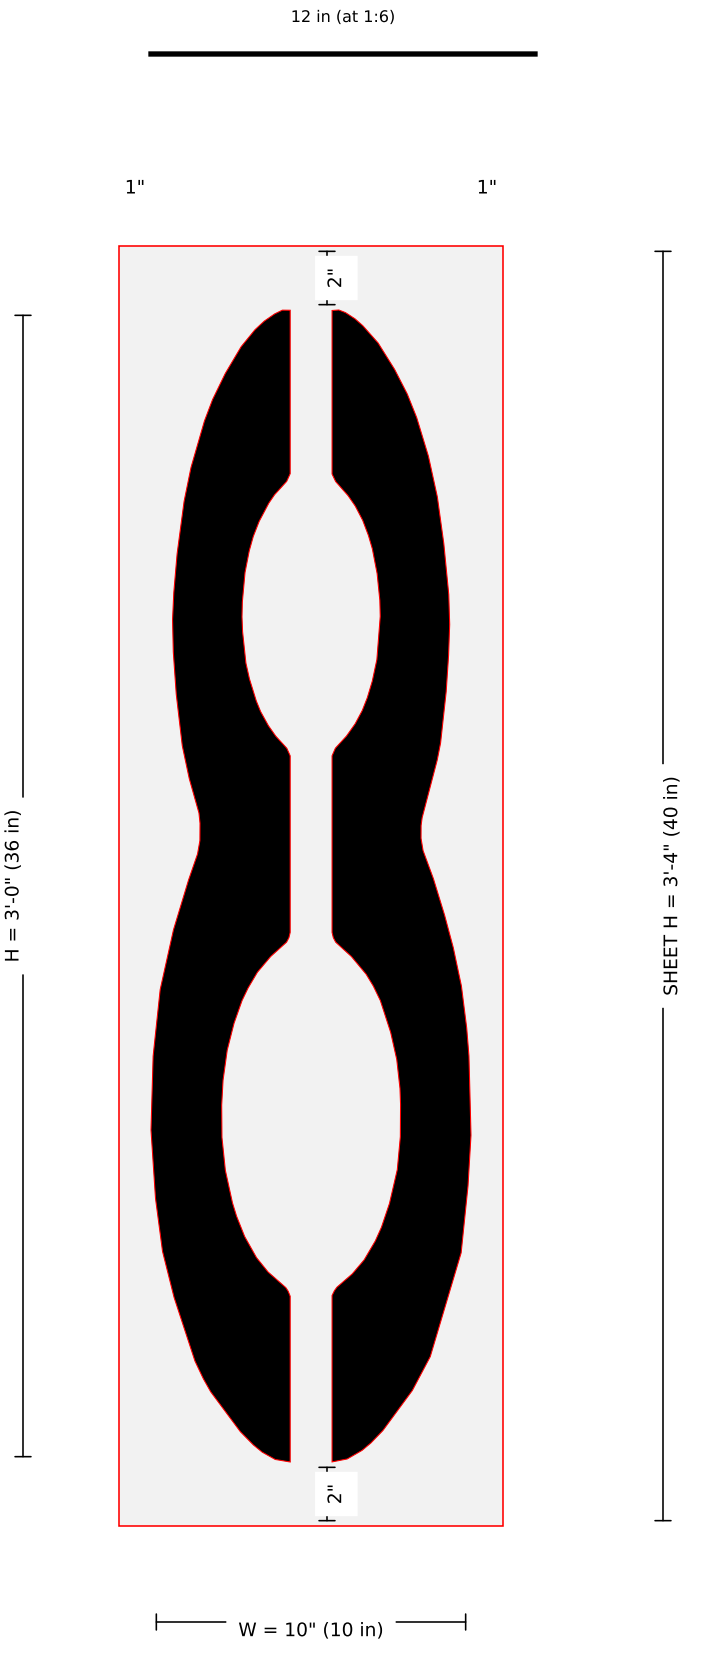



Pieces: 1 · sheet 12 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-0368-36in-FAA-Airport-Number-8-Stencil-42x16-2.jpg: width 10 from image scale (9.87); NOT the kit listing width; kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-9

36" FAA Airport "9" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 9.5 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

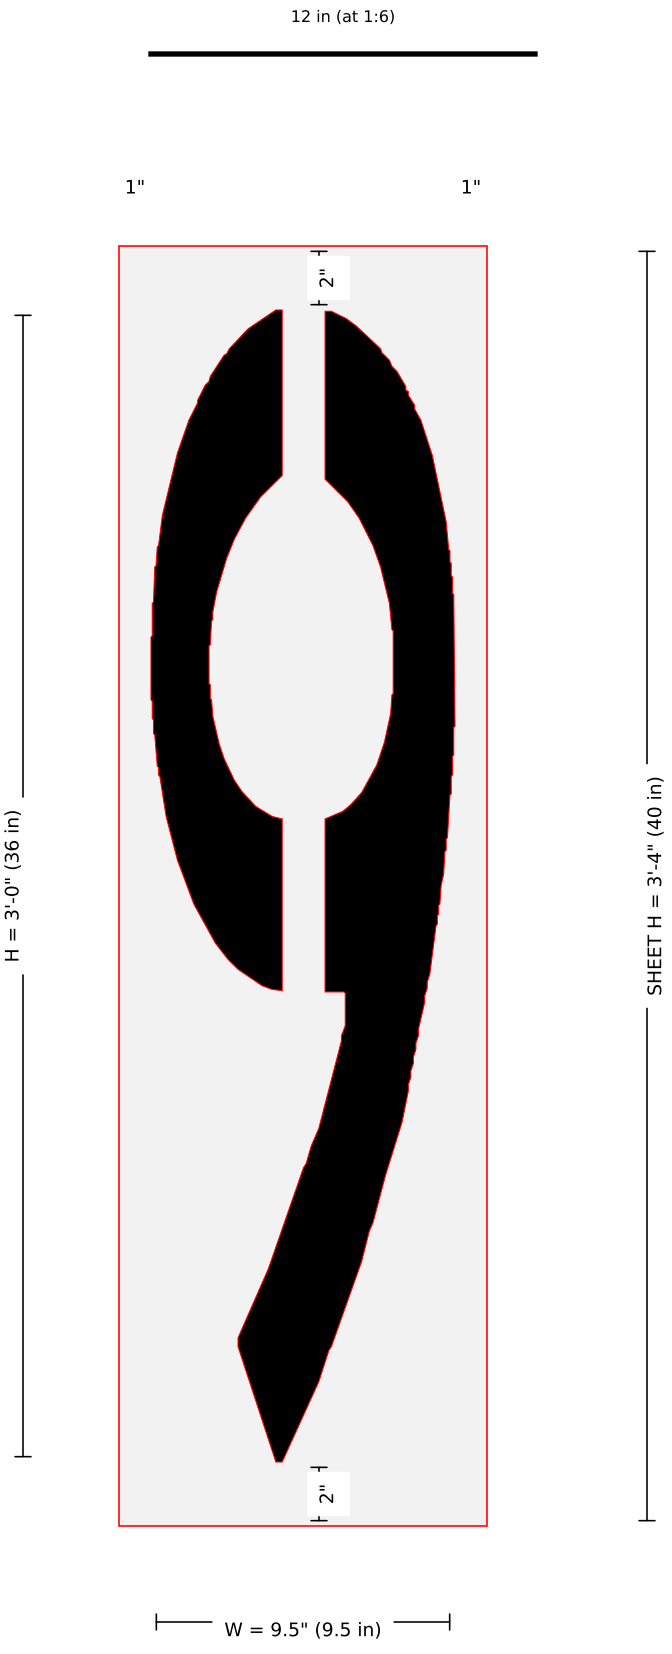



Pieces: 1 · sheet 11.5 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-0369-36in-FAA-Airport-Number-9-Stencil-42x16-2.jpg: width 9.5 from image scale (9.44); NOT the kit listing width; kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-A

36" FAA Airport "A" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 12 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

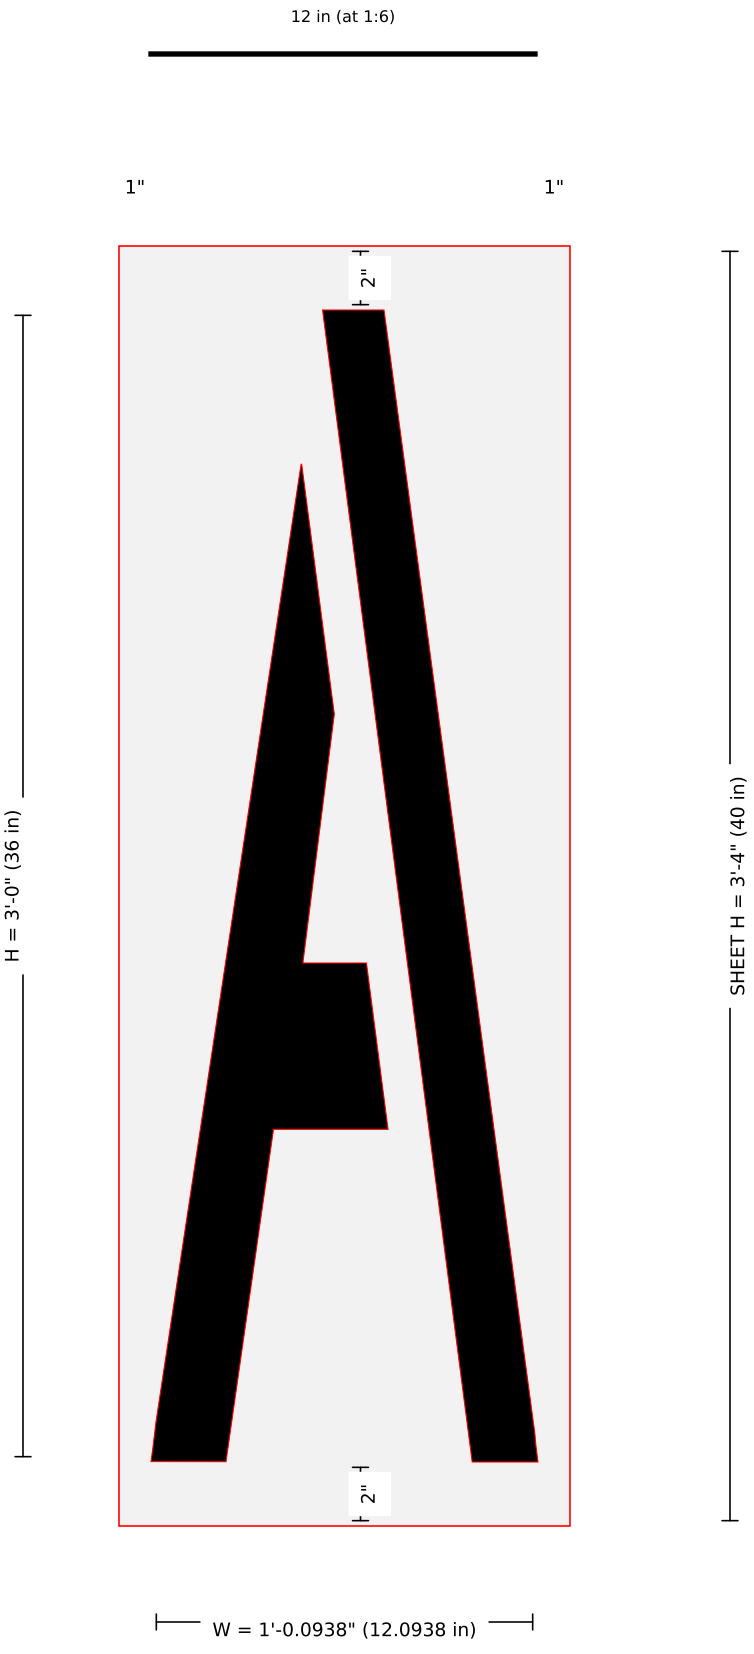



Pieces: 1 · sheet 14.094 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036A-36in-FAA-Airport-Letter-A-Stencil-42x16-2.jpg: width = kit listing 12 (image-scale 12.24); kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-B

36" FAA Airport "B" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 9.5 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

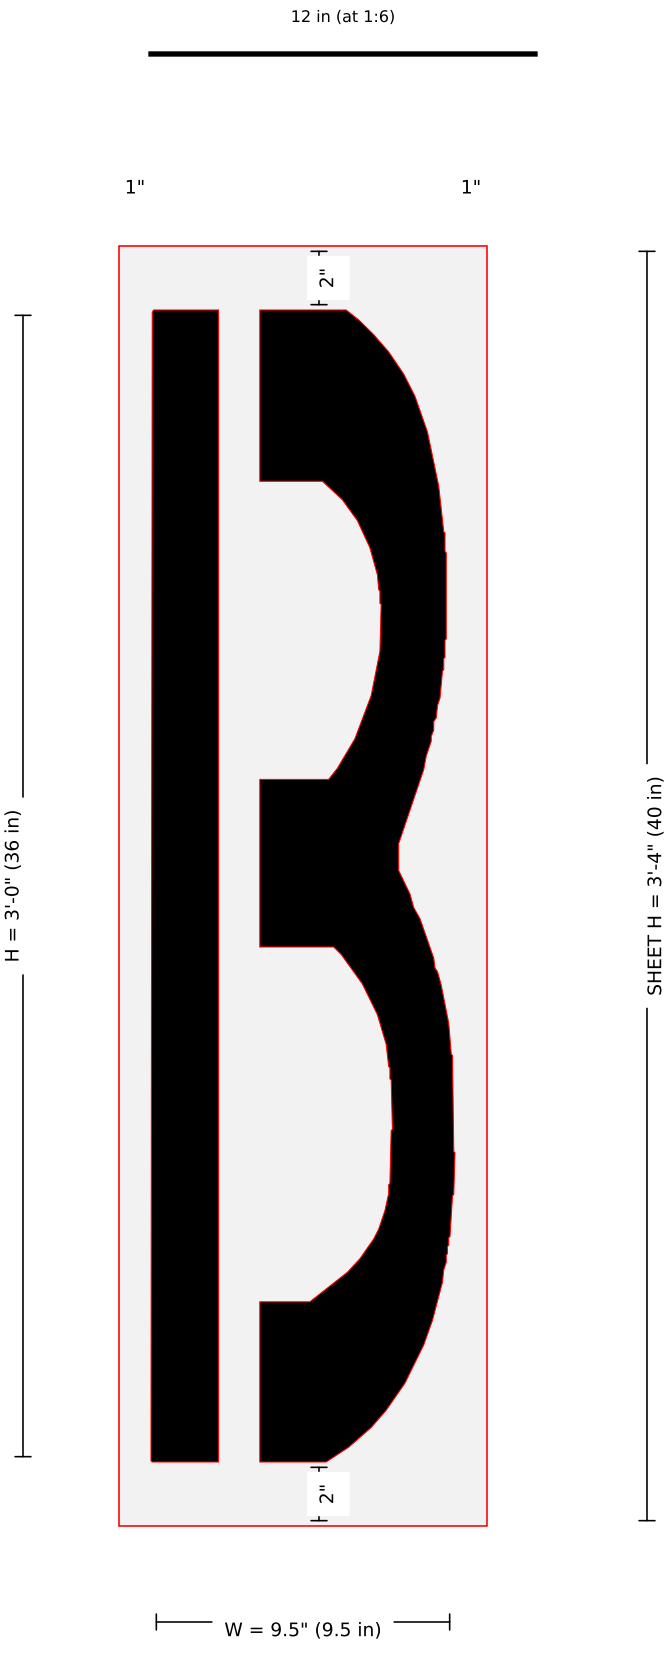



SHEET W = 11.5" (11.5 in)

Pieces: 1 · sheet 11.5 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036B-36in-FAA-Airport-Letter-B-Stencil-42x16-2.jpg: width 9.5 from image scale (9.36); NOT the kit listing width; kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-C

36" FAA Airport "C" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 9.5 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

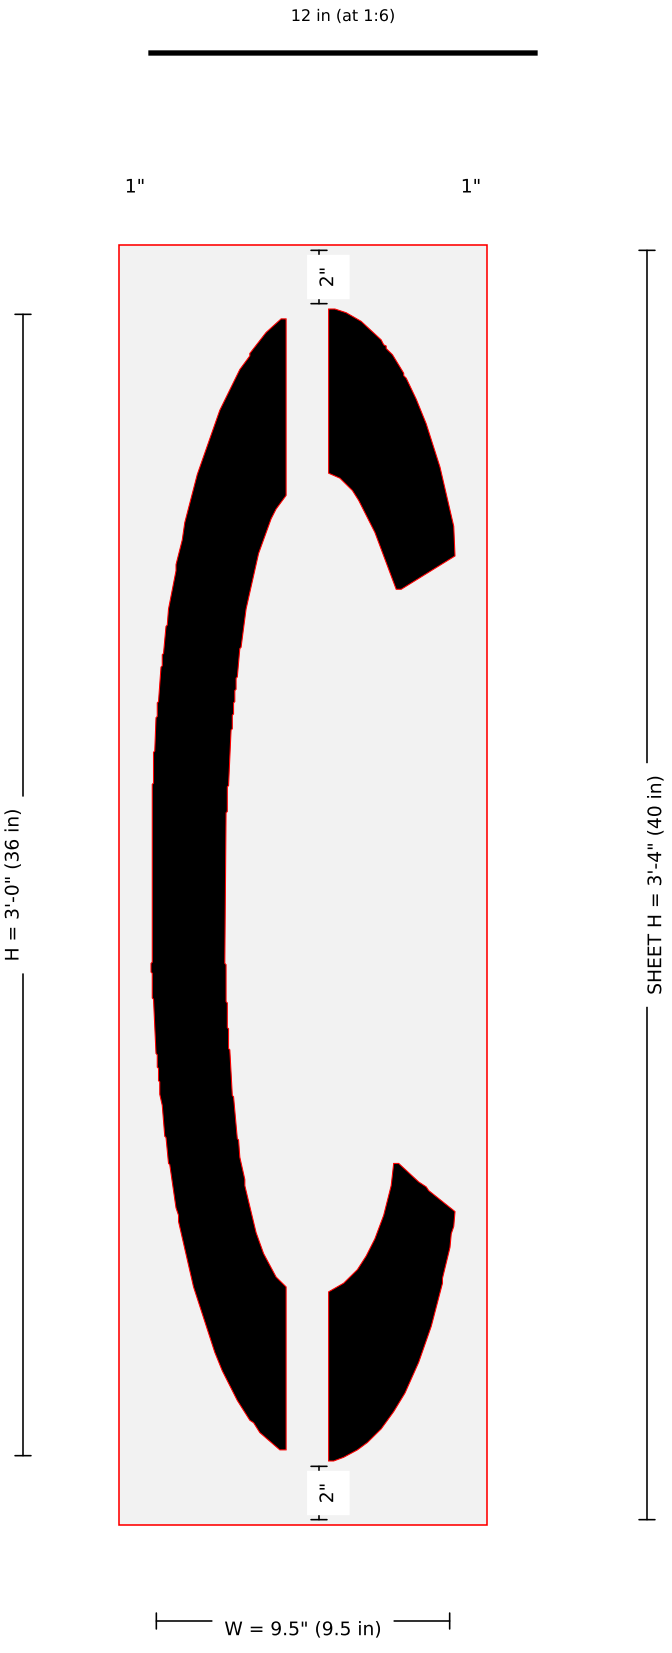



SHEET W = 11.5" (11.5 in)

Pieces: 1 · sheet 11.5 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036C-36in-FAA-Airport-Letter-C-Stencil-42x16-2.jpg: width 9.5 from image scale (9.38); NOT the kit listing width; kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-D

36" FAA Airport "D" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 9.5 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

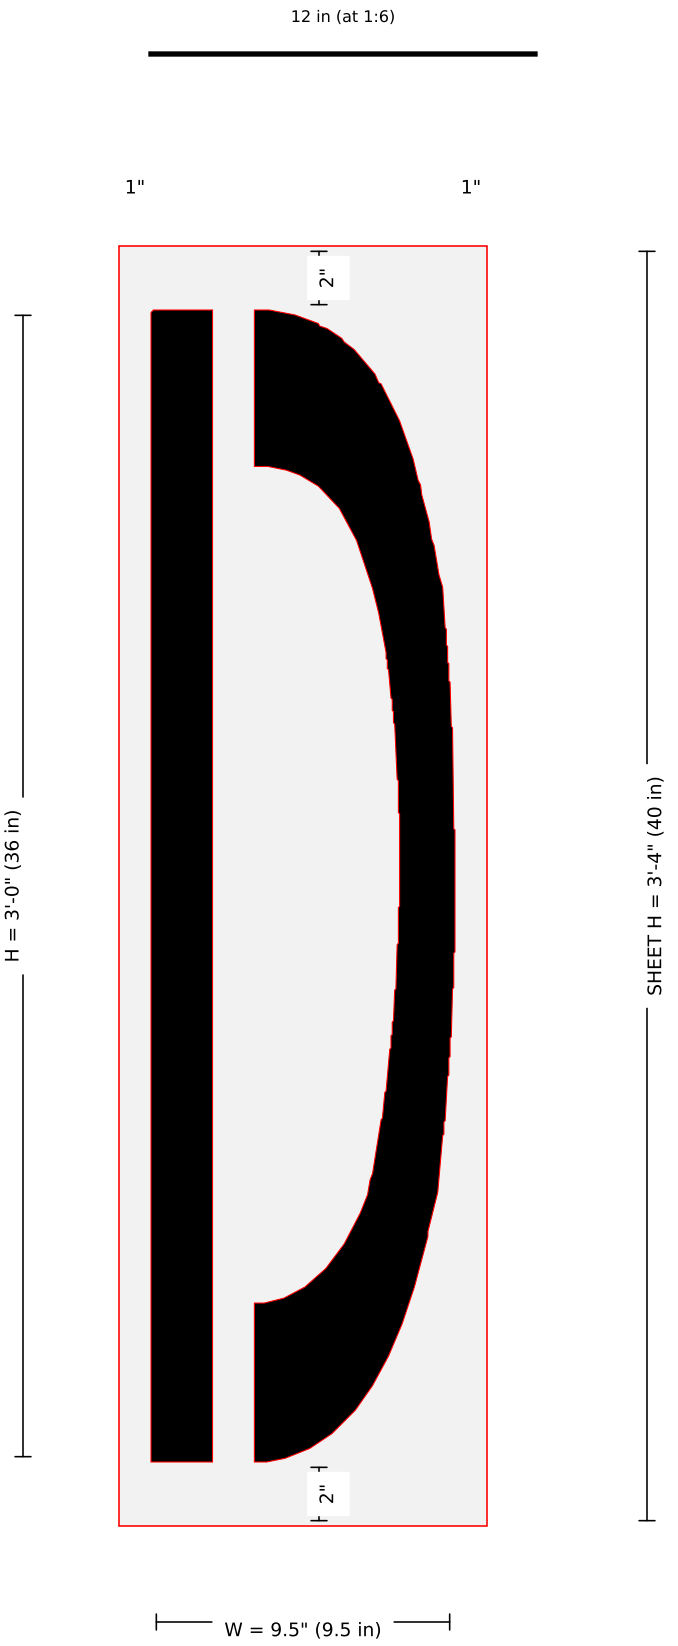



Pieces: 1 · sheet 11.5 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036D-36in-FAA-Airport-Letter-D-Stencil-42x16-2.jpg: width 9.5 from image scale (9.51); NOT the kit listing width; kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-E

36" FAA Airport "E" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 8.5 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

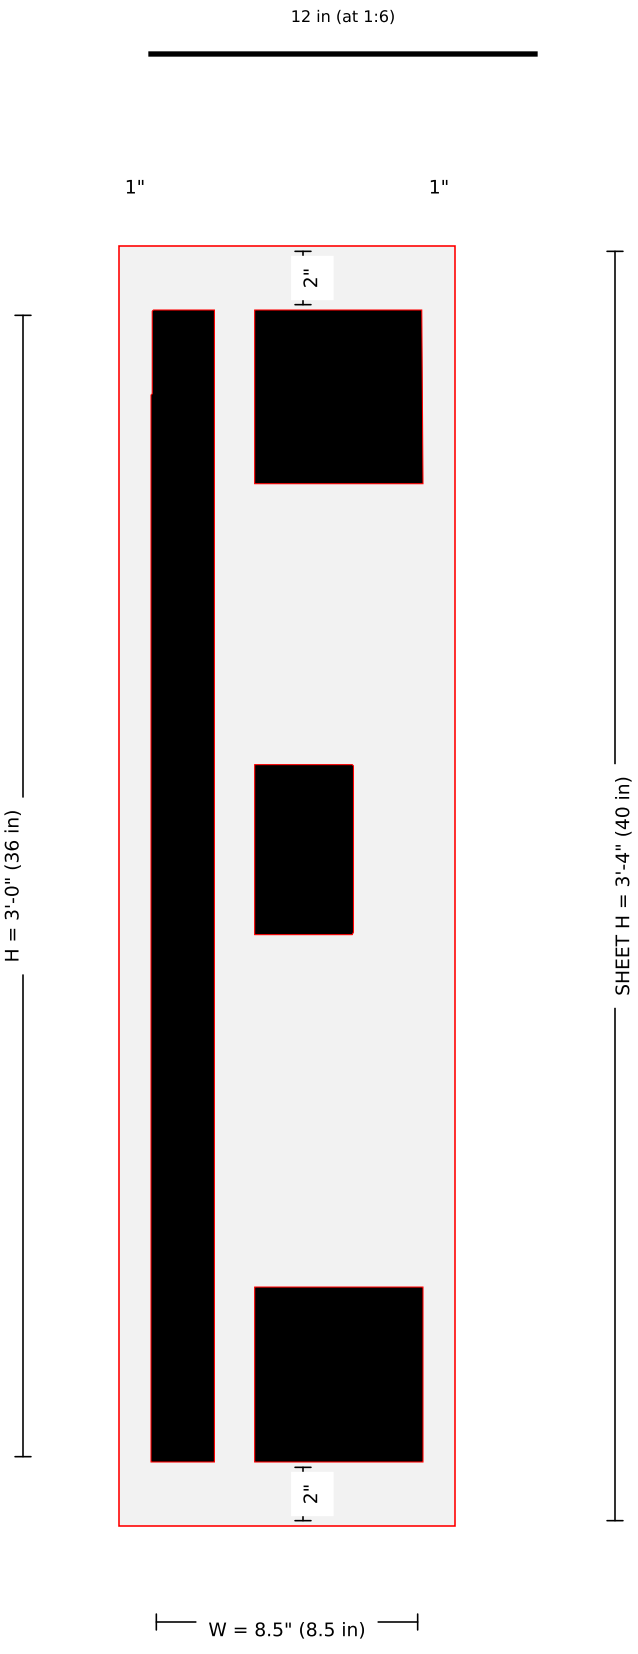



Pieces: 1 · sheet 10.5 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036E-36in-FAA-Airport-Letter-E-Stencil-42x16-2.jpg: width 8.5 from image scale (8.59); NOT the kit listing width; kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-F

36" FAA Airport "F" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 8.5 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

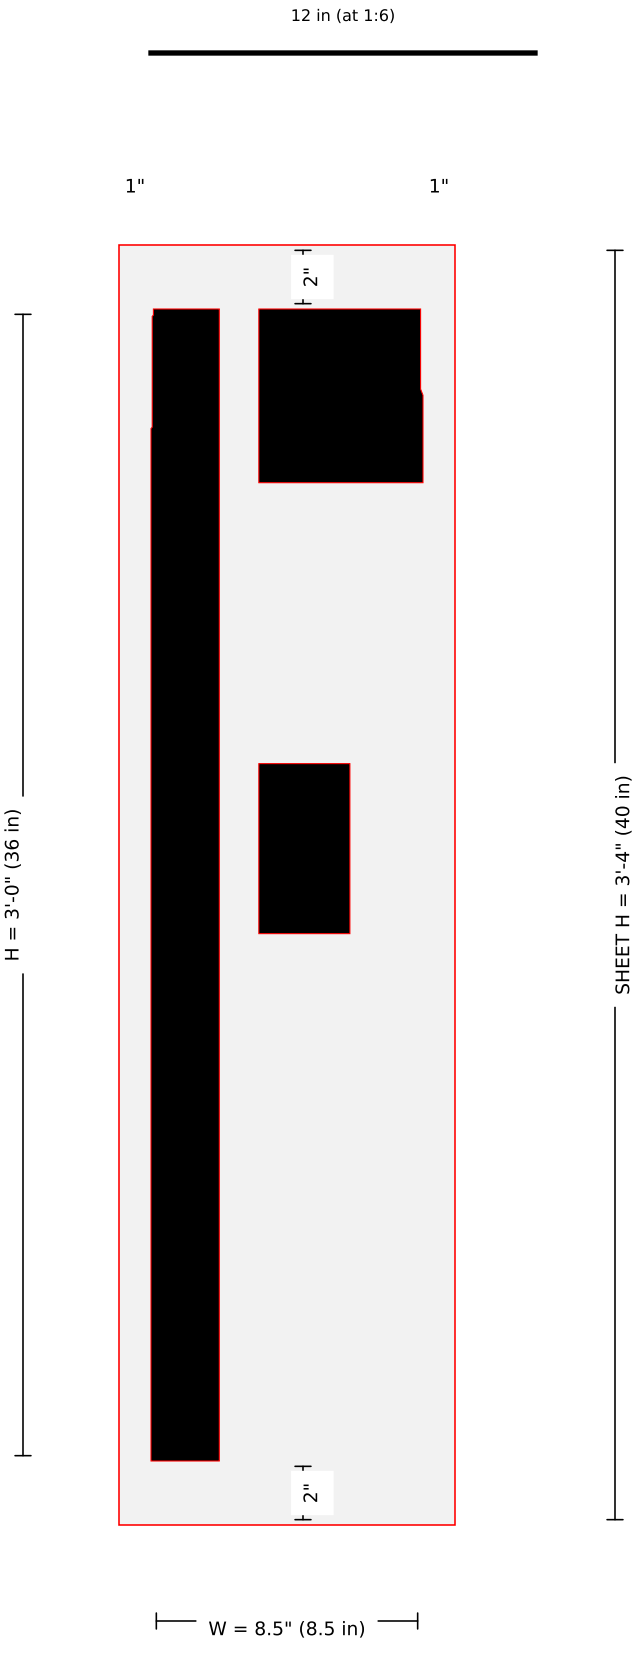



Pieces: 1 · sheet 10.5 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036F-36in-FAA-Airport-Letter-F-Stencil-42x16-2.jpg: width 8.5 from image scale (8.74); NOT the kit listing width; kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-G

36" FAA Airport "G" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 10 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

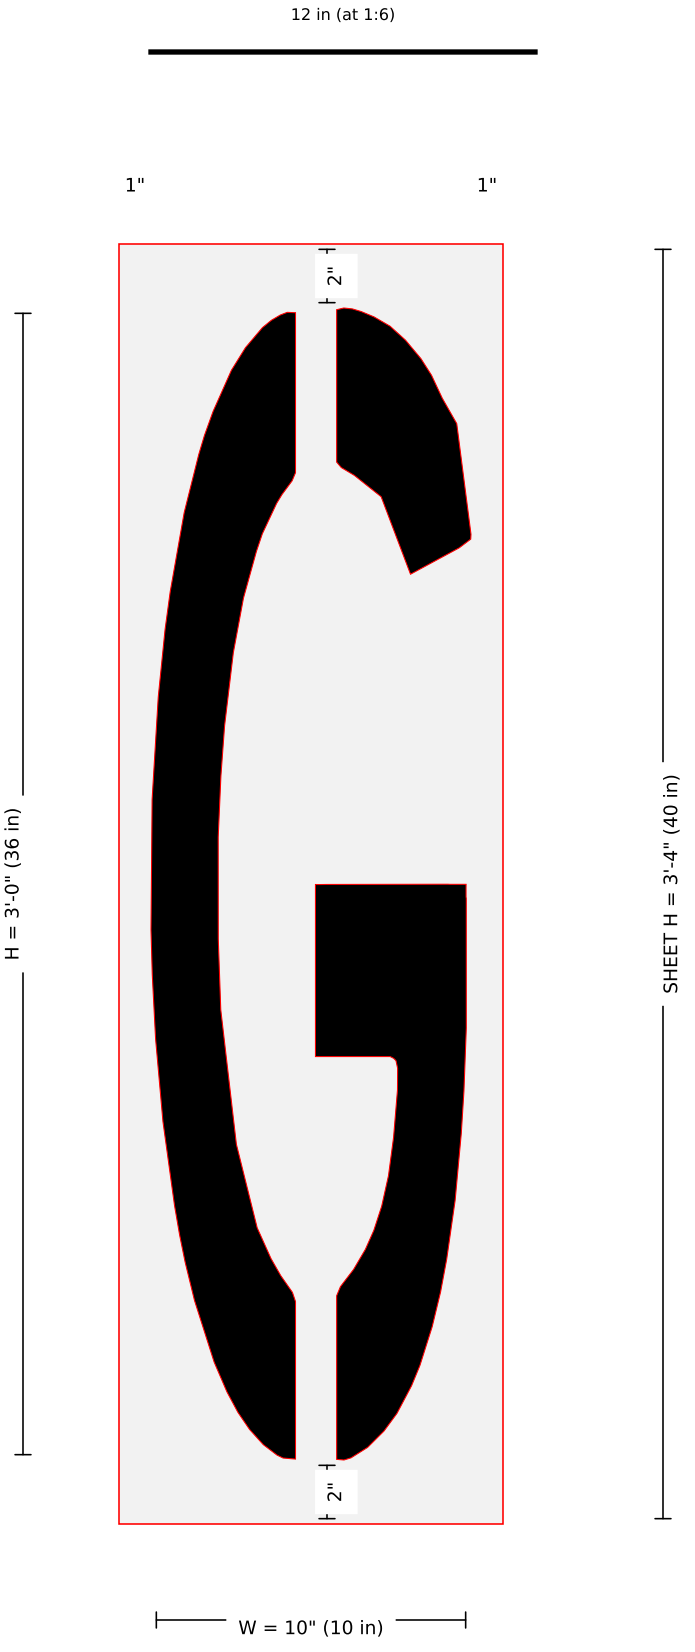



SHEET W = 1'-0" (12 in)

Pieces: 1 · sheet 12 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036G-36in-FAA-Airport-Letter-G-Stencil-42x16-2.jpg: width 10 from image scale (10.04); NOT the kit listing width; kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-I

36" FAA Airport "I" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 2 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

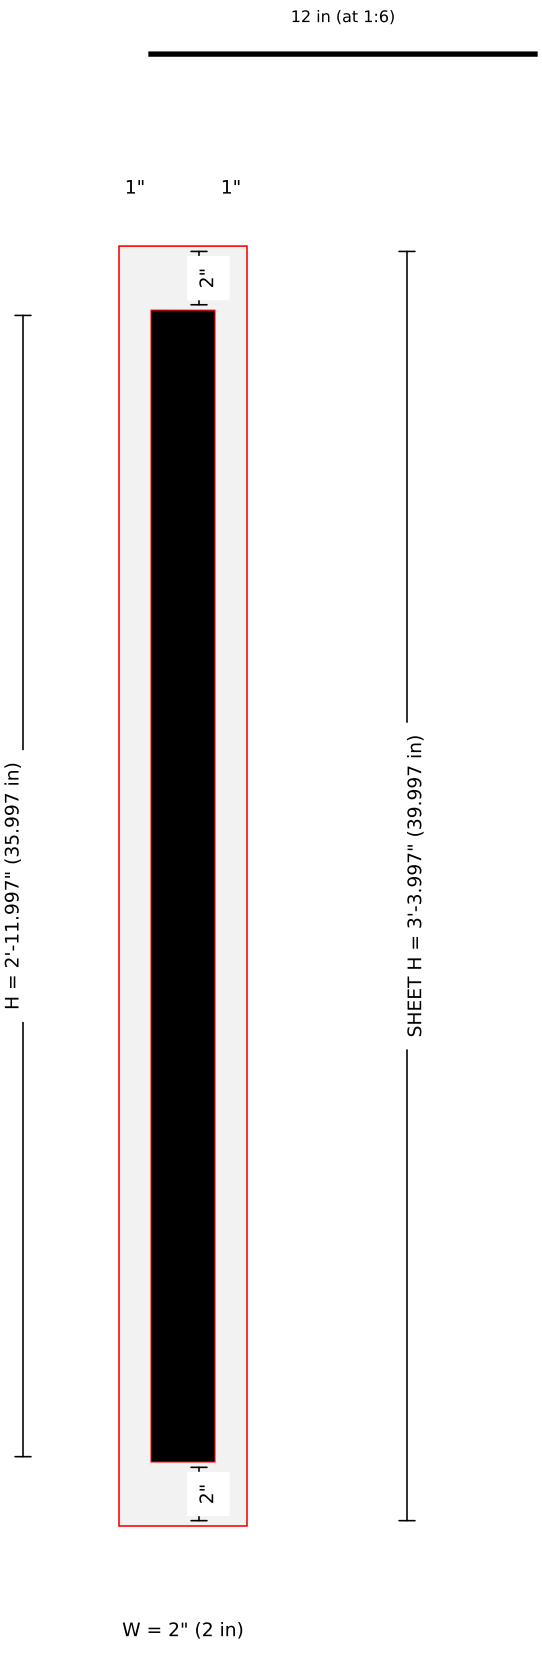



Pieces: 1 · sheet 4 x 39.997 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036I-36in-FAA-Airport-Letter-I-Stencil-42x8-2.jpg: width 2 from image scale (2.19); NOT the kit listing width; kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.07 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-J

36" FAA Airport "J" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 9 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

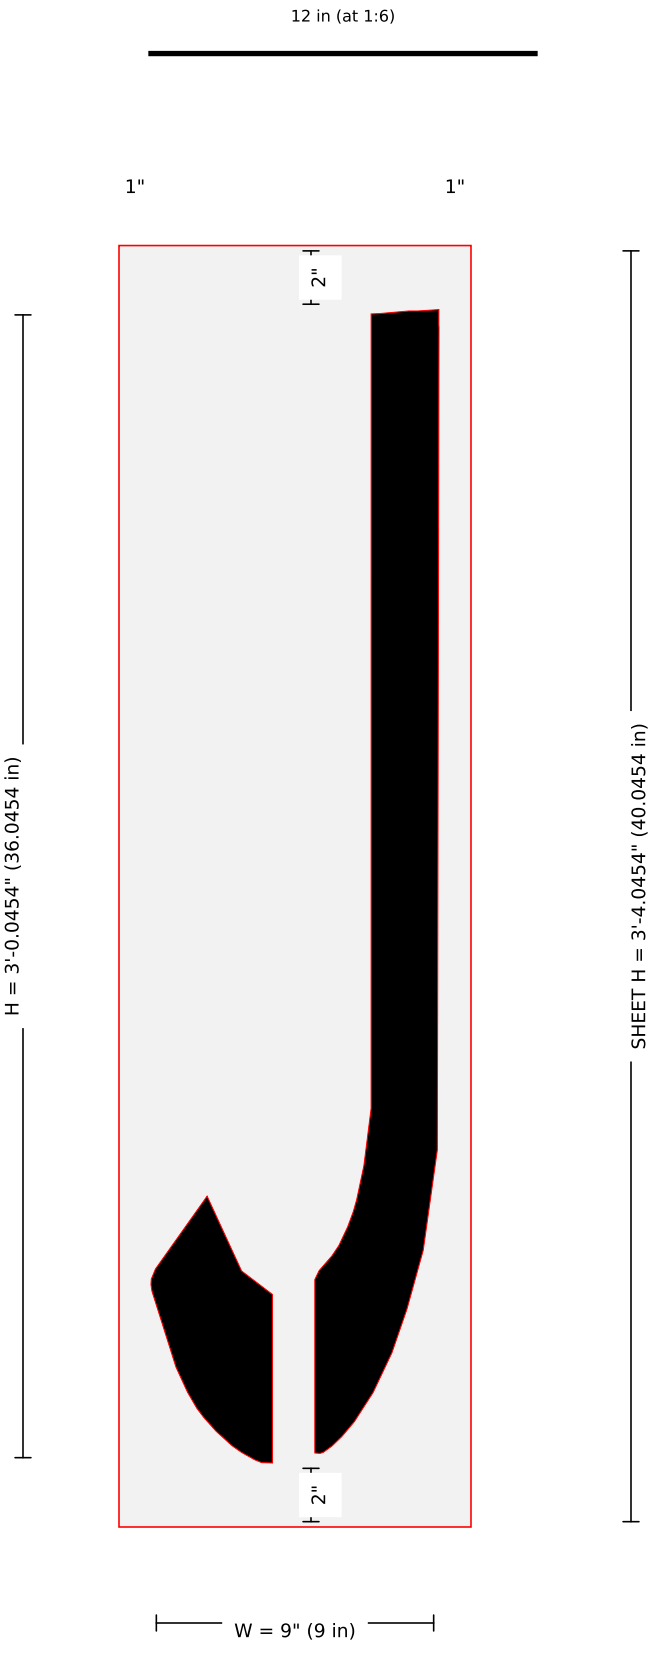



Pieces: 1 · sheet 11 x 40.045 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036J-36in-FAA-Airport-Letter-J-Stencil-42x16-2.jpg: width 9 from image scale (9.12); NOT the kit listing width; kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-K

36" FAA Airport "K" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 10 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

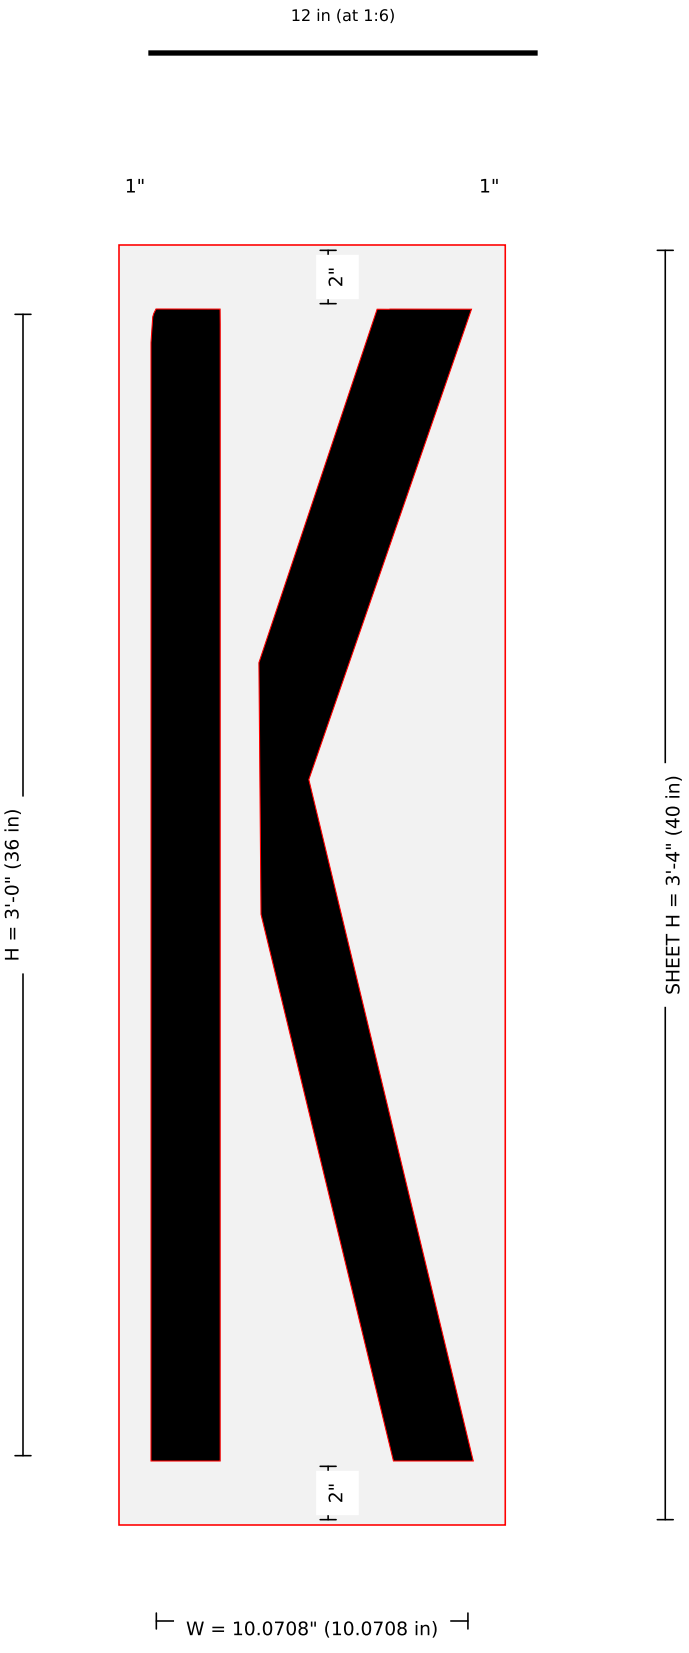



Pieces: 1 · sheet 12.071 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036K-36in-FAA-Airport-Letter-K-Stencil-42x16-2.jpg: width 10 from image scale (10.01); NOT the kit listing width; kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-L

36" FAA Airport "L" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 9 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

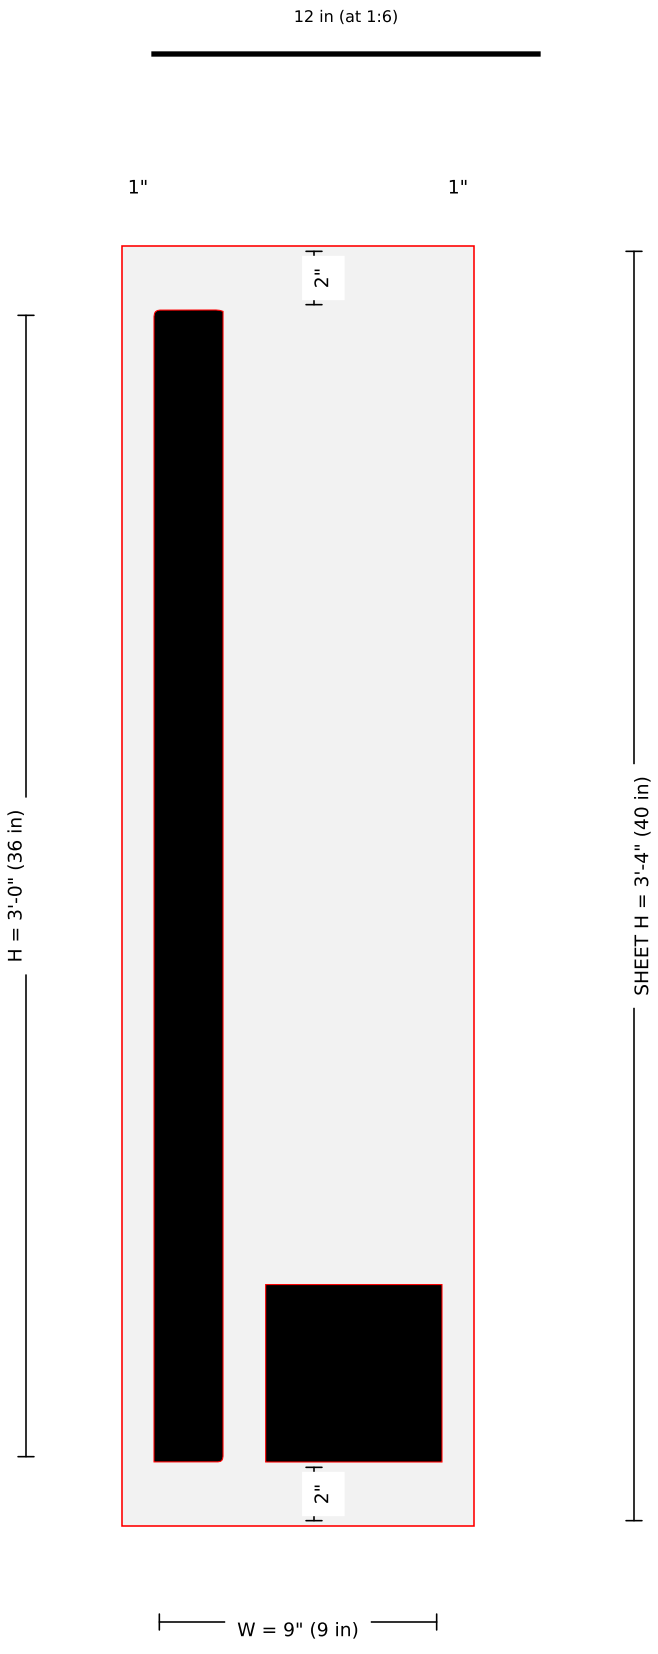



Pieces: 1 · sheet 11 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036L-36in-FAA-Airport-Letter-L-Stencil-42x16-2.jpg: width 9 from image scale (8.89); NOT the kit listing width; kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.07 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-M

36" FAA Airport "M" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 11.5 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

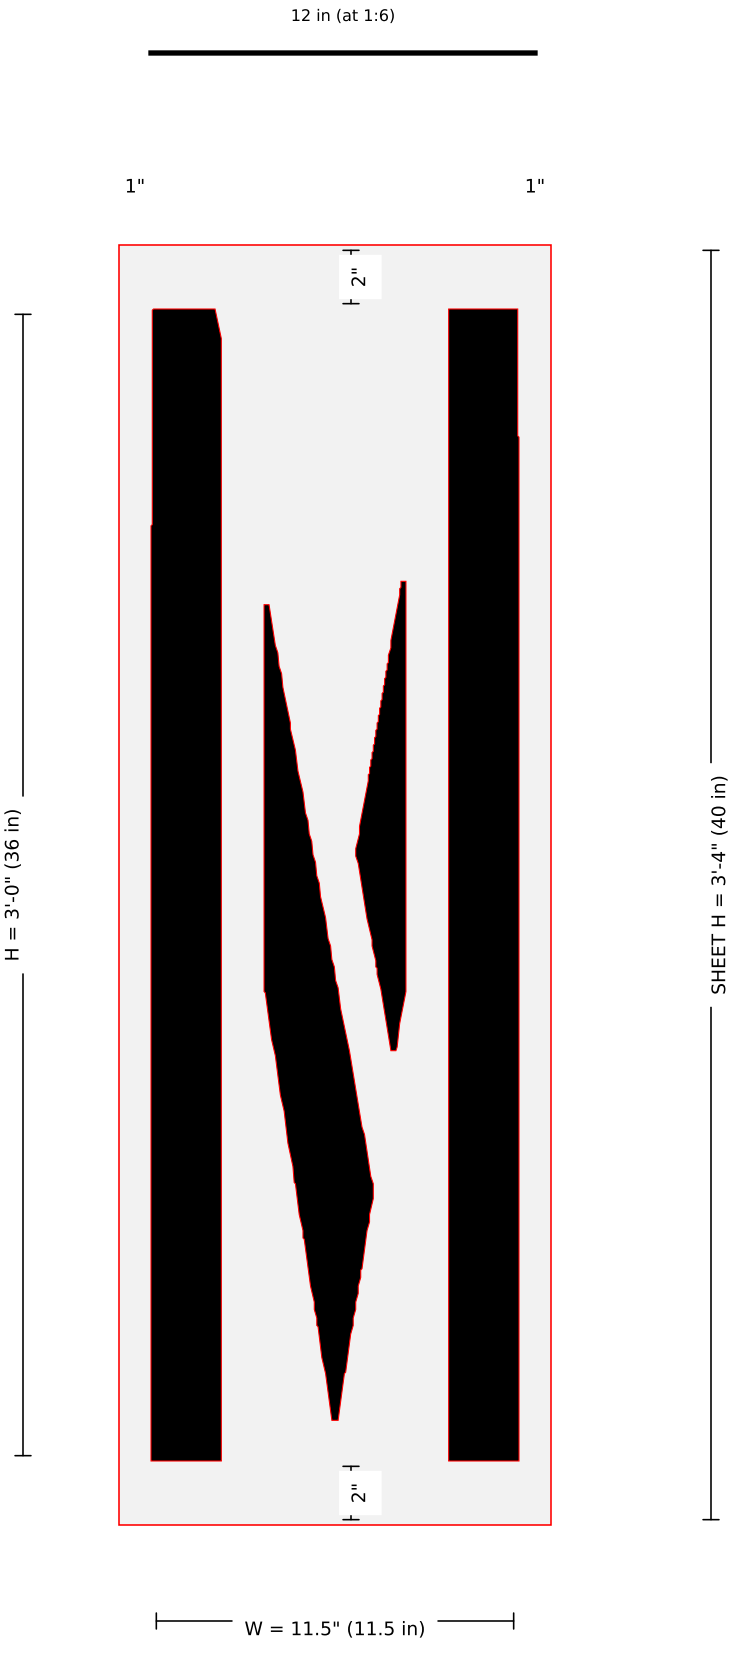



SHEET W = 1'-1.5" (13.5 in)

Pieces: 1 · sheet 13.5 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036M-36in-FAA-Airport-Letter-M-Stencil-42x16-2.jpg: width 11.5 from image scale (11.28); NOT the kit listing width; kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-N

36" FAA Airport "N" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 10 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

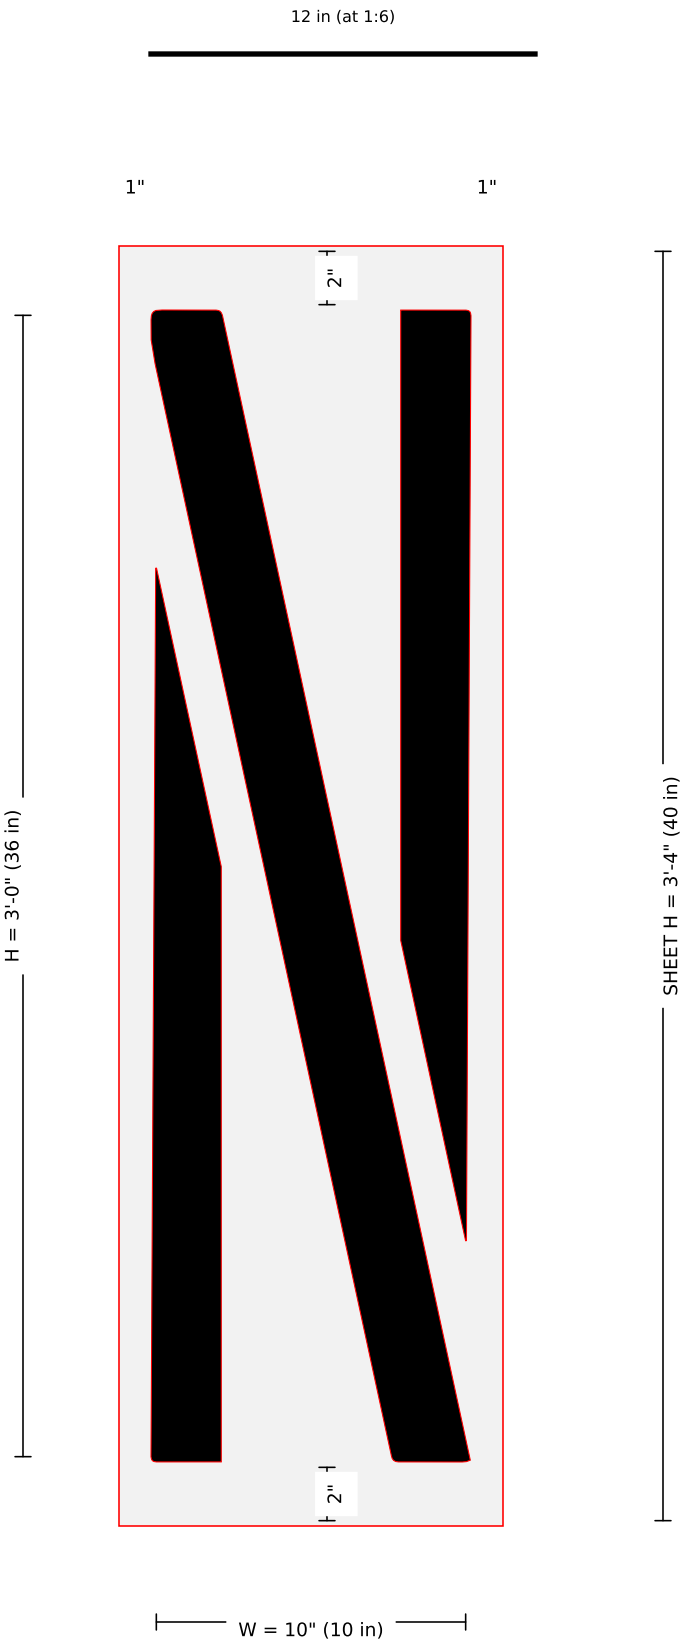



Pieces: 1 · sheet 12 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036N-36in-FAA-Airport-Letter-N-Stencil-42x16-2.jpg: width 10 from image scale (9.82); NOT the kit listing width; kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.07 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-O

36" FAA Airport "O" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 10.5 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

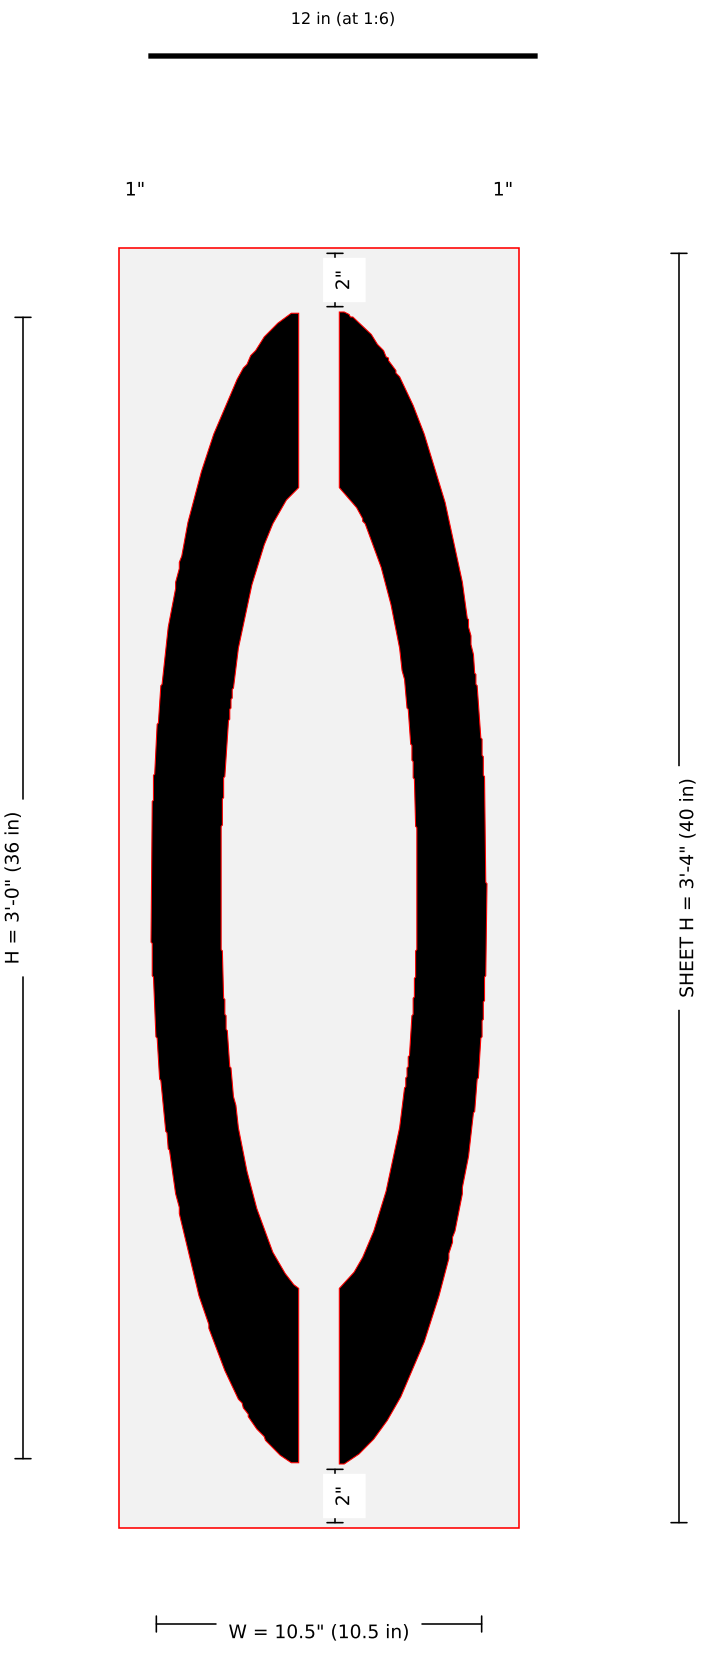



Pieces: 1 · sheet 12.5 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036O-36in-FAA-Airport-Letter-O-Stencil-42x16-2.jpg: width 10.5 from image scale (10.62); NOT the kit listing width; kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-P

36" FAA Airport "P" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 10 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

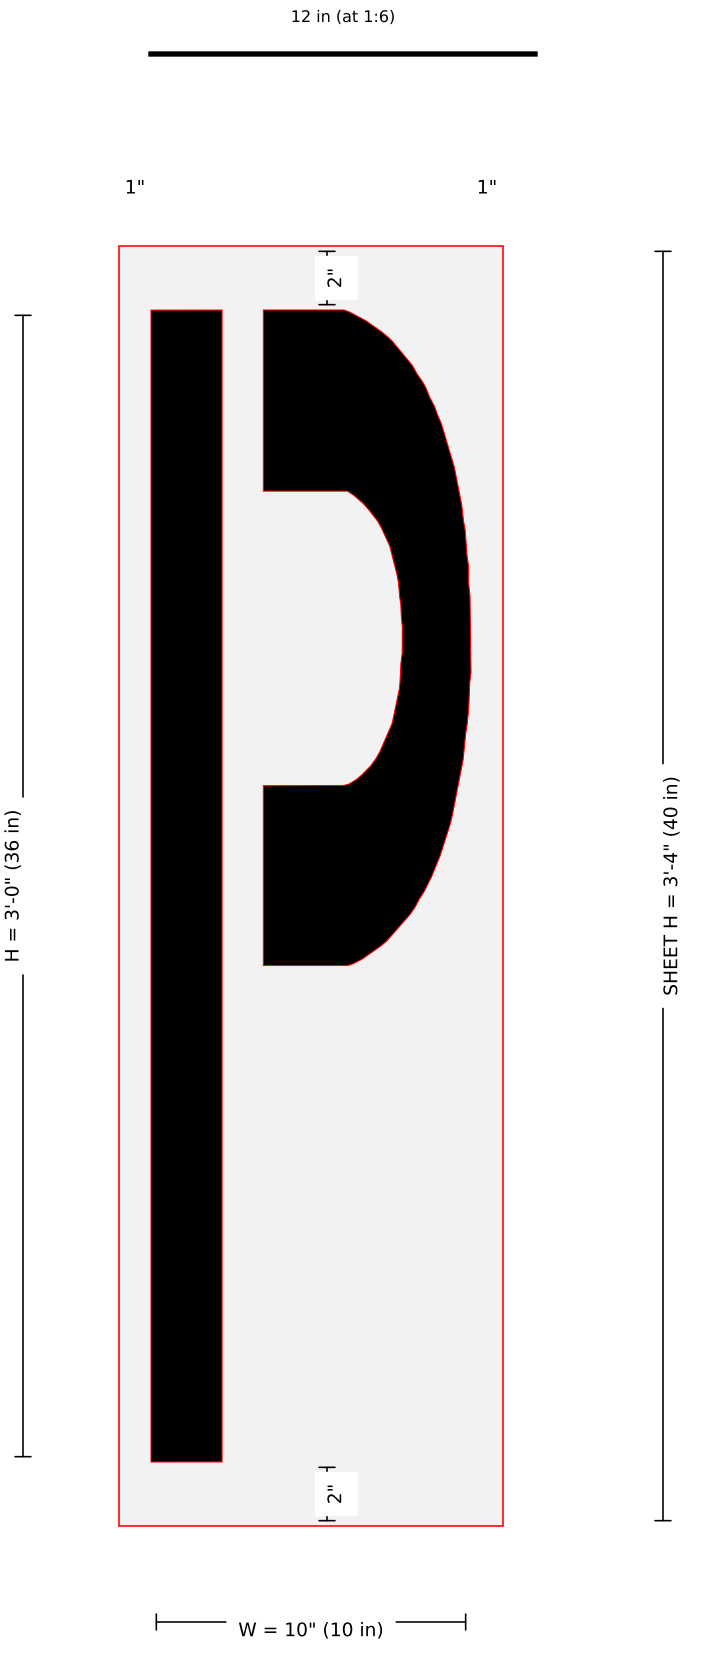



Pieces: 1 · sheet 12 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036P-36in-FAA-Airport-Letter-P-Stencil-42x16-2.jpg: width 10 from image scale (9.86); NOT the kit listing width; kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.07 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-Q

36" FAA Airport "Q" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 10 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

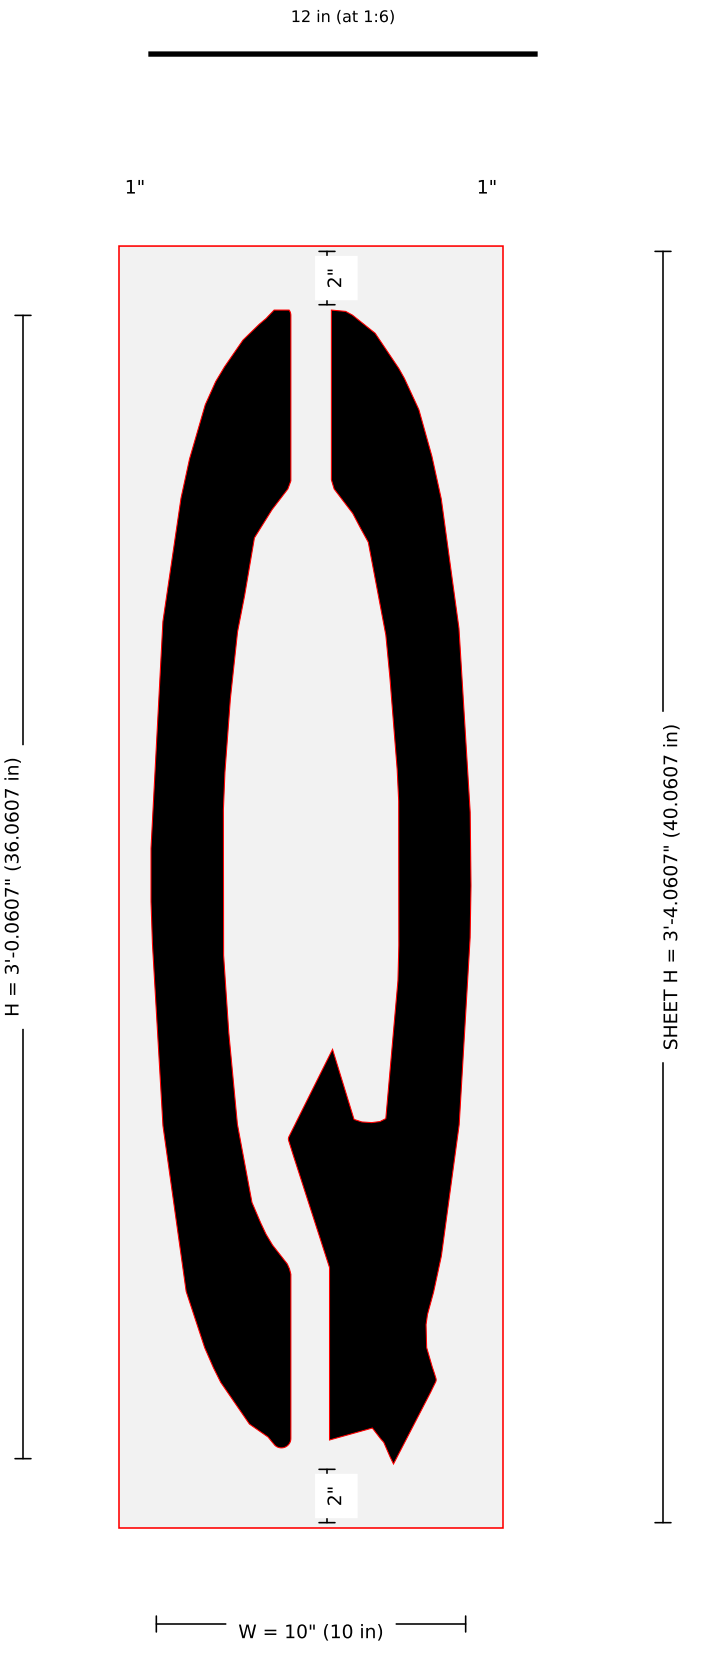



Pieces: 1 · sheet 12 x 40.061 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036Q-36in-FAA-Airport-Letter-Q-Stencil-42x16-2.jpg: width 10 from image scale (10.20); NOT the kit listing width; kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 8 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-R

36" FAA Airport "R" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 9.5 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

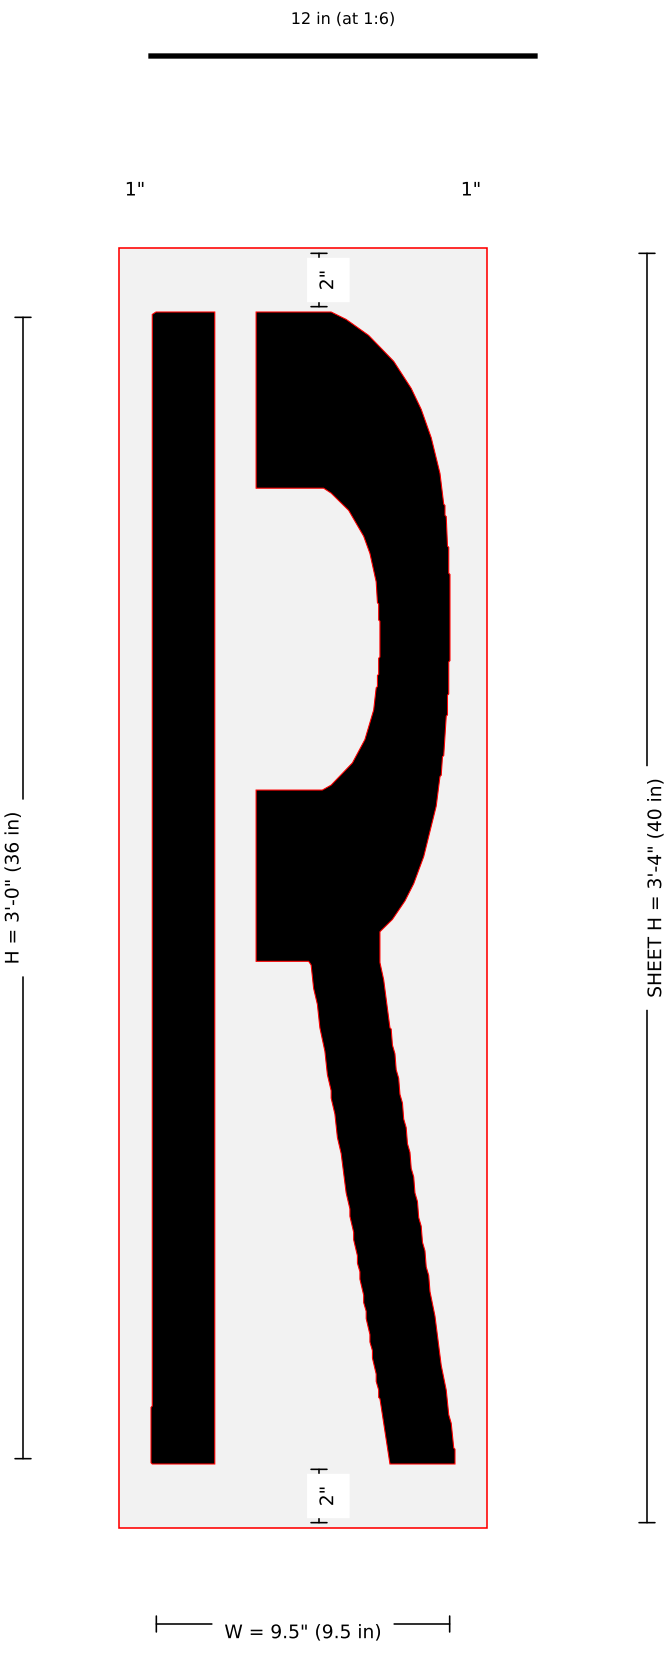



Pieces: 1 · sheet 11.5 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036R-36in-FAA-Airport-Letter-R-Stencil-42x16-2.jpg: width 9.5 from image scale (9.36); NOT the kit listing width; kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-S

36" FAA Airport "S" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 9.5 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

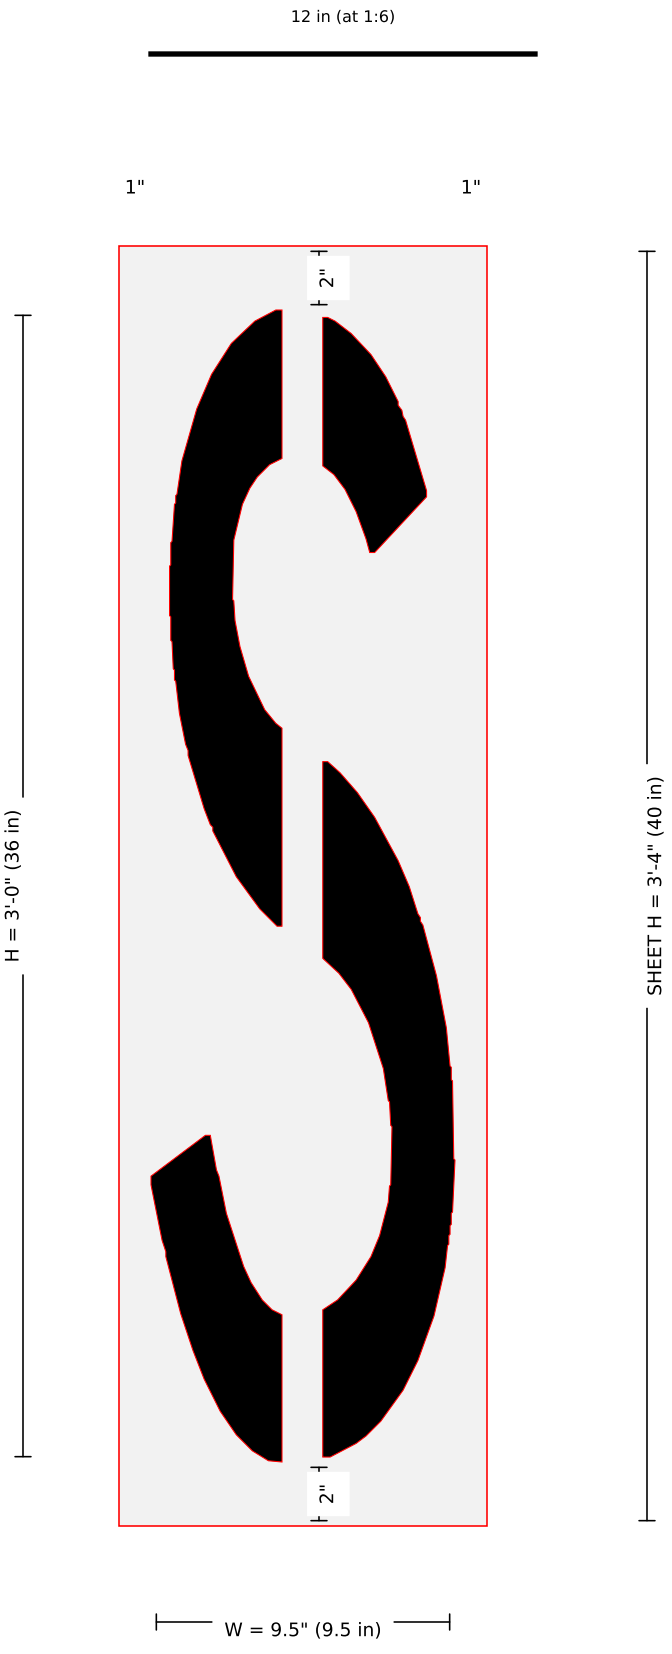



SHEET W = 11.5" (11.5 in)

Pieces: 1 · sheet 11.5 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036S-36in-FAA-Airport-Letter-S-Stencil-42x16-2.jpg: width 9.5 from image scale (9.51); NOT the kit listing width; kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-T

36" FAA Airport "T" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 9 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

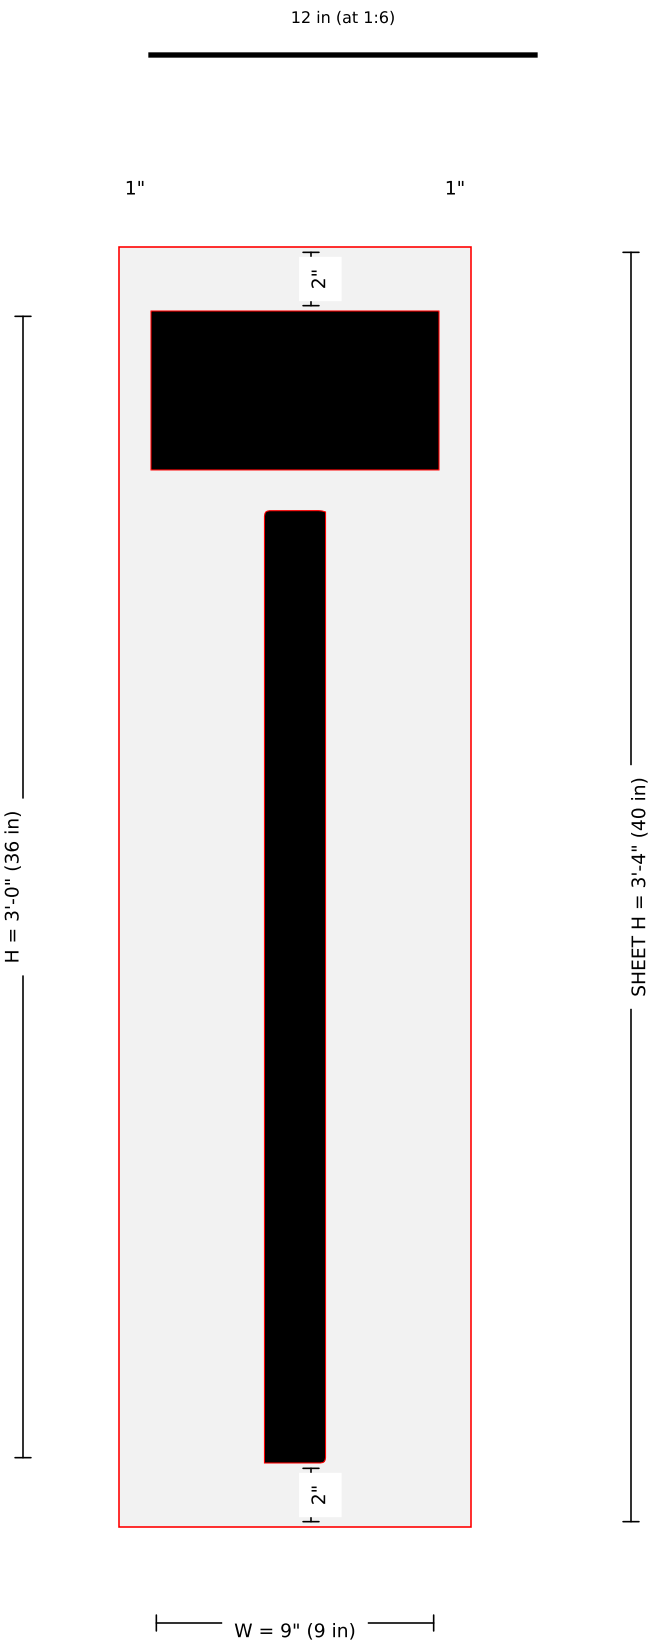



SHEET W = 11" (11 in)

Pieces: 1 · sheet 11 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036T-36in-FAA-Airport-Letter-T-Stencil-42x16-2.jpg: width 9 from image scale (8.89); NOT the kit listing width; kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.07 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-U

36" FAA Airport "U" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 10.5 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

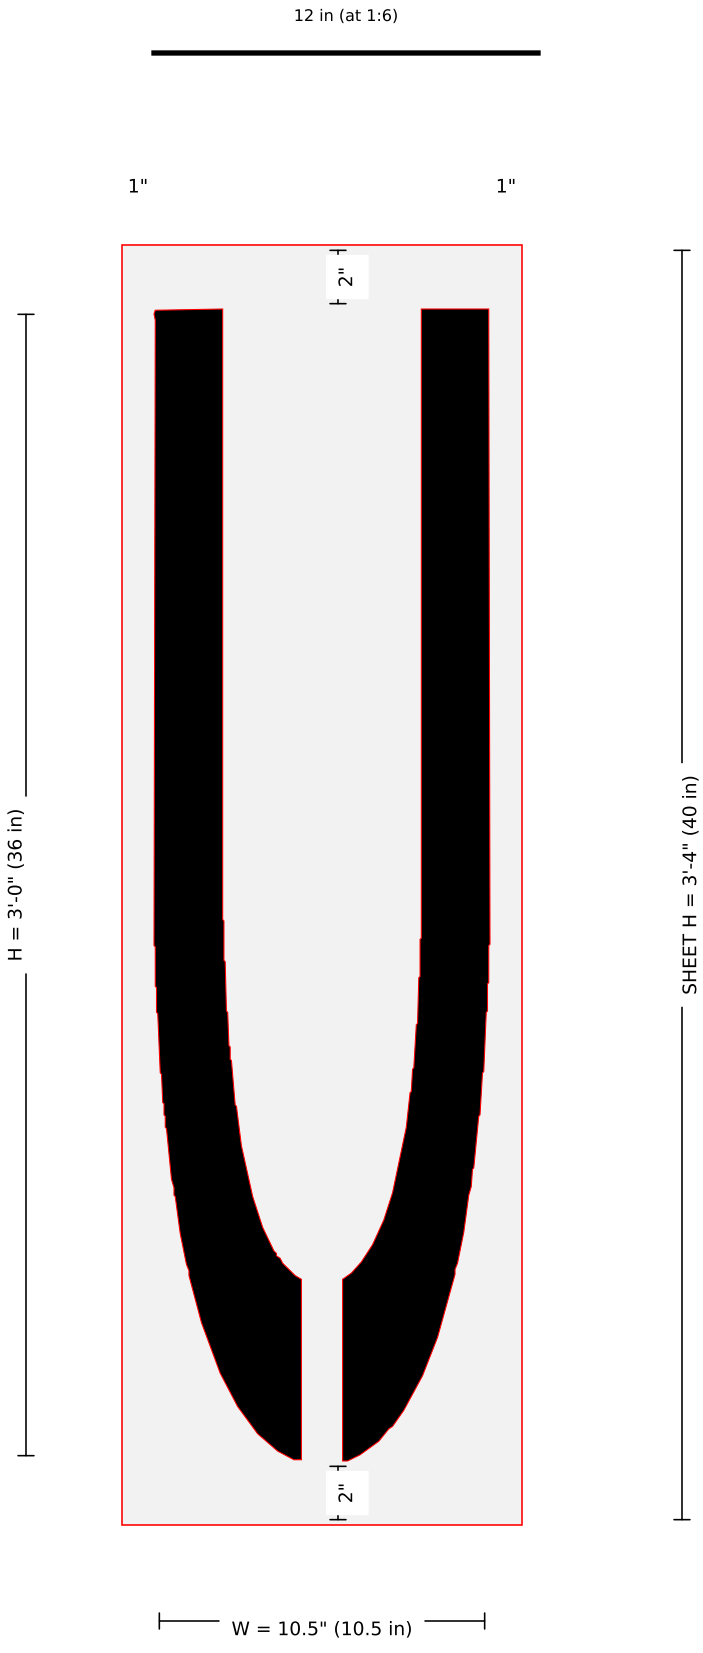




Pieces: 1 · sheet 12.5 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036U-36in-FAA-Airport-Letter-U-Stencil-42x16-2.jpg: width 10.5 from image scale (10.39); NOT the kit listing width; kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-V

36" FAA Airport "V" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 11.5 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

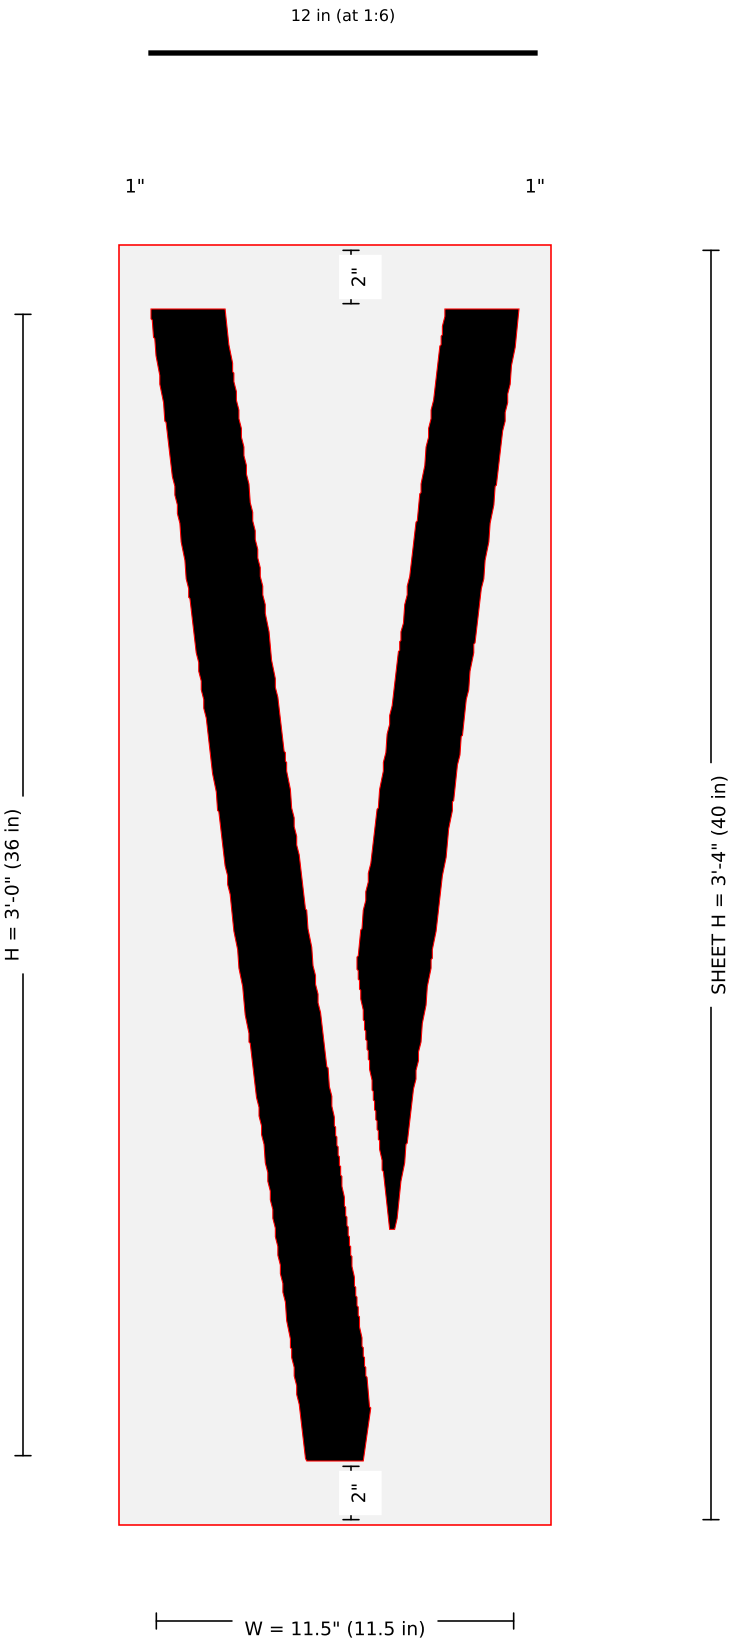



Pieces: 1 · sheet 13.5 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036V-36in-FAA-Airport-Letter-V-Stencil-42x16-2.jpg: width 11.5 from image scale (11.28); NOT the kit listing width; kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-W

36" FAA Airport "W" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 12.5 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut



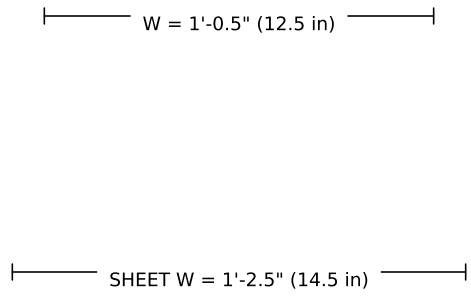




Pieces: 1 · sheet 14.5 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036W-36in-FAA-Airport-Letter-W-Stencil-42x16-2.jpg: width 12.5 from image scale (12.74); NOT the kit listing width; kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-X

36" FAA Airport "X" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 9.5 W x 36 H

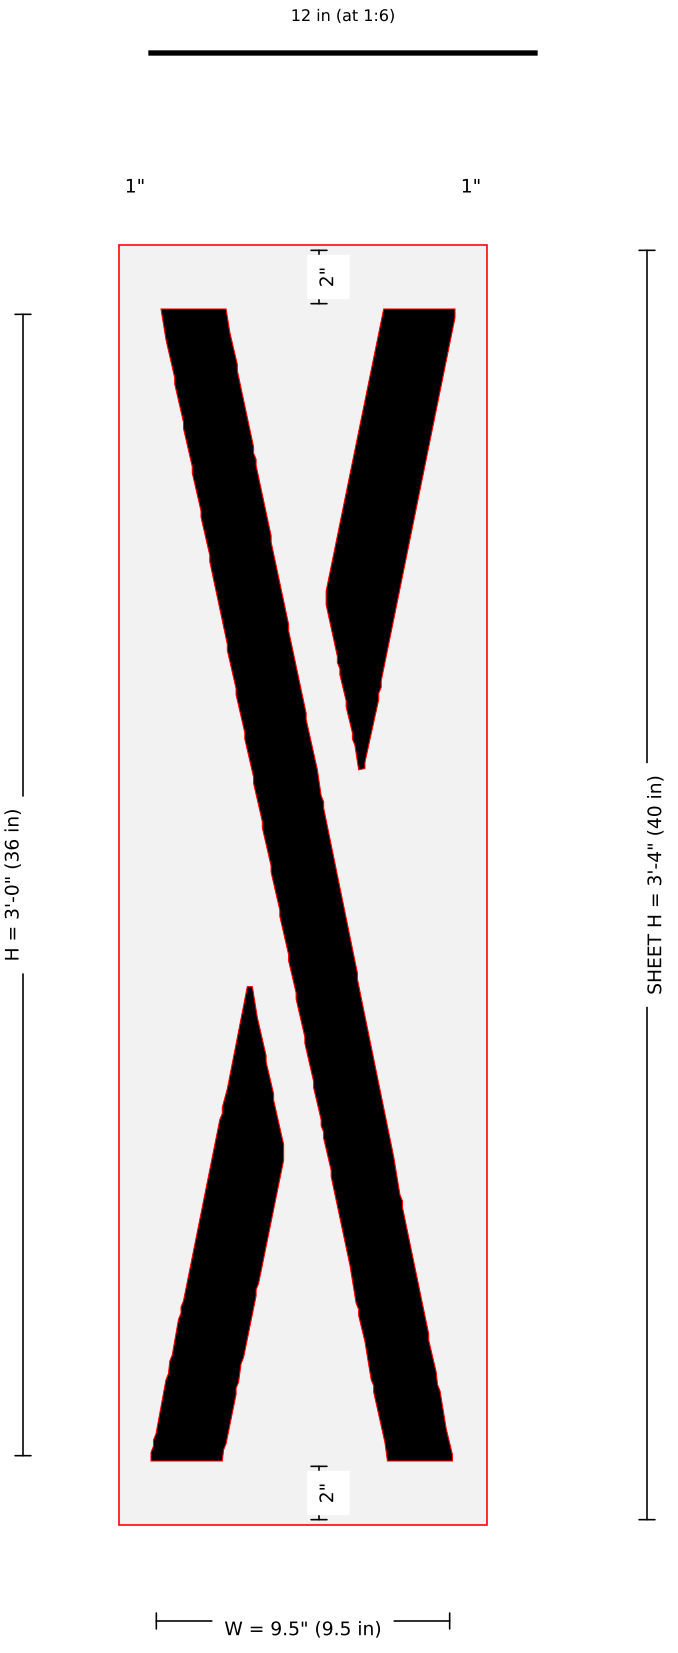Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut





Pieces: 1 · sheet 11.5 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036X-36in-FAA-Airport-Letter-X-Stencil-42x16-2.jpg: width 9.5 from image scale (9.36); NOT the kit listing width; kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-Y

36" FAA Airport "Y" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 12 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

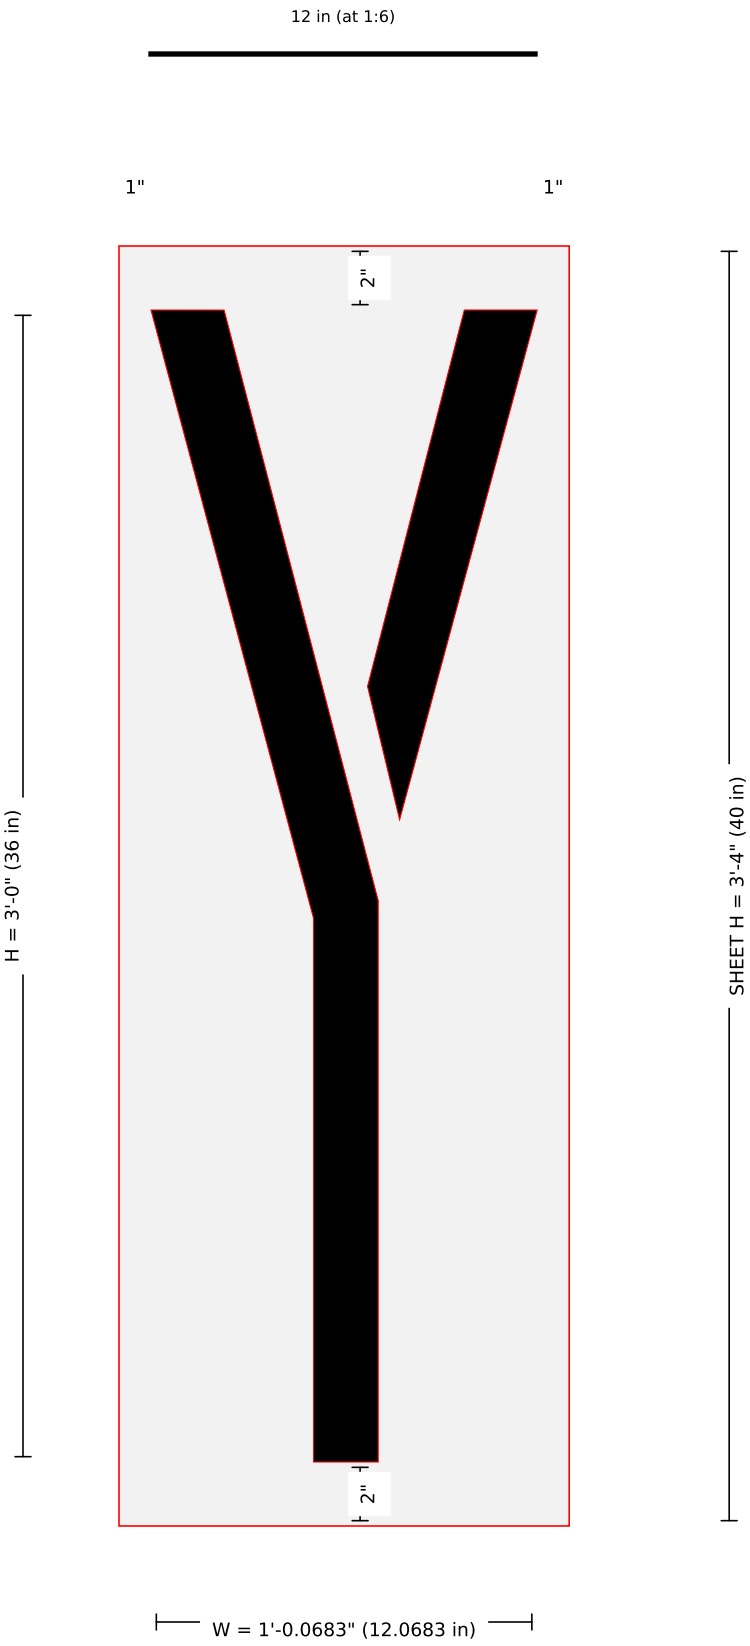




Pieces: 1 · sheet 14.068 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036Y-36in-FAA-Airport-Letter-Y-Stencil-42x16-2.jpg: width = kit listing 12 (image-scale 12.36); kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.07 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-Z

36" FAA Airport "Z" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 10 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

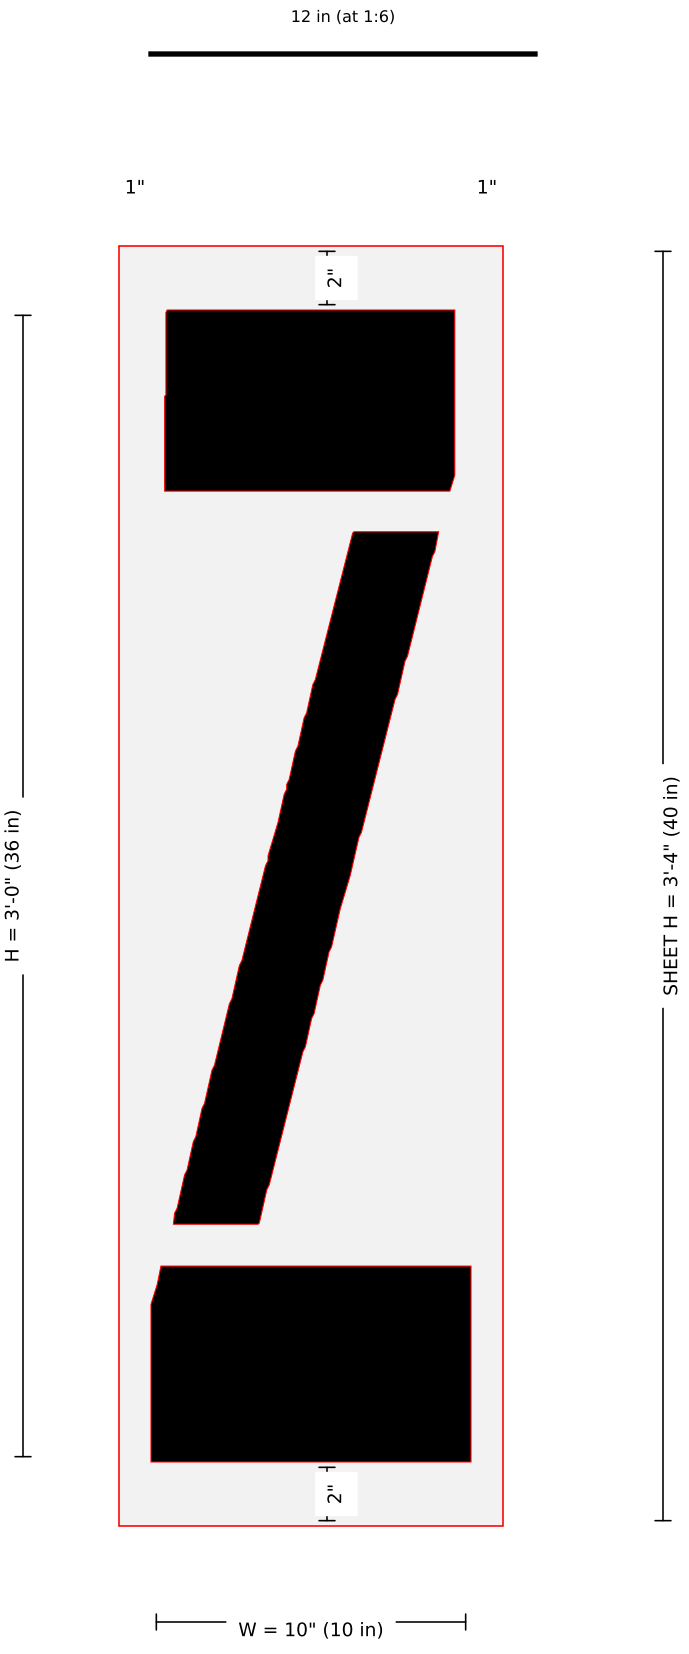






Pieces: 1 · sheet 12 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036Z-36in-FAA-Airport-Letter-Z-Stencil-42x16-2.jpg: width 10 from image scale (9.90); NOT the kit listing width; kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-0

36" FAA Airport "0" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 10 W x 36 H

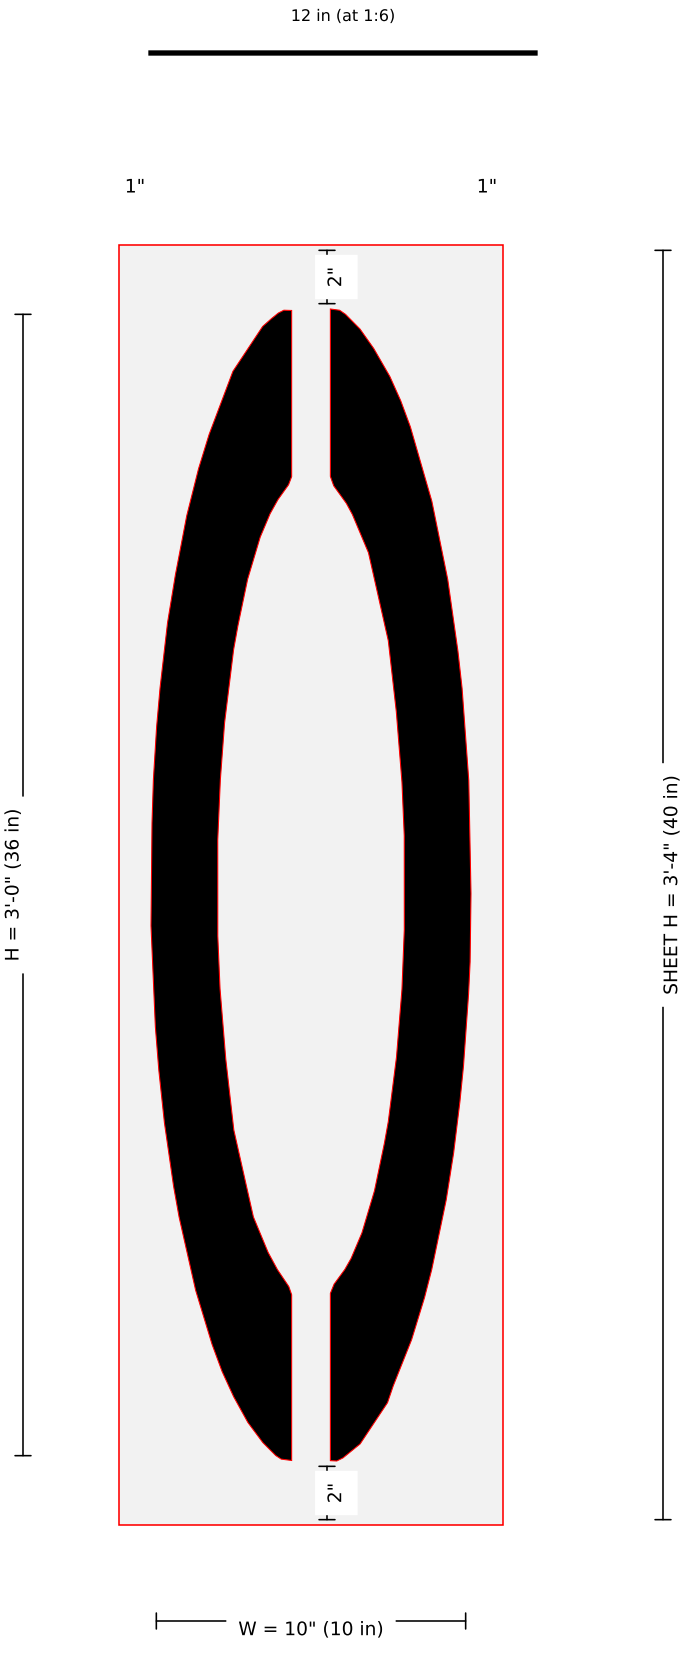Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut





Pieces: 1 · sheet 12 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-0360-36in-FAA-Airport-Number-0-Stencil-42x16-2.jpg: width = 1-800 image width label 10 in (image-scale 10.62); kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-1

36" FAA Airport "1" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 3 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

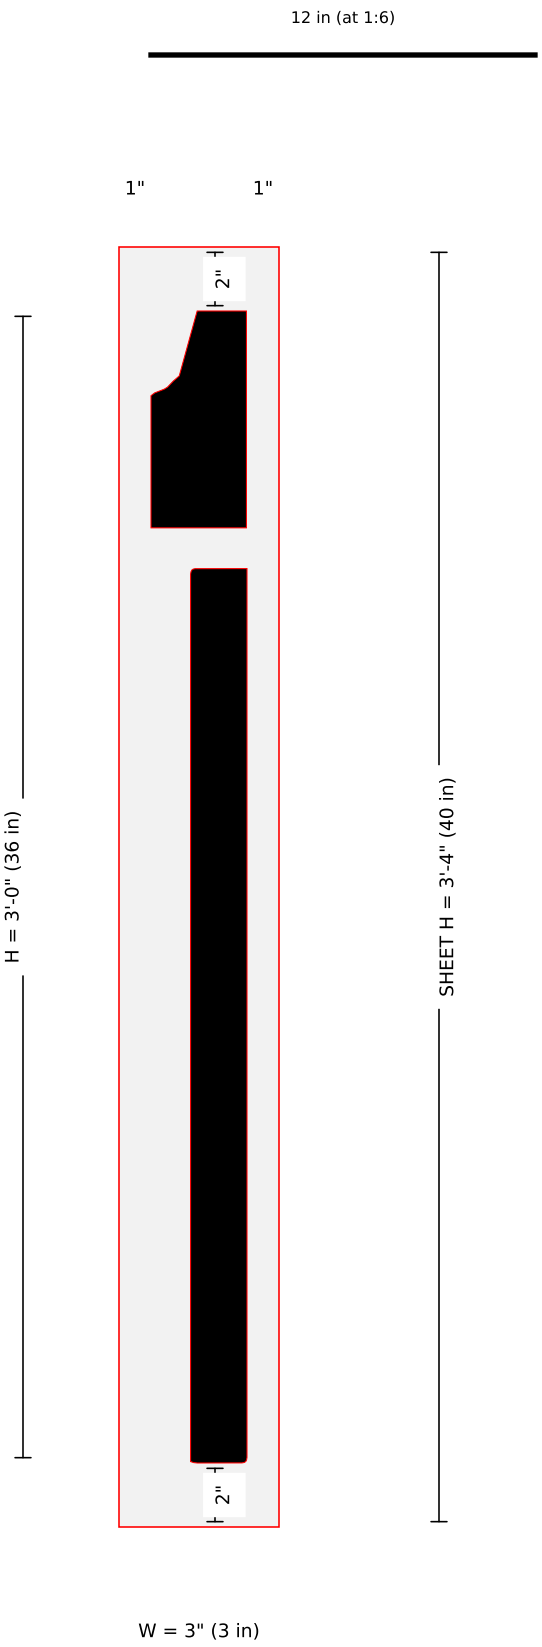



SHEET W = 5" (5 in)

Pieces: 1 · sheet 5 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-0361-36in-FAA-Airport-Number-1-Stencil-42x8-2.jpg: width = 1-800 image width label 3 in (image-scale 3.43); kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.07 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-2

36" FAA Airport "2" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 10 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

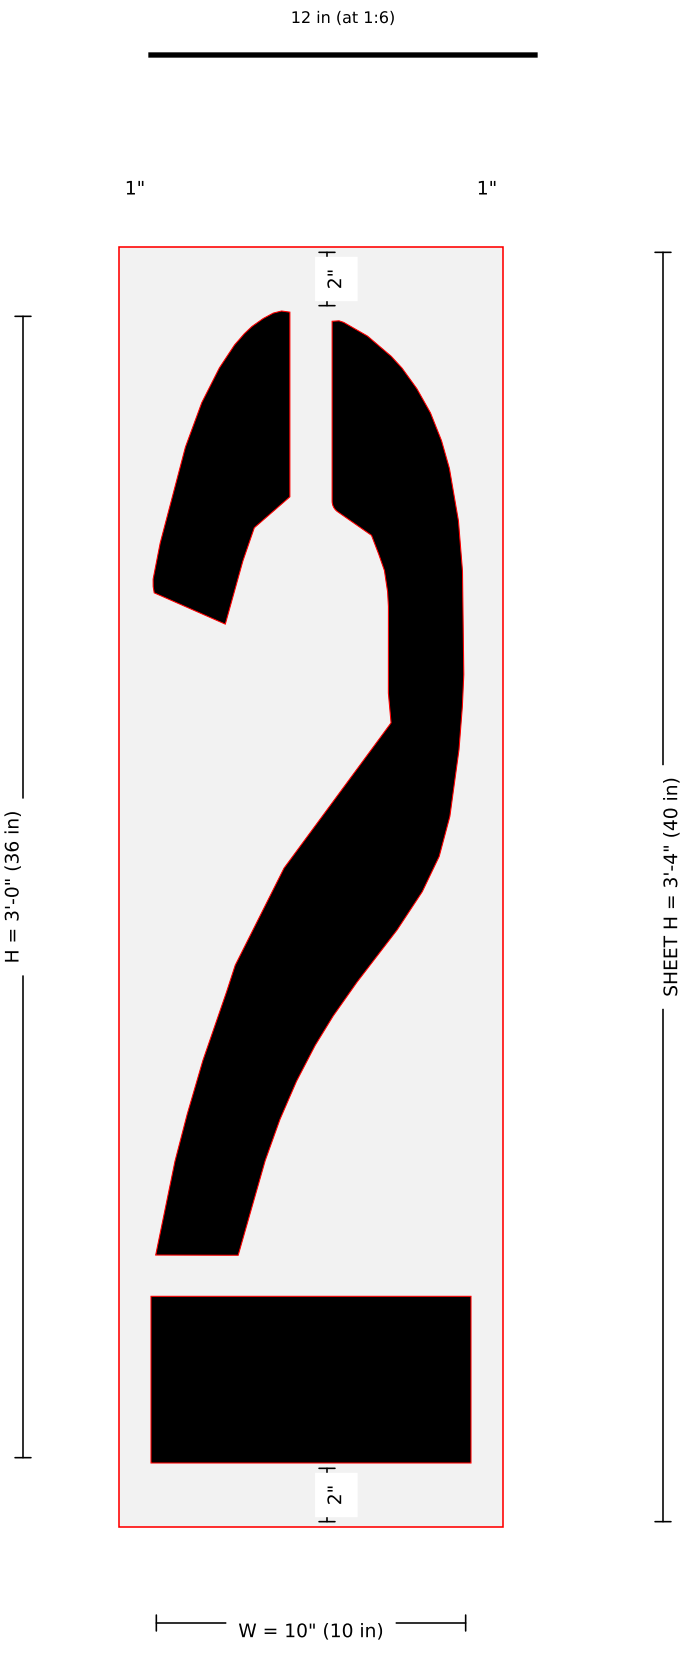



Pieces: 1 · sheet 12 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-0362-36in-FAA-Airport-Number-2-Stencil-42x16-2.jpg: width = 1-800 image width label 10 in (image-scale 9.67); kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-4

36" FAA Airport "4" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 11 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

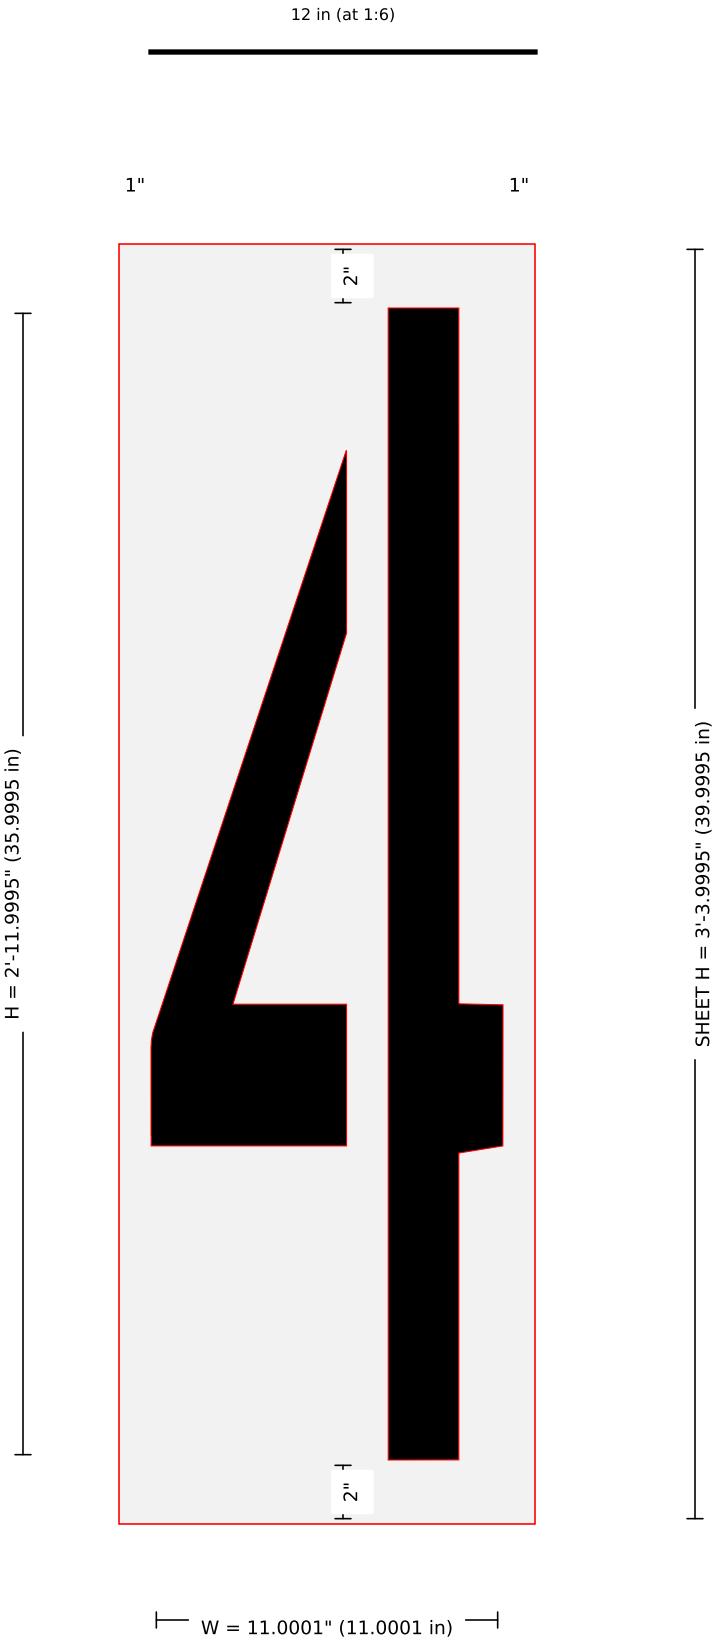



Pieces: 1 · sheet 13 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-0364-36in-FAA-Airport-Number-4-Stencil-42x16-2.jpg: width = 1-800 image width label 11 in (image-scale 10.74); kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.12 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-5

36" FAA Airport "5" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 9 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

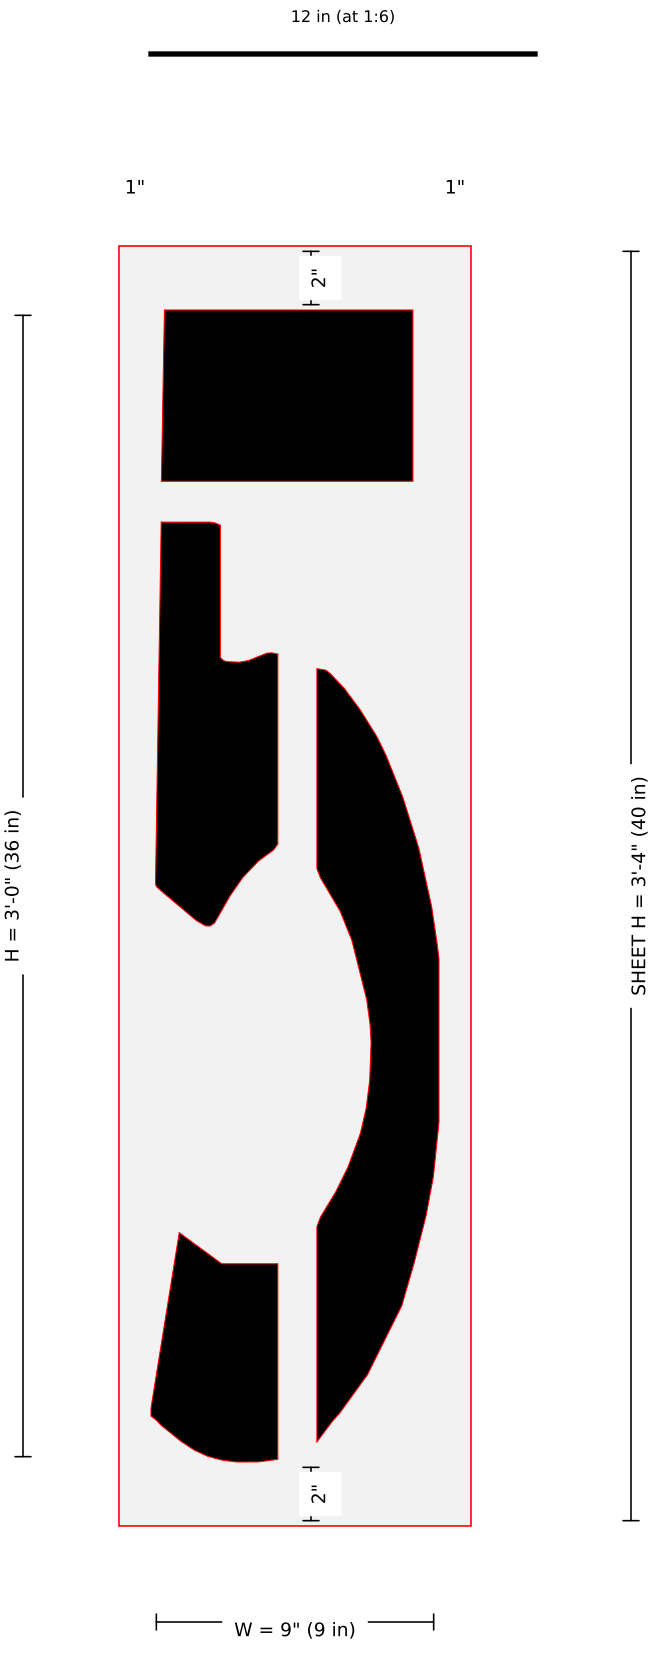



SHEET W = 11" (11 in)

Pieces: 1 · sheet 11 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-0365-36in-FAA-Airport-Number-5-Stencil-42x16-2.jpg: width = 1-800 image width label 9 in (image-scale 9.39); kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-6

36" FAA Airport "6" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 9 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

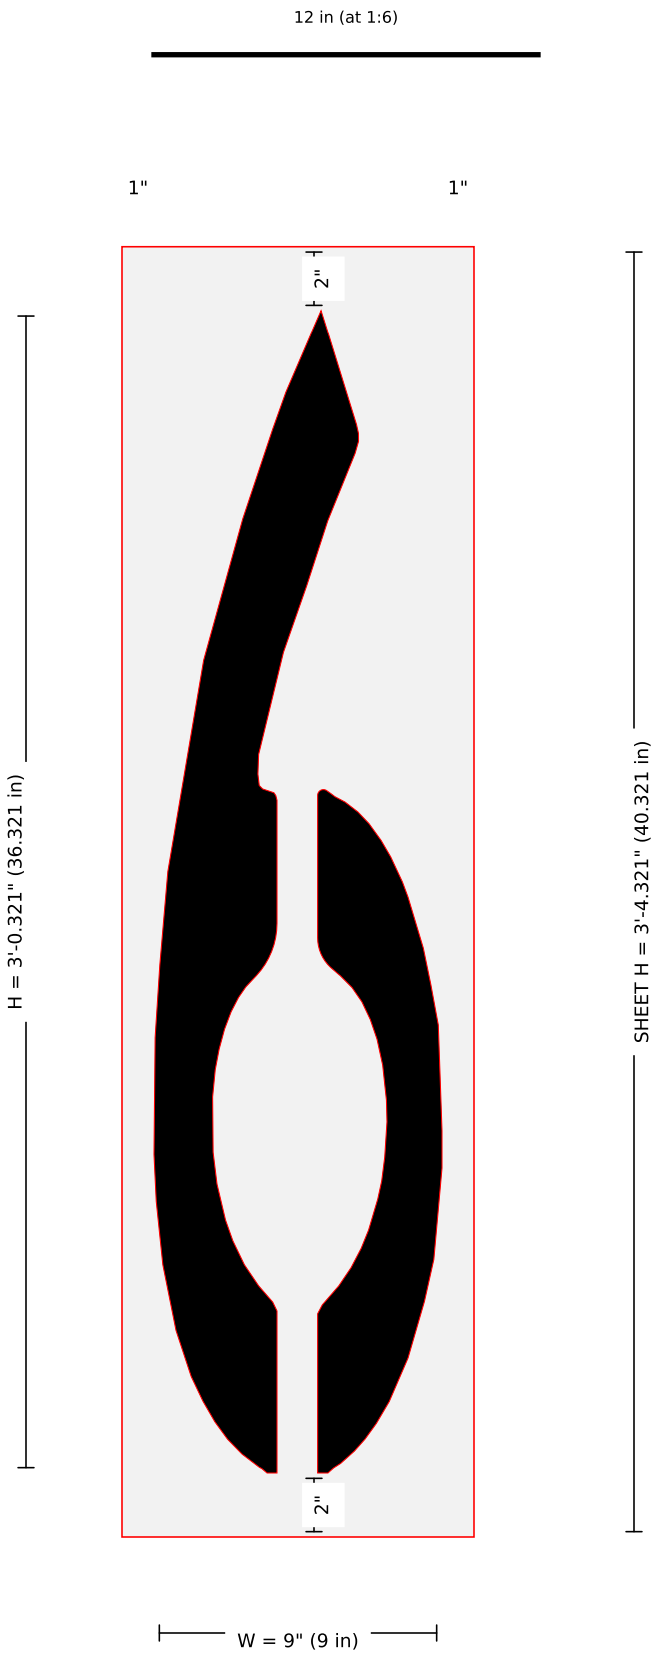



Pieces: 1 · sheet 11 x 40.321 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-0366-36in-FAA-Airport-Number-6-Stencil-42x16-2.jpg: width = 1-800 image width label 9 in (image-scale 9.44); kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 13 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-7

36" FAA Airport "7" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 10 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

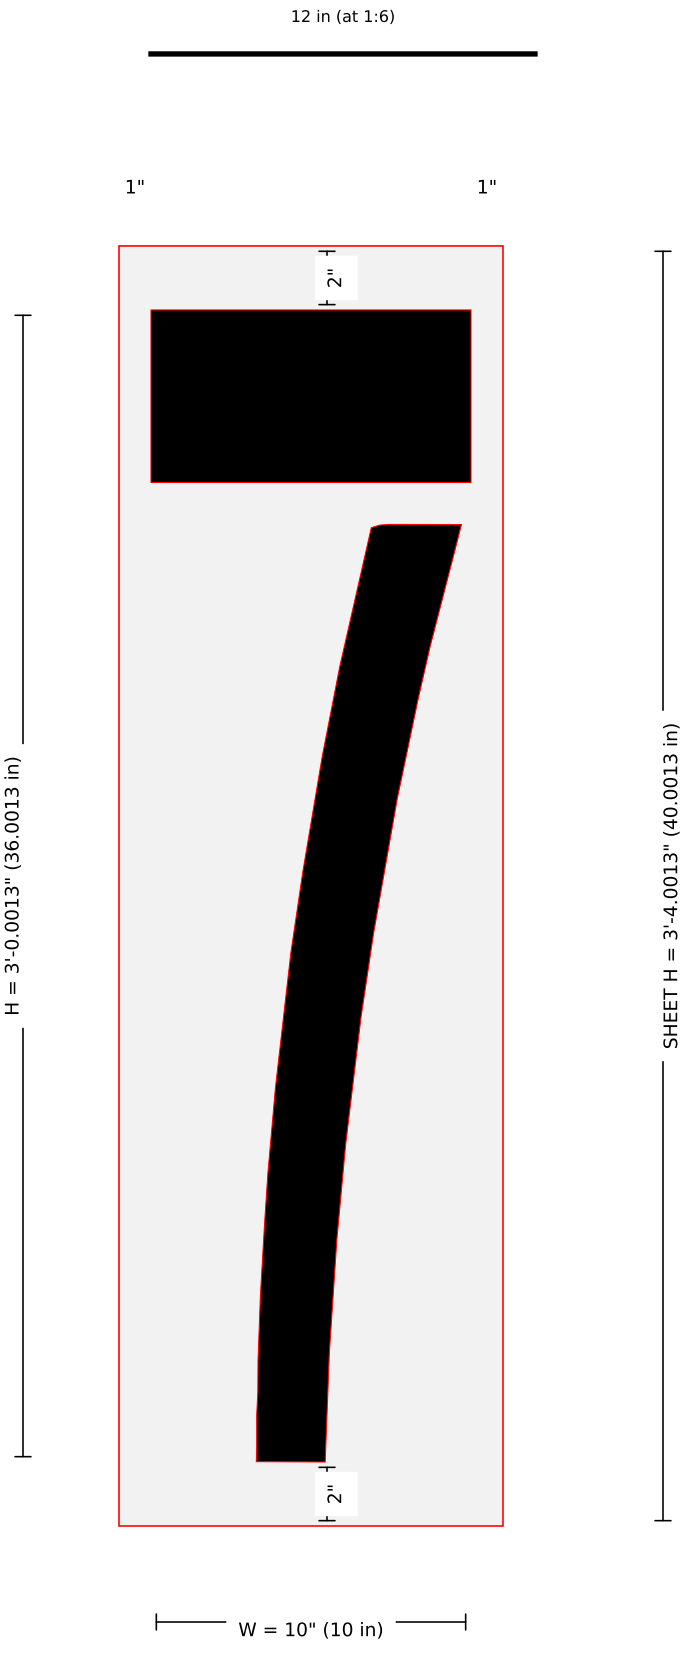



SHEET W = 1'-0" (12 in)

Pieces: 1 · sheet 12 x 40.001 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-0367-36in-FAA-Airport-Number-7-Stencil-42x16-2.jpg: width = 1-800 image width label 10 in (image-scale 9.66); kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-9

36" FAA Airport "9" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 9 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

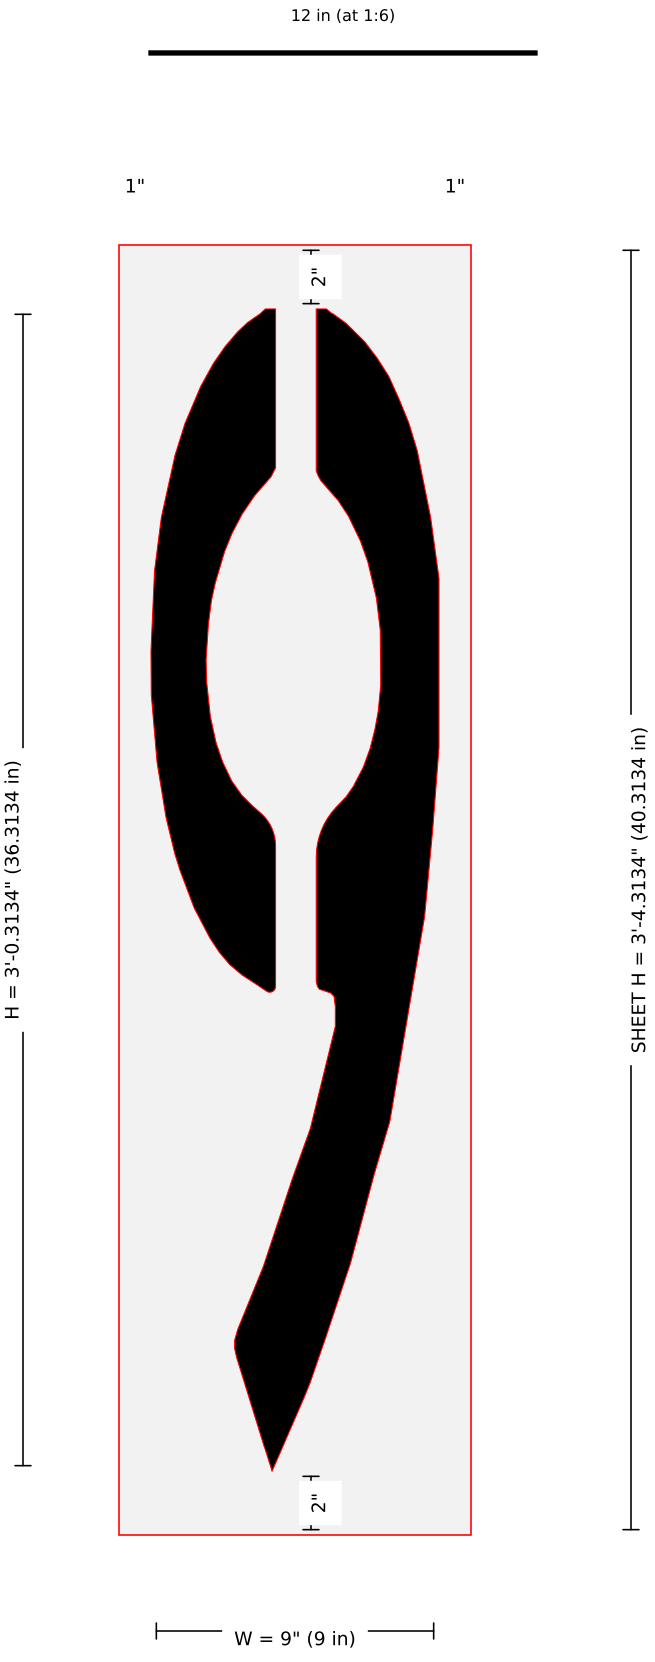



Pieces: 1 · sheet 11 x 40.313 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-0369-36in-FAA-Airport-Number-9-Stencil-42x16-2.jpg: width = 1-800 image width label 9 in (image-scale 9.44); kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 13 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-B

36" FAA Airport "B" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 9 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

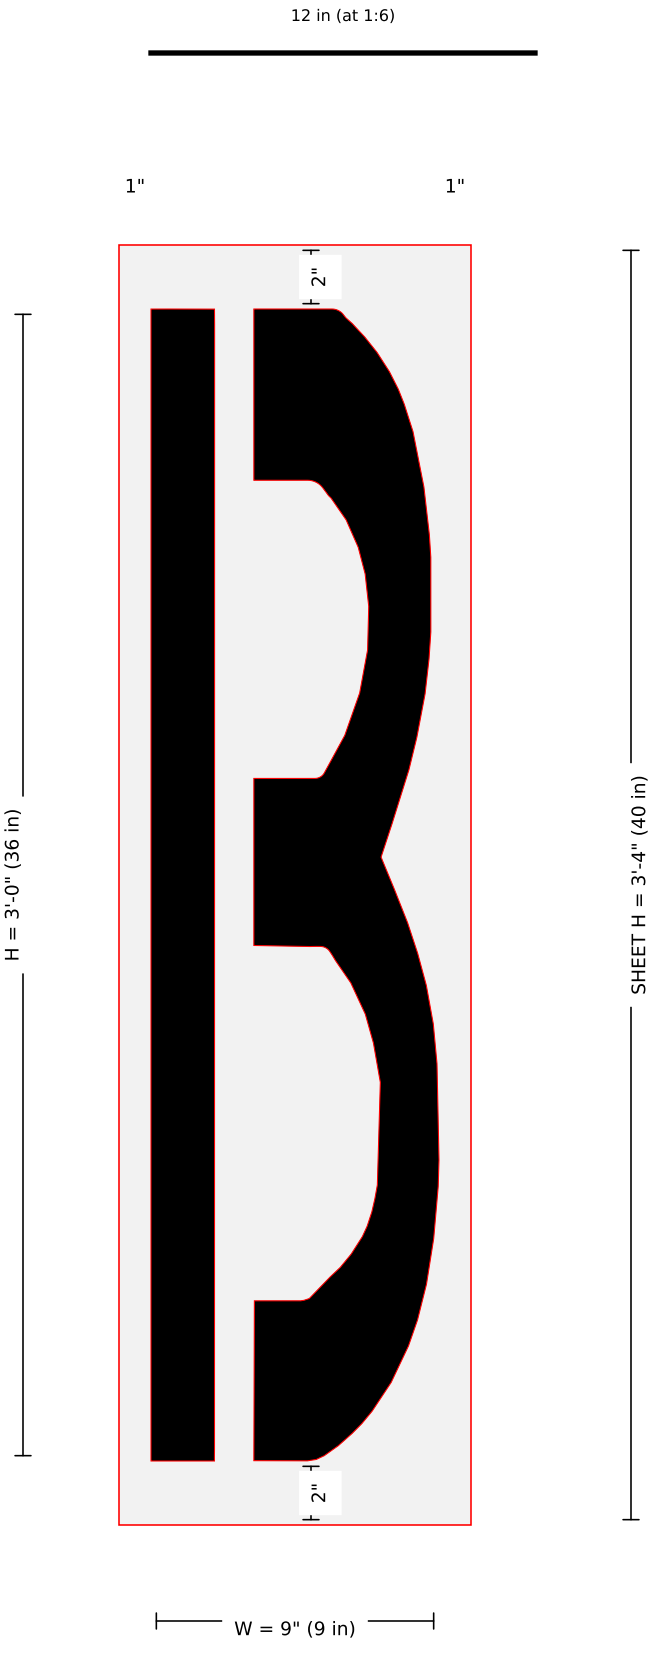



Pieces: 1 · sheet 11 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036B-36in-FAA-Airport-Letter-B-Stencil-42x16-2.jpg: width = 1-800 image width label 9 in (image-scale 9.36); kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 16 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-C

36" FAA Airport "C" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 9 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

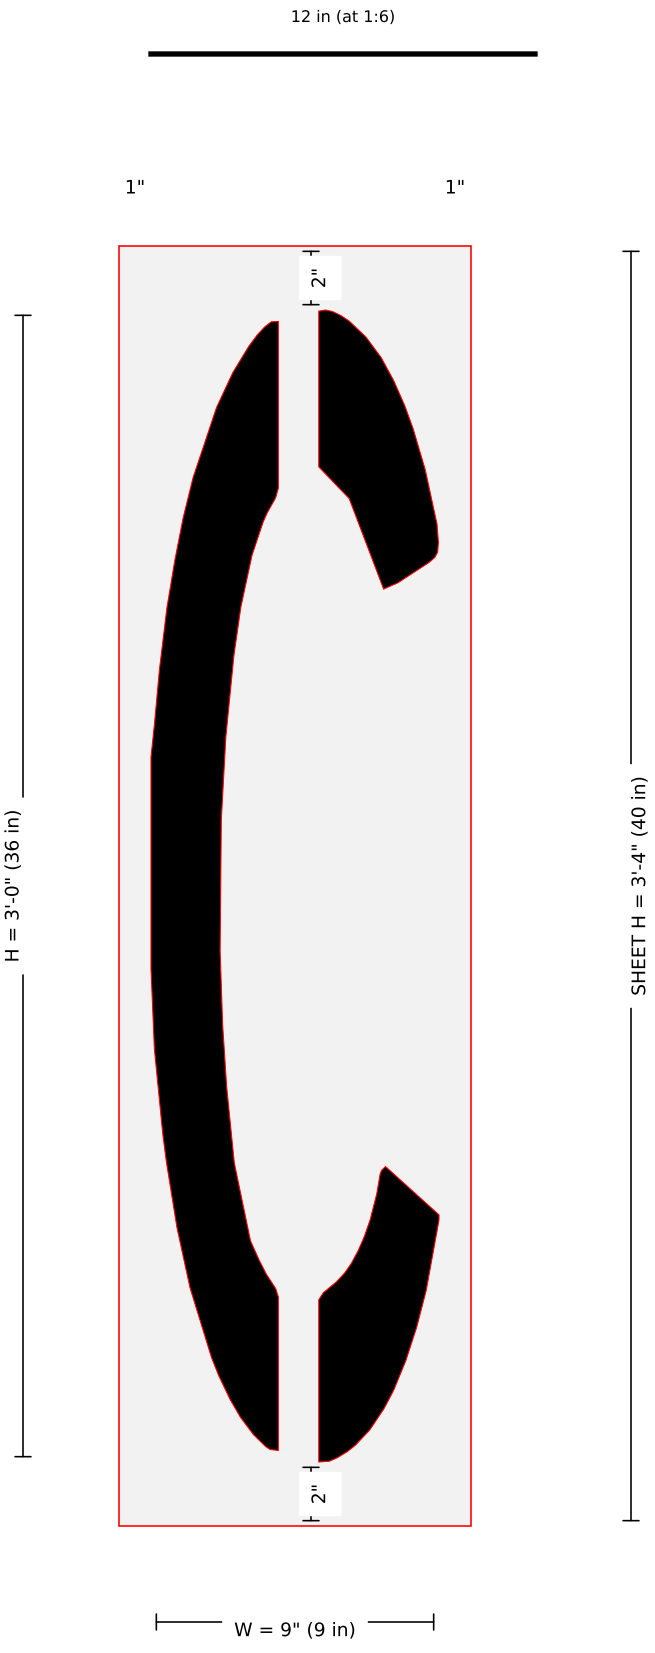



Pieces: 1 · sheet 11 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036C-36in-FAA-Airport-Letter-C-Stencil-42x16-2.jpg: width = 1-800 image width label 9 in (image-scale 9.38); kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-D

36" FAA Airport "D" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 9 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

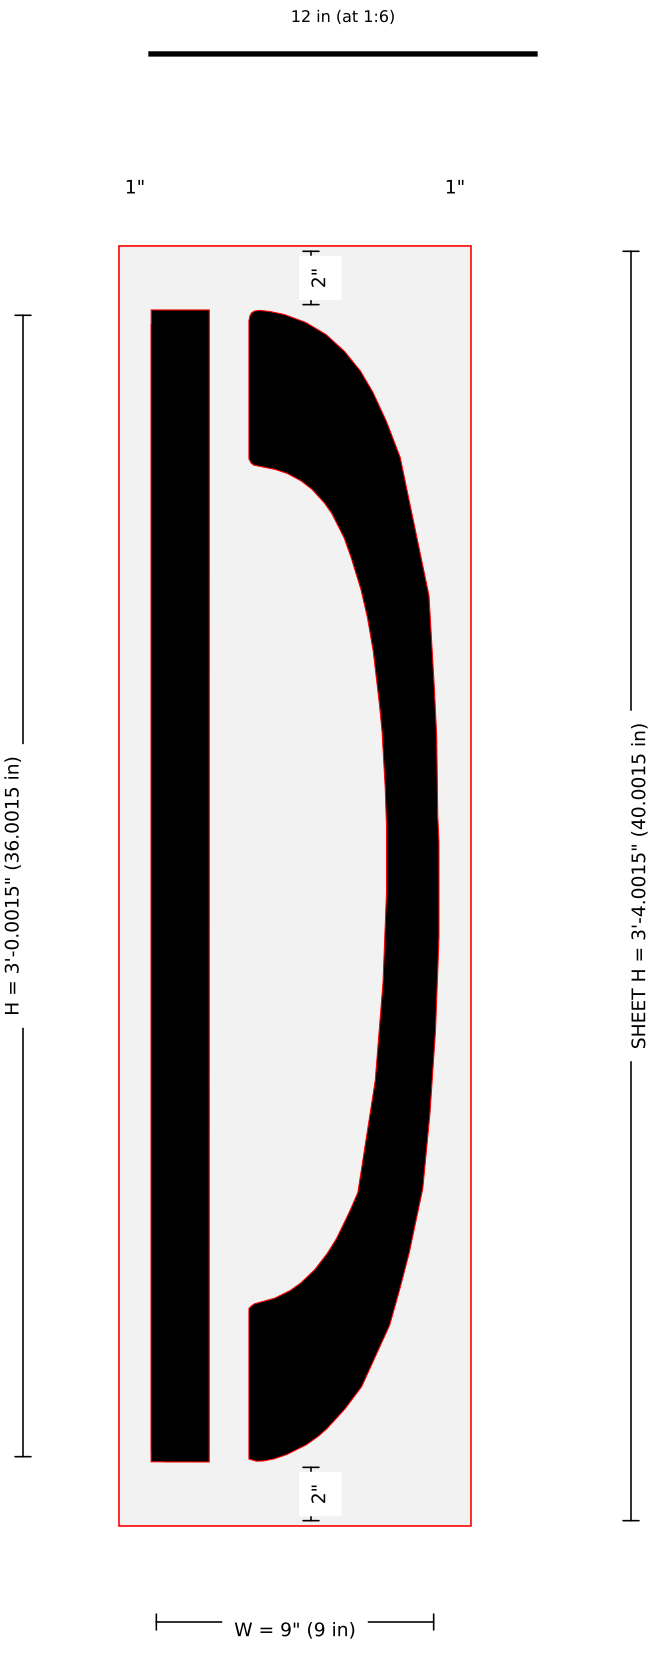



Pieces: 1 · sheet 11 x 40.001 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036D-36in-FAA-Airport-Letter-D-Stencil-42x16-2.jpg: width = 1-800 image width label 9 in (image-scale 9.51); kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-E

36" FAA Airport "E" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 9 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

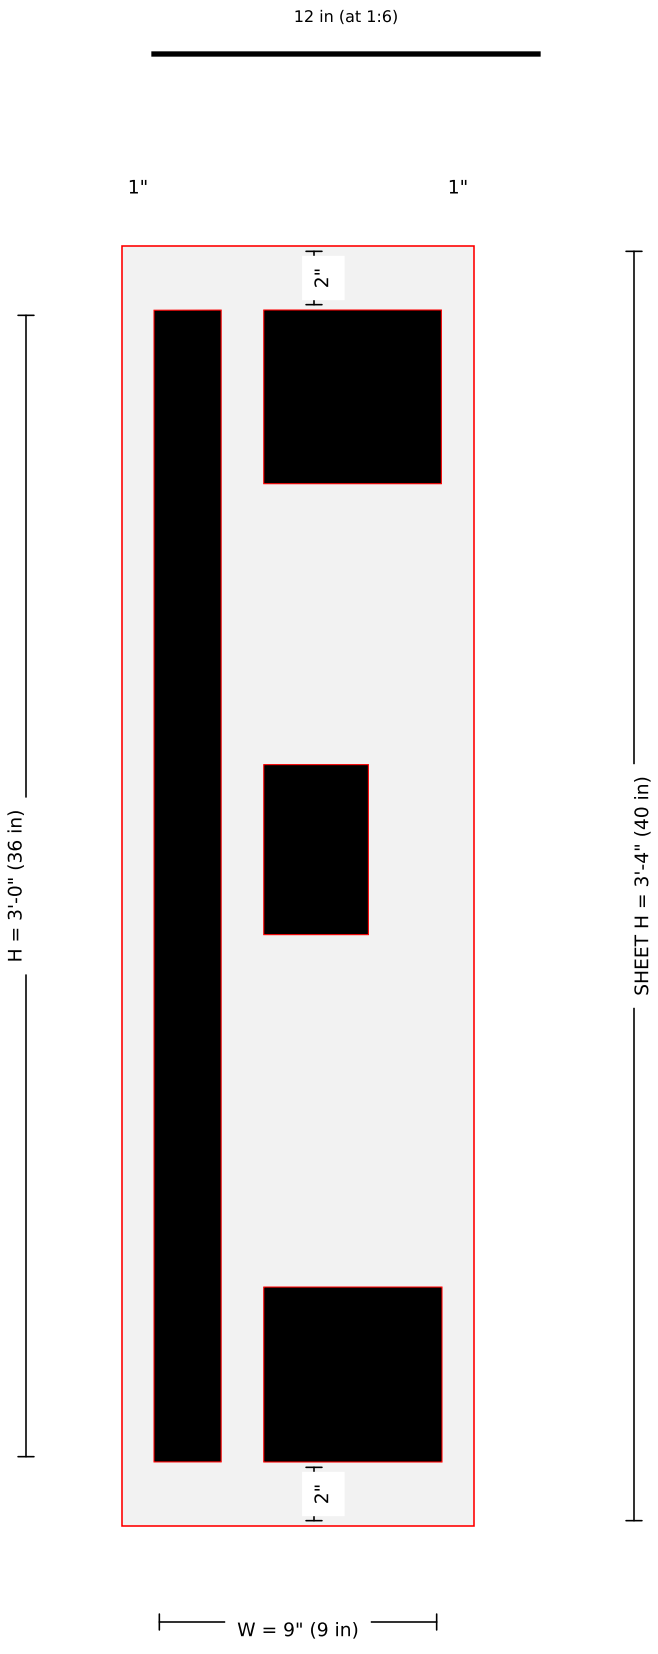



SHEET W = 11" (11 in)

Pieces: 1 · sheet 11 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036E-36in-FAA-Airport-Letter-E-Stencil-42x16-2.jpg: width = 1-800 image width label 9 in (image-scale 8.59); kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.07 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-F

36" FAA Airport "F" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 9 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

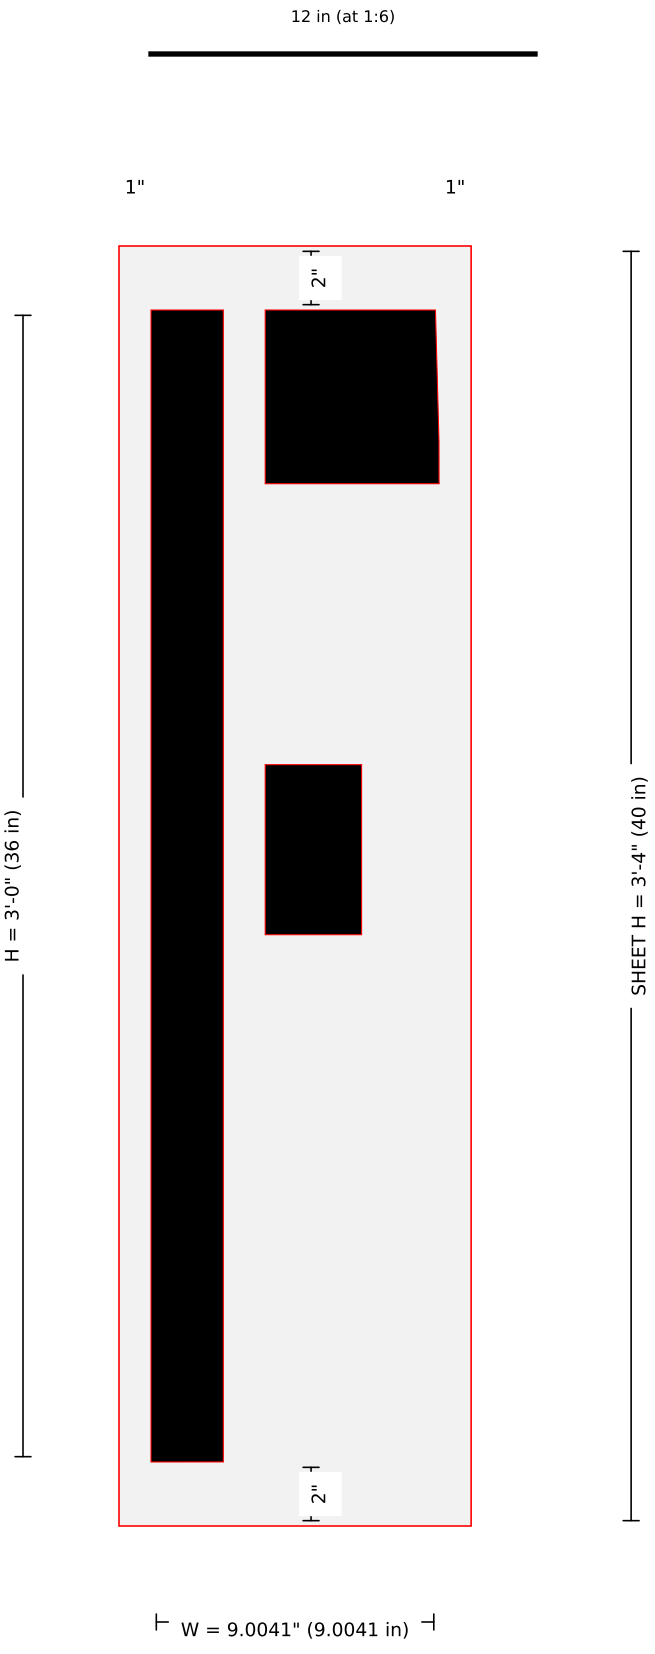



Pieces: 1 · sheet 11.004 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036F-36in-FAA-Airport-Letter-F-Stencil-42x16-2.jpg: width = 1-800 image width label 9 in (image-scale 8.74); kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.07 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-H

36" FAA Airport "H" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 10 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

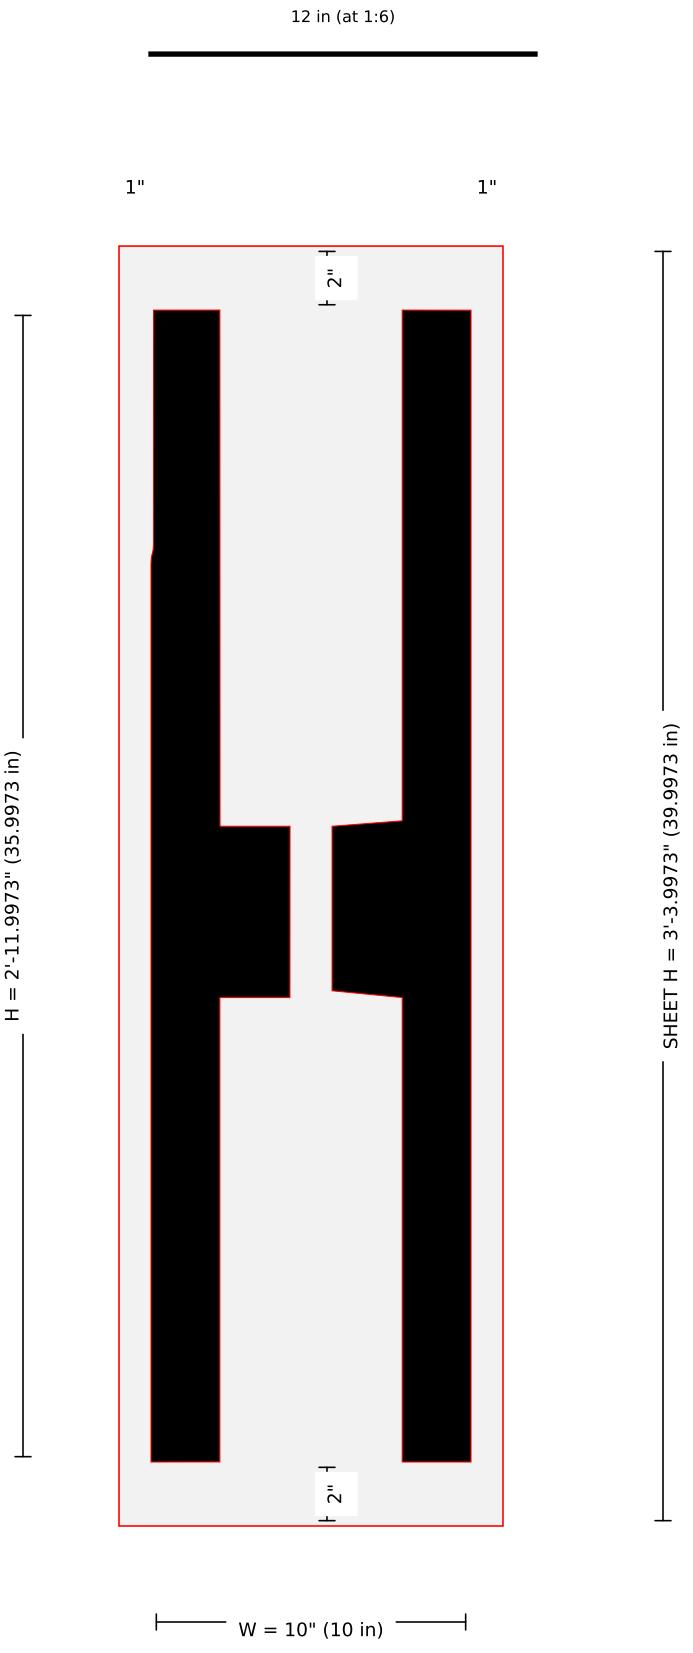



Pieces: 1 · sheet 12 x 39.997 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036H-36in-FAA-Airport-Letter-H-Stencil-42x16-2.jpg: width = 1-800 image width label 10 in (image-scale 9.66); kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.07 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-M

36" FAA Airport "M" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 11 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

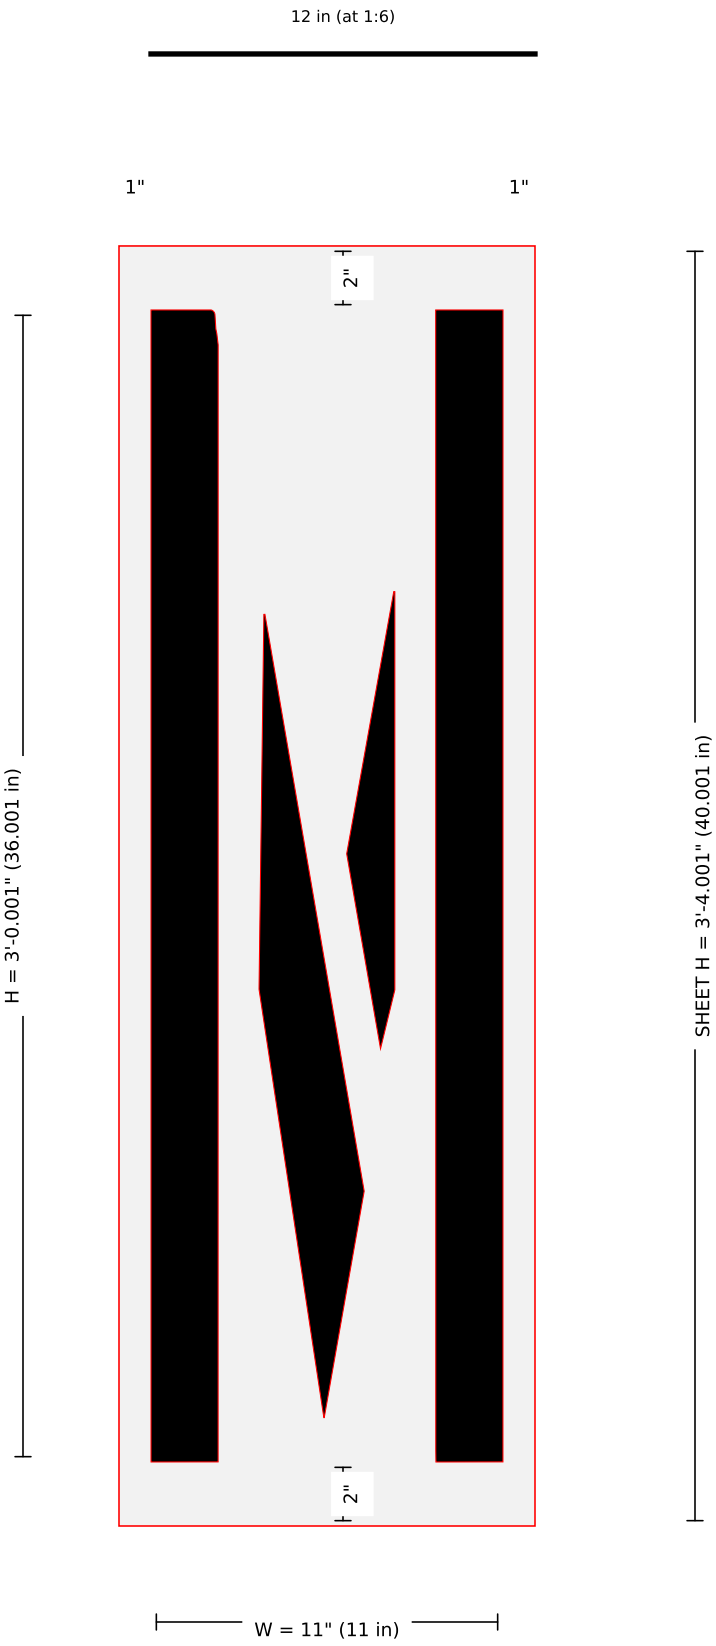



Pieces: 1 · sheet 13 x 40.001 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036M-36in-FAA-Airport-Letter-M-Stencil-42x16-2.jpg: width = 1-800 image width label 11 in (image-scale 11.28); kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 1 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-O

36" FAA Airport "O" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 10 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

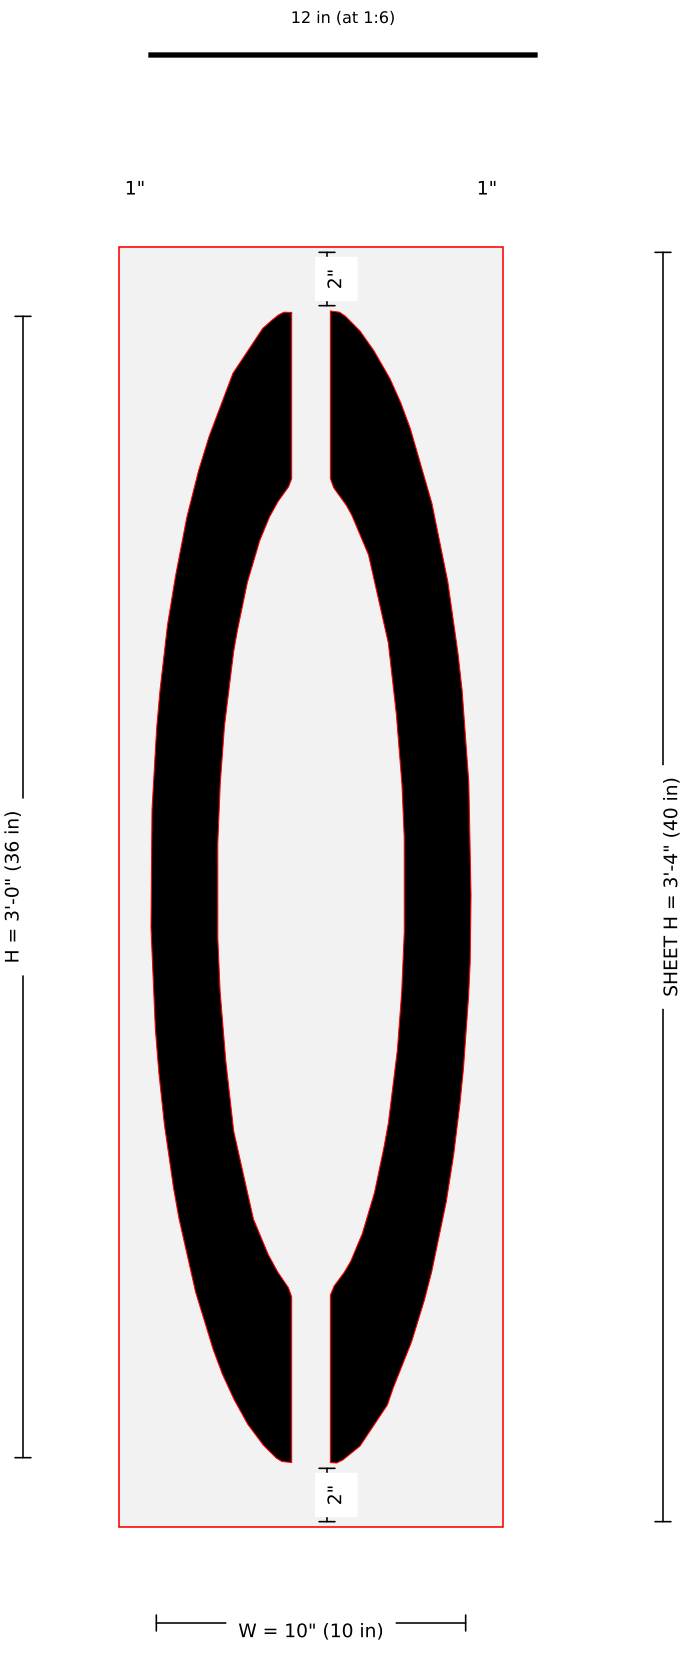



Pieces: 1 · sheet 12 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036O-36in-FAA-Airport-Letter-O-Stencil-42x16-2.jpg: width = 1-800 image width label 10 in (image-scale 10.62); kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-R

36" FAA Airport "R" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 9 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

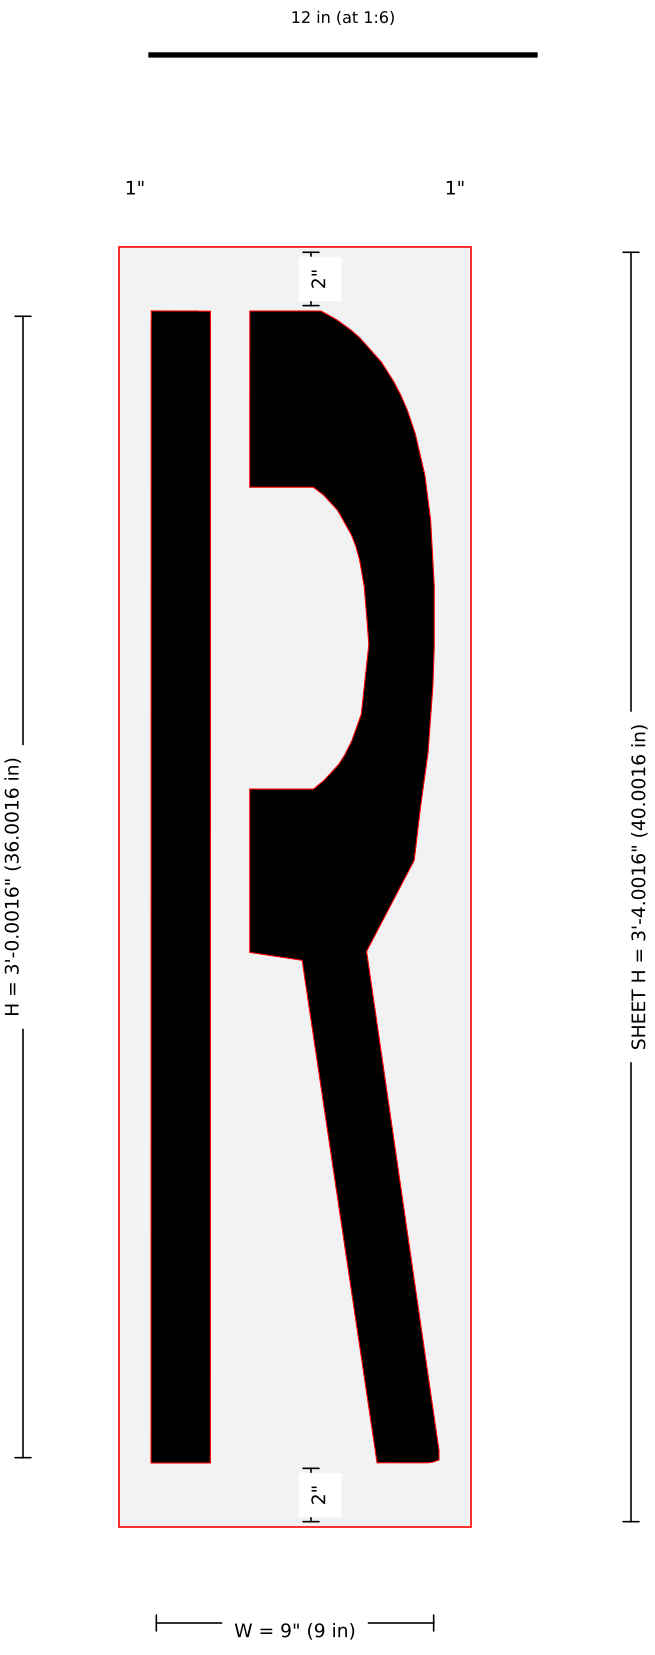



Pieces: 1 · sheet 11 x 40.002 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036R-36in-FAA-Airport-Letter-R-Stencil-42x16-2.jpg: width = 1-800 image width label 9 in (image-scale 9.36); kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-S

36" FAA Airport "S" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 9 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

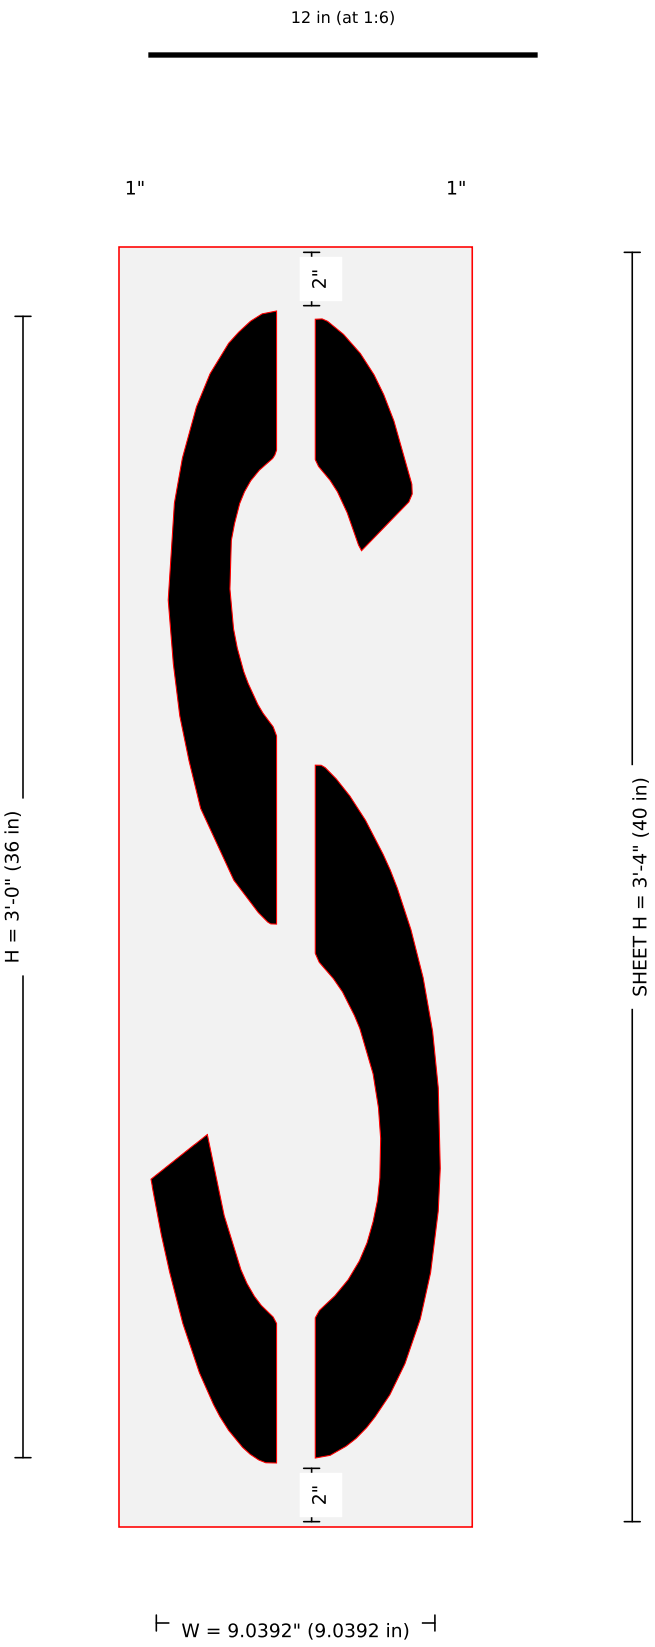



Pieces: 1 · sheet 11.039 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036S-36in-FAA-Airport-Letter-S-Stencil-42x16-2.jpg: width = 1-800 image width label 9 in (image-scale 9.51); kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-U

36" FAA Airport "U" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 10 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

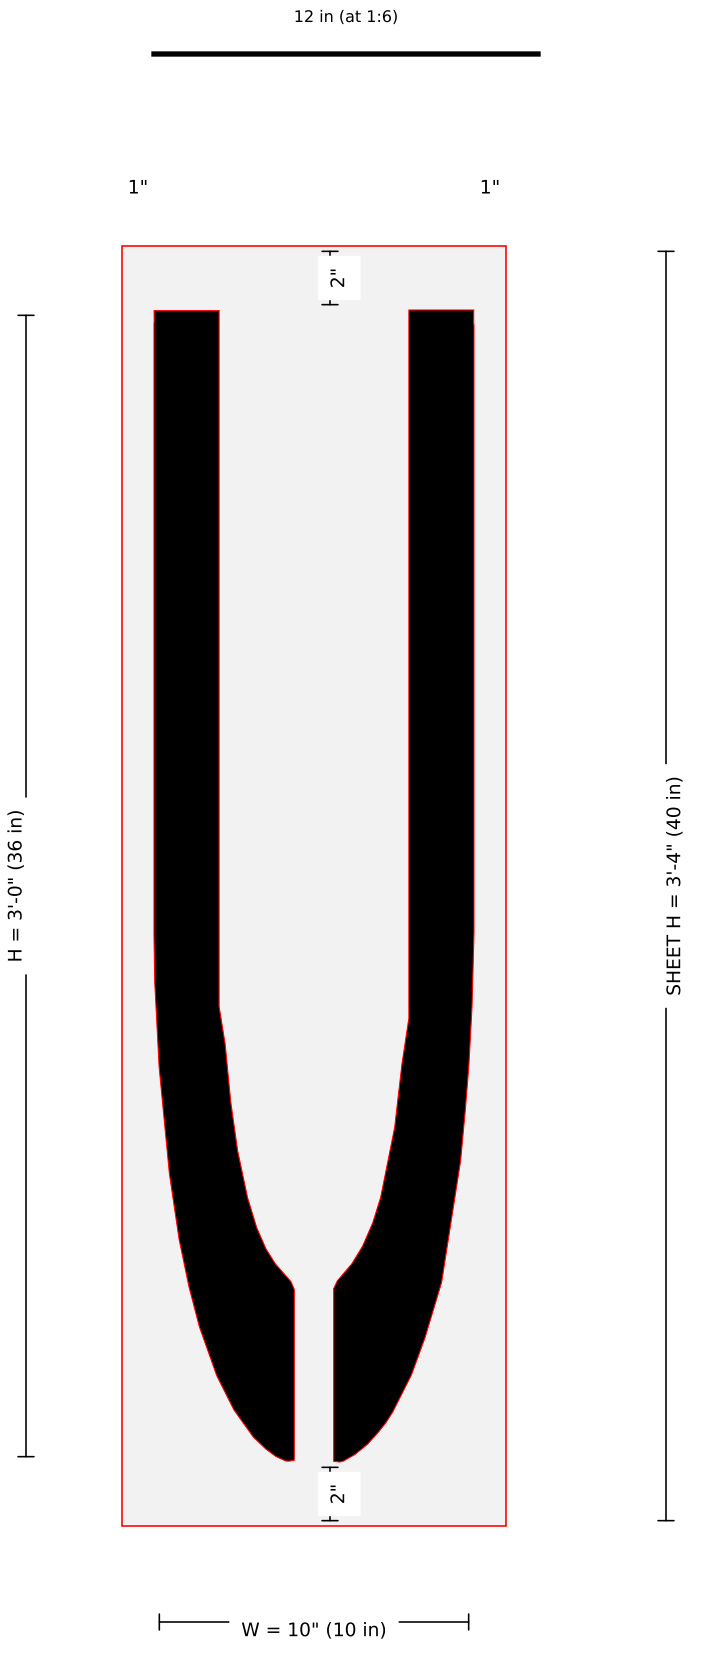



SHEET W = 1'-0" (12 in)

Pieces: 1 · sheet 12 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036U-36in-FAA-Airport-Letter-U-Stencil-42x16-2.jpg: width = 1-800 image width label 10 in (image-scale 10.39); kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-V

36" FAA Airport "V" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 11 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

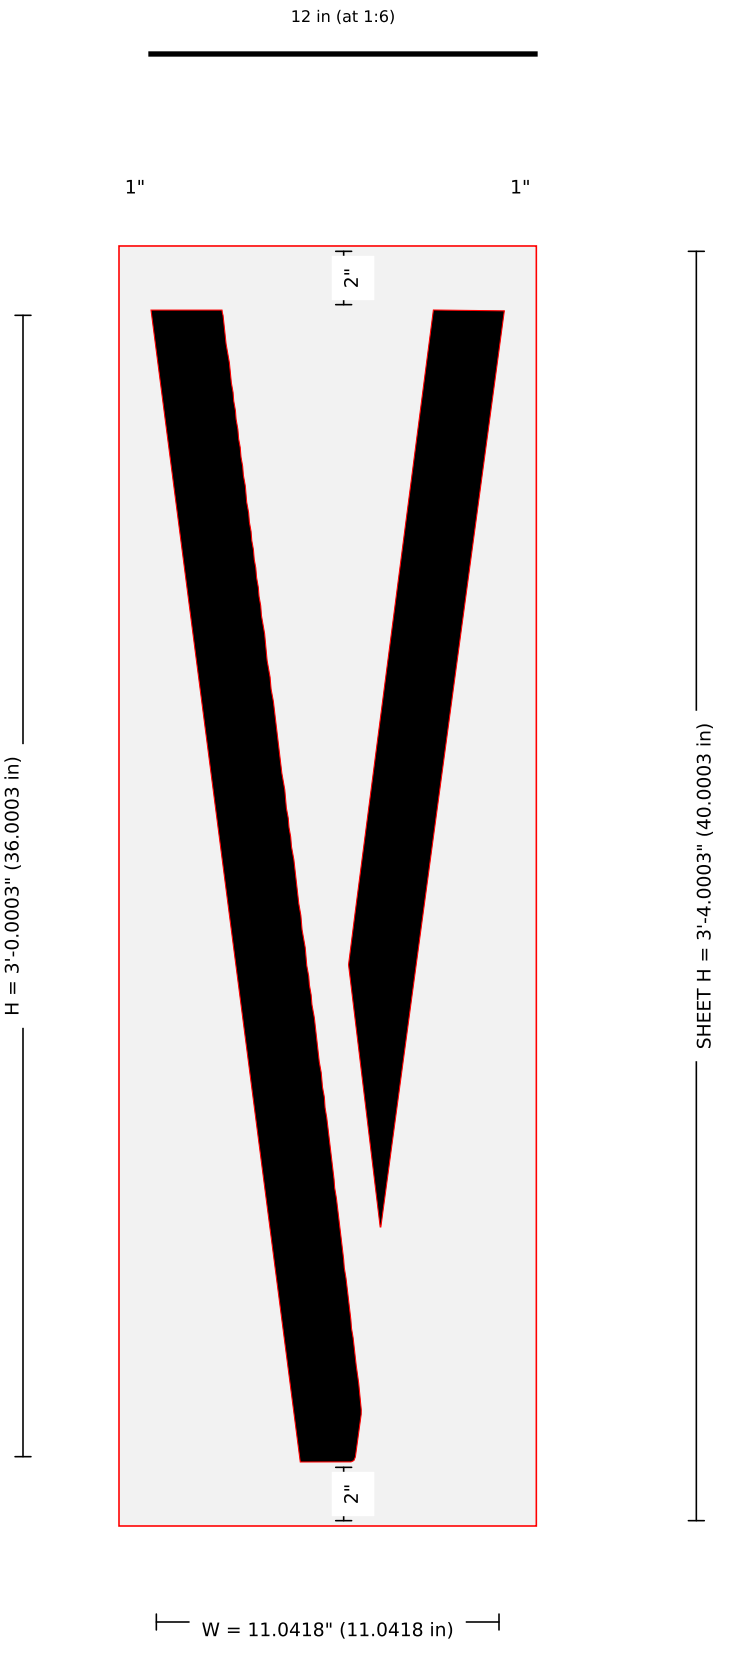


Pieces: 1 · sheet 13.042 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036V-36in-FAA-Airport-Letter-V-Stencil-42x16-2.jpg: width = 1-800 image width label 11 in (image-scale 11.28); kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 0.5); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-W

36" FAA Airport "W" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 13 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut





Pieces: 1 · sheet 15.015 x 40.002 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036W-36in-FAA-Airport-Letter-W-Stencil-42x16-2.jpg: width = 1-800 image width label 13 in (image-scale 12.74); kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-X

36" FAA Airport "X" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 9 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

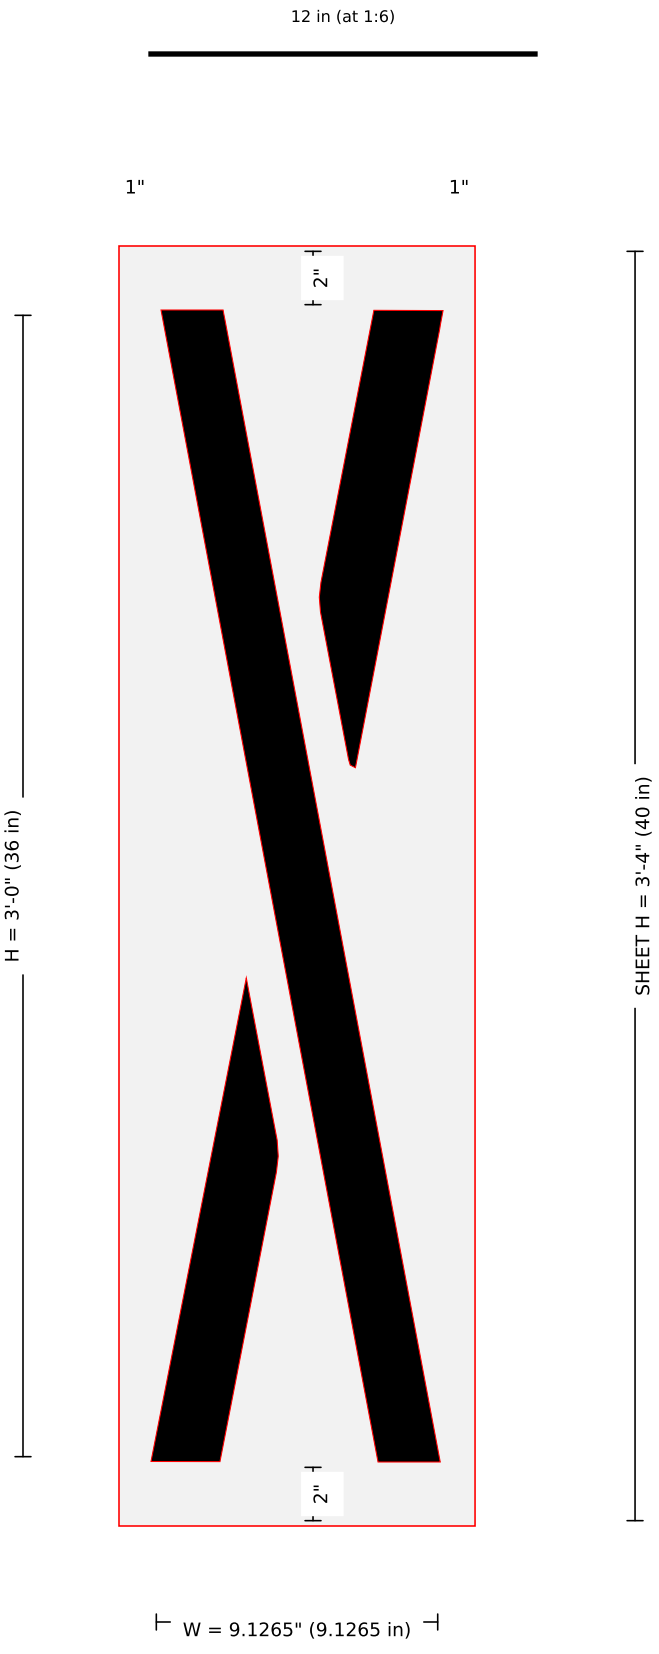



Pieces: 1 · sheet 11.126 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036X-36in-FAA-Airport-Letter-X-Stencil-42x16-2.jpg: width = 1-800 image width label 9 in (image-scale 9.36); kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 1 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

# SSS-FAA-036-01-Z

36" FAA Airport "Z" - kit SSS-FAA-036-01, traced from 1-800-Stencil image, 9 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

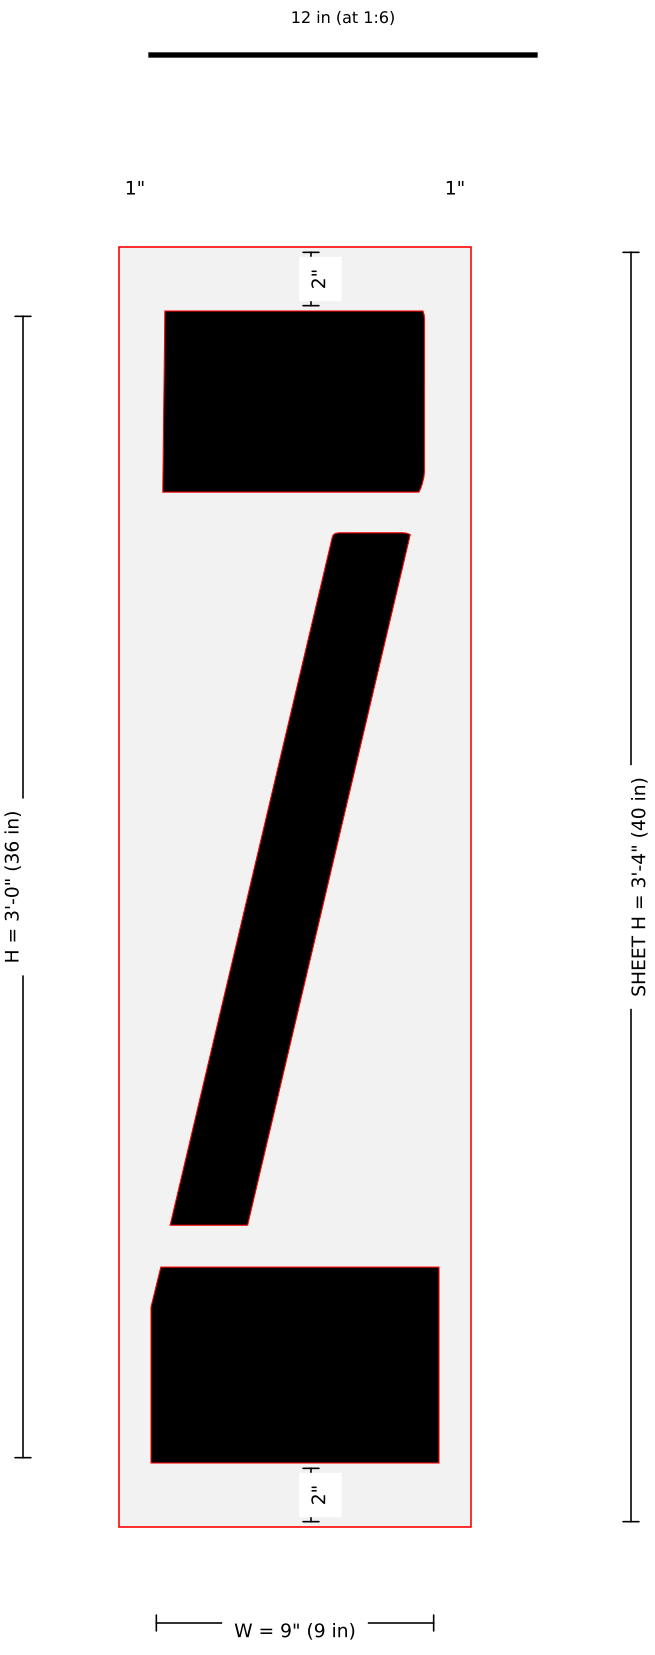


SHEET W = 11" (11 in)

Pieces: 1 · sheet 11 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-036Z-36in-FAA-Airport-Letter-Z-Stencil-42x16-2.jpg: width = 1-800 image width label 9 in (image-scale 9.90); kit sheet 16 x 42 (side margin 2).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.07 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.