

SSS-FAA-036-03-0

36" FAA Airport "0" - kit SSS-FAA-036-03, traced from 1-800-Stencil image, 18 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

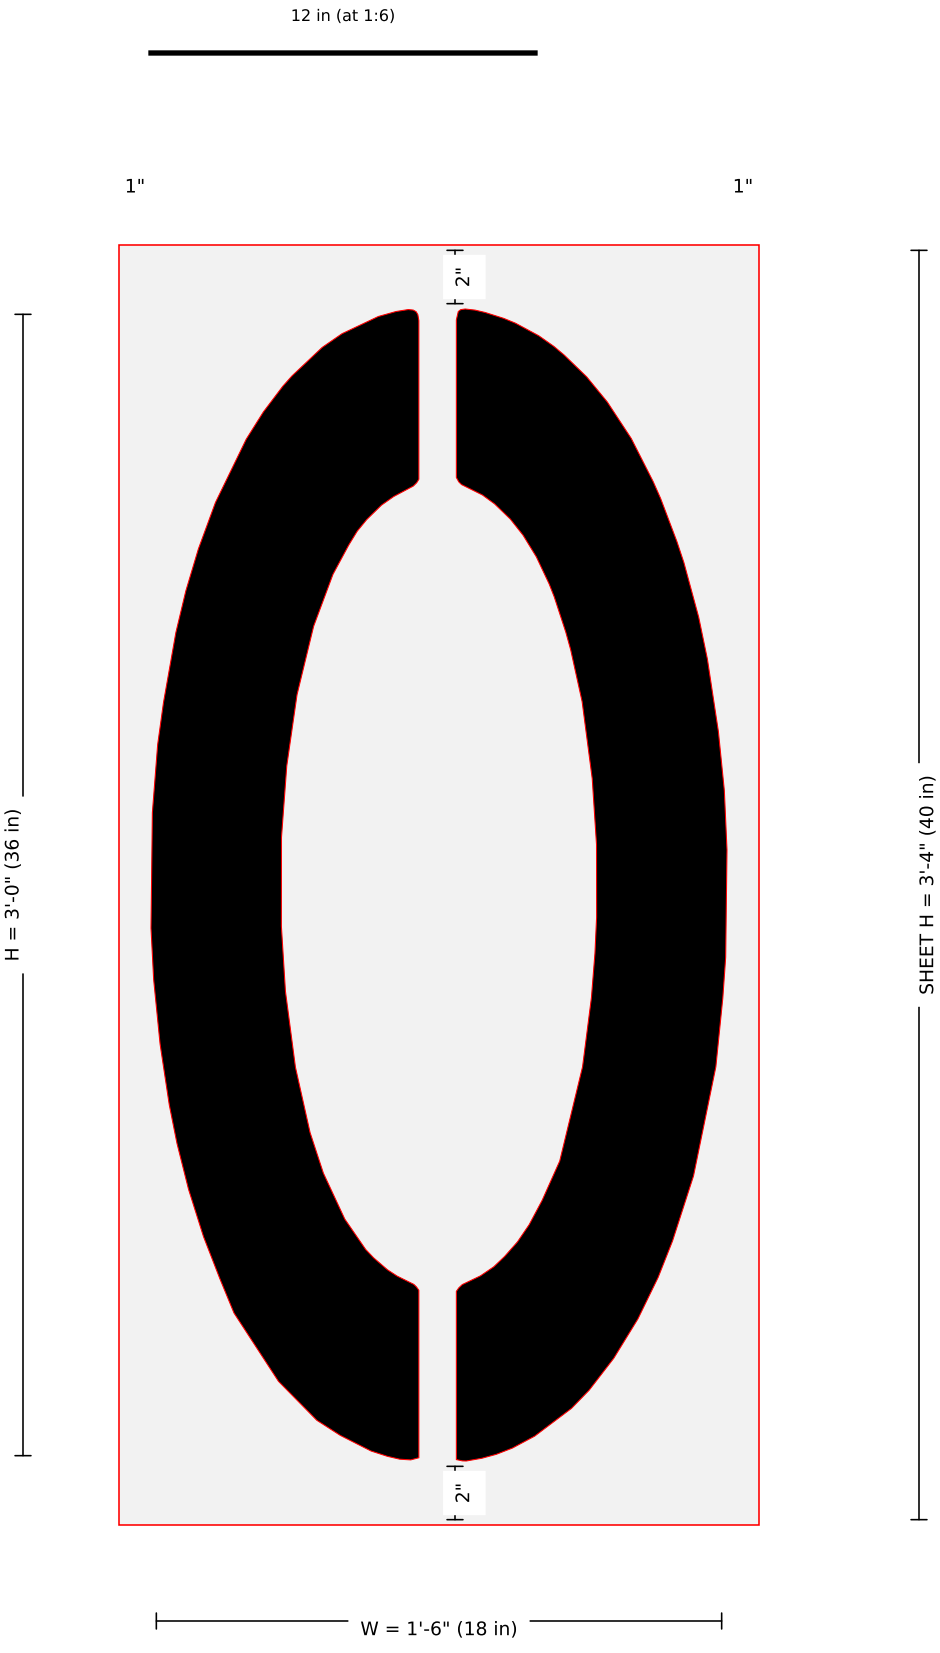




Pieces: 1 · sheet 20 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-W360-36in-wide-FAA-Airport-Number-0-Stencil-2.jpg: width = kit listing 18 (image-scale 17.85); kit sheet 24 x 44 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-036-03-2

36" FAA Airport "2" - kit SSS-FAA-036-03, traced from 1-800-Stencil image, 18 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

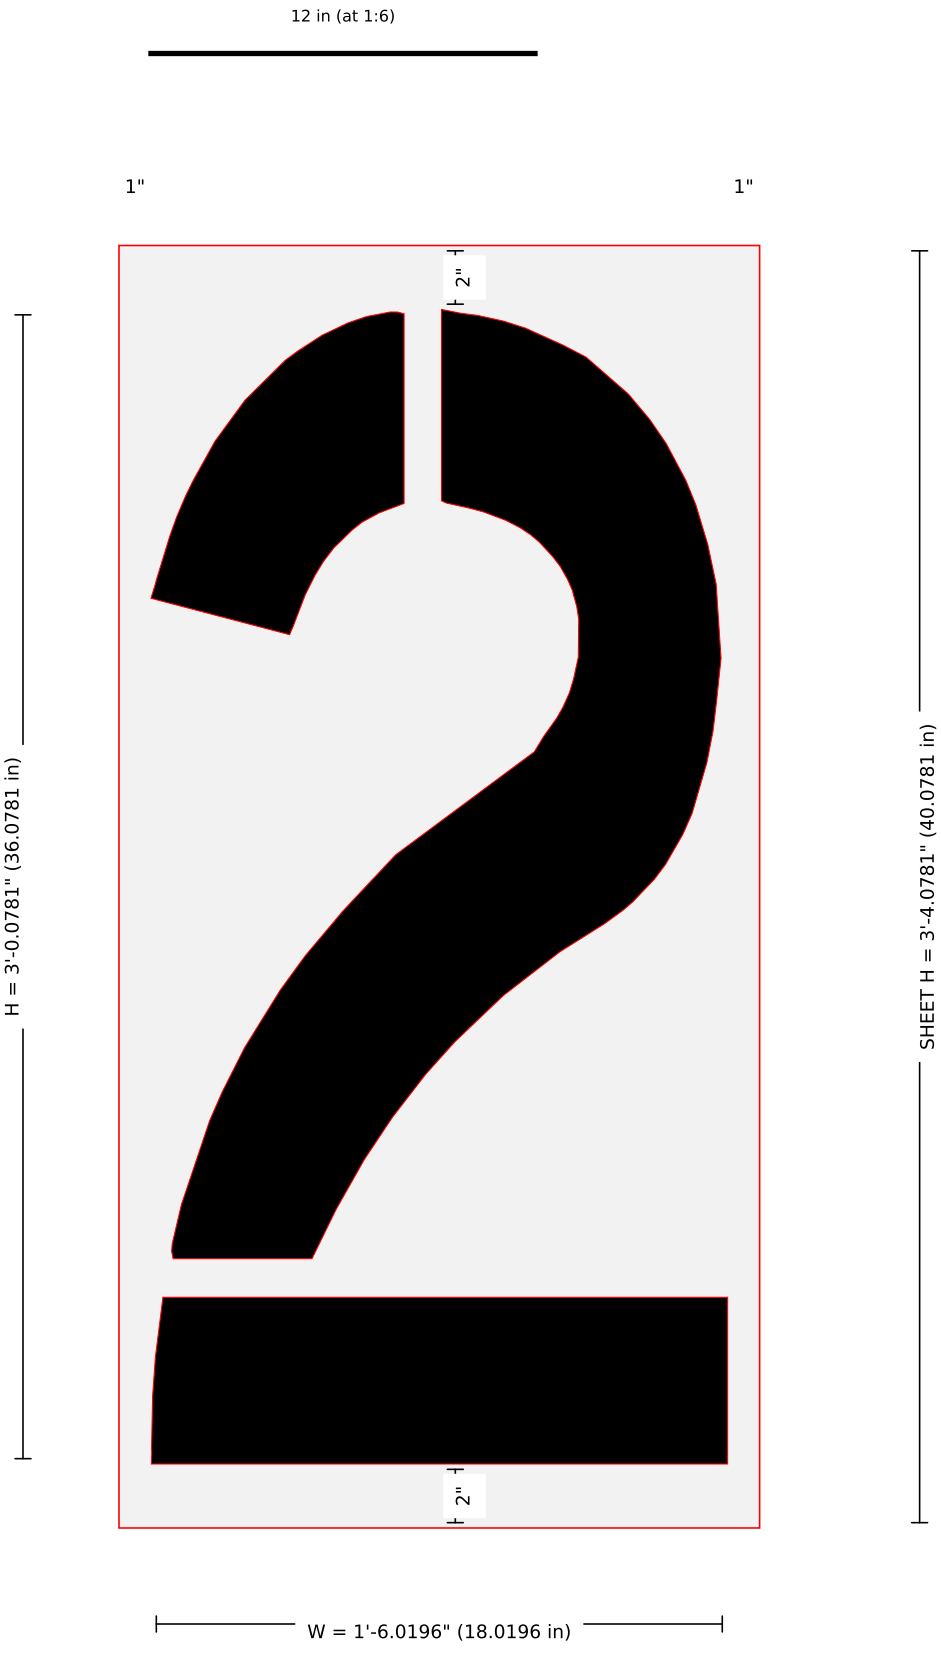


Pieces: 1 · sheet 20.02 x 40.078 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-W362-36in-wide-FAA-Airport-Number-2-Stencil-2.jpg: width = kit listing 18 (image-scale 17.85); kit sheet 24 x 44 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-036-03-3

36" FAA Airport "3" - kit SSS-FAA-036-03, traced from 1-800-Stencil image, 18 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

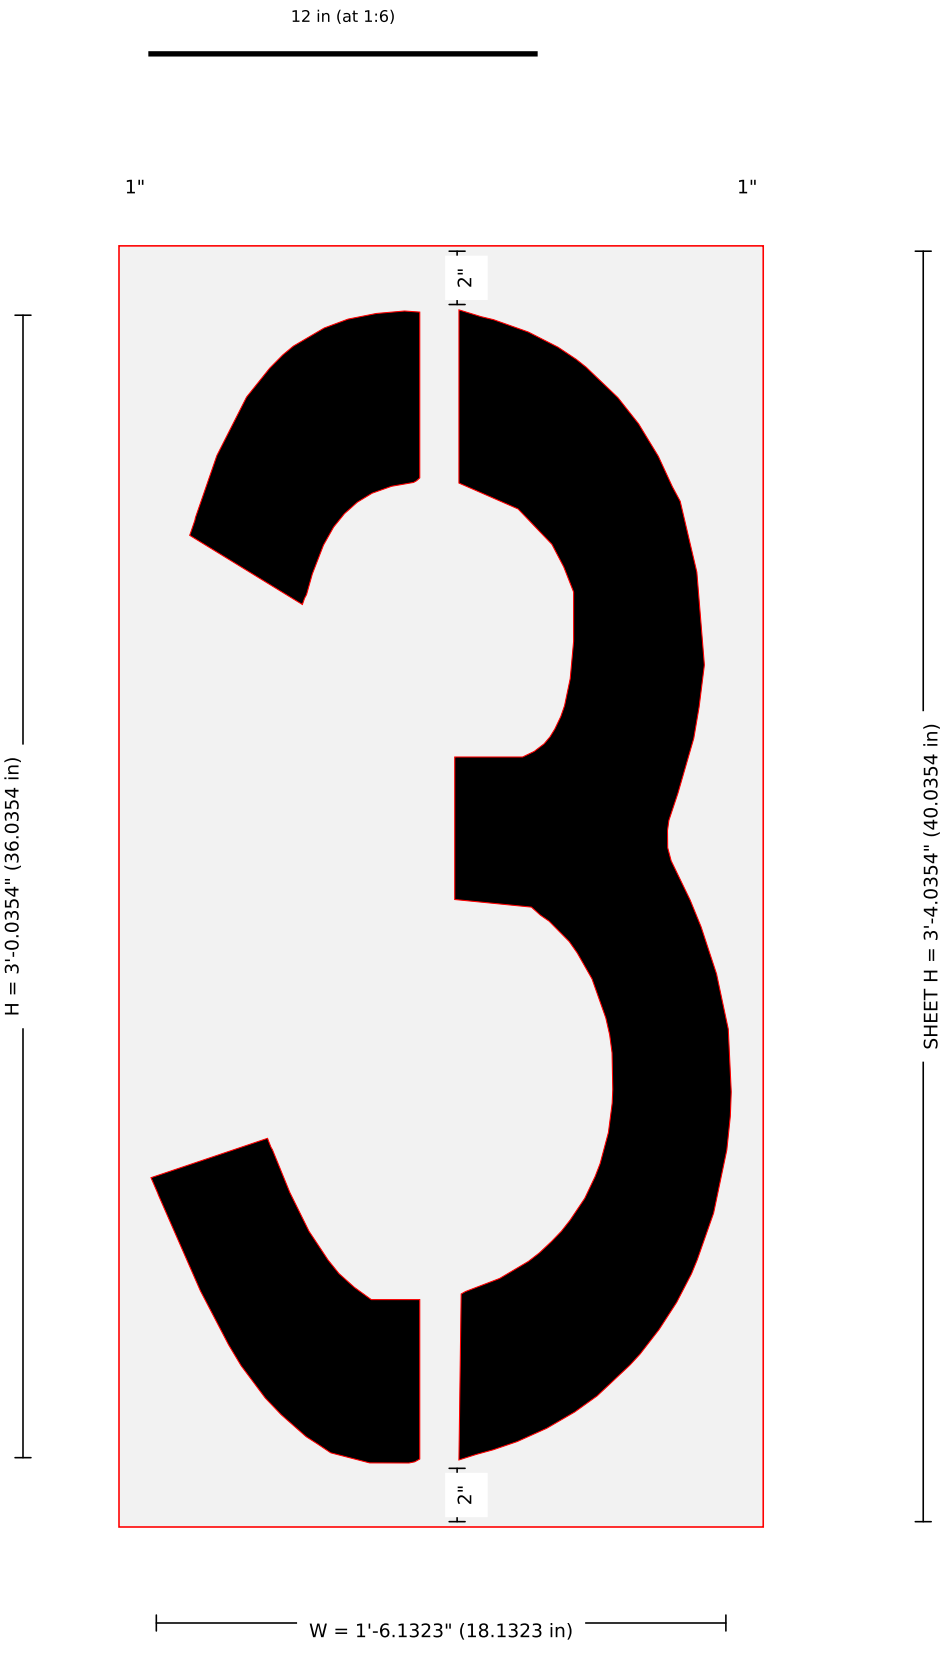


Pieces: 1 · sheet 20.132 x 40.035 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-W363-36in-wide-FAA-Airport-Number-3-Stencil-2.jpg: width = kit listing 18 (image-scale 17.76); kit sheet 24 x 44 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-036-03-4

36" FAA Airport "4" - kit SSS-FAA-036-03, traced from 1-800-Stencil image, 18 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

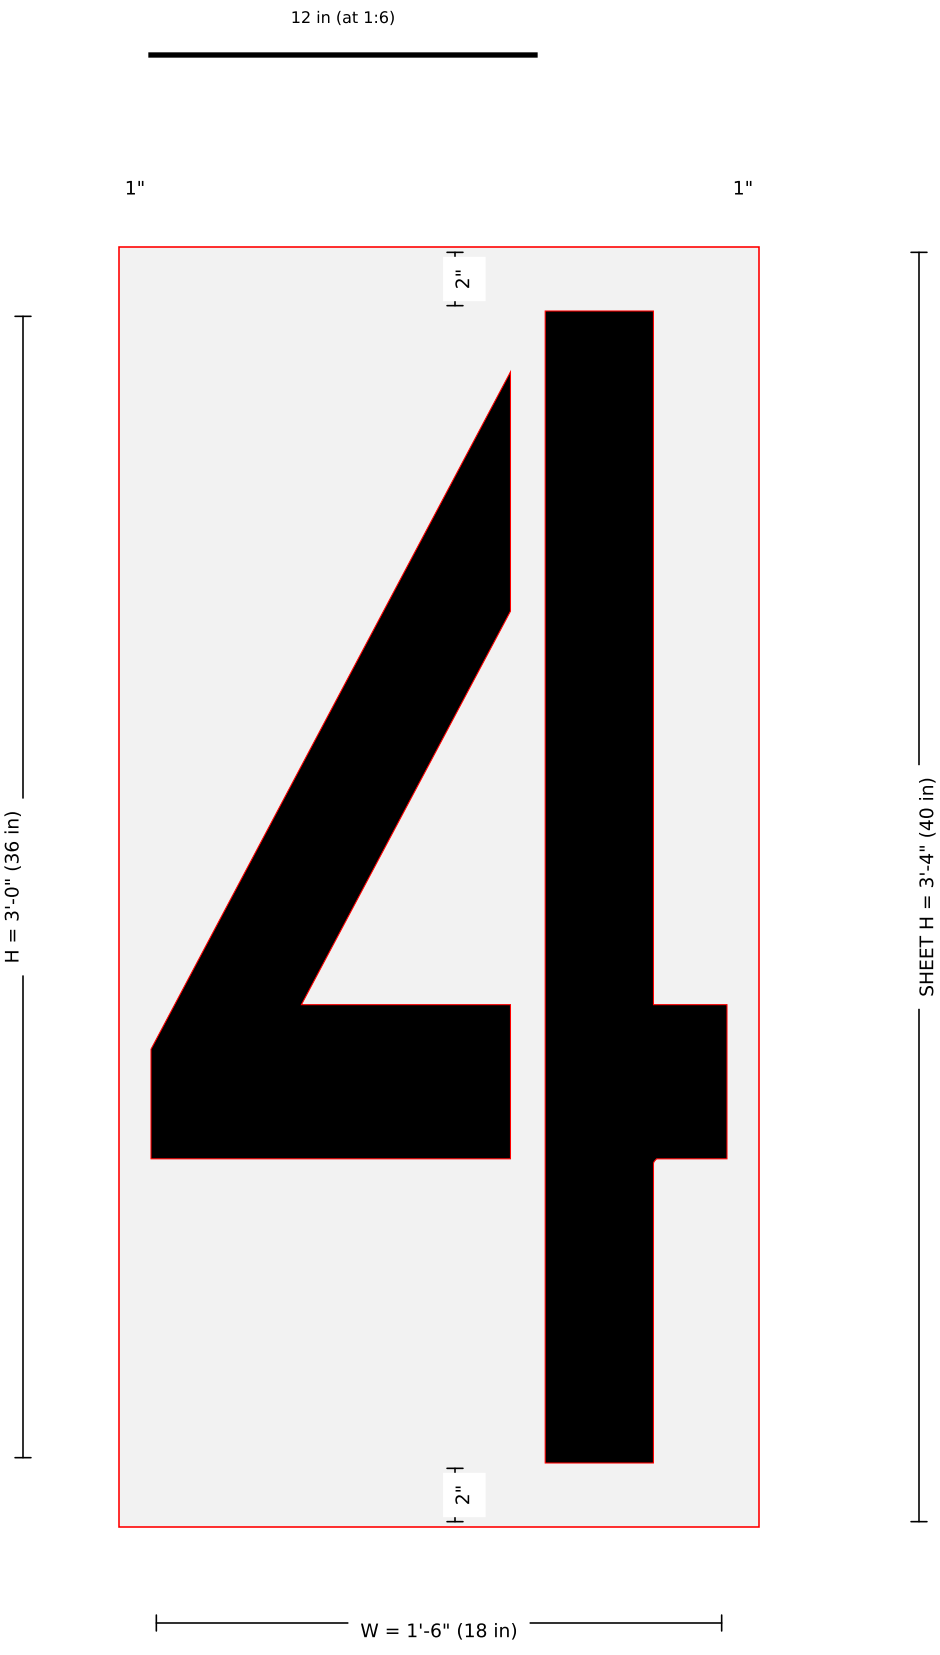


SHEET W = 1'-8" (20 in)

Pieces: 1 · sheet 20 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-W364-36in-wide-FAA-Airport-Number-4-Stencil-2.jpg: width = kit listing 18 (image-scale 17.85); kit sheet 24 x 44 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.07 in (smoothing level 0.25); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 1 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-036-03-5

36" FAA Airport "5" - kit SSS-FAA-036-03, traced from 1-800-Stencil image, 18 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

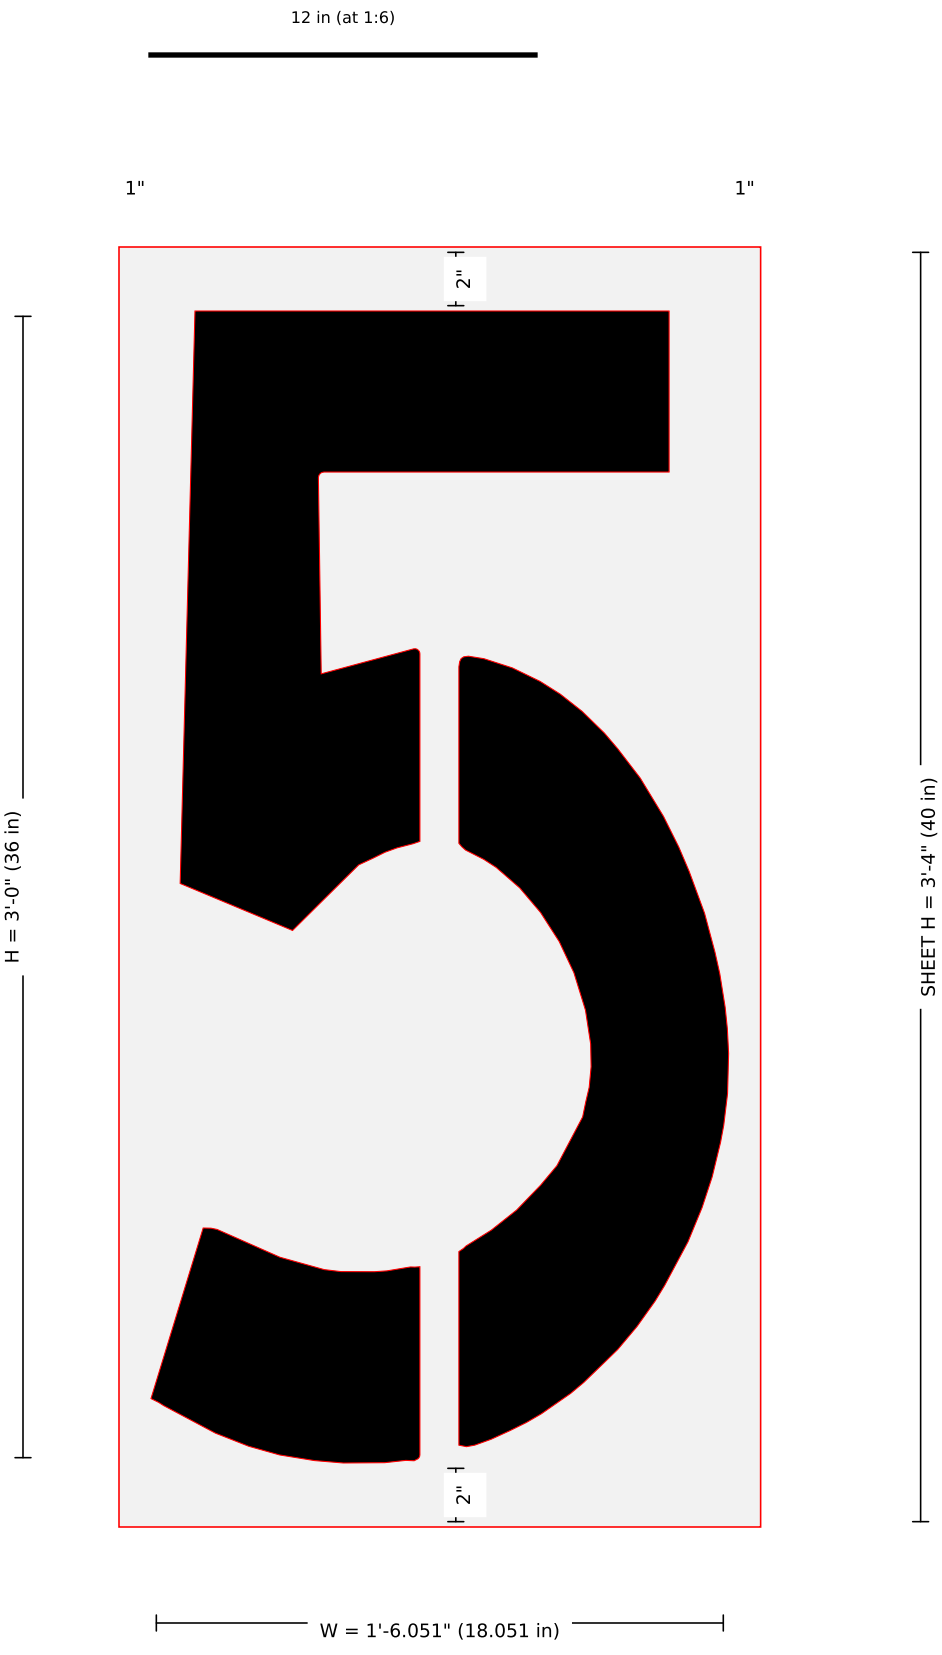


SHEET W = 1'-8.051" (20.051 in)

Pieces: 1 · sheet 20.051 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-W365-36in-wide-FAA-Airport-Number-5-Stencil-2.jpg: width = kit listing 18 (image-scale 17.81); kit sheet 24 x 44 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-036-03-6

36" FAA Airport "6" - kit SSS-FAA-036-03, traced from 1-800-Stencil image, 18 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

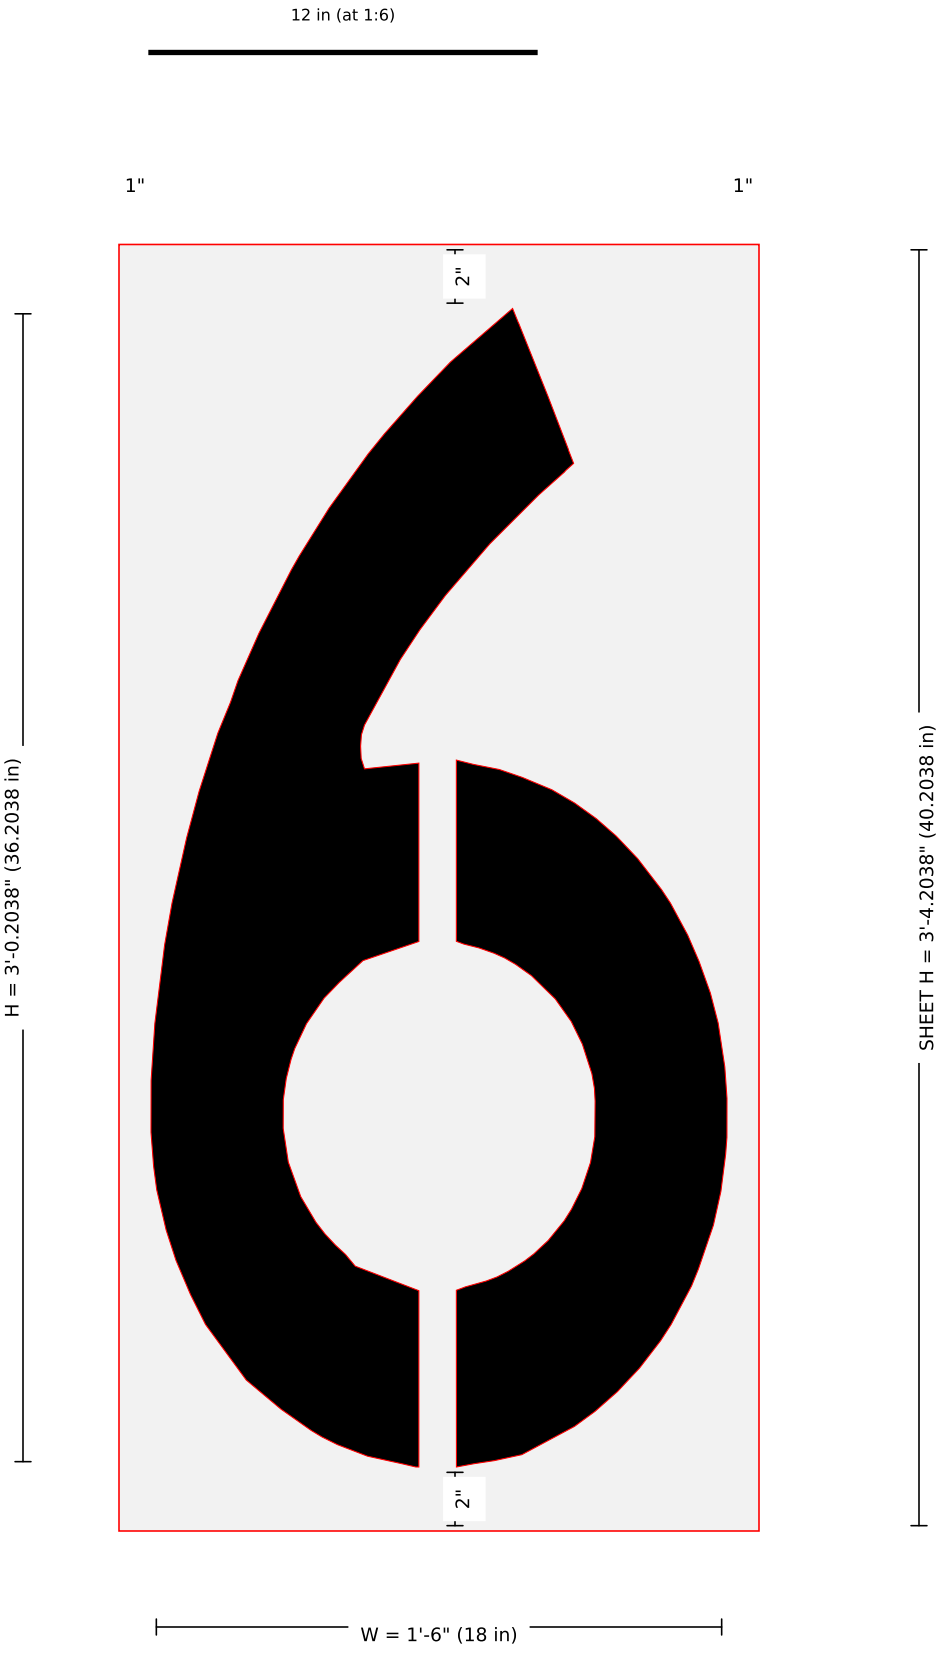



Pieces: 1 · sheet 20 x 40.204 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-W366-36in-wide-FAA-Airport-Number-6-Stencil-2.jpg: width = kit listing 18 (image-scale 17.94); kit sheet 24 x 44 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 7 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-036-03-7

36" FAA Airport "7" - kit SSS-FAA-036-03, traced from 1-800-Stencil image, 18 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

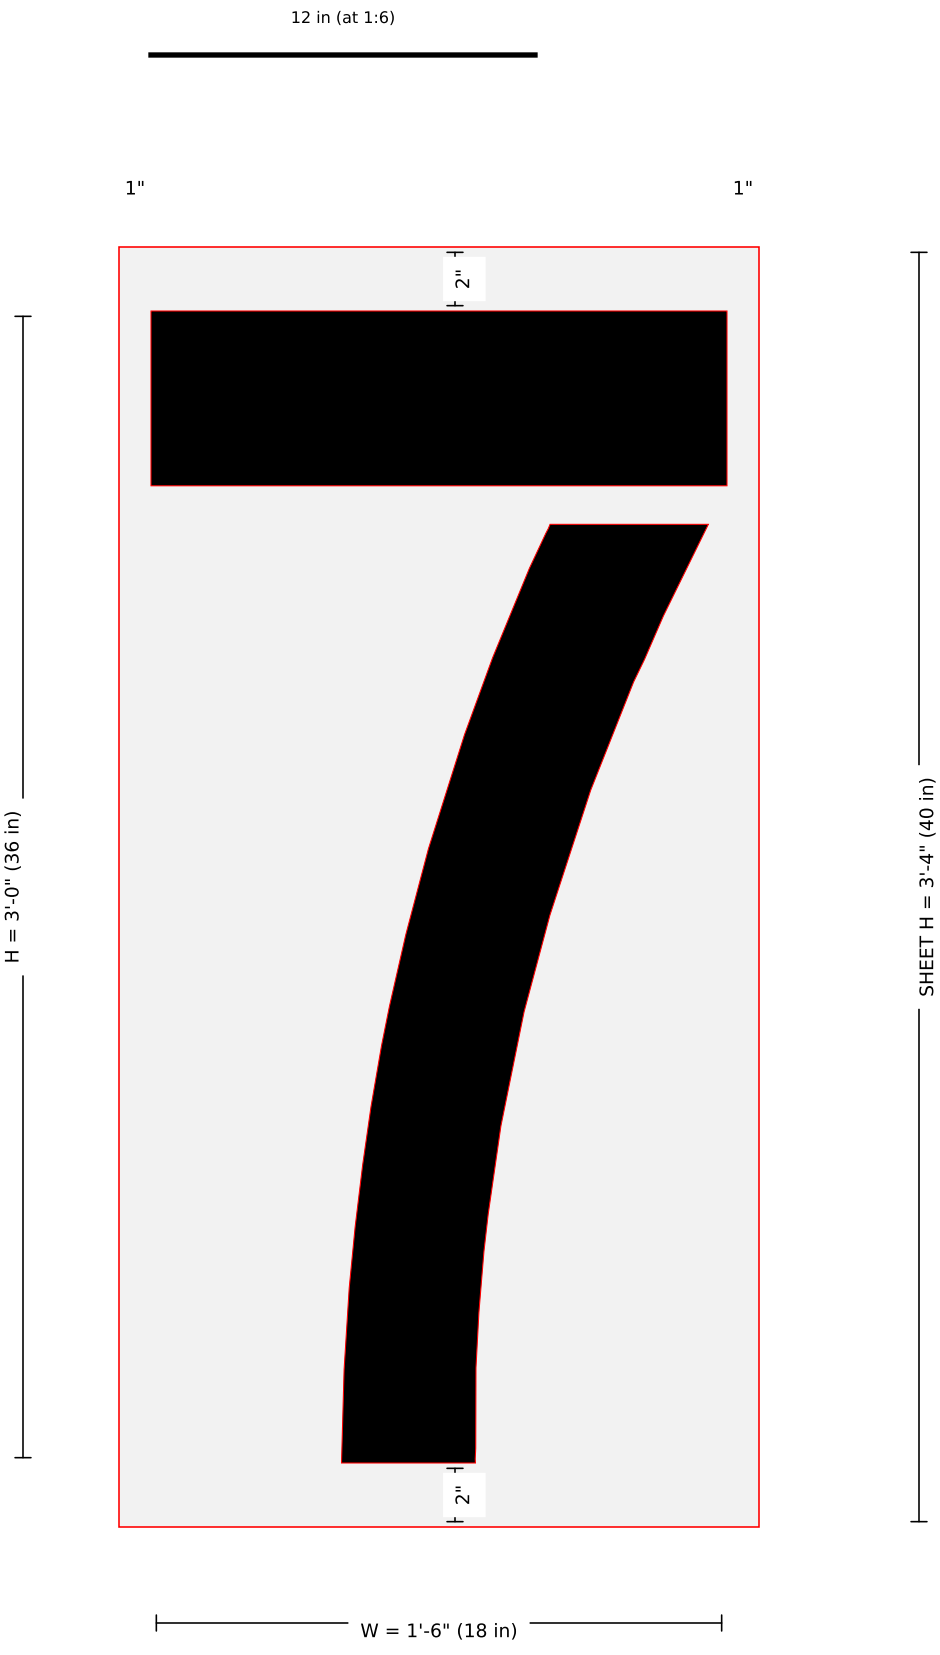




Pieces: 1 · sheet 20 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-W367-36in-wide-FAA-Airport-Number-7-Stencil-2.jpg: width = kit listing 18 (image-scale 17.85); kit sheet 24 x 44 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-036-03-8

36" FAA Airport "8" - kit SSS-FAA-036-03, traced from 1-800-Stencil image, 18 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

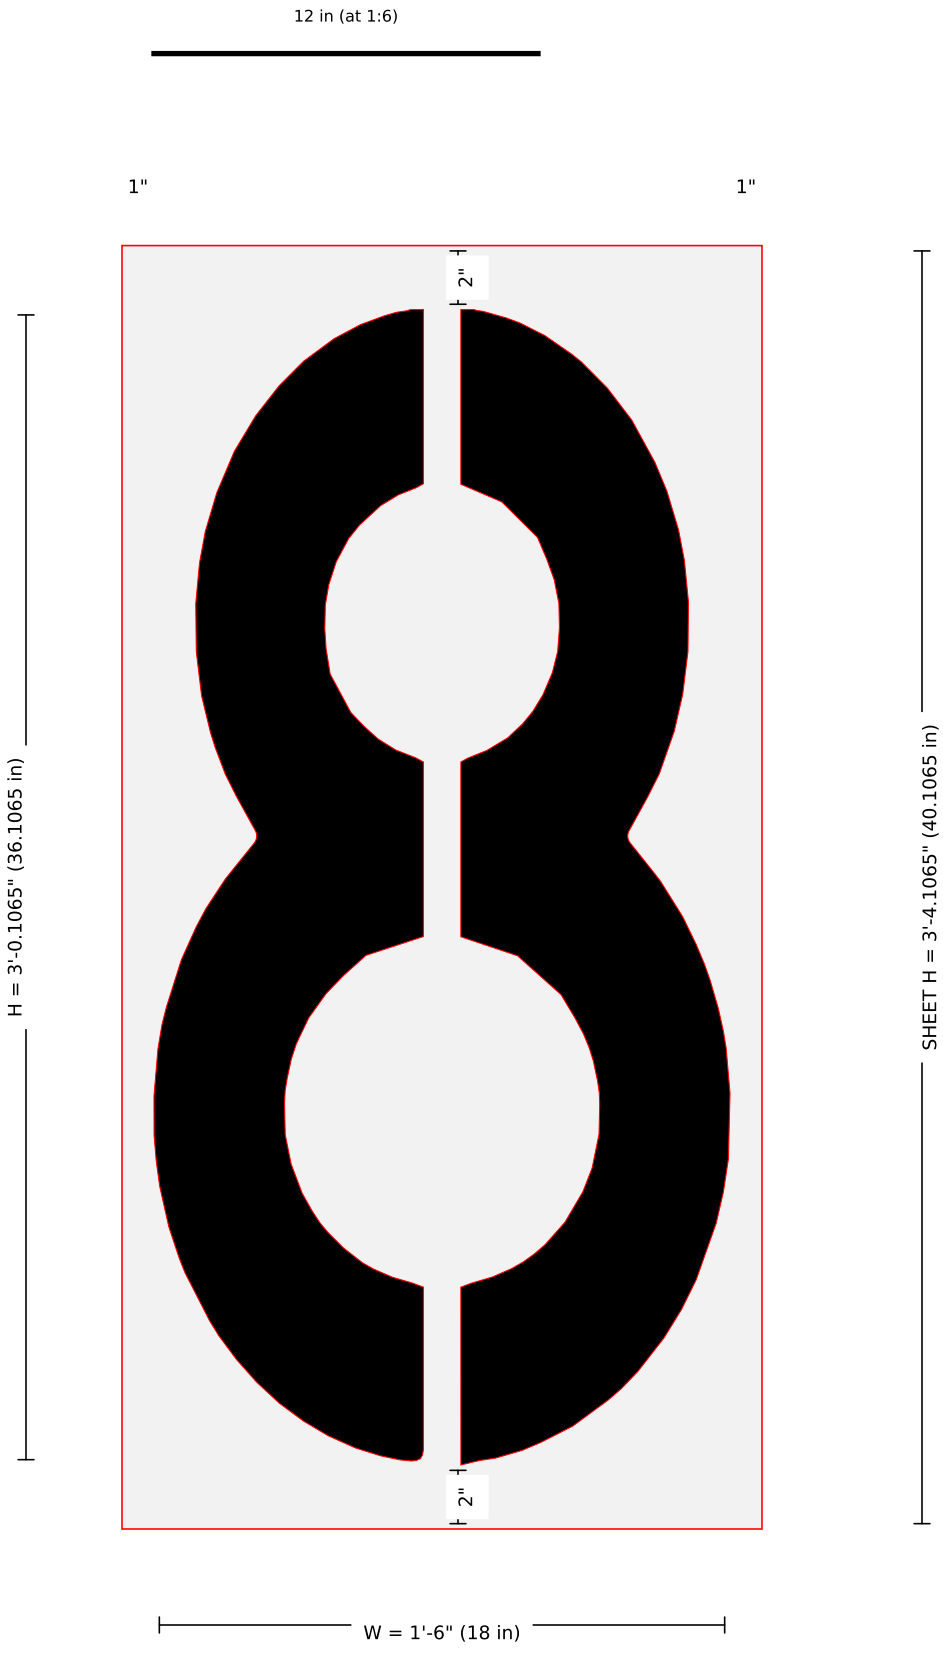


Pieces: 1 · sheet 20 x 40.107 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-W368-36in-wide-FAA-Airport-Number-8-Stencil-2.jpg: width = kit listing 18 (image-scale 17.85); kit sheet 24 x 44 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 19 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-036-03-9

36" FAA Airport "9" - kit SSS-FAA-036-03, traced from 1-800-Stencil image, 18 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

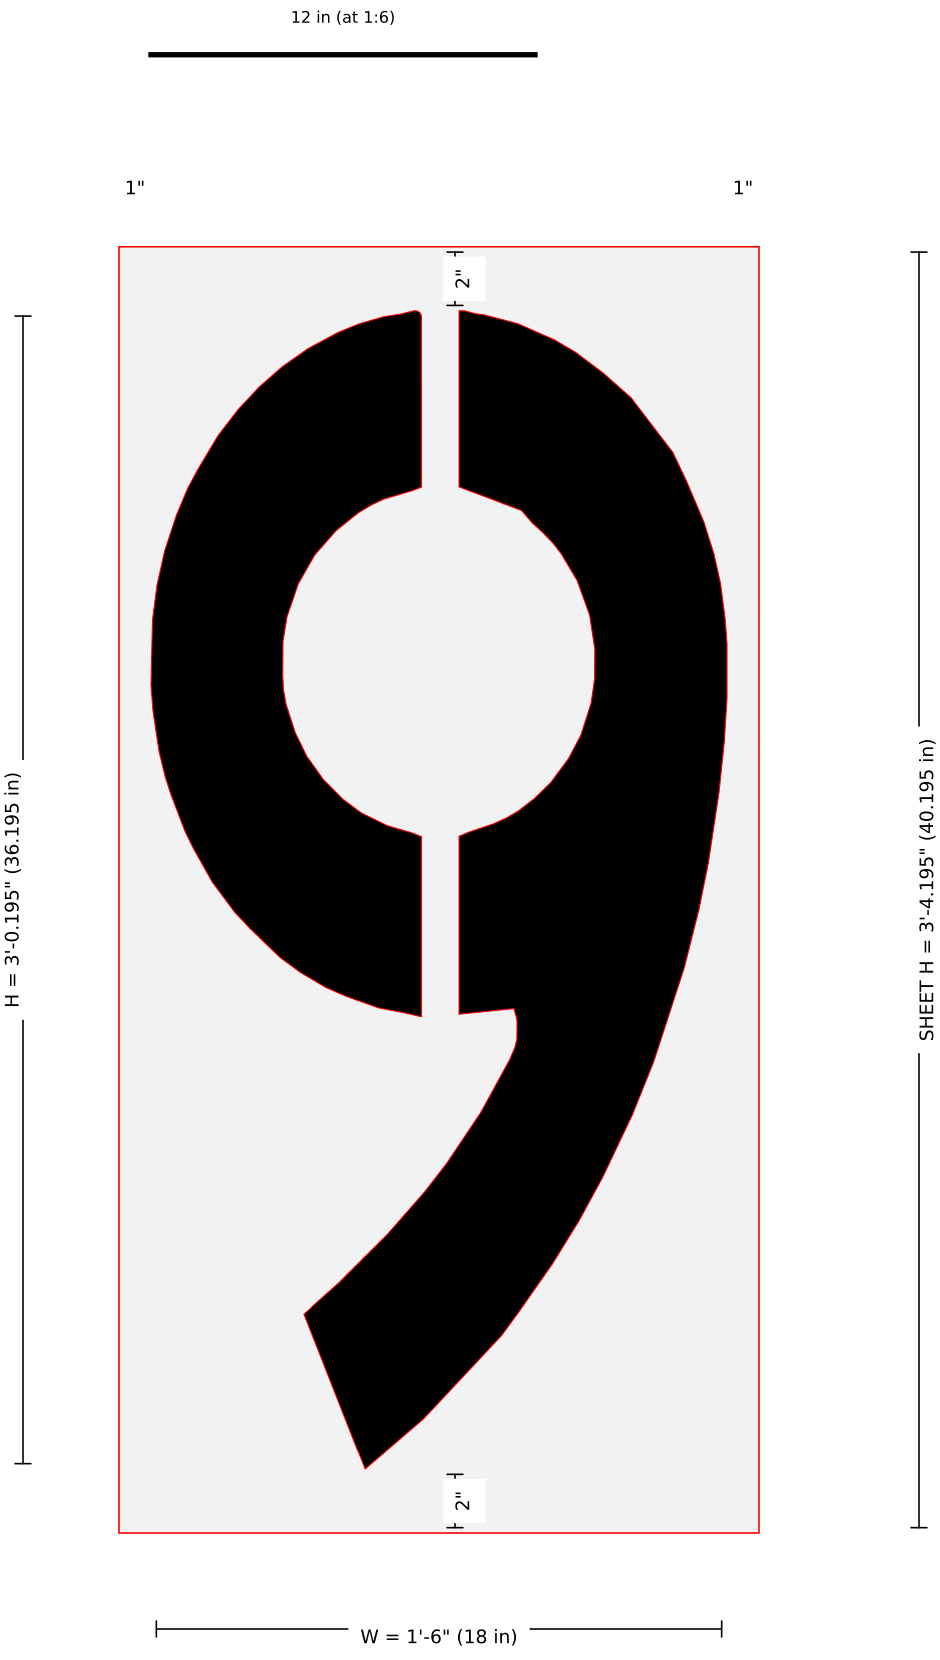


Pieces: 1 · sheet 20 x 40.195 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-W369-36in-wide-FAA-Airport-Number-9-Stencil-2.jpg: width = kit listing 18 (image-scale 17.94); kit sheet 24 x 44 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 9 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-036-03-A

36" FAA Airport "A" - kit SSS-FAA-036-03, traced from 1-800-Stencil image, 18 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

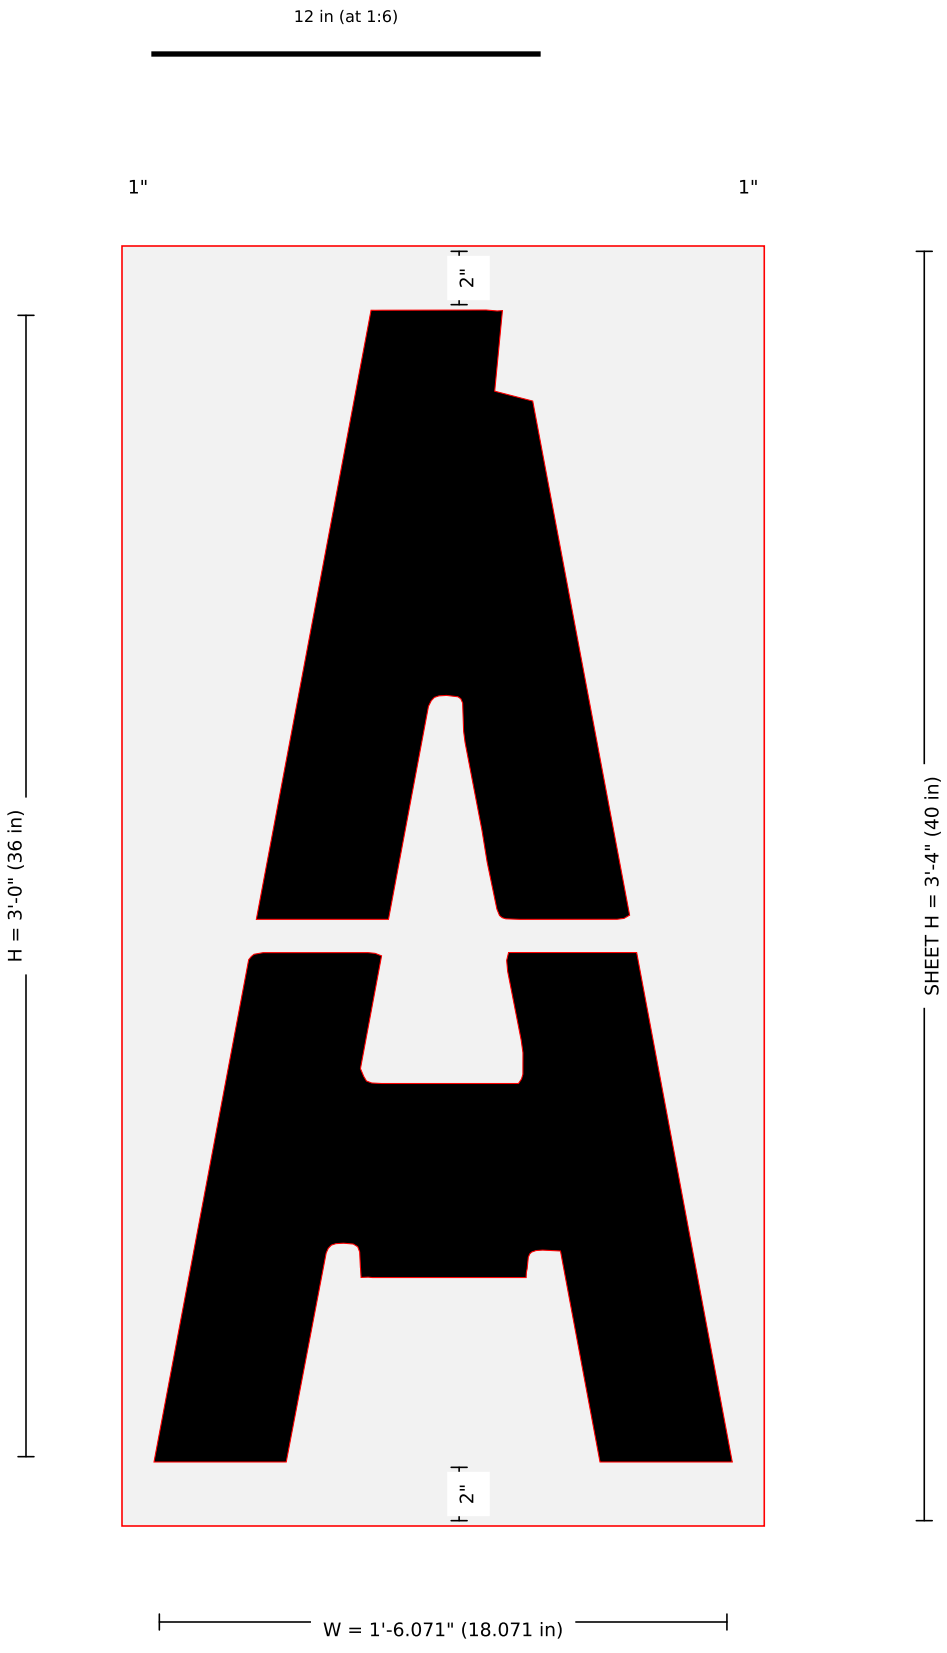



Pieces: 1 · sheet 20.071 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-W36A-36in-wide-FAA-Airport-Letter-A-Stencil-2.jpg: width = kit listing 18 (image-scale 17.76); kit sheet 24 x 44 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-036-03-B

36" FAA Airport "B" - kit SSS-FAA-036-03, traced from 1-800-Stencil image, 18 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

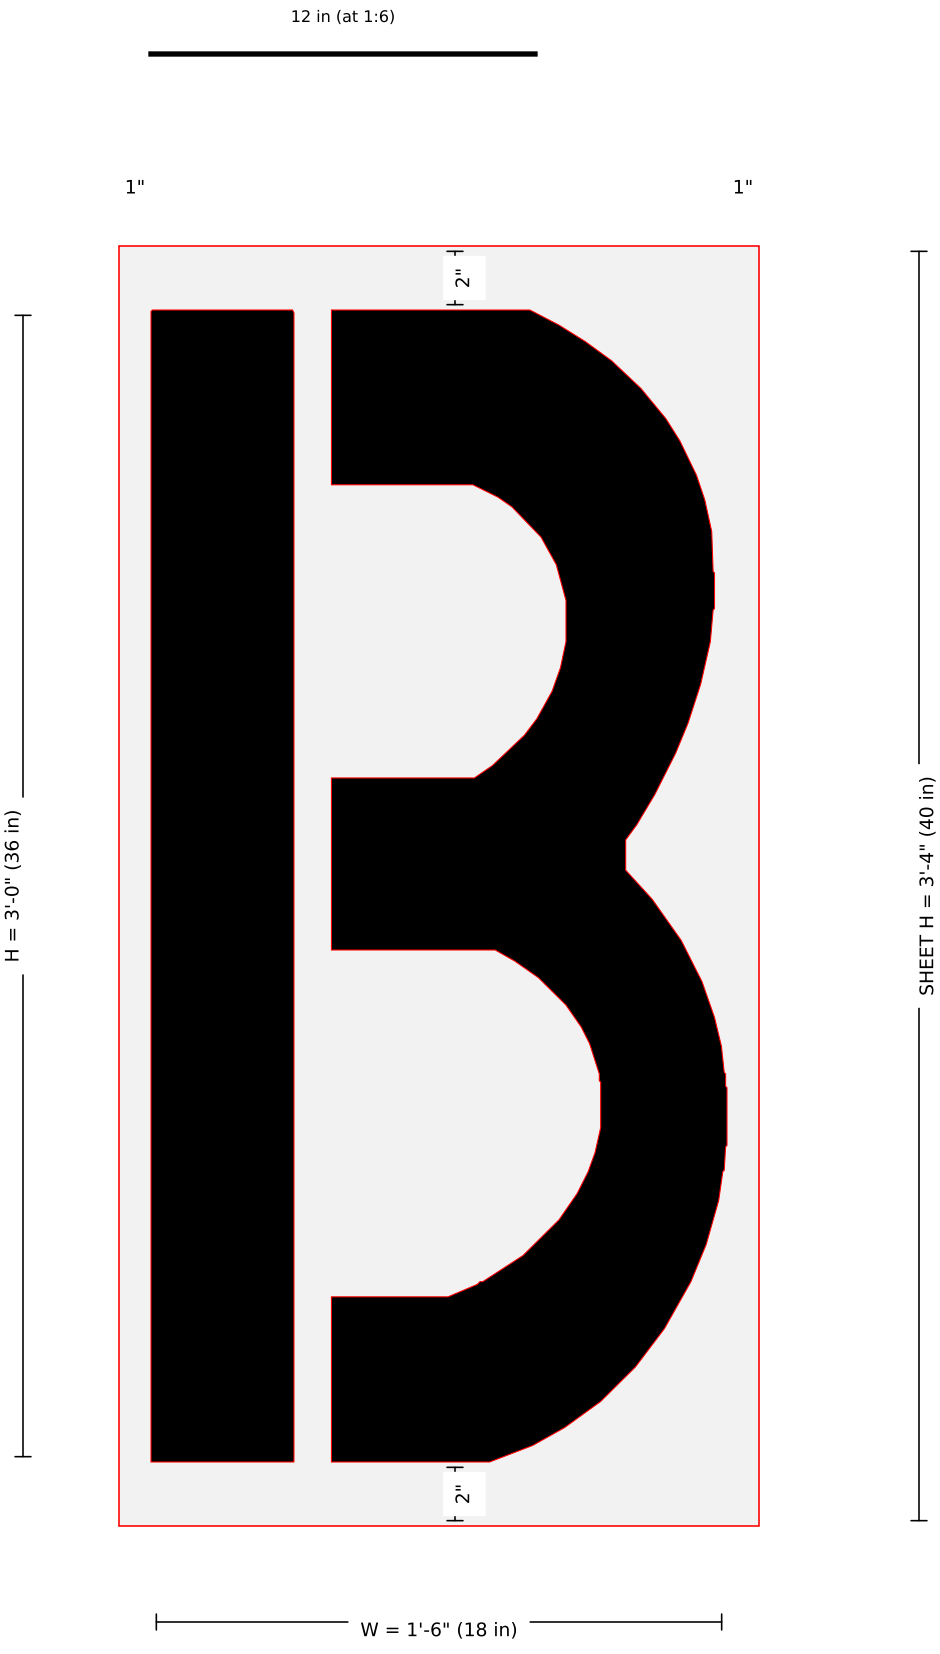




Pieces: 1 · sheet 20 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-W36B-36in-wide-FAA-Airport-Letter-B-Stencil-2.jpg: width = kit listing 18 (image-scale 17.85); kit sheet 24 x 44 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-036-03-C

36" FAA Airport "C" - kit SSS-FAA-036-03, traced from 1-800-Stencil image, 18 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

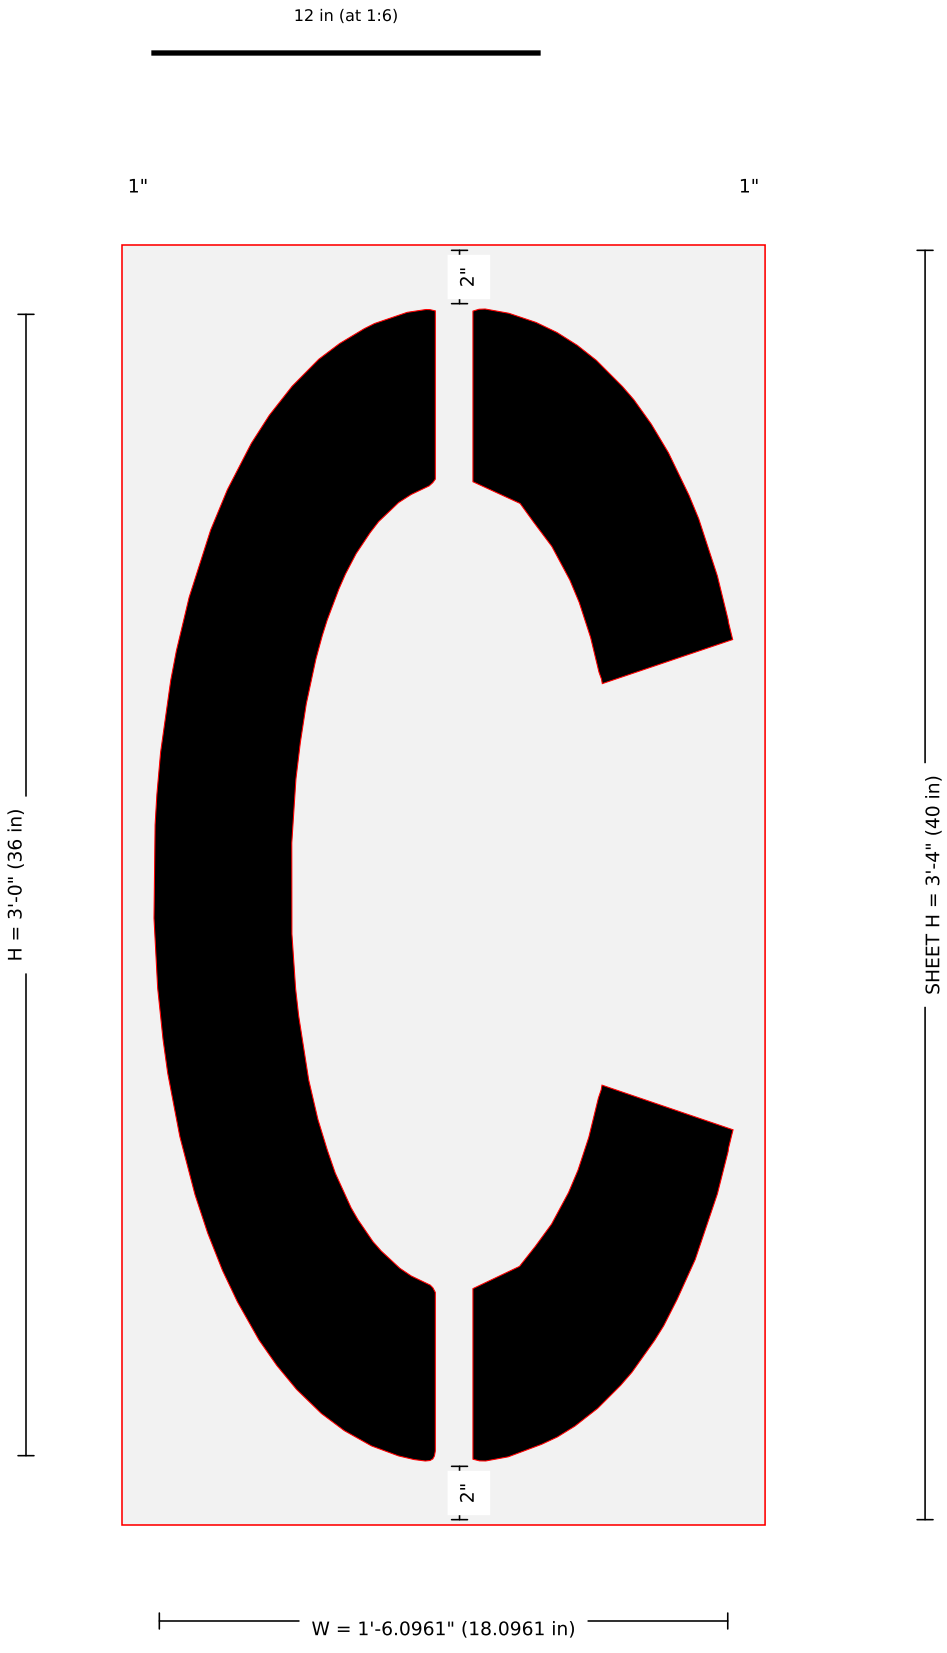


Pieces: 1 · sheet 20.096 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-W36C-36in-wide-FAA-Airport-Letter-C-Stencil-2.jpg: width = kit listing 18 (image-scale 17.81); kit sheet 24 x 44 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-036-03-D

36" FAA Airport "D" - kit SSS-FAA-036-03, traced from 1-800-Stencil image, 18 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

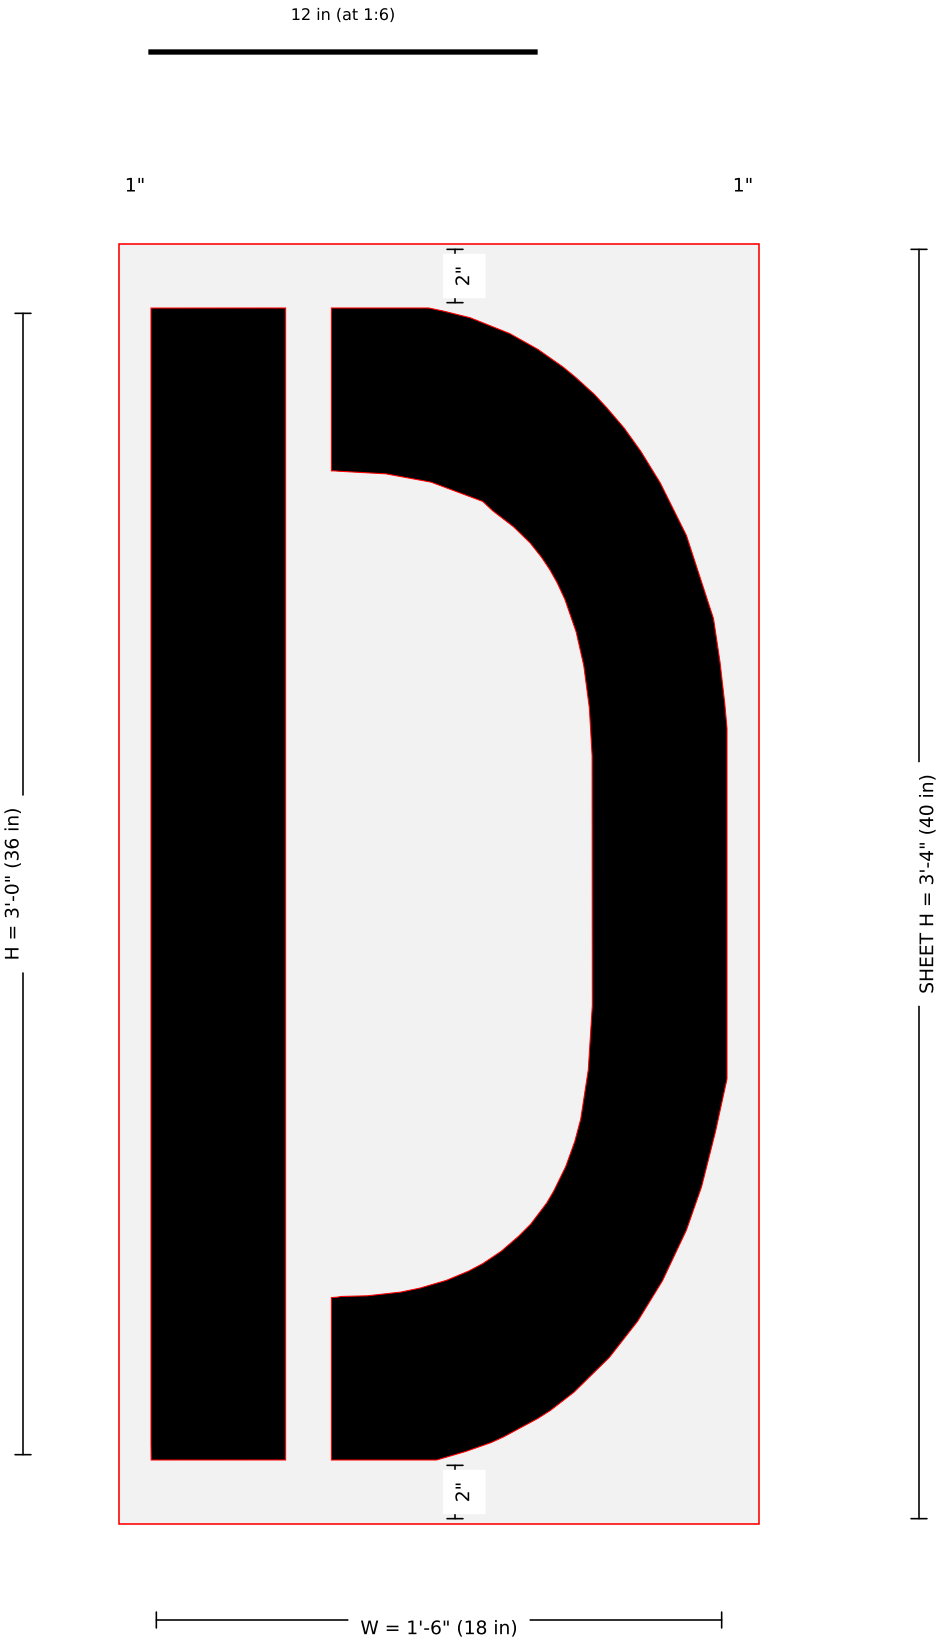



Pieces: 1 · sheet 20 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-W36D-36in-wide-FAA-Airport-Letter-D-Stencil-2.jpg: width = kit listing 18 (image-scale 17.85); kit sheet 24 x 44 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-036-03-E

36" FAA Airport "E" - kit SSS-FAA-036-03, traced from 1-800-Stencil image, 18 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

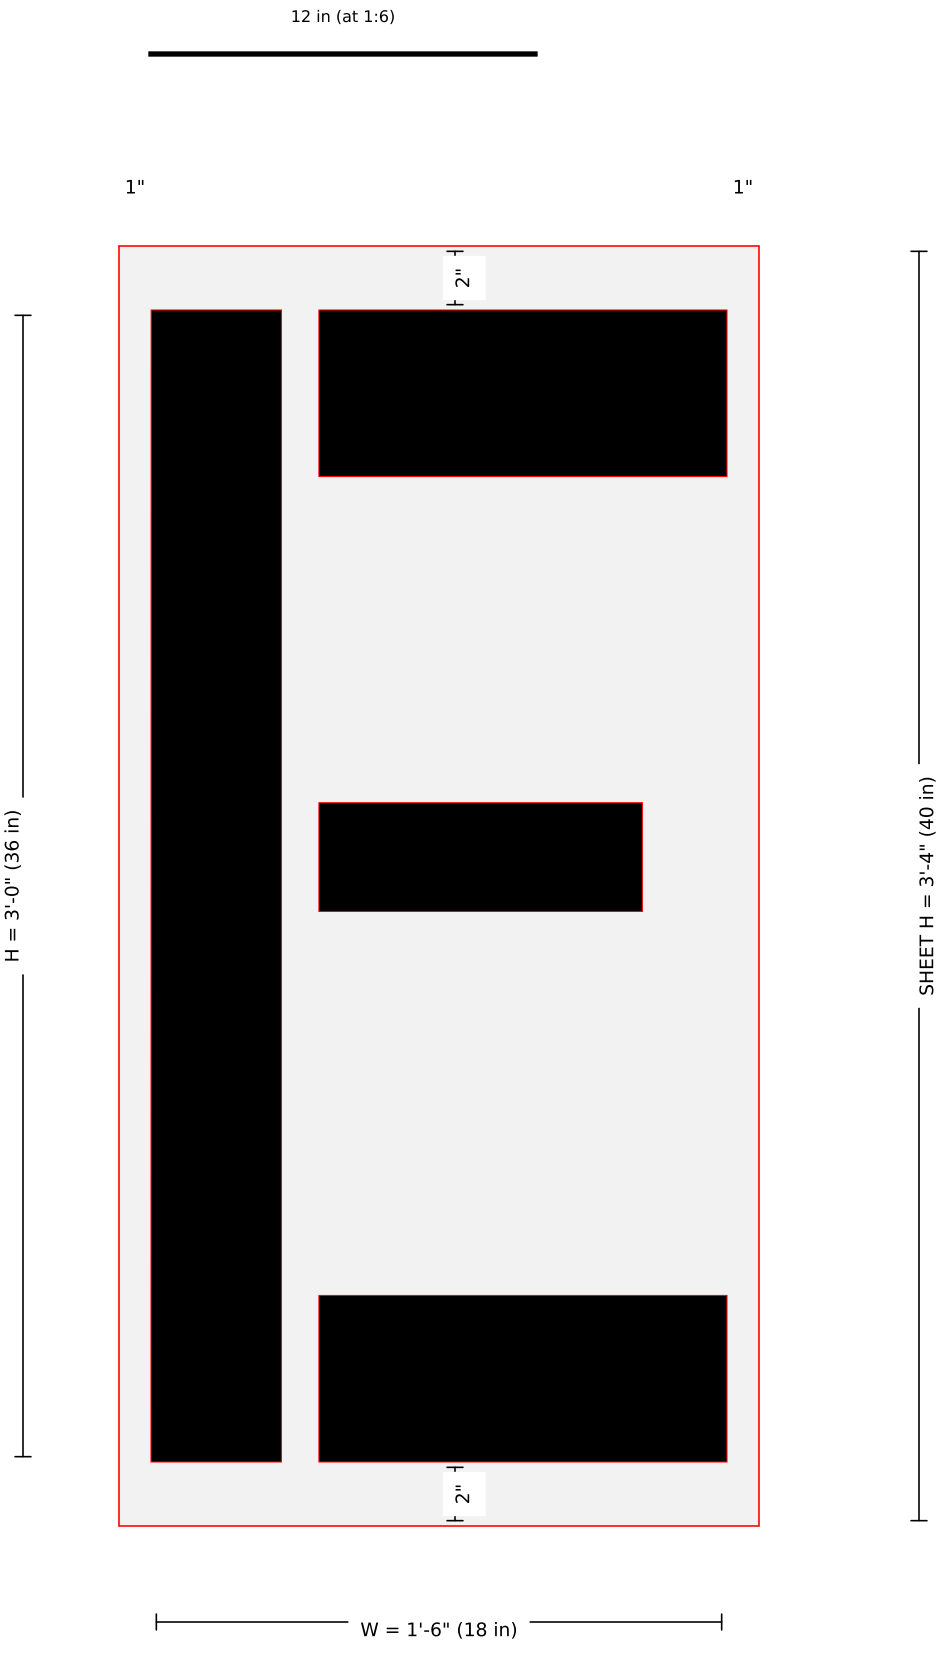





Pieces: 1 · sheet 20 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-W36E-36in-wide-FAA-Airport-Letter-E-Stencil-2.jpg: width = kit listing 18 (image-scale 17.85); kit sheet 24 x 44 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.07 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-036-03-F

36" FAA Airport "F" - kit SSS-FAA-036-03, traced from 1-800-Stencil image, 18 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

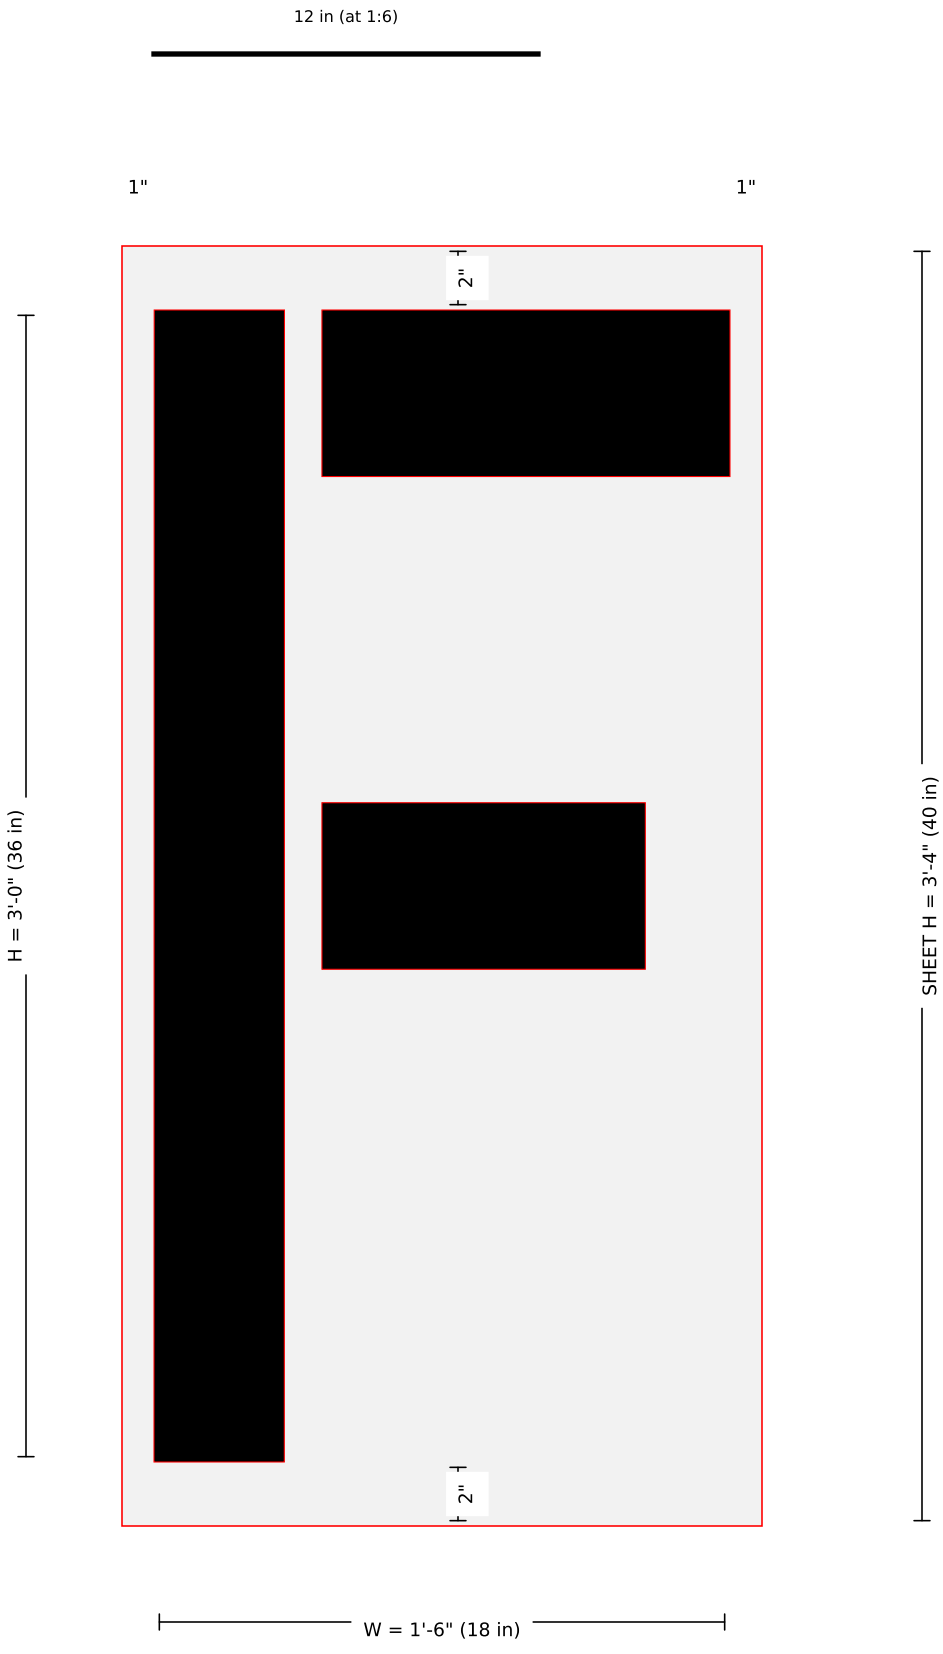




Pieces: 1 · sheet 20 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-W36F-36in-wide-FAA-Airport-Letter-F-Stencil-2.jpg: width = kit listing 18 (image-scale 17.85); kit sheet 24 x 44 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.07 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-036-03-G

36" FAA Airport "G" - kit SSS-FAA-036-03, traced from 1-800-Stencil image, 18 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

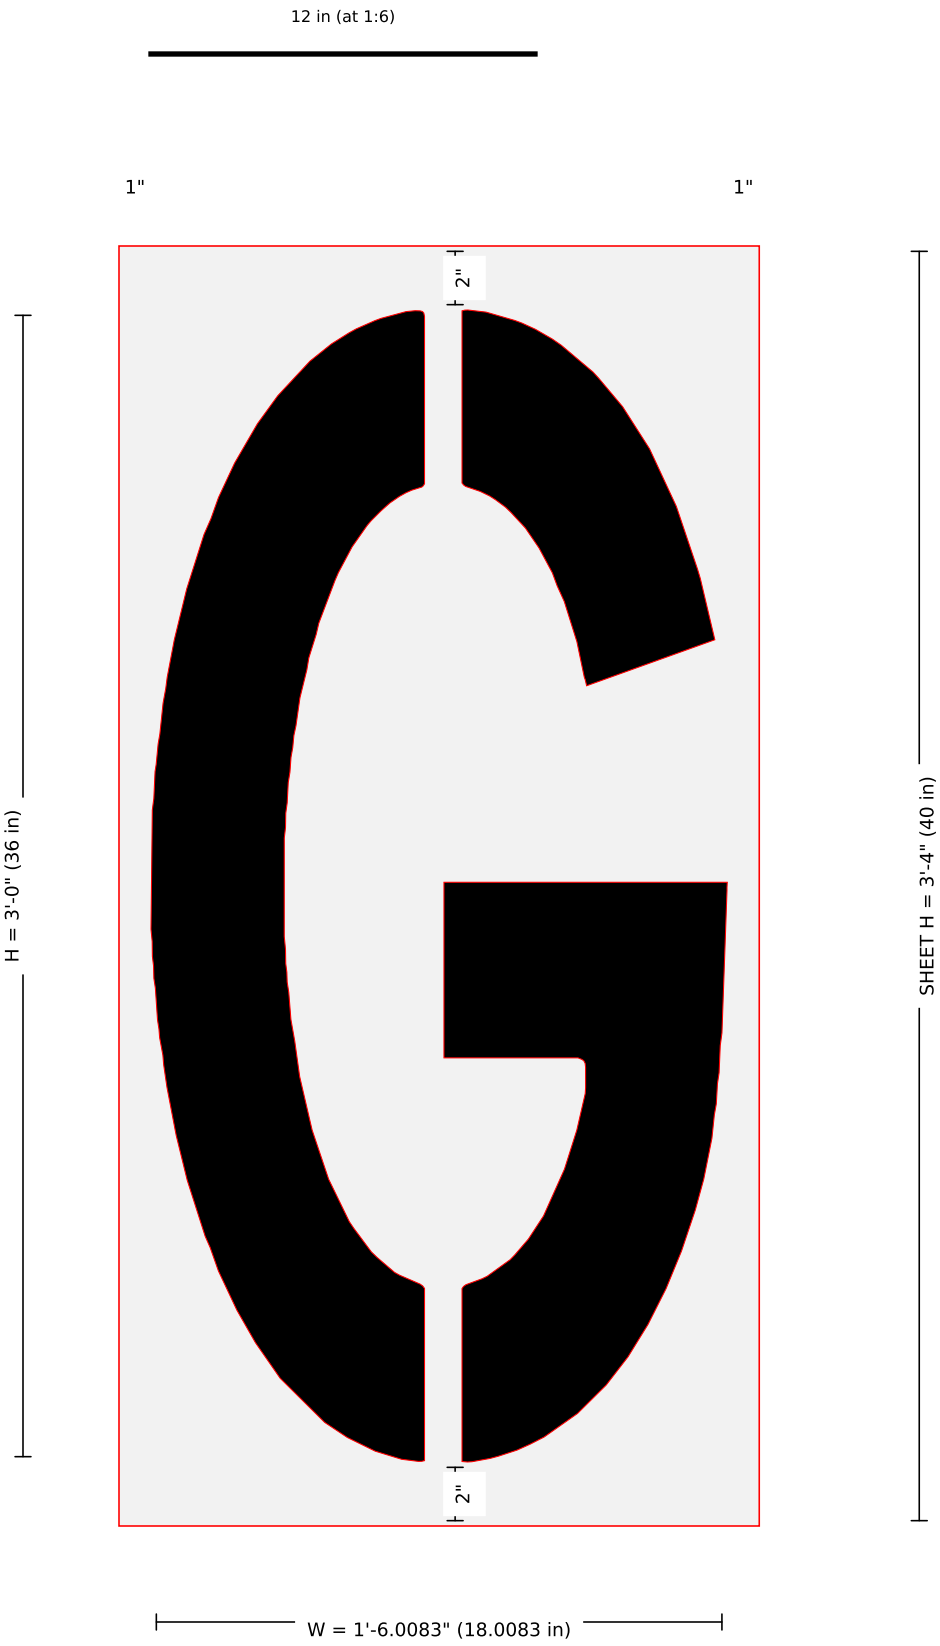


SHEET W = 1'-8.0083" (20.0083 in)


Pieces: 1 · sheet 20.008 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-W36G-36in-wide-FAA-Airport-Letter-G-Stencil-2.jpg: width = kit listing 18 (image-scale 17.85); kit sheet 24 x 44 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 0.5); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-036-03-H

36" FAA Airport "H" - kit SSS-FAA-036-03, traced from 1-800-Stencil image, 18 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

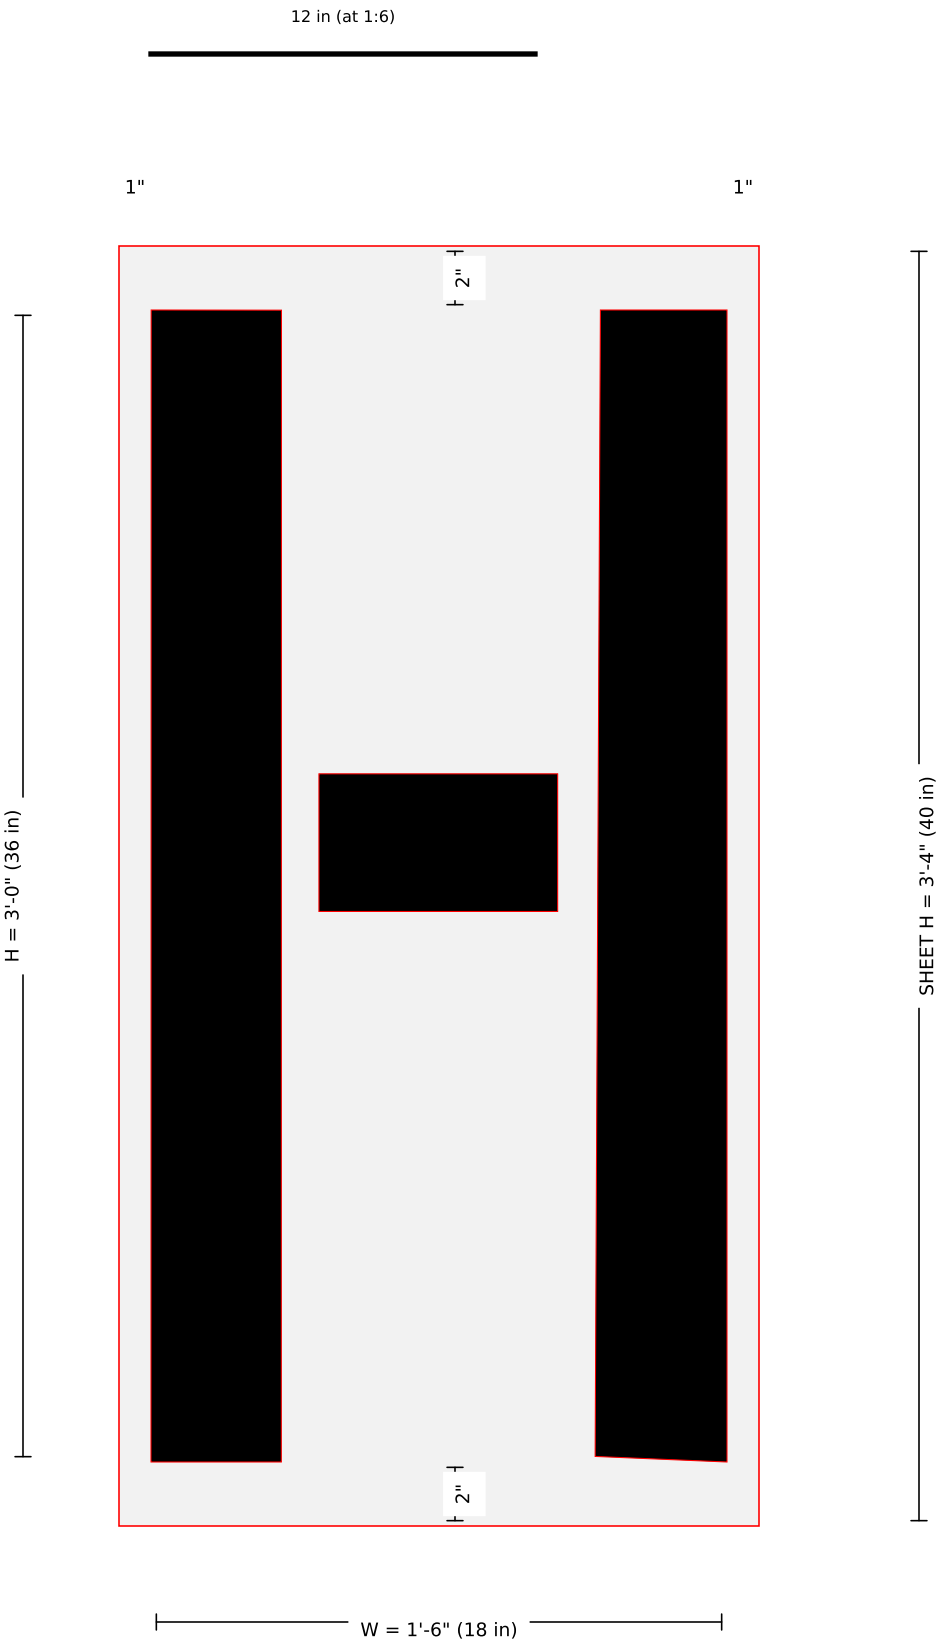




Pieces: 1 · sheet 20 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-W36H-36in-wide-FAA-Airport-Letter-H-Stencil-2.jpg: width = kit listing 18 (image-scale 17.85); kit sheet 24 x 44 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.07 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-036-03-J

36" FAA Airport "J" - kit SSS-FAA-036-03, traced from 1-800-Stencil image, 18 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

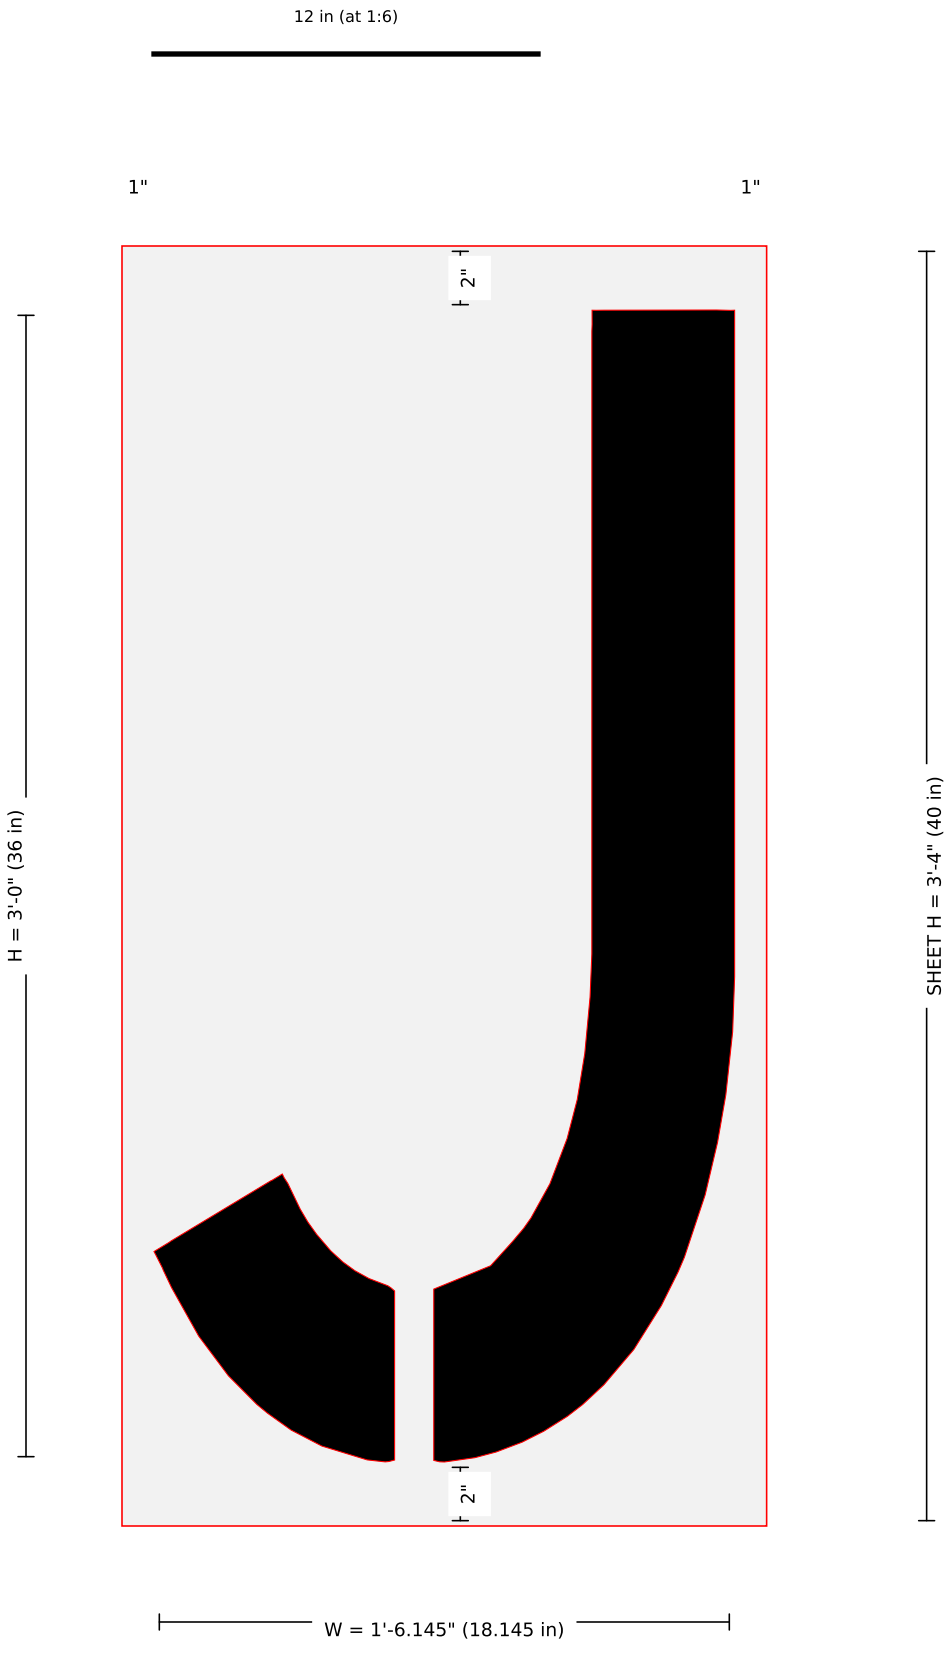


SHEET W = 1'-8.145" (20.145 in)

Pieces: 1 · sheet 20.145 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-W36J-36in-wide-FAA-Airport-Letter-J-Stencil-2.jpg: width = kit listing 18 (image-scale 17.81); kit sheet 24 x 44 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-036-03-K

36" FAA Airport "K" - kit SSS-FAA-036-03, traced from 1-800-Stencil image, 18 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

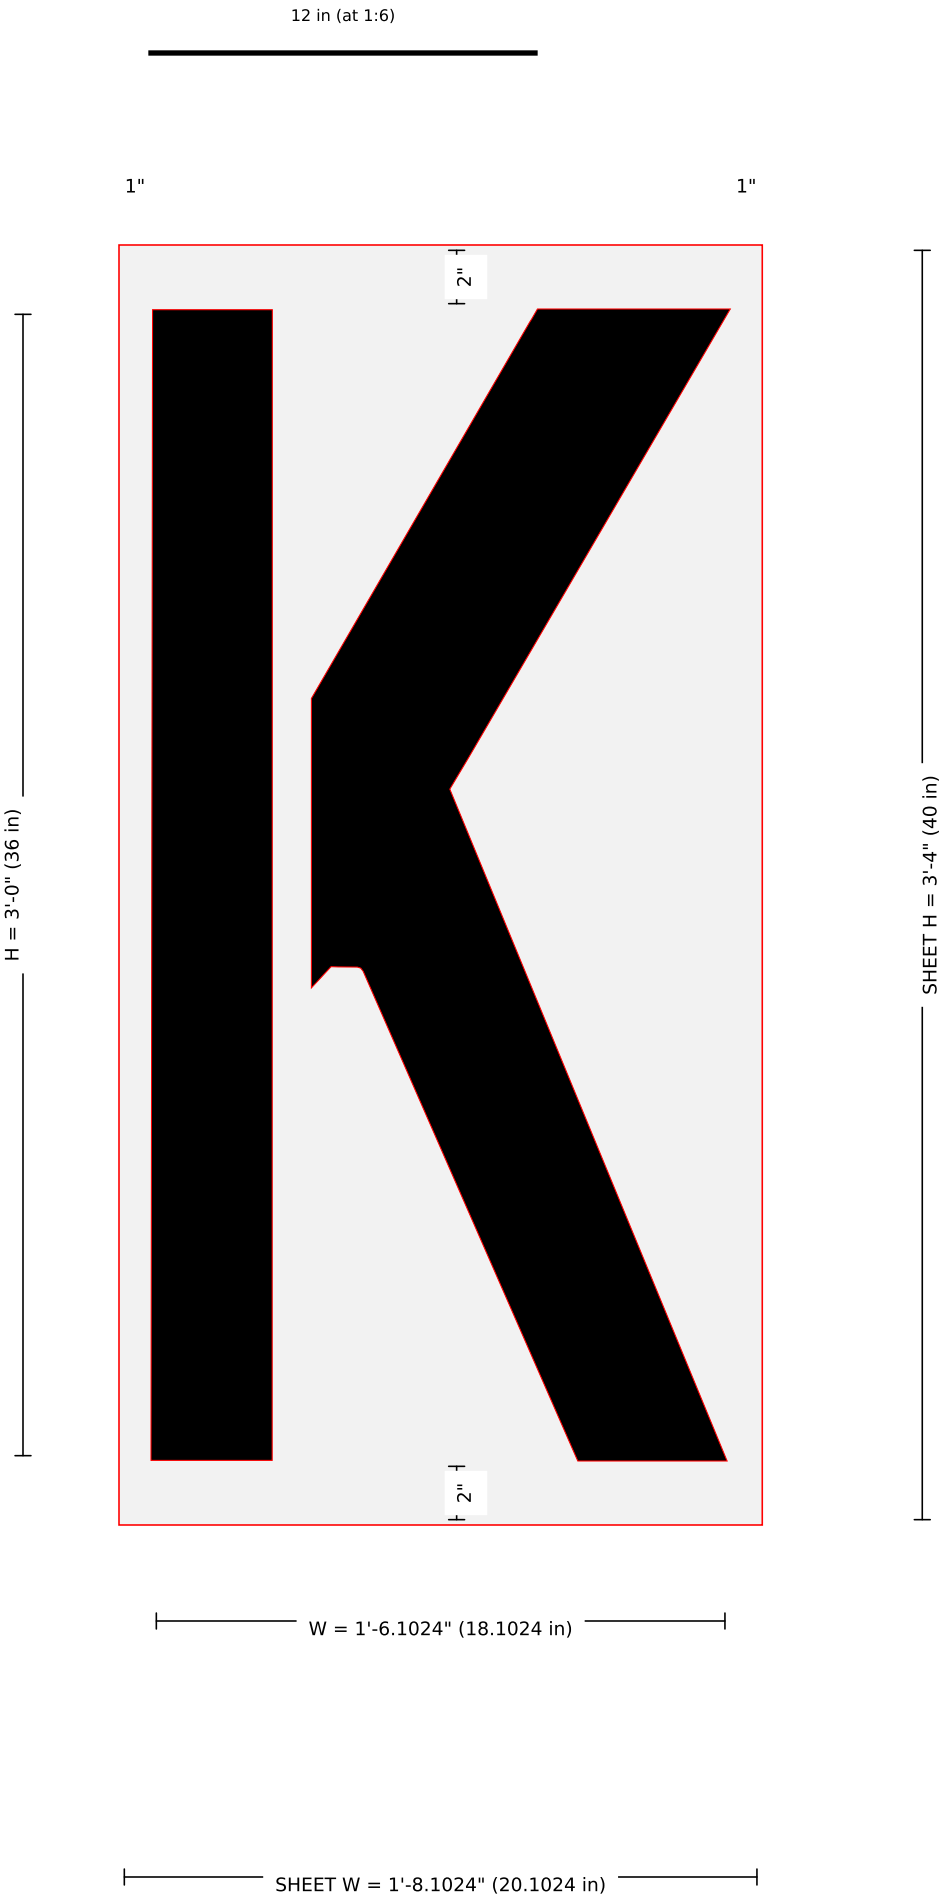


Pieces: 1 · sheet 20.102 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-W36K-36in-wide-FAA-Airport-Letter-K-Stencil-2.jpg: width = kit listing 18 (image-scale 17.76); kit sheet 24 x 44 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.07 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 1 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-036-03-L

36" FAA Airport "L" - kit SSS-FAA-036-03, traced from 1-800-Stencil image, 18 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

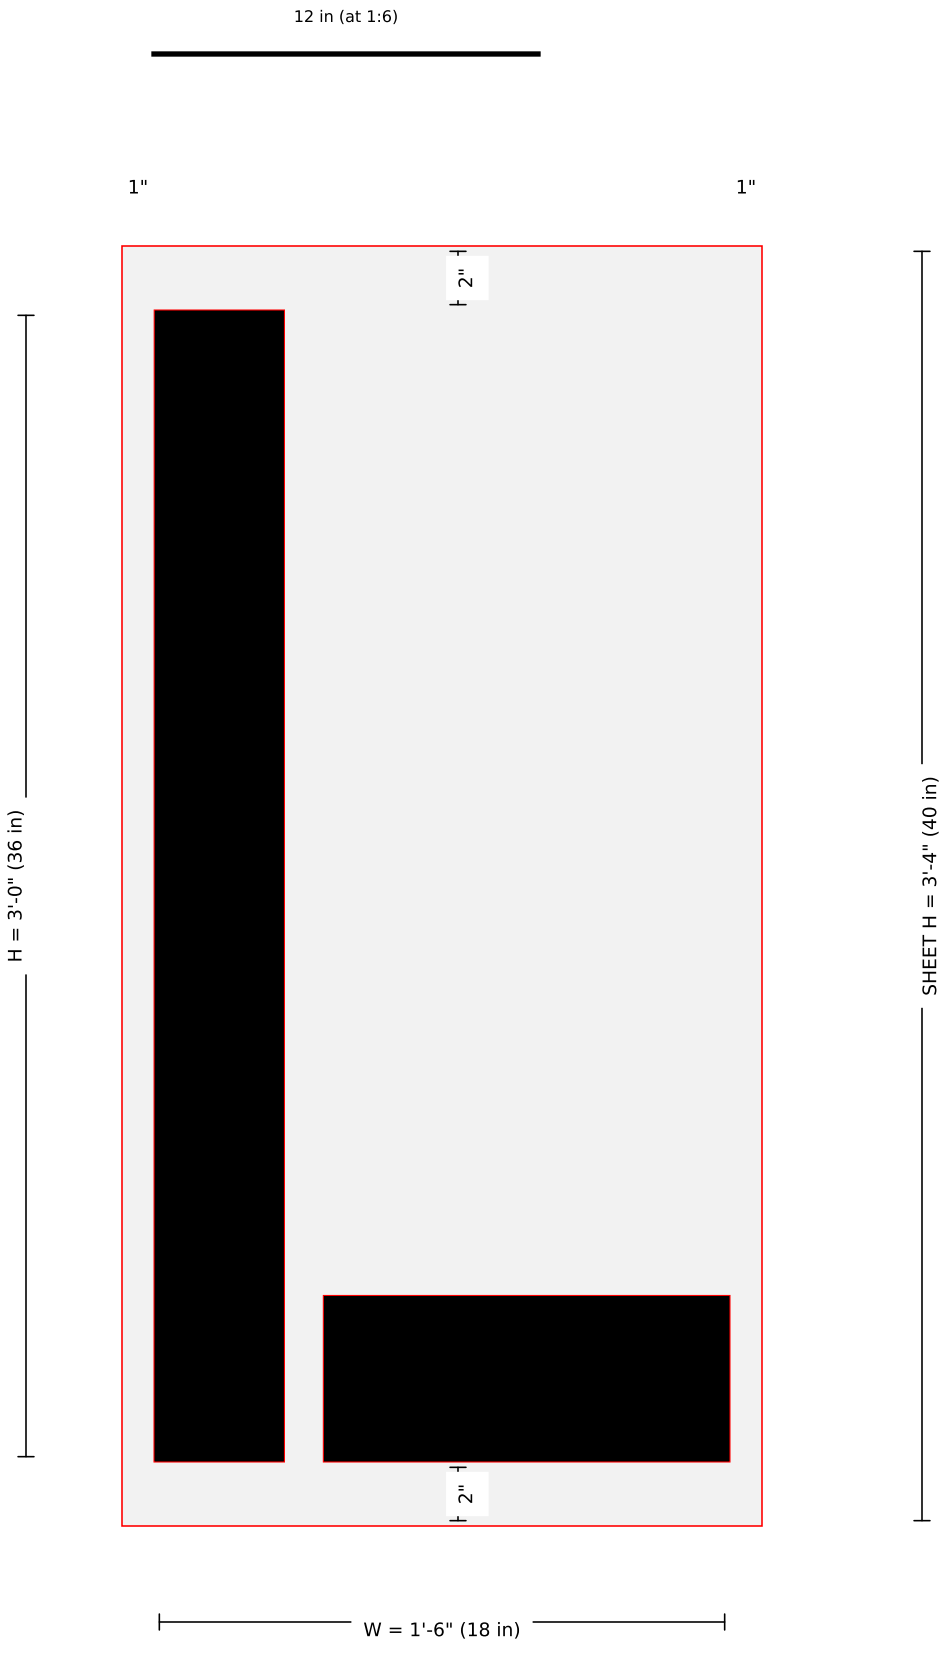


SHEET W = 1'-8" (20 in)

Pieces: 1 · sheet 20 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-W36L-36in-wide-FAA-Airport-Letter-L-Stencil-2.jpg: width = kit listing 18 (image-scale 17.85); kit sheet 24 x 44 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.07 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-036-03-M

36" FAA Airport "M" - kit SSS-FAA-036-03, traced from 1-800-Stencil image, 18 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

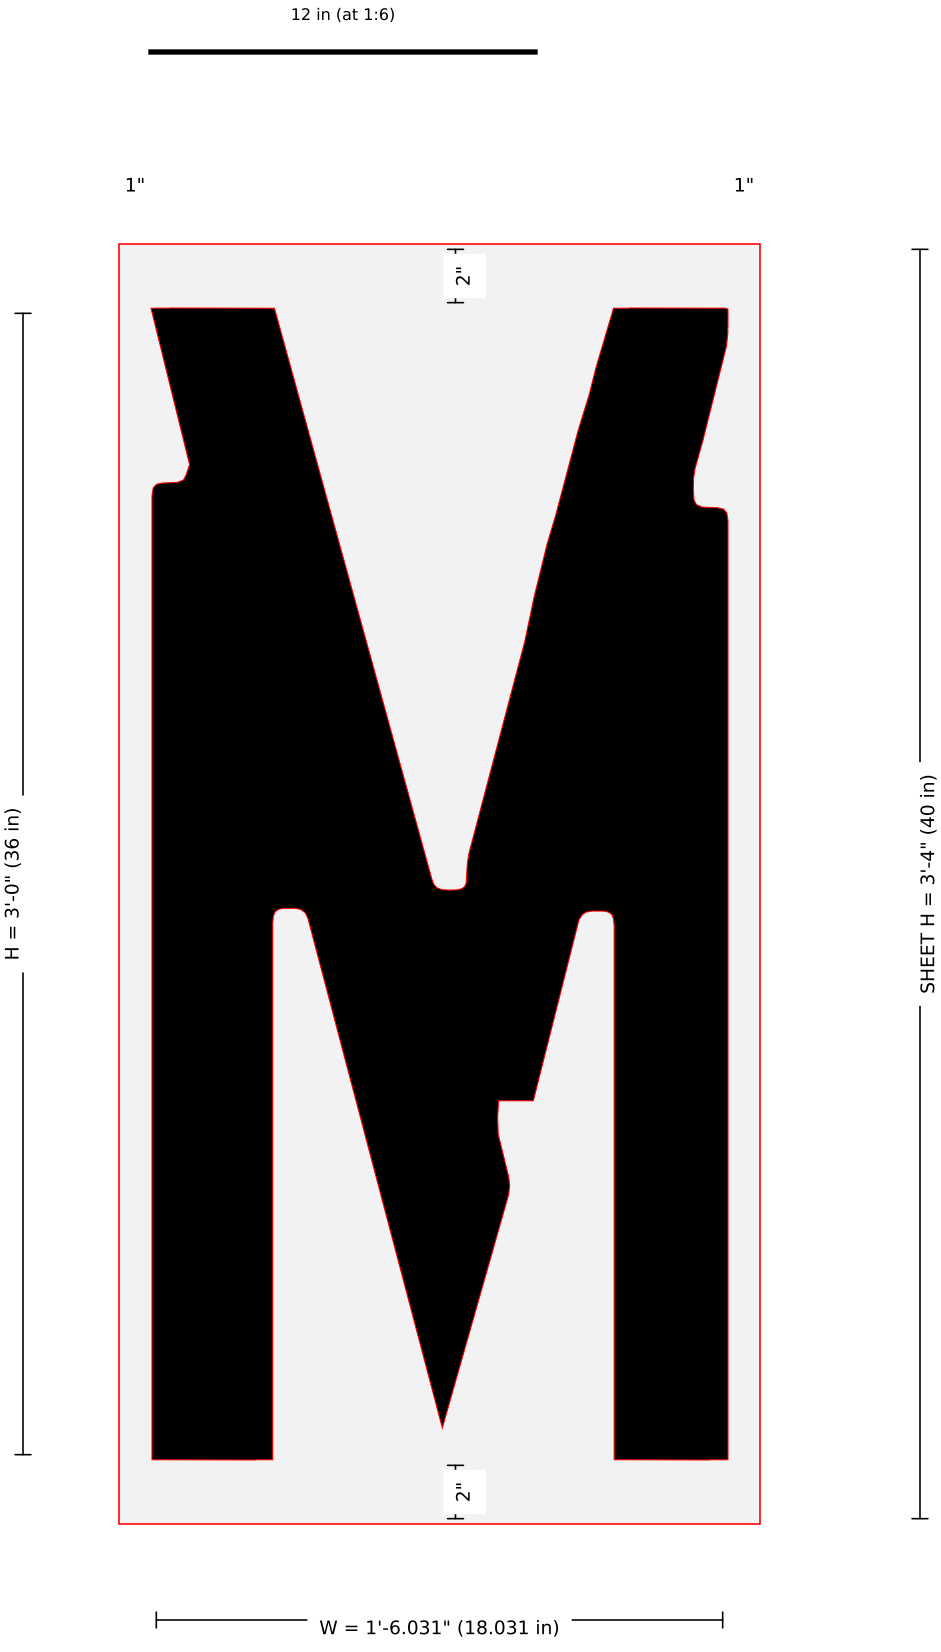


SHEET W = 1'-8.031" (20.031 in)

Pieces: 1 · sheet 20.031 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-W36M-36in-wide-FAA-Airport-Letter-M-Stencil-2.jpg: width = kit listing 18 (image-scale 17.85); kit sheet 24 x 44 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 1 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-036-03-N

36" FAA Airport "N" - kit SSS-FAA-036-03, traced from 1-800-Stencil image, 18 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

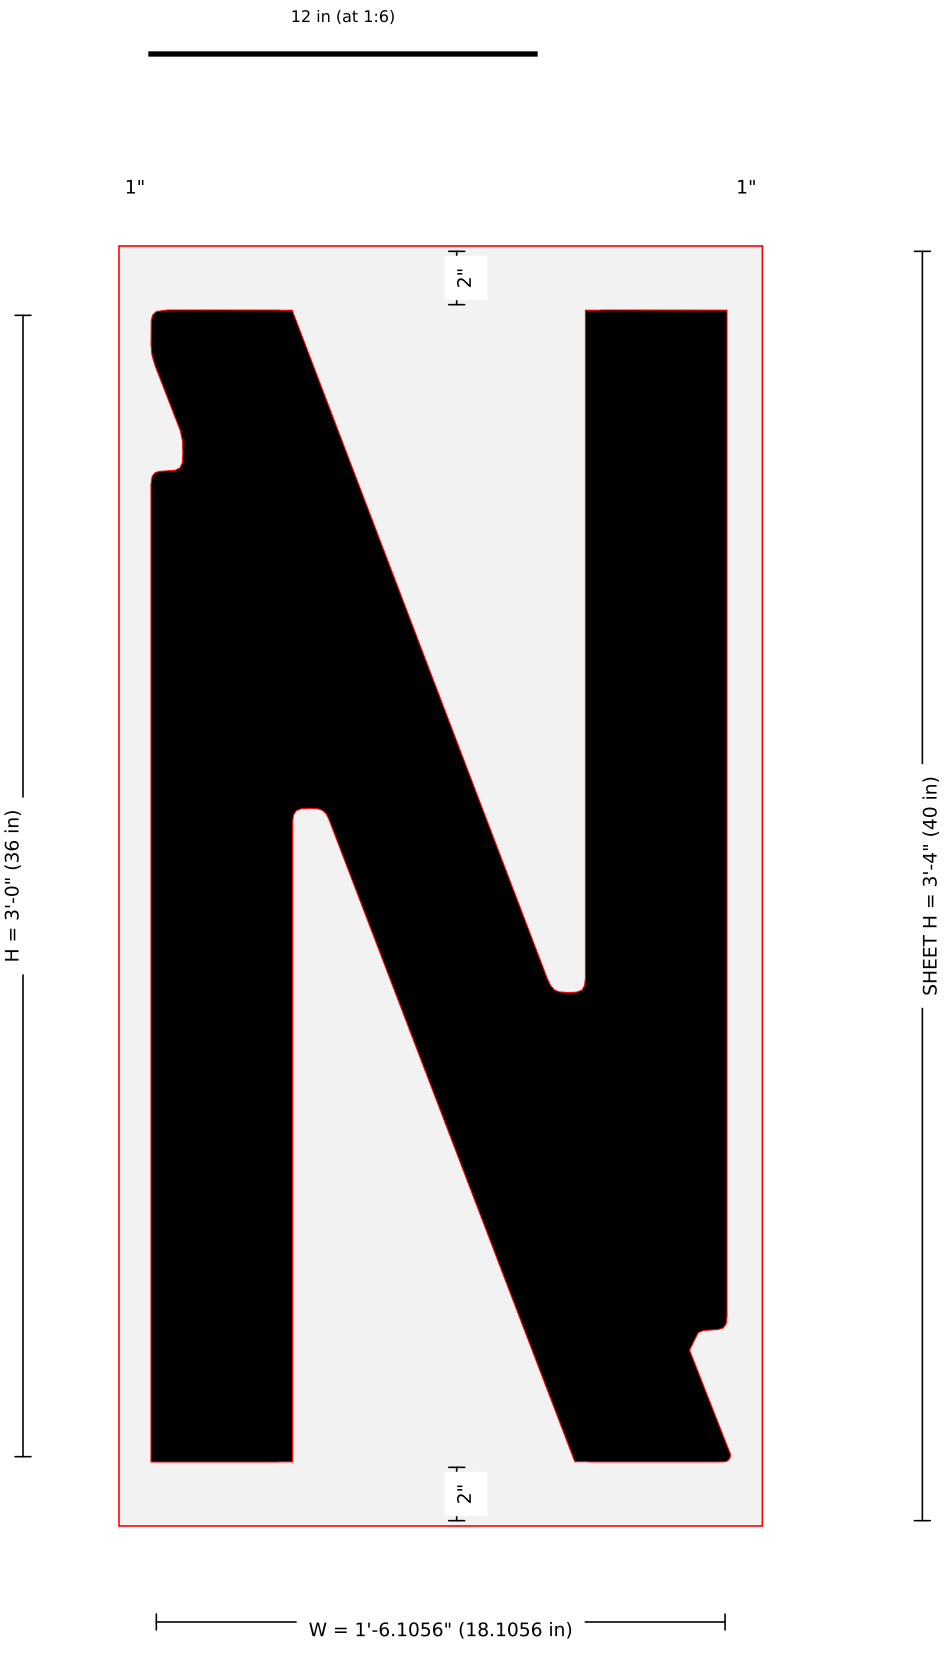


SHEET W = 1'-8.1056" (20.1056 in)

Pieces: 1 · sheet 20.106 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-W36N-36in-wide-FAA-Airport-Letter-N-Stencil-2.jpg: width = kit listing 18 (image-scale 17.85); kit sheet 24 x 44 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-036-03-O

36" FAA Airport "O" - kit SSS-FAA-036-03, traced from 1-800-Stencil image, 18 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

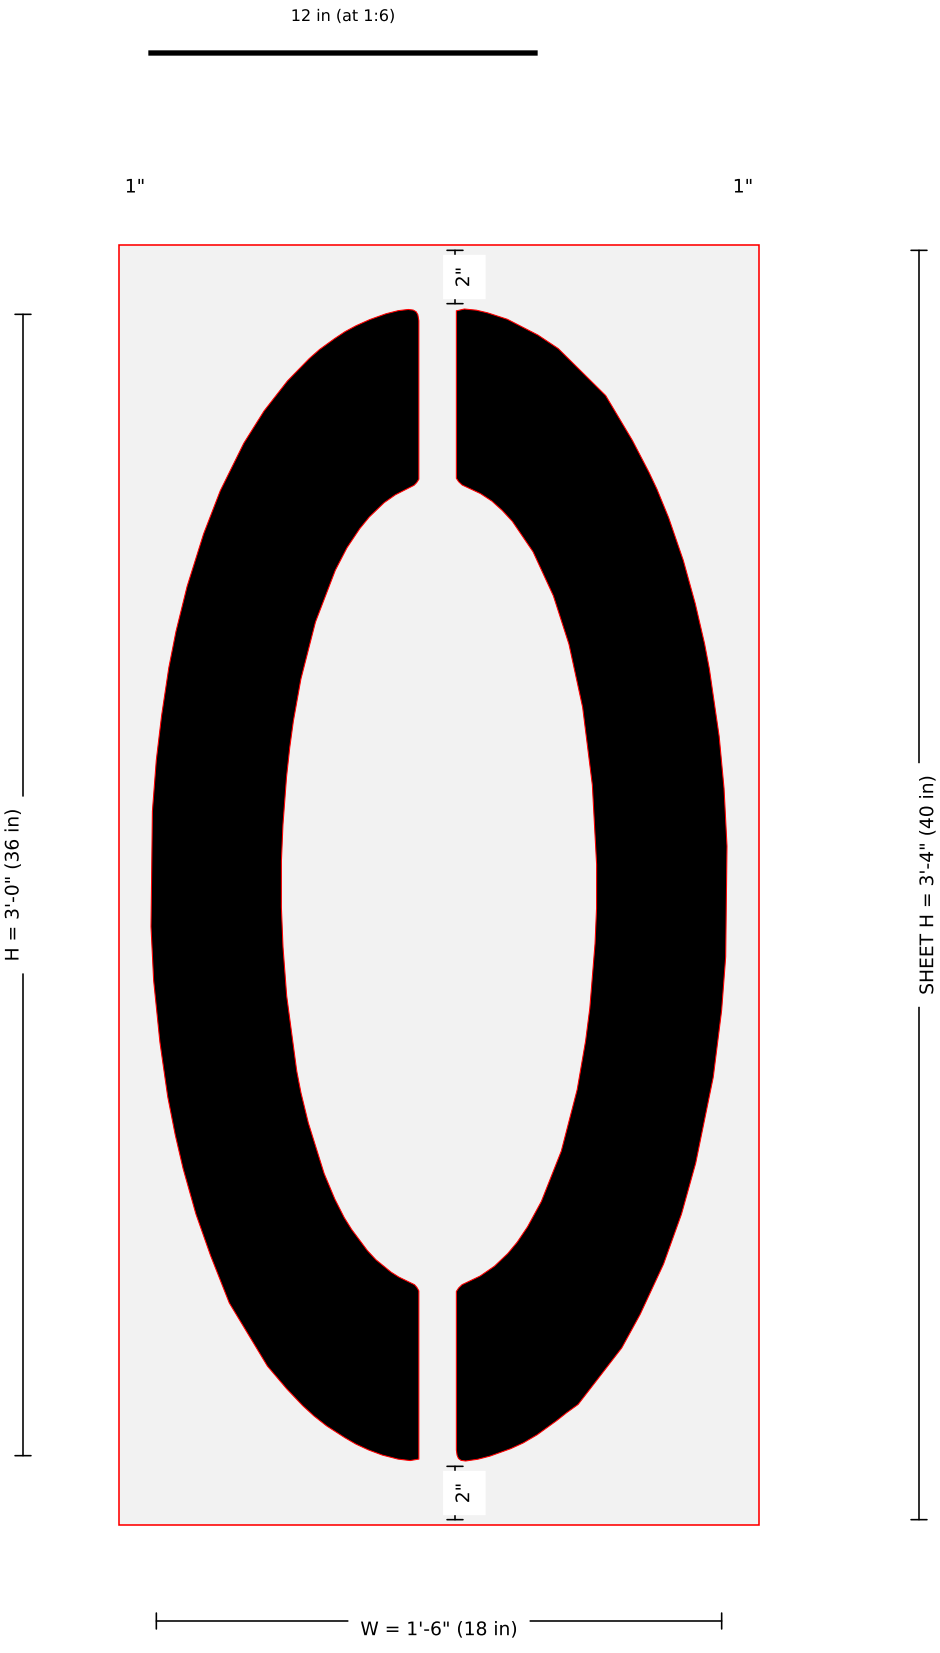


SHEET W = 1'-8" (20 in)

Pieces: 1 · sheet 20 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-W36O-36in-wide-FAA-Airport-Letter-O-Stencil-2.jpg: width = kit listing 18 (image-scale 17.85); kit sheet 24 x 44 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-036-03-Q

36" FAA Airport "Q" - kit SSS-FAA-036-03, traced from 1-800-Stencil image, 18 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

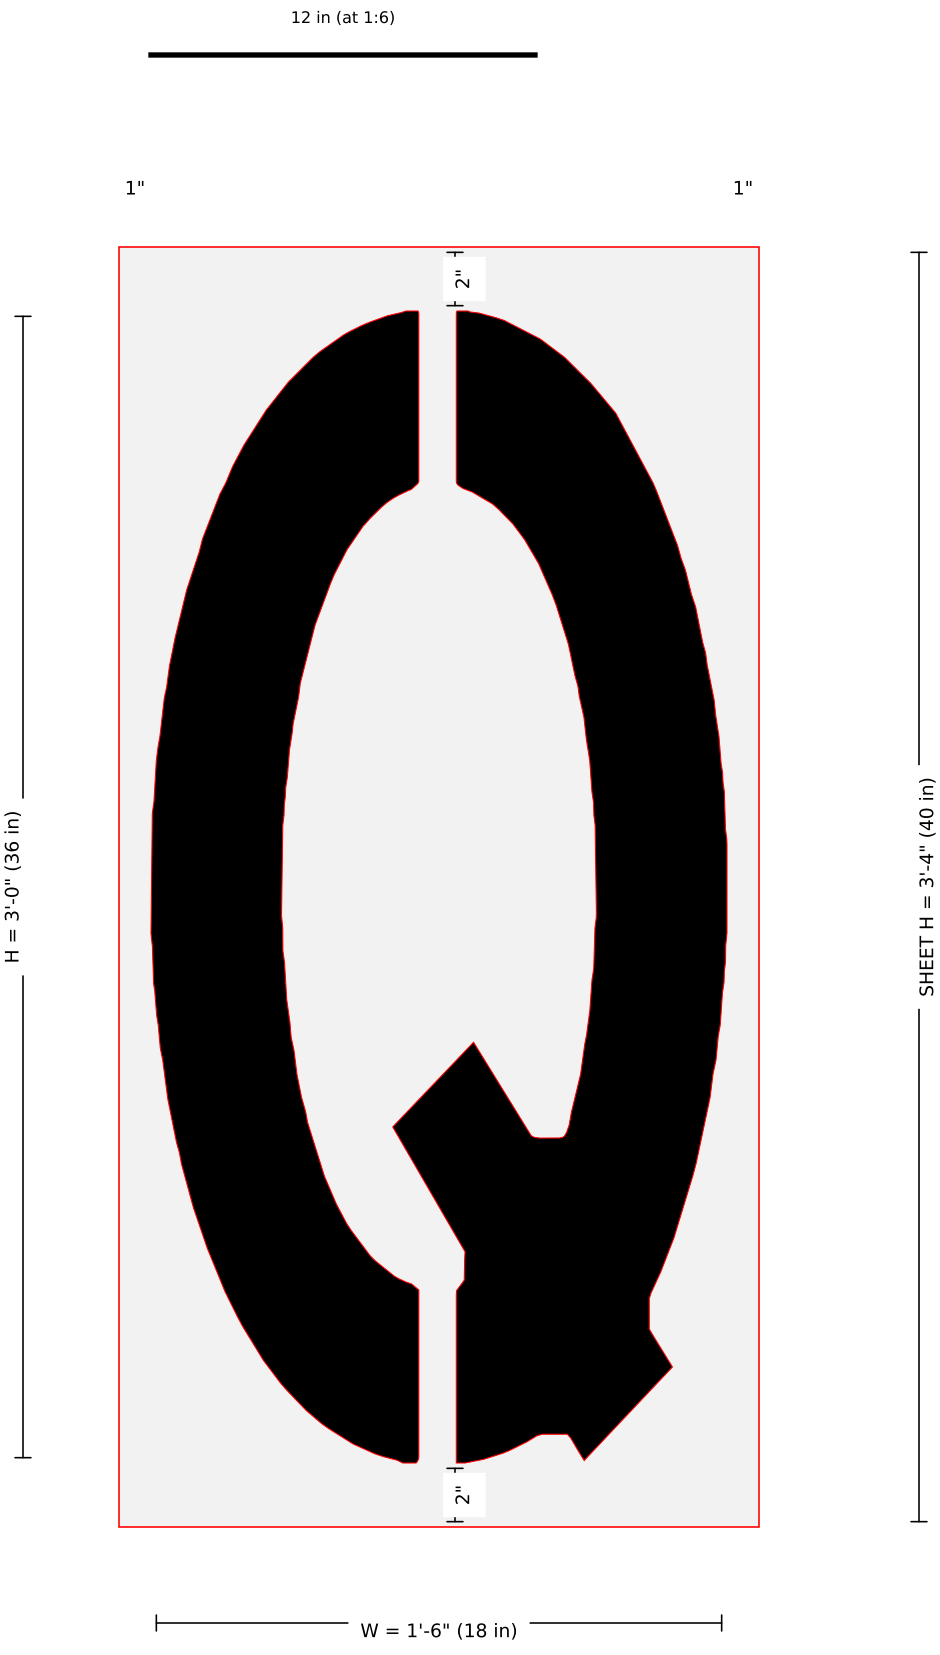


Pieces: 1 · sheet 20 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-W36Q-36in-wide-FAA-Airport-Letter-Q-Stencil-2.jpg: width = kit listing 18 (image-scale 17.85); kit sheet 24 x 44 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 0.5); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 14 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-036-03-R

36" FAA Airport "R" - kit SSS-FAA-036-03, traced from 1-800-Stencil image, 18 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

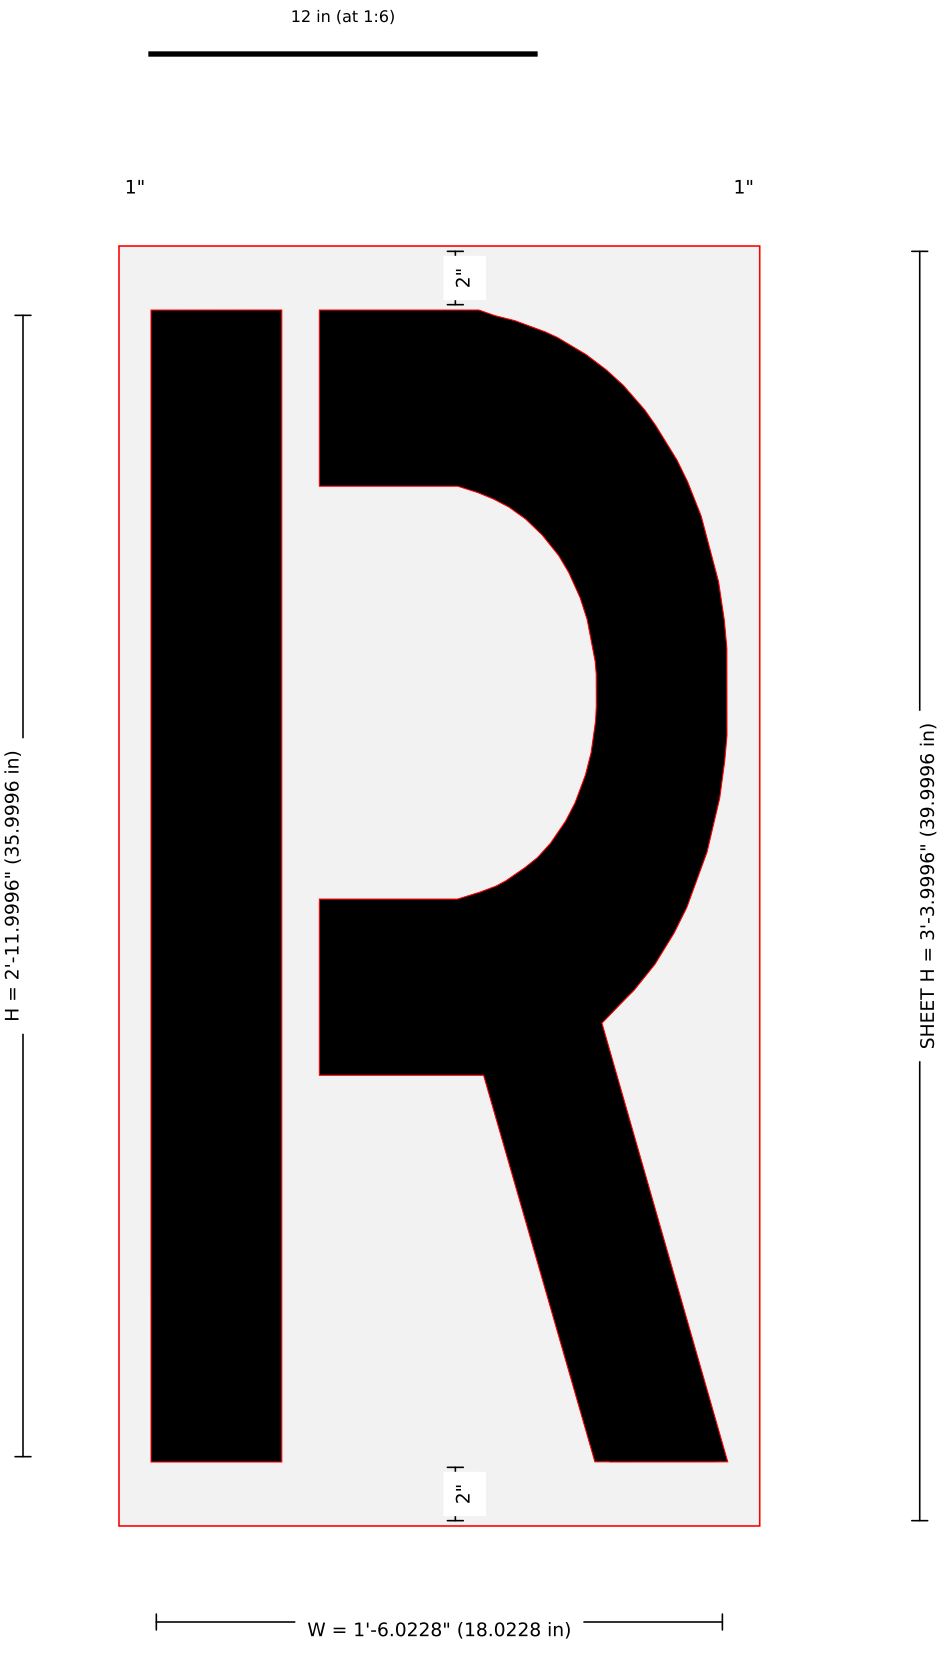


Pieces: 1 · sheet 20.023 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-W36R-36in-wide-FAA-Airport-Letter-R-Stencil-2.jpg: width = kit listing 18 (image-scale 17.81); kit sheet 24 x 44 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 1 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-036-03-S

36" FAA Airport "S" - kit SSS-FAA-036-03, traced from 1-800-Stencil image, 18 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

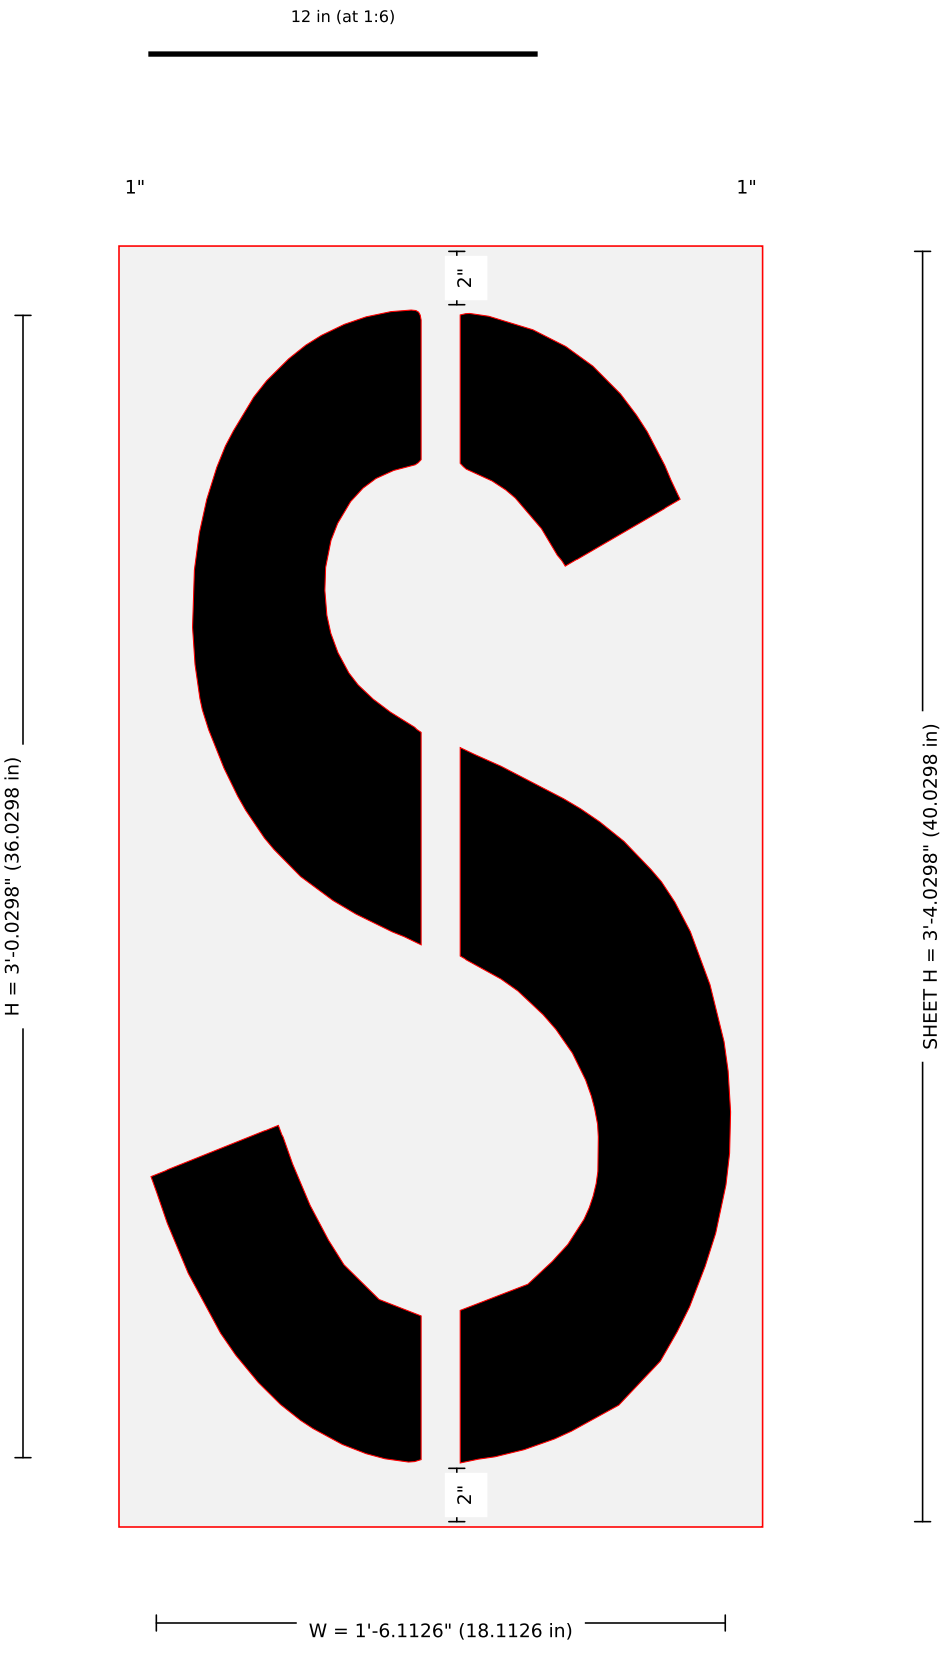


SHEET W = 1'-8.1126" (20.1126 in)

Pieces: 1 · sheet 20.113 x 40.03 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-W36S-36in-wide-FAA-Airport-Letter-S-Stencil-2.jpg: width = kit listing 18 (image-scale 17.83); kit sheet 24 x 44 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-036-03-T

36" FAA Airport "T" - kit SSS-FAA-036-03, traced from 1-800-Stencil image, 18 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

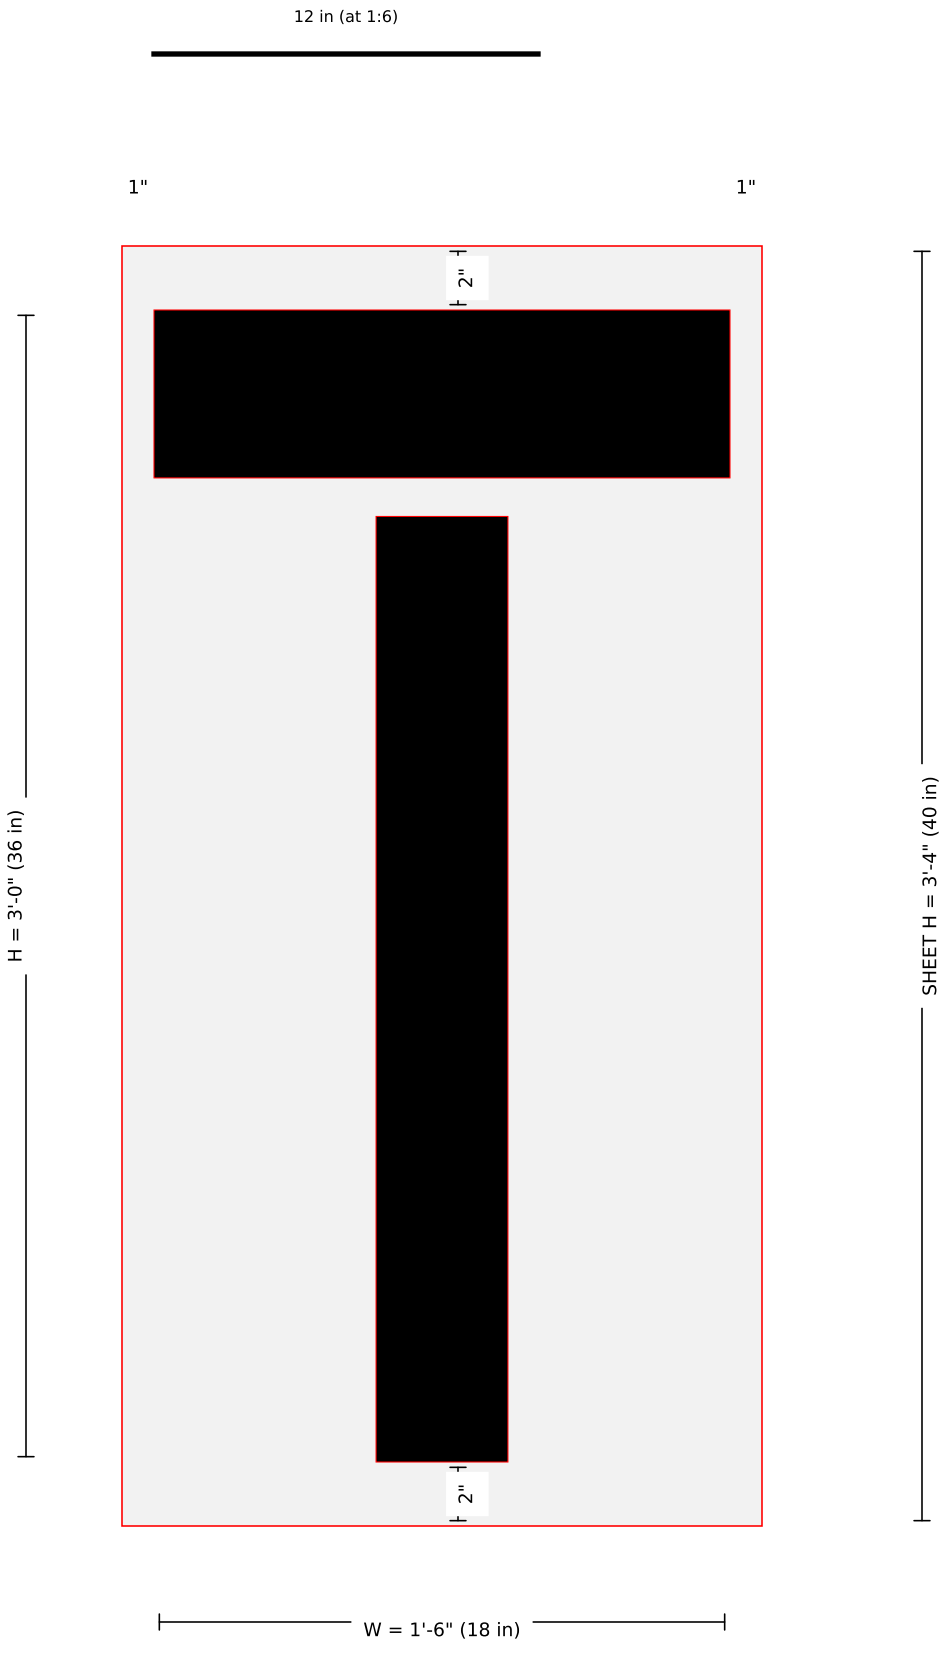


SHEET W = 1'-8" (20 in)

Pieces: 1 · sheet 20 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-W36T-36in-wide-FAA-Airport-Letter-T-Stencil-2.jpg: width = kit listing 18 (image-scale 17.85); kit sheet 24 x 44 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.07 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-036-03-U

36" FAA Airport "U" - kit SSS-FAA-036-03, traced from 1-800-Stencil image, 18 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

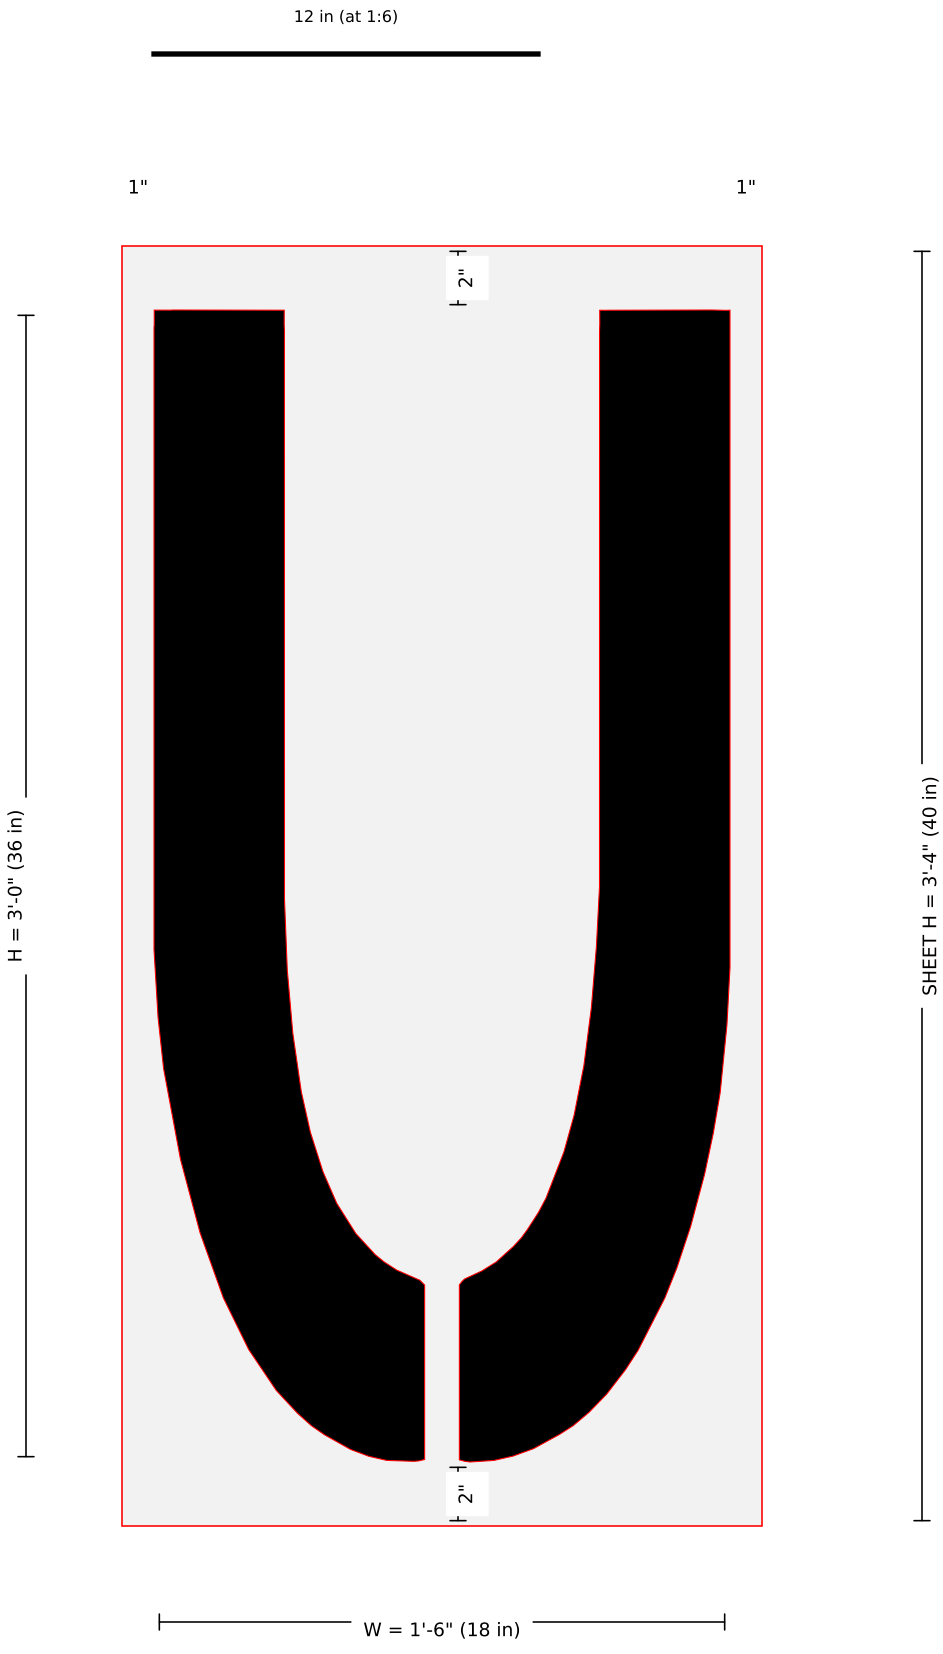


SHEET W = 1'-8" (20 in)


Pieces: 1 · sheet 20 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-W36U-36in-wide-FAA-Airport-Letter-U-Stencil-2.jpg: width = kit listing 18 (image-scale 17.85); kit sheet 24 x 44 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-036-03-V

36" FAA Airport "V" - kit SSS-FAA-036-03, traced from 1-800-Stencil image, 18 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

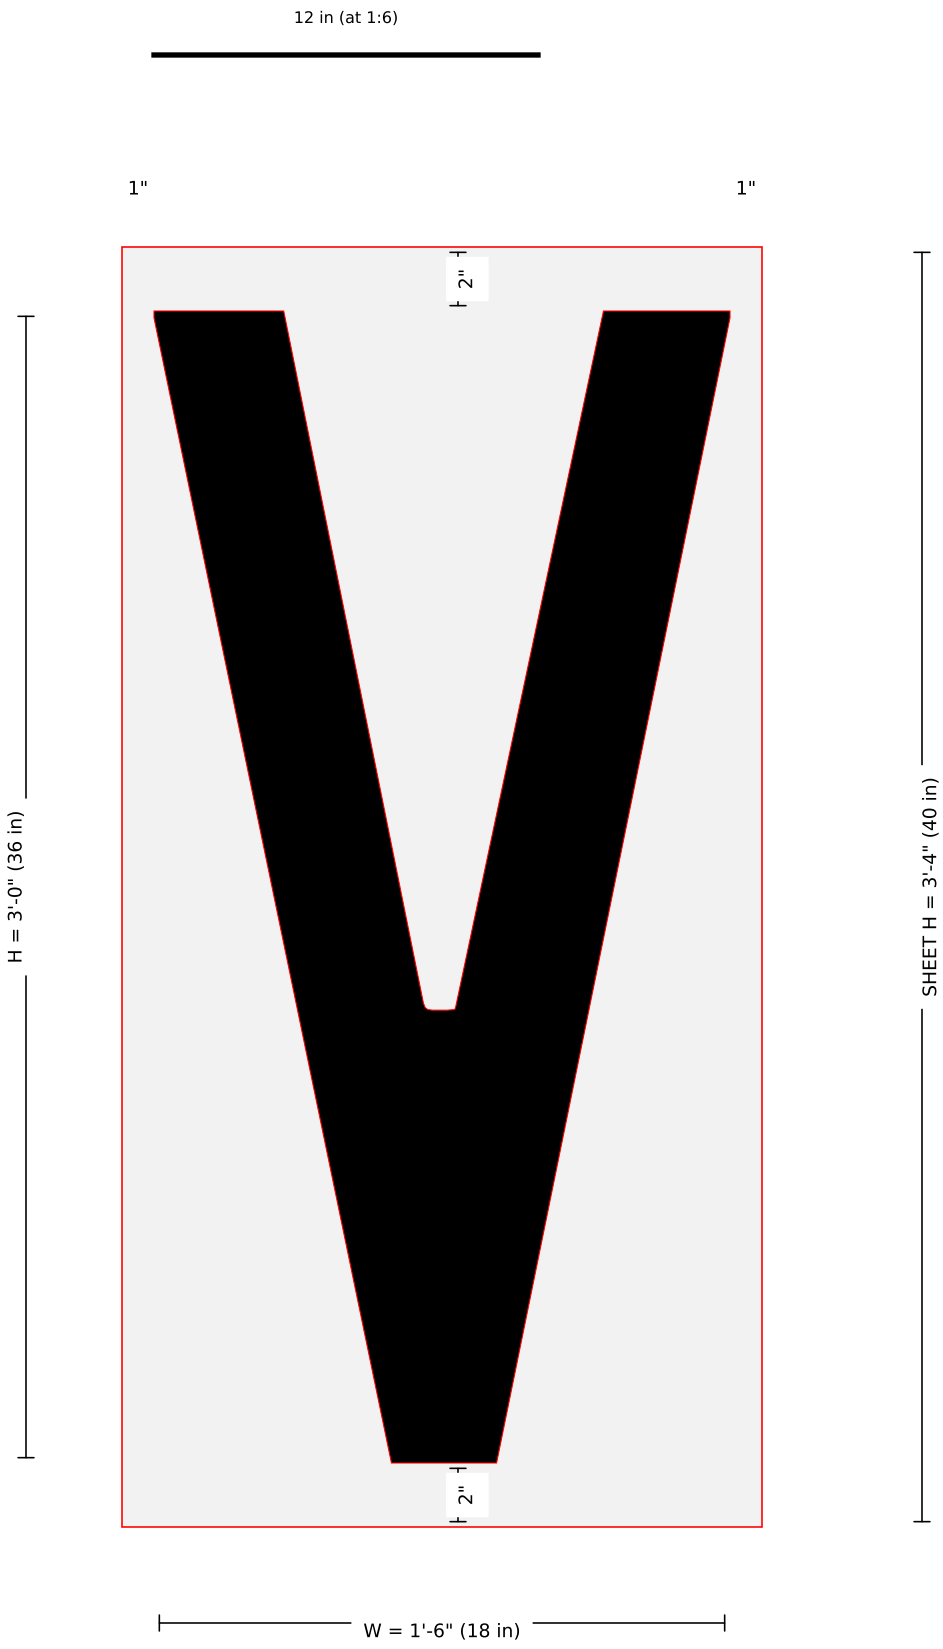




Pieces: 1 · sheet 20 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-W36V-36in-wide-FAA-Airport-Letter-V-Stencil-2.jpg: width = kit listing 18 (image-scale 17.76); kit sheet 24 x 44 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.07 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-036-03-W

36" FAA Airport "W" - kit SSS-FAA-036-03, traced from 1-800-Stencil image, 18 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

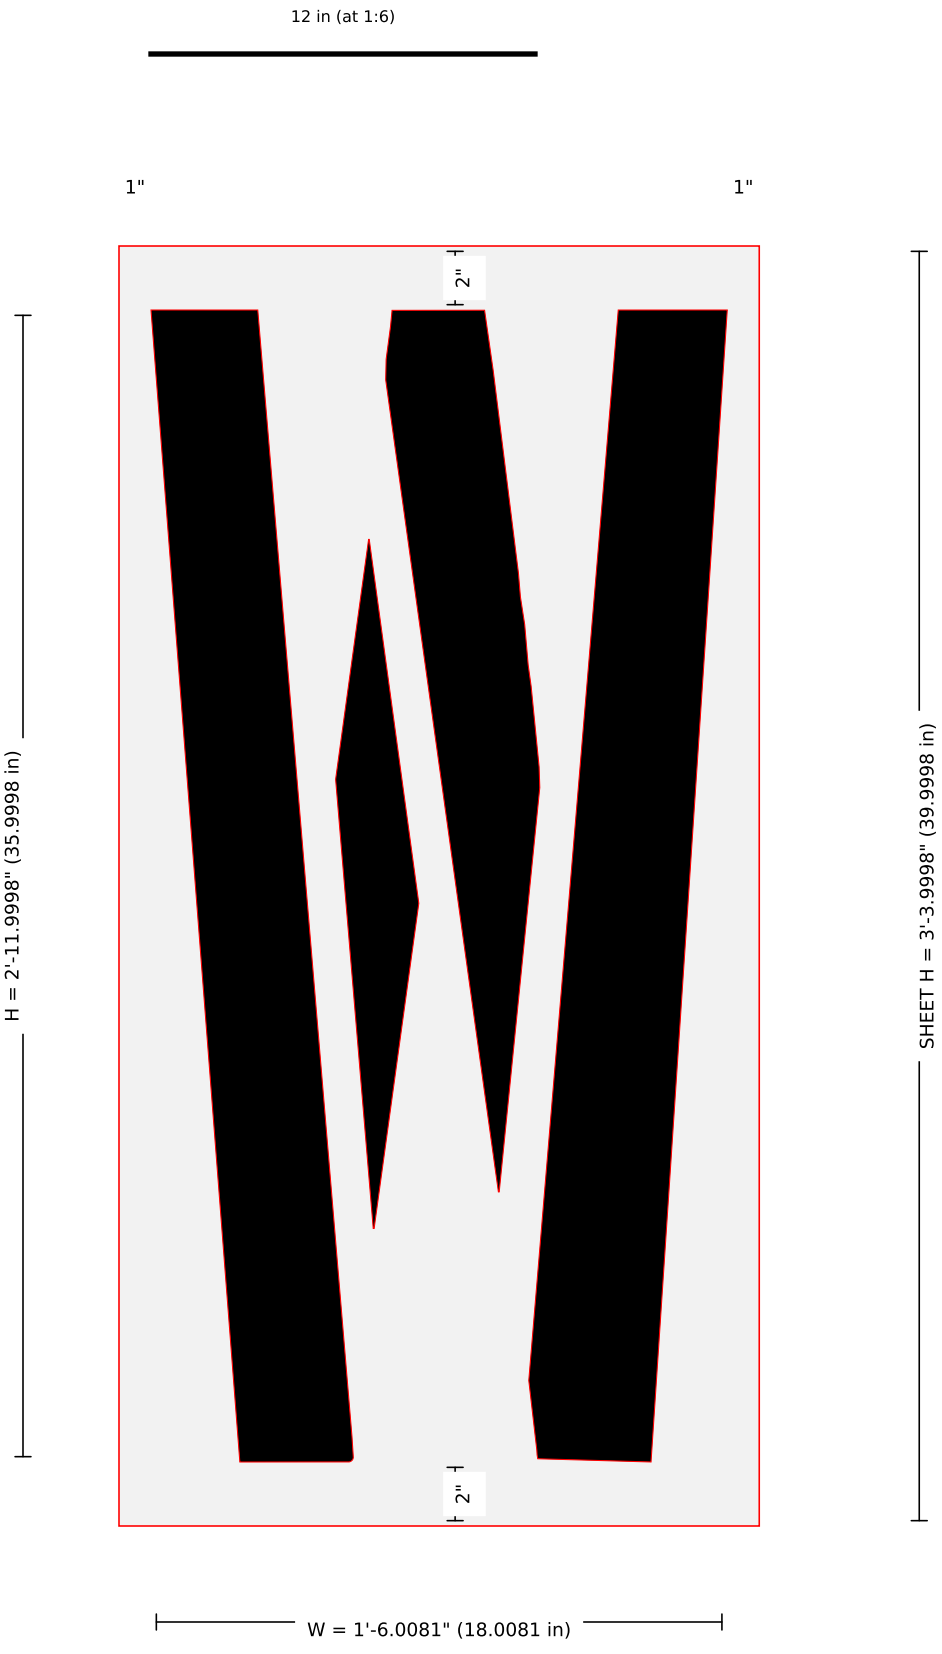


SHEET W = 1'-8.0081" (20.0081 in)


Pieces: 1 · sheet 20.008 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-W36W-36in-wide-FAA-Airport-Letter-W-Stencil-2.jpg: width = kit listing 18 (image-scale 17.85); kit sheet 24 x 44 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.14 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-036-03-X

36" FAA Airport "X" - kit SSS-FAA-036-03, traced from 1-800-Stencil image, 18 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

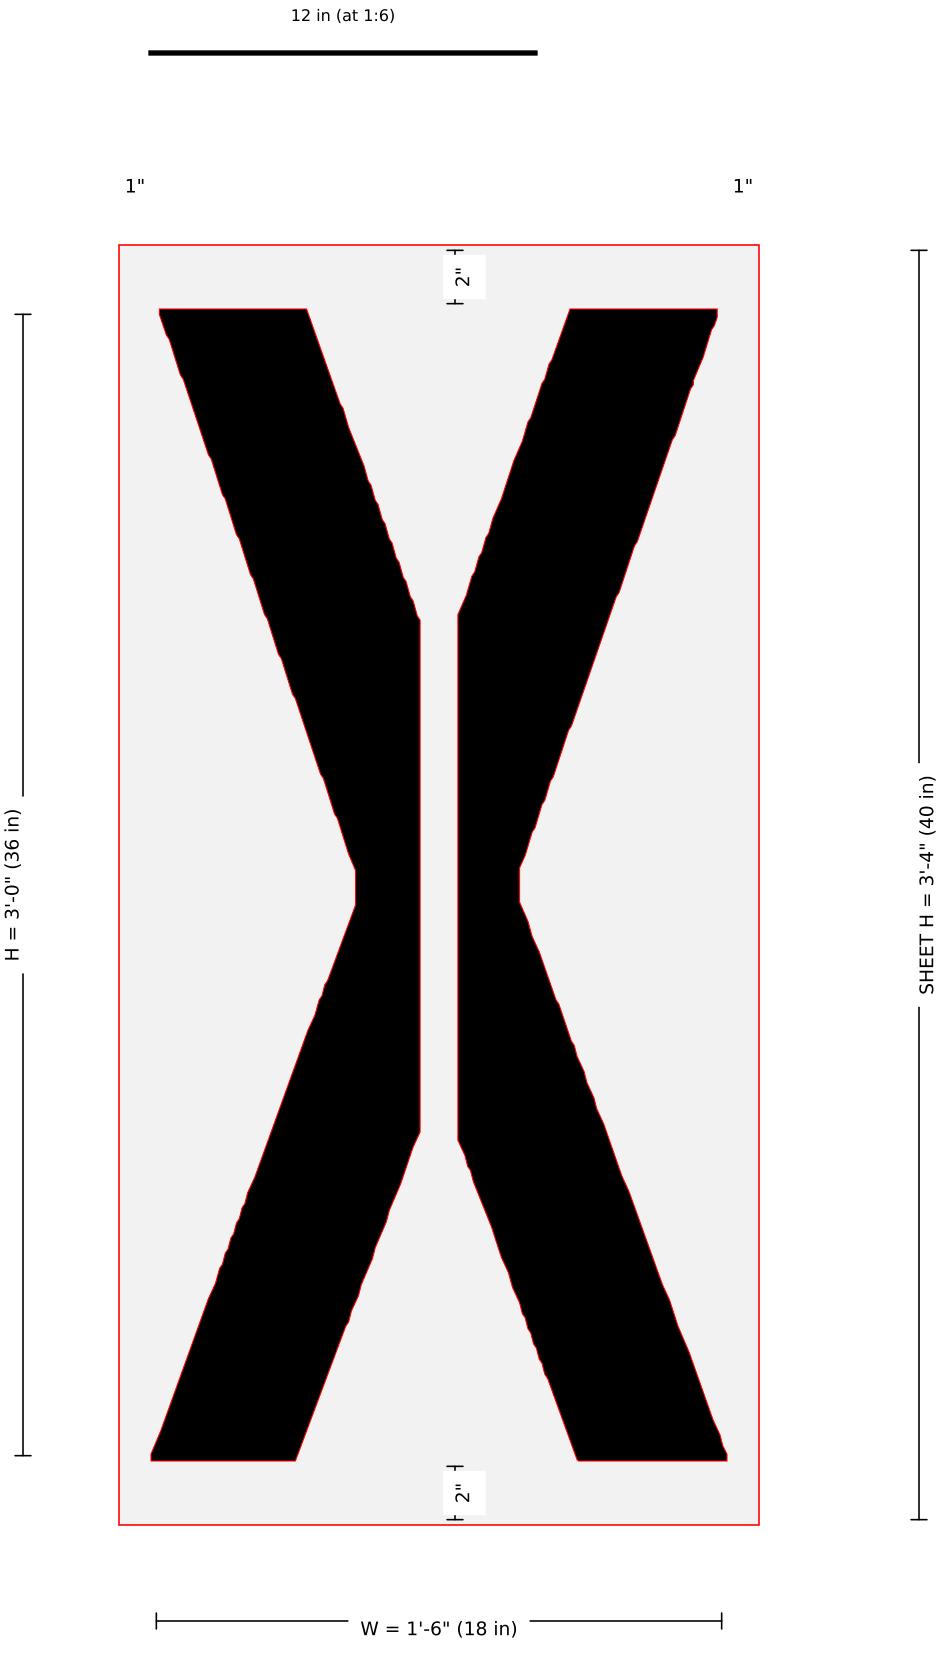




Pieces: 1 · sheet 20 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-W36X-36in-wide-FAA-Airport-Letter-X-Stencil-2.jpg: width = kit listing 18 (image-scale 17.68); kit sheet 24 x 44 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-036-03-Y

36" FAA Airport "Y" - kit SSS-FAA-036-03, traced from 1-800-Stencil image, 18 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

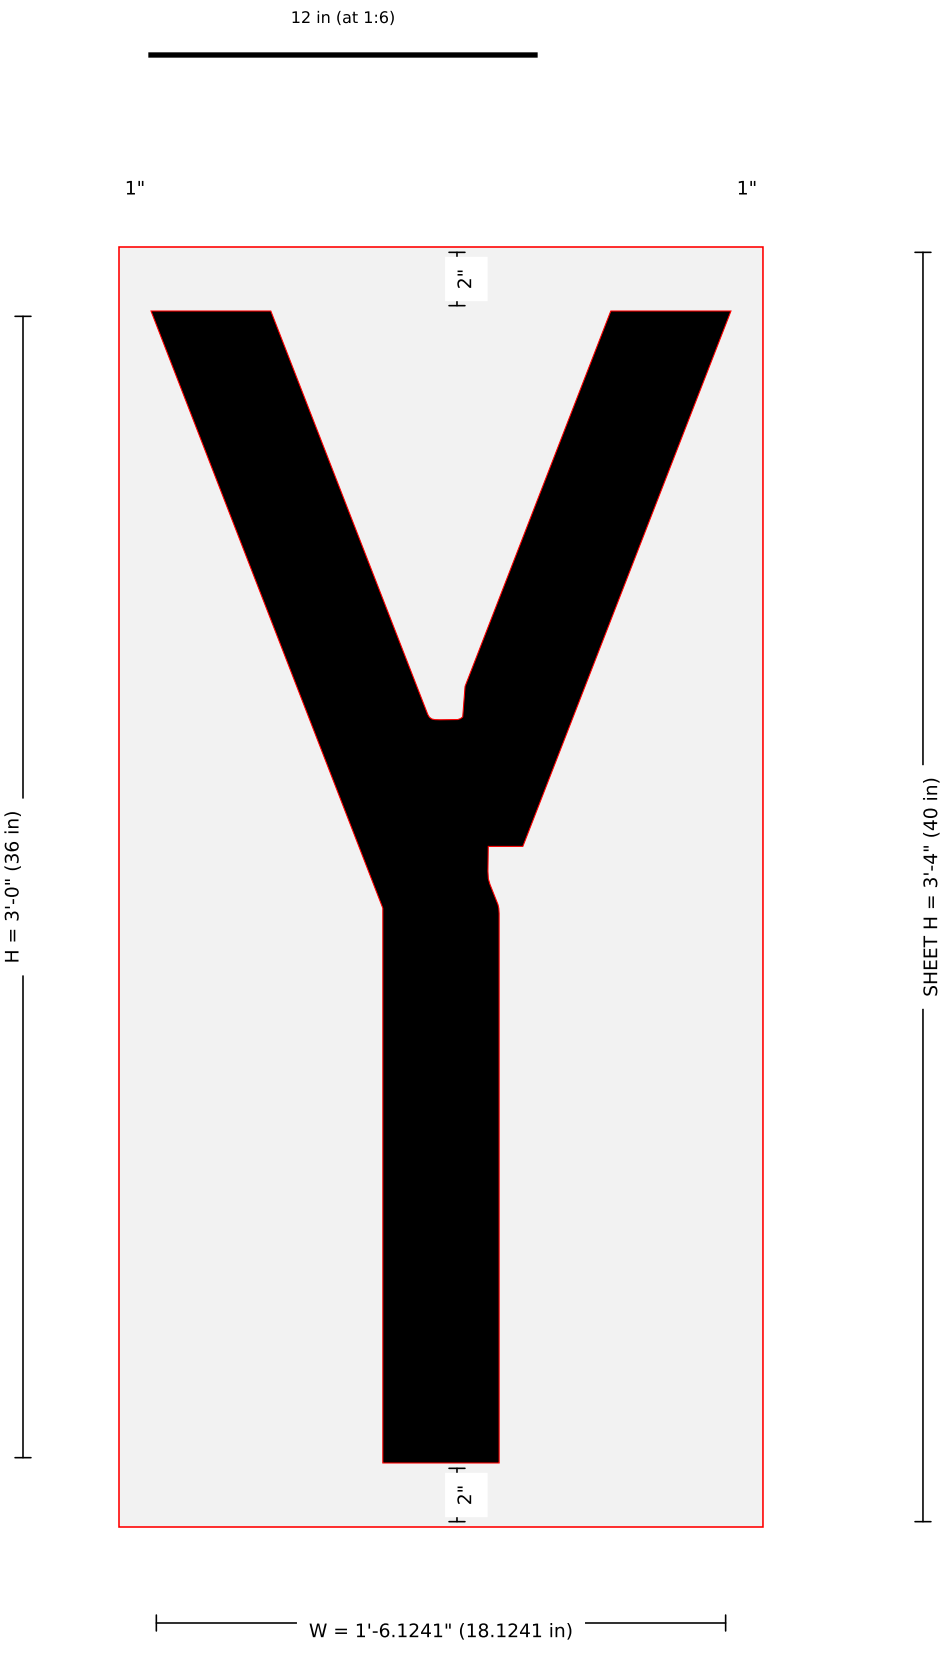



Pieces: 1 · sheet 20.124 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-W36Y-36in-wide-FAA-Airport-Letter-Y-Stencil-2.jpg: width = kit listing 18 (image-scale 17.68); kit sheet 24 x 44 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.07 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-036-03-Z

36" FAA Airport "Z" - kit SSS-FAA-036-03, traced from 1-800-Stencil image, 18 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

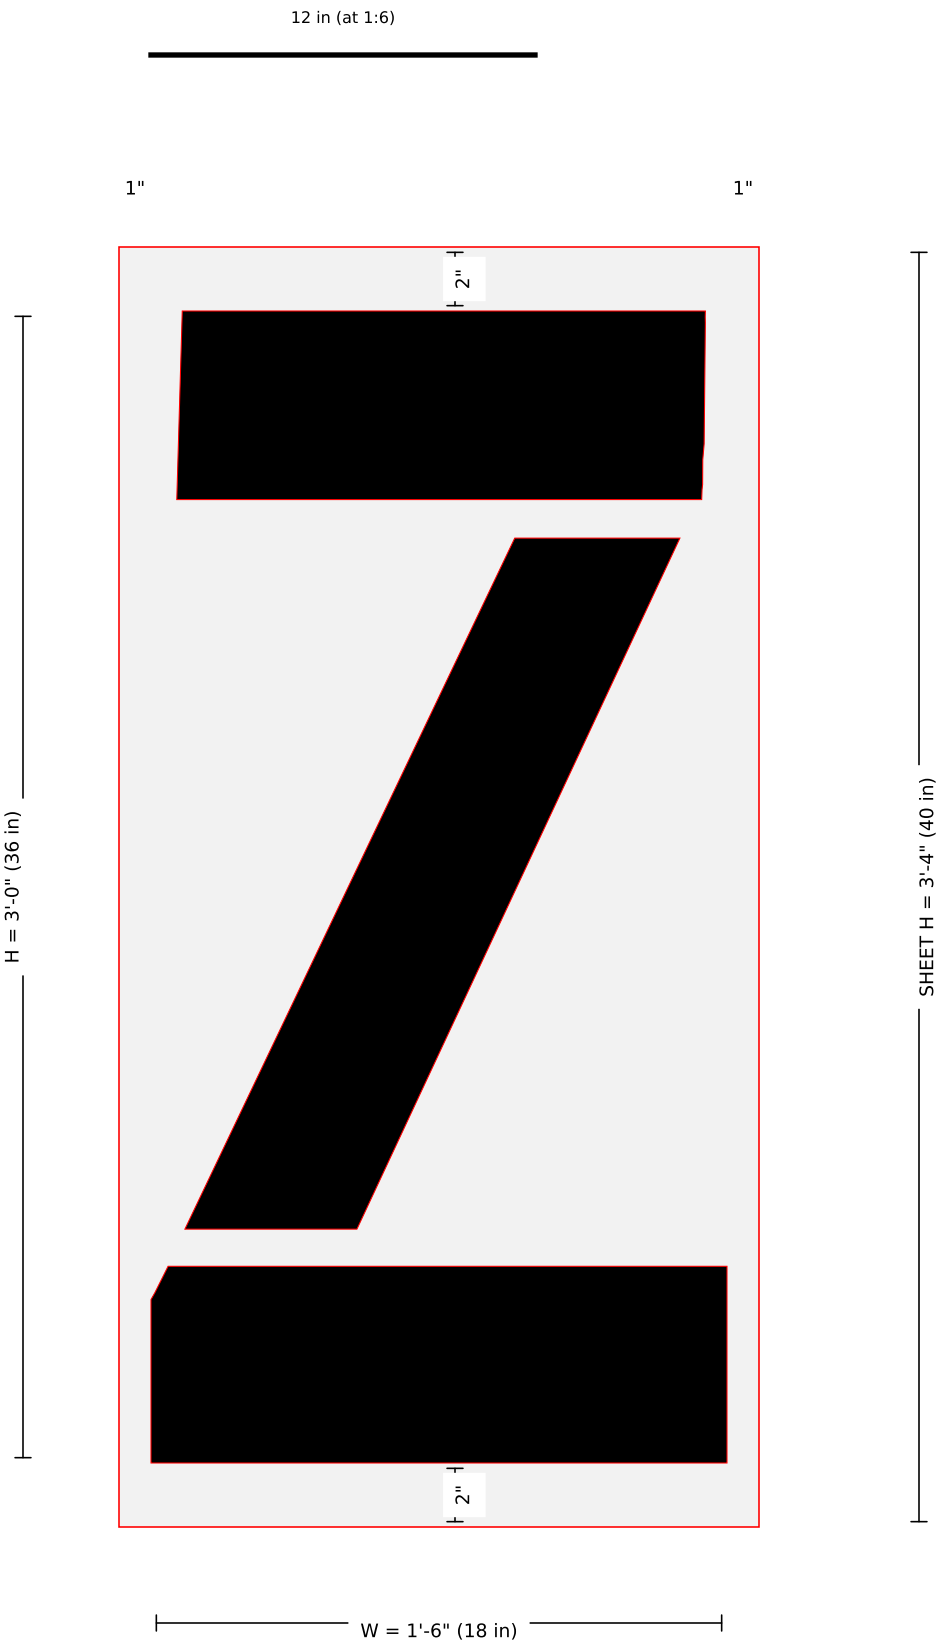




Pieces: 1 · sheet 20 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-W36Z-36in-wide-FAA-Airport-Letter-Z-Stencil-2.jpg: width = kit listing 18 (image-scale 17.85); kit sheet 24 x 44 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.09 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-036-03-1

36" FAA Airport "1" - kit SSS-FAA-036-03, traced from 1-800-Stencil image, 5 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

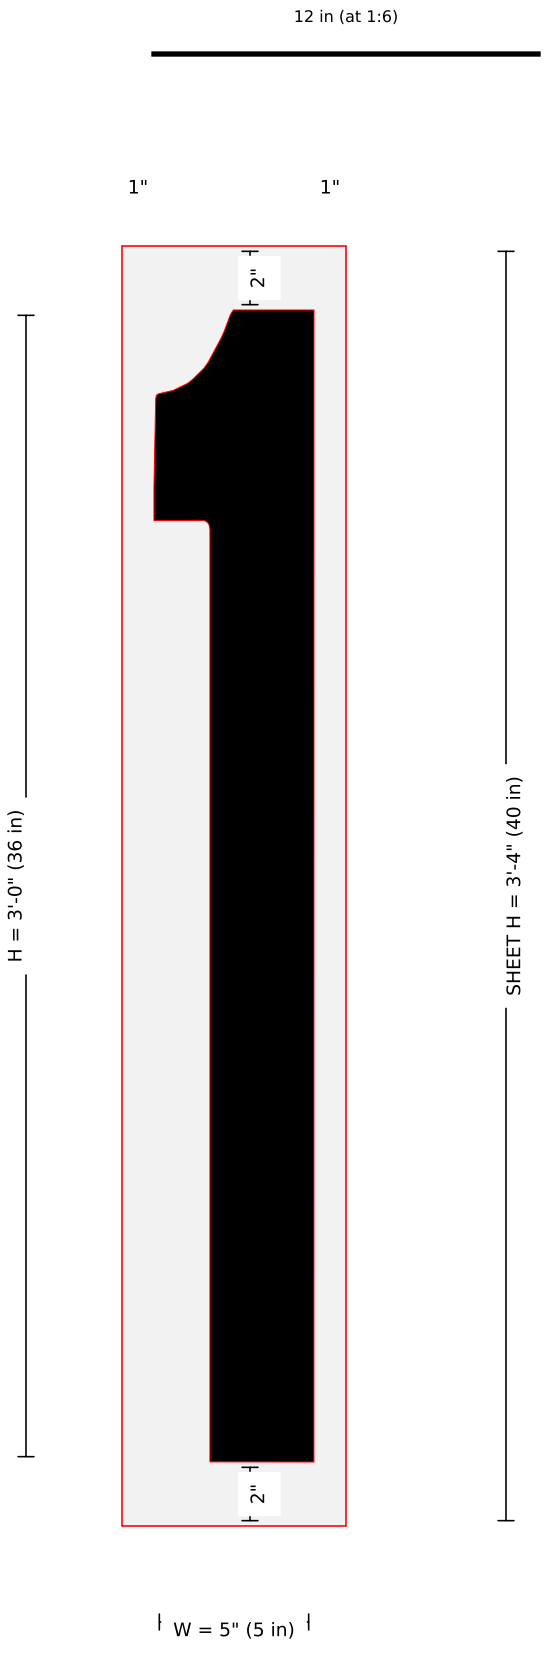


Pieces: 1 · sheet 7 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-W361-36in-wide-FAA-Airport-Number-1-Stencil-2.jpg: width = 1-800 image width label 5 in (image-scale 5.29); kit sheet 24 x 44 (side margin 3).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.07 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-036-03-B

36" FAA Airport "B" - kit SSS-FAA-036-03, traced from 1-800-Stencil image, 17 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

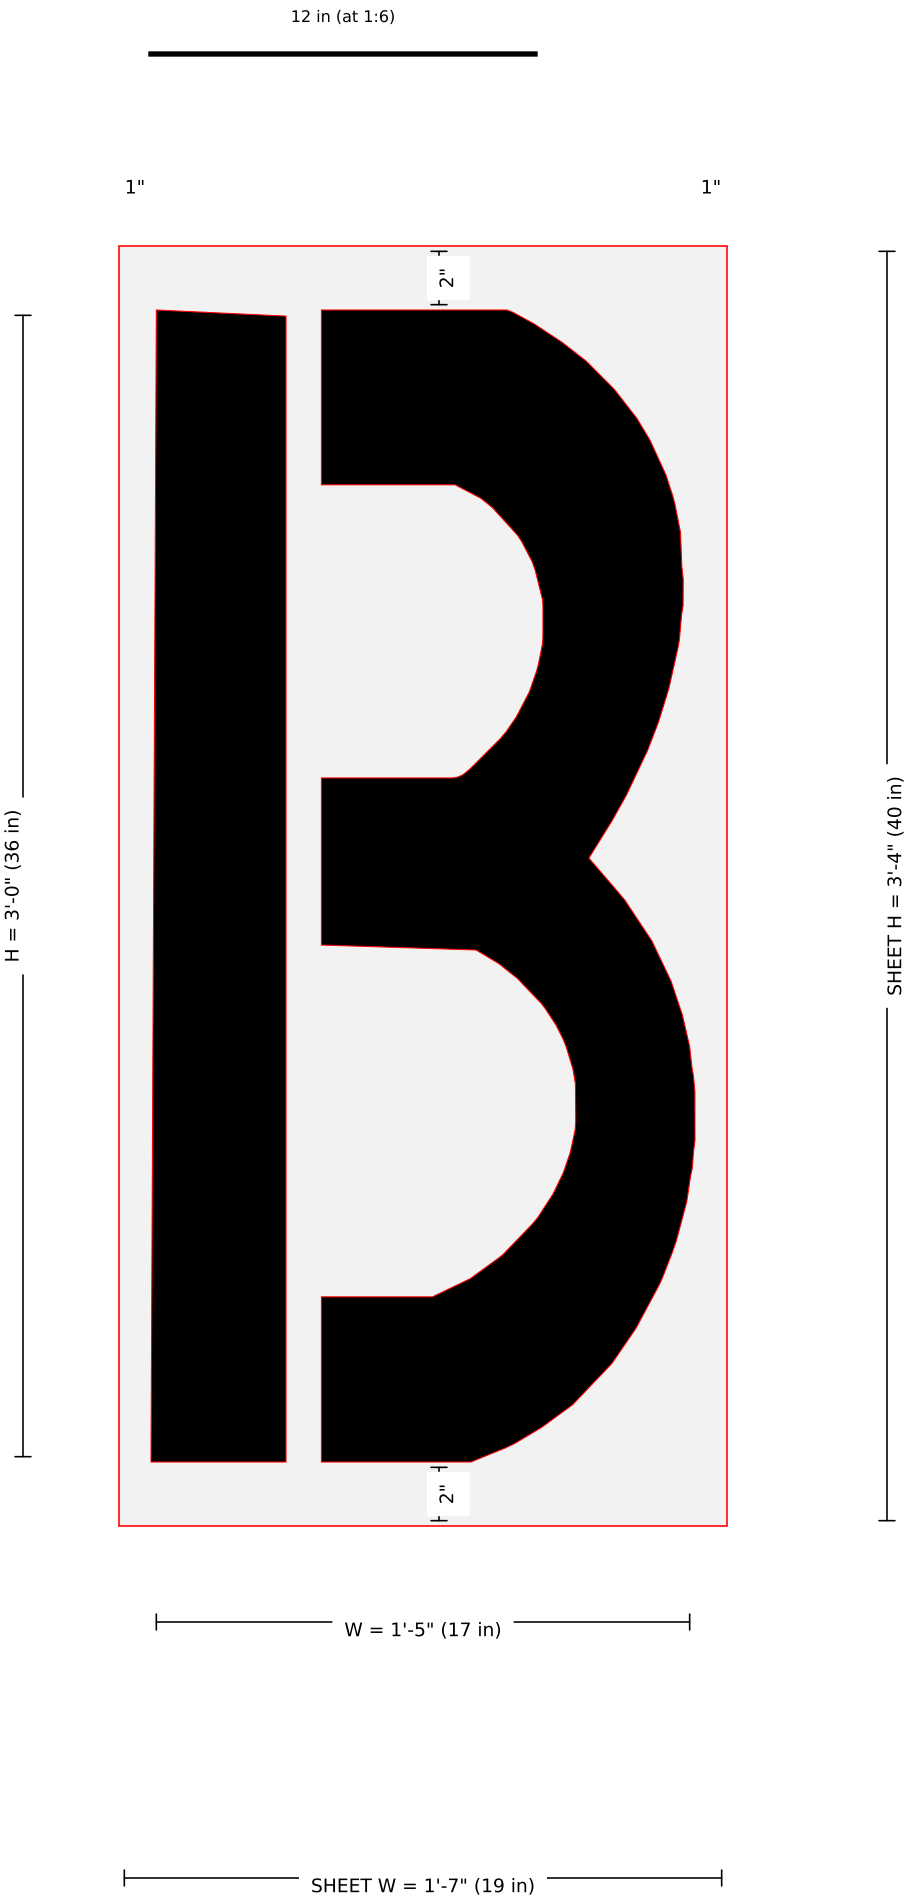


Pieces: 1 · sheet 19 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-W36B-36in-wide-FAA-Airport-Letter-B-Stencil-2.jpg: width = 1-800 image width label 17 in (image-scale 17.85); kit sheet 24 x 44 (side margin 3).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.07 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 4 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-036-03-I

36" FAA Airport "I" - kit SSS-FAA-036-03, traced from 1-800-Stencil image, 4 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

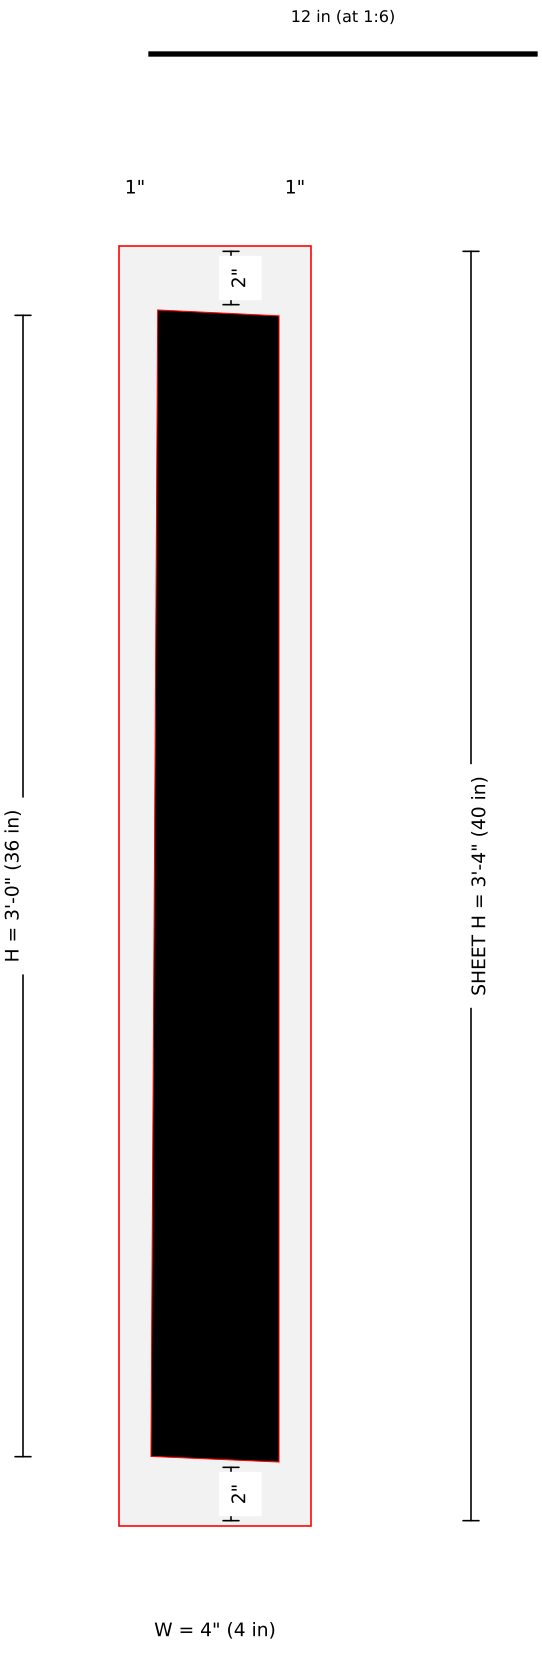



Pieces: 1 · sheet 6 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-W36I-36in-wide-FAA-Airport-Letter-I-Stencil-2.jpg: width = 1-800 image width label 4 in (image-scale 4.26); kit sheet 24 x 44 (side margin 3).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.07 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-036-03-X

36" FAA Airport "X" - kit SSS-FAA-036-03, traced from 1-800-Stencil image, 17 W x 36 H

Scale 1:6 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

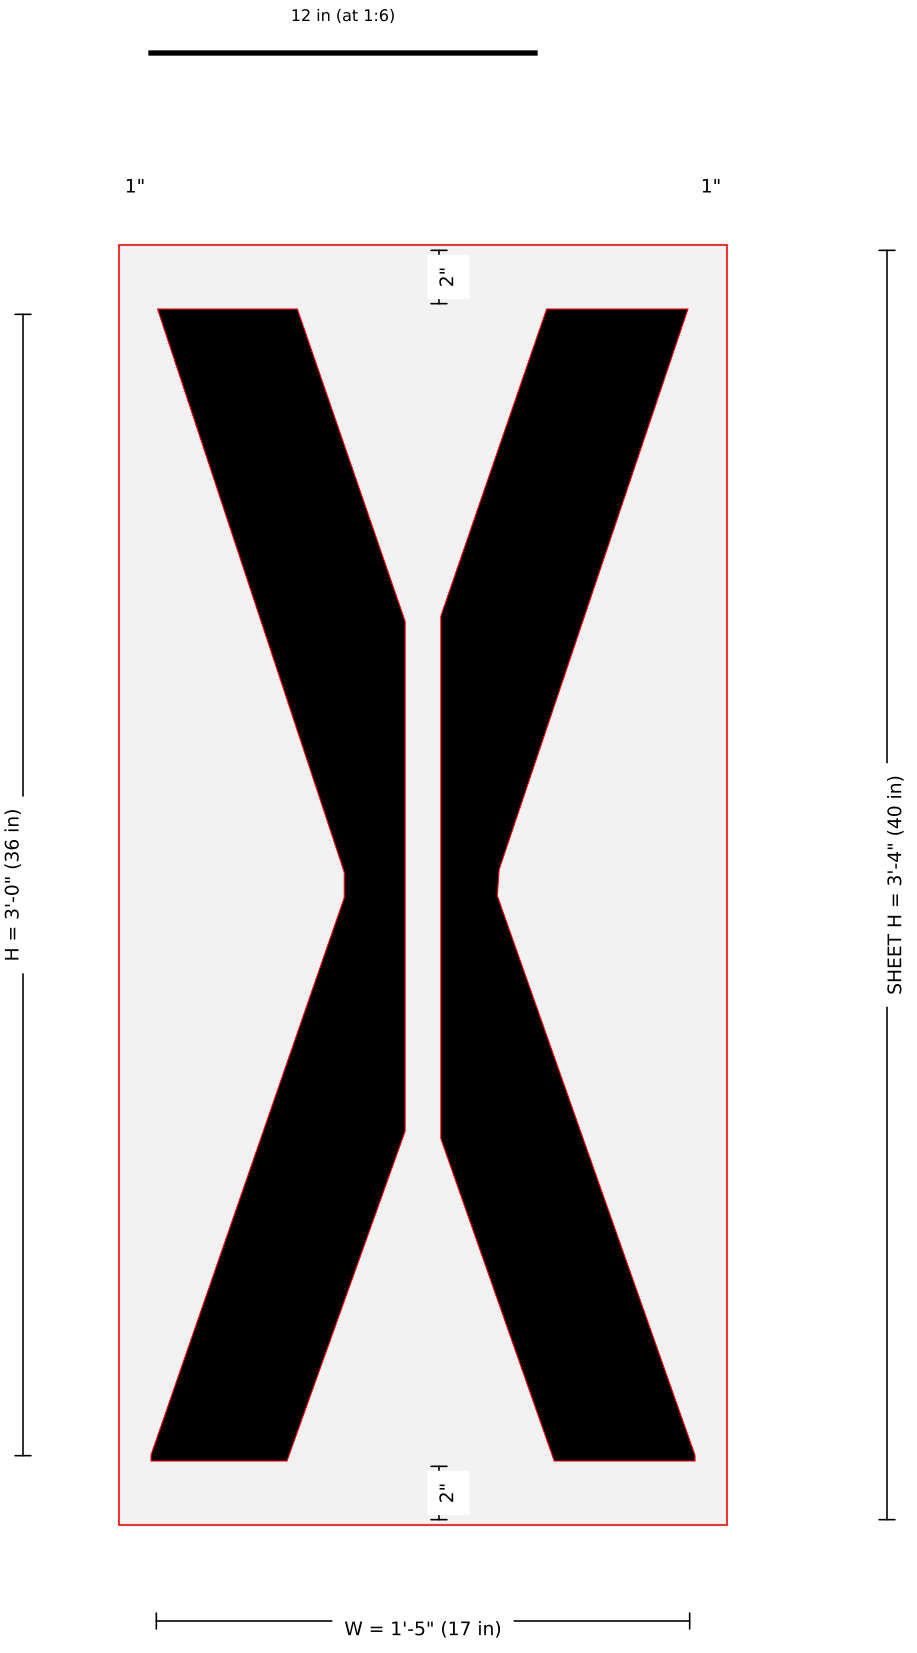



Pieces: 1 · sheet 19 x 40 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-W36X-36in-wide-FAA-Airport-Letter-X-Stencil-2.jpg: width = 1-800 image width label 17 in (image-scale 17.68); kit sheet 24 x 44 (side margin 3).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.07 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.