
SSS-FAA-048-01-0

48" FAA Airport "0" - kit SSS-FAA-048-01, traced from 1-800-Stencil image, 24 W x 48 H

Scale 1:8 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

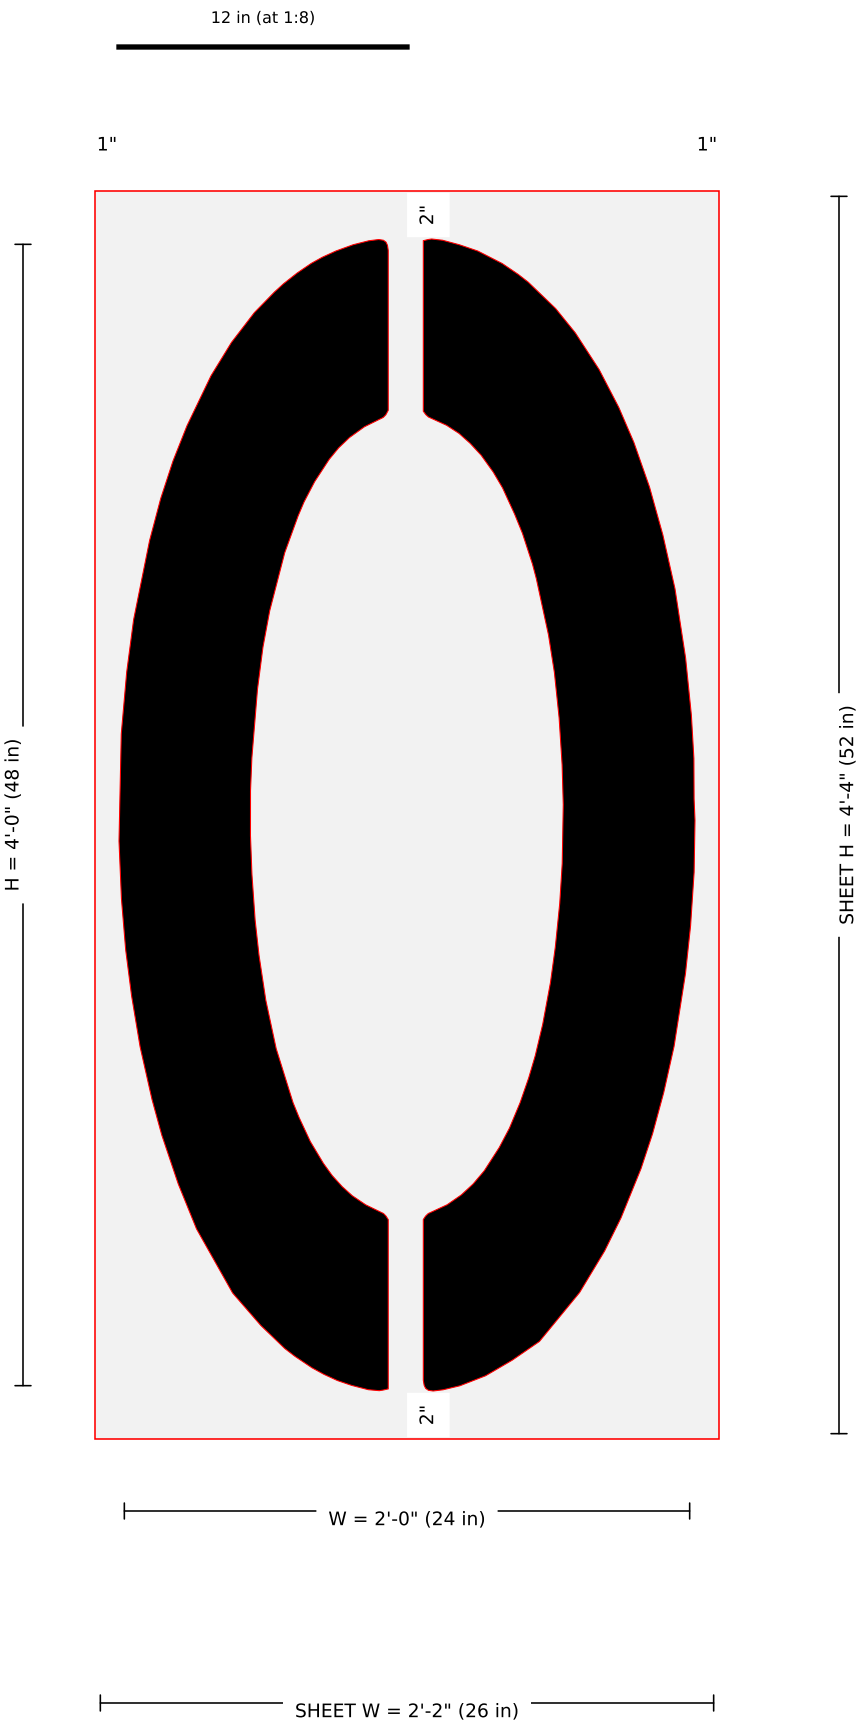


Pieces: 1 · sheet 26 x 52 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-048-48in-FAA-Airport-Number-0-Stencil-2.jpg: width = kit listing 24 (image-scale 23.90); kit sheet 30 x 56 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.19 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-048-01-2

48" FAA Airport "2" - kit SSS-FAA-048-01, traced from 1-800-Stencil image, 24 W x 48 H

Scale 1:8 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

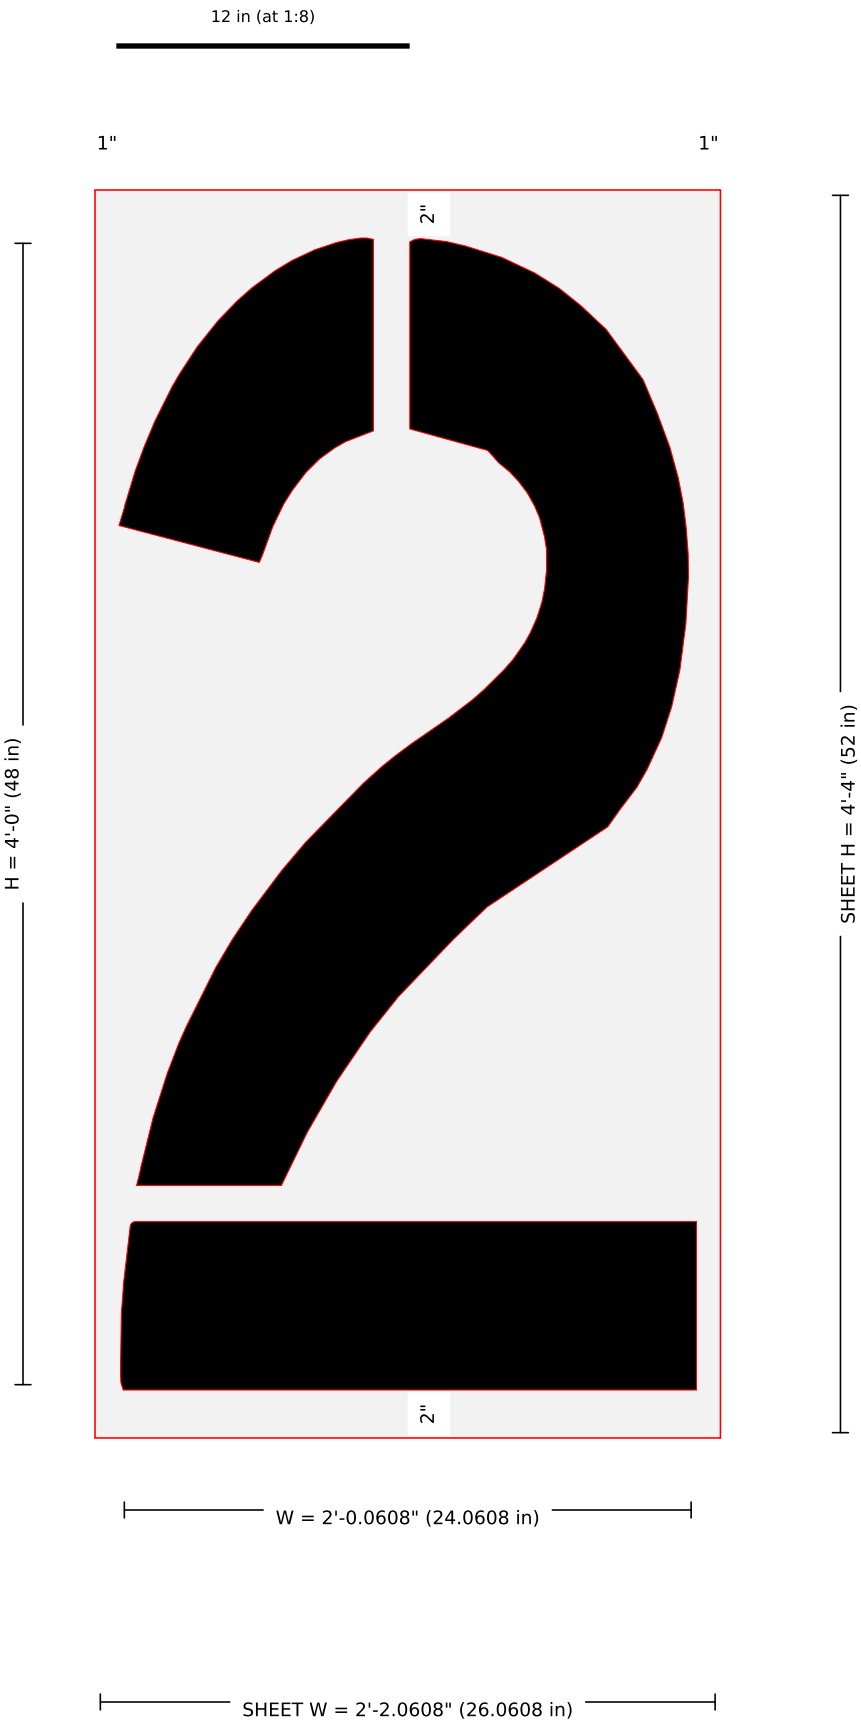


Pieces: 1 · sheet 26.061 x 52 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-048-48in-FAA-Airport-Number-2-Stencil-2.jpg: width = kit listing 24 (image-scale 23.82); kit sheet 30 x 56 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.19 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-048-01-3

48" FAA Airport "3" - kit SSS-FAA-048-01, traced from 1-800-Stencil image, 24 W x 48 H

Scale 1:8 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

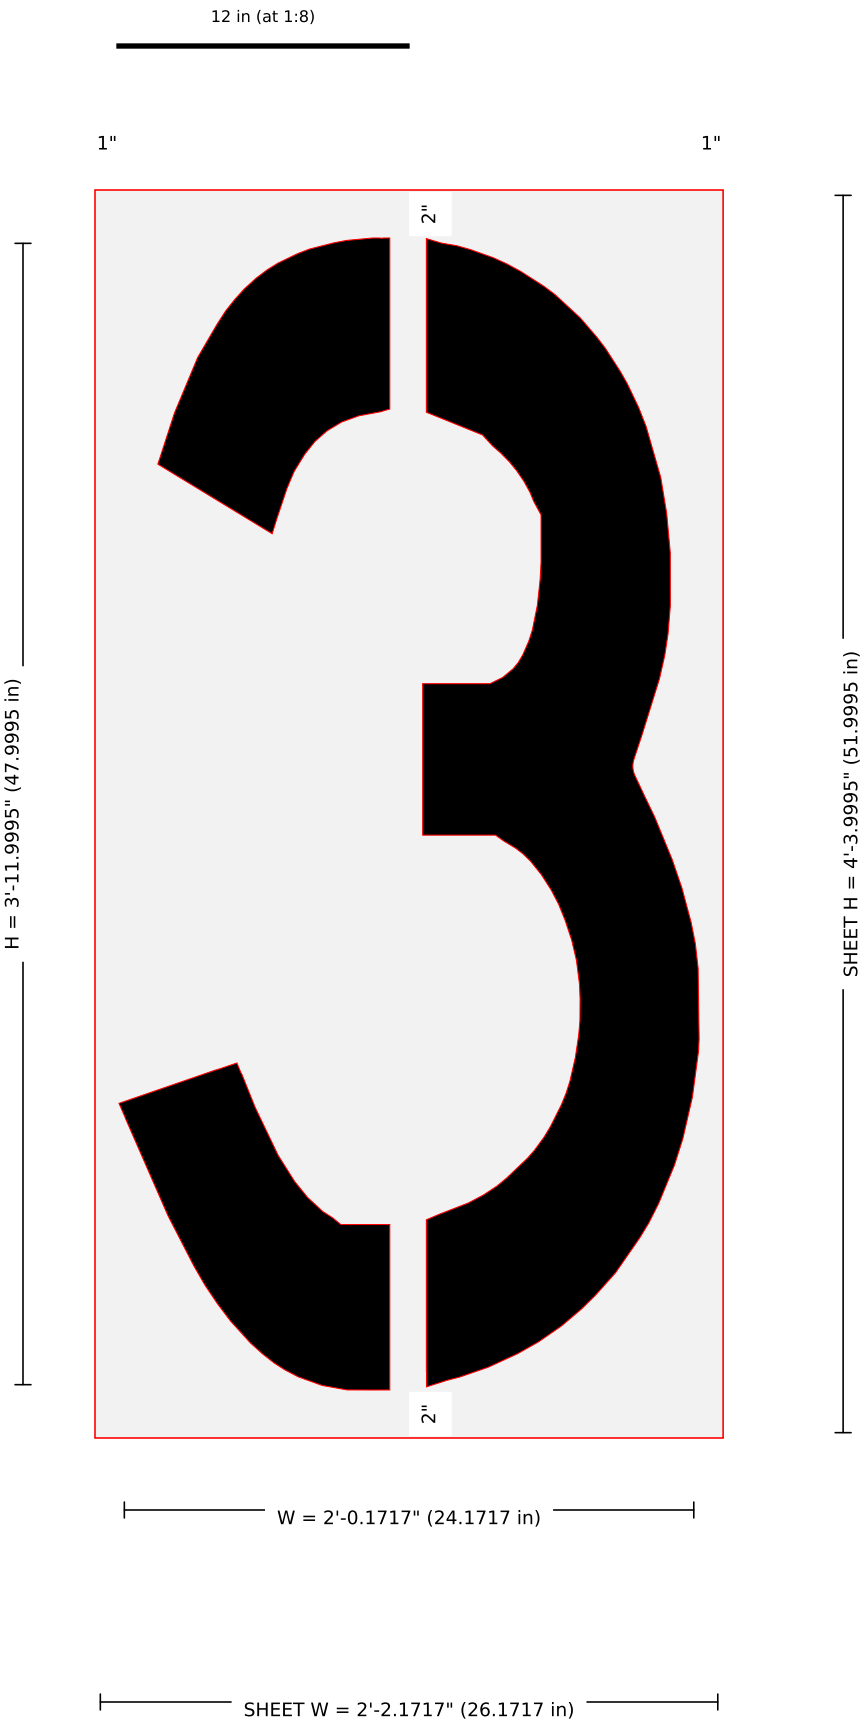


Pieces: 1 · sheet 26.172 x 52 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-048-48in-FAA-Airport-Number-3-Stencil-2.jpg: width = kit listing 24 (image-scale 23.72); kit sheet 30 x 56 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.19 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 15 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-048-01-4

48" FAA Airport "4" - kit SSS-FAA-048-01, traced from 1-800-Stencil image, 24 W x 48 H

Scale 1:8 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

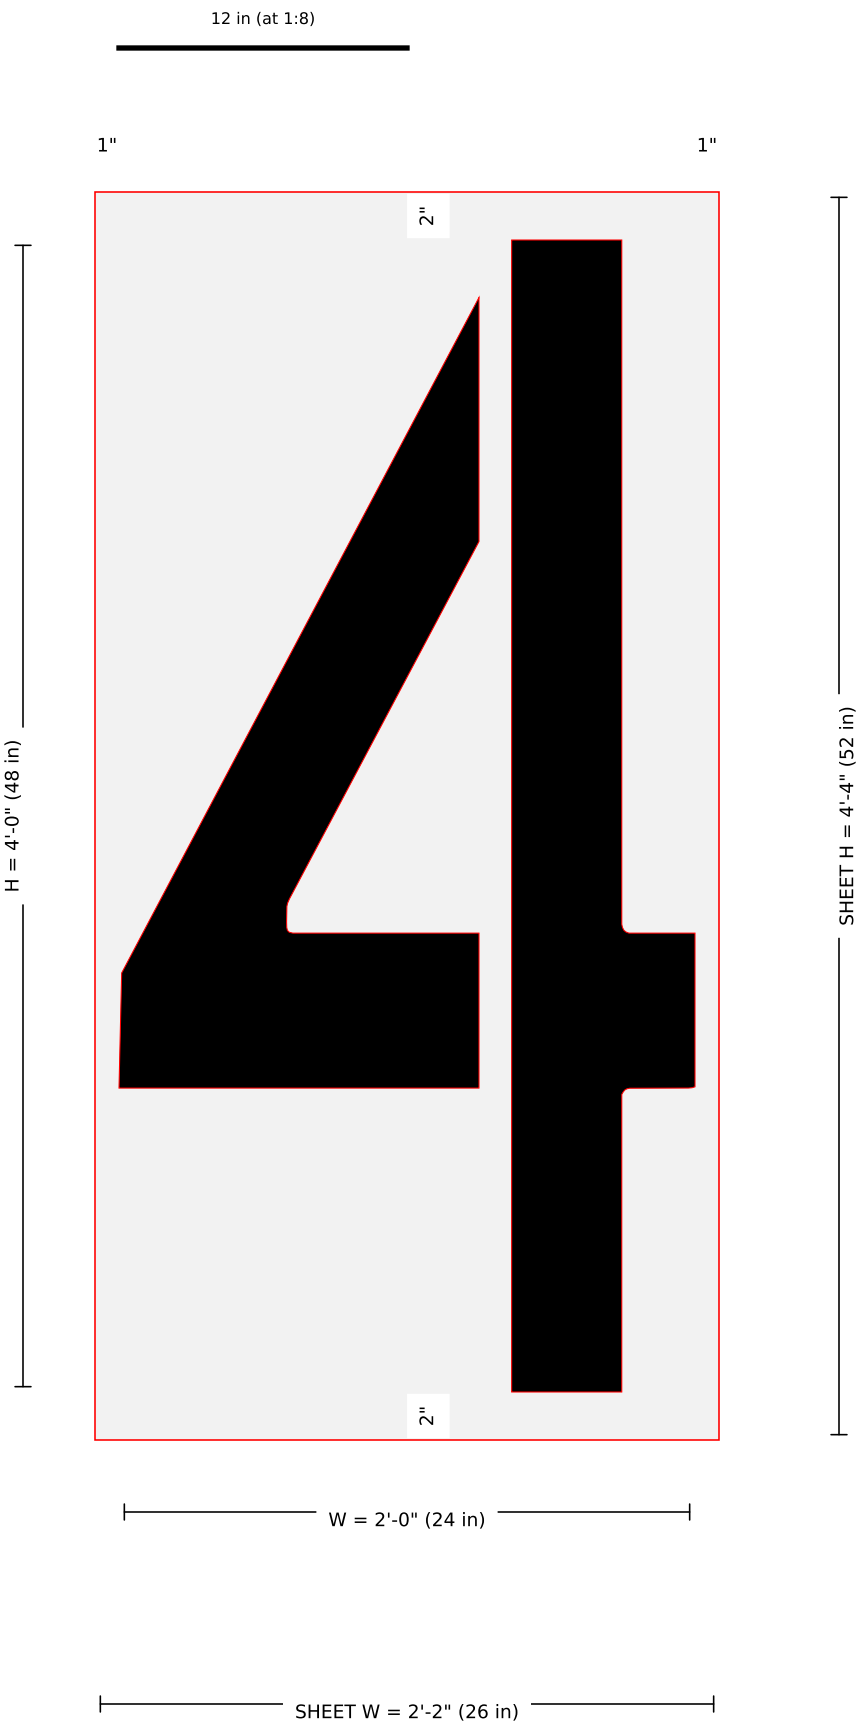


Pieces: 1 · sheet 26 x 52 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-048-48in-FAA-Airport-Number-4-Stencil-2.jpg: width = kit listing 24 (image-scale 23.87); kit sheet 30 x 56 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.10 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-048-01-5

48" FAA Airport "5" - kit SSS-FAA-048-01, traced from 1-800-Stencil image, 24 W x 48 H

Scale 1:8 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

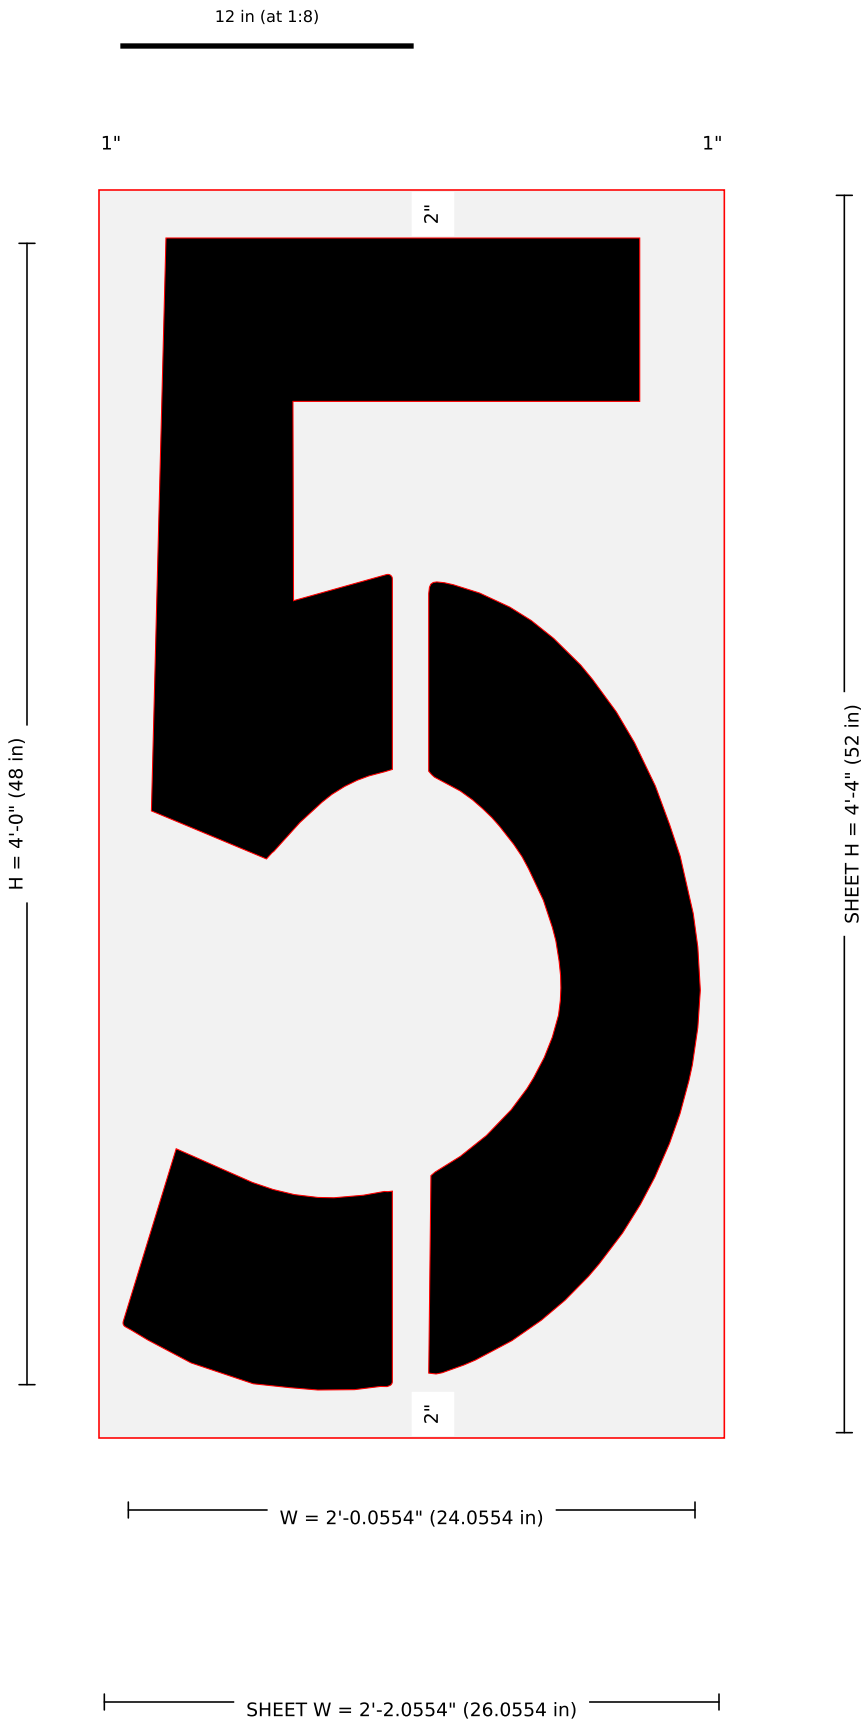


Pieces: 1 · sheet 26.055 x 52 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-048-48in-FAA-Airport-Number-5-Stencil-2.jpg: width = kit listing 24 (image-scale 23.77); kit sheet 30 x 56 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.19 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-048-01-6

48" FAA Airport "6" - kit SSS-FAA-048-01, traced from 1-800-Stencil image, 24 W x 48 H

Scale 1:8 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

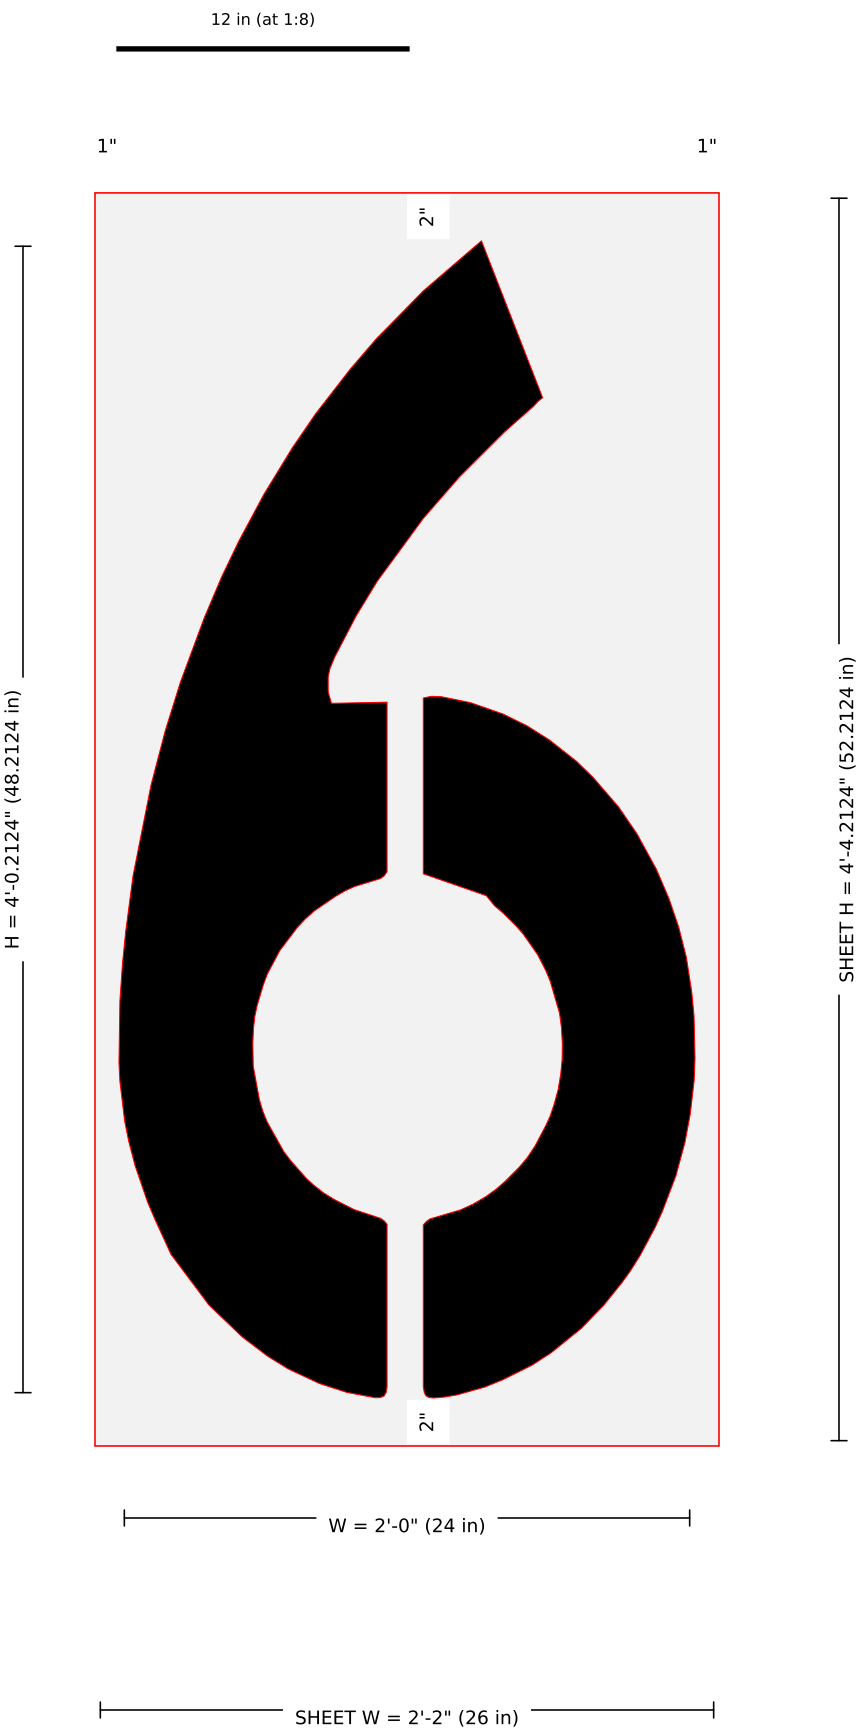


Pieces: 1 · sheet 26 x 52.212 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-048-48in-FAA-Airport-Number-6-Stencil-2.jpg: width = kit listing 24 (image-scale 23.97); kit sheet 30 x 56 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.19 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-048-01-7

48" FAA Airport "7" - kit SSS-FAA-048-01, traced from 1-800-Stencil image, 24 W x 48 H

Scale 1:8 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

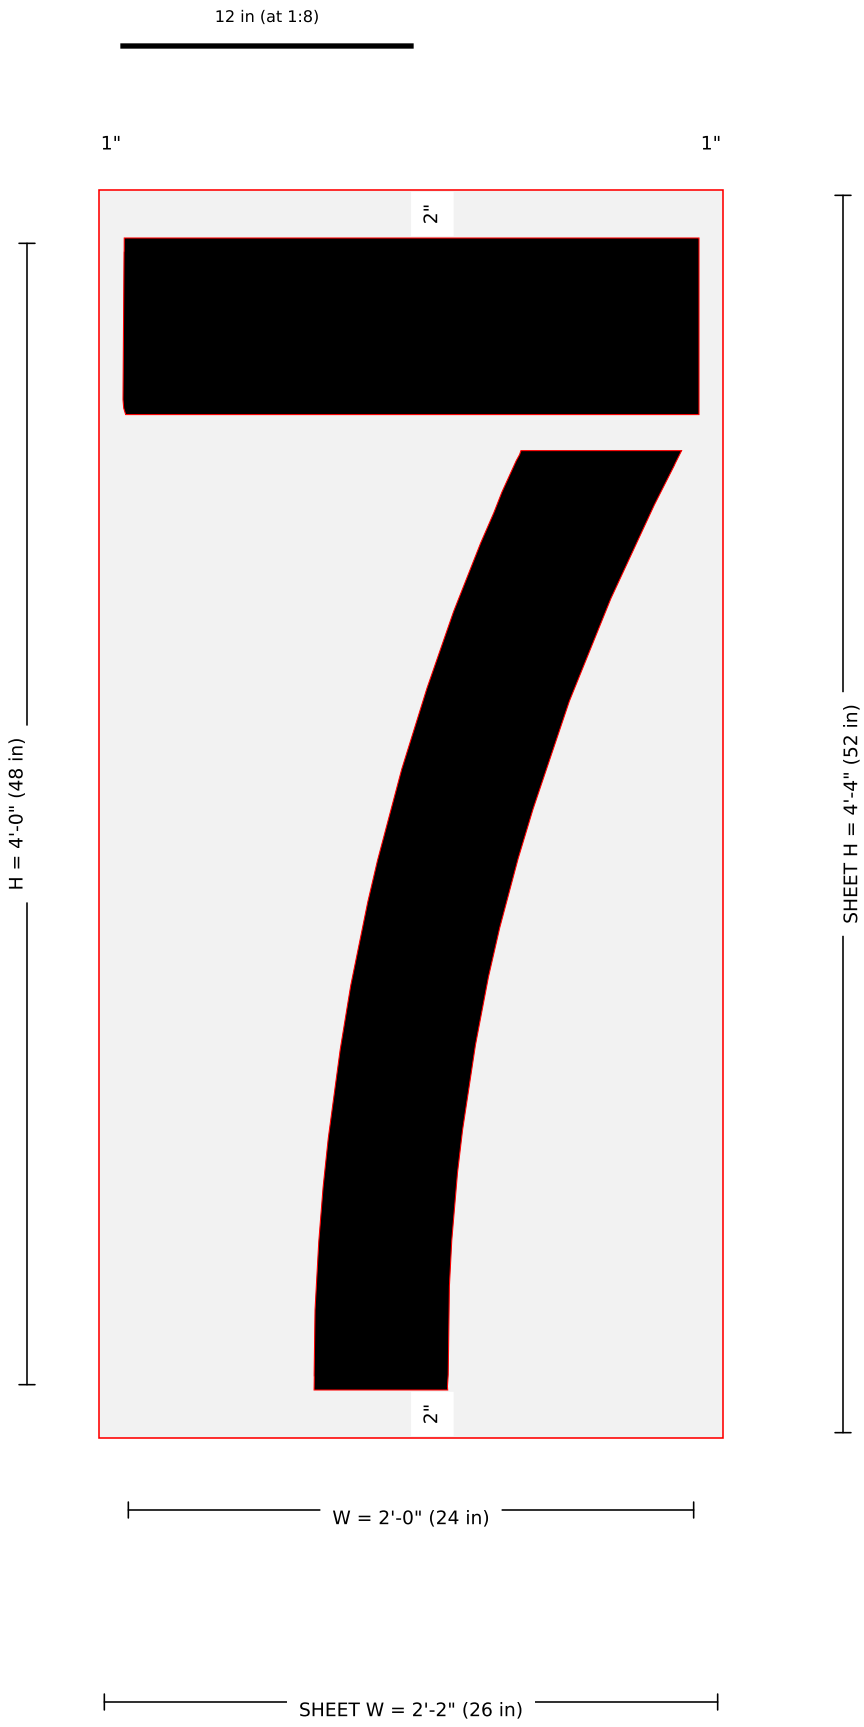


Pieces: 1 · sheet 26 x 52 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-048-48in-FAA-Airport-Number-7-Stencil-2.jpg: width = kit listing 24 (image-scale 23.87); kit sheet 30 x 56 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.19 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-048-01-8

48" FAA Airport "8" - kit SSS-FAA-048-01, traced from 1-800-Stencil image, 24 W x 48 H

Scale 1:8 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

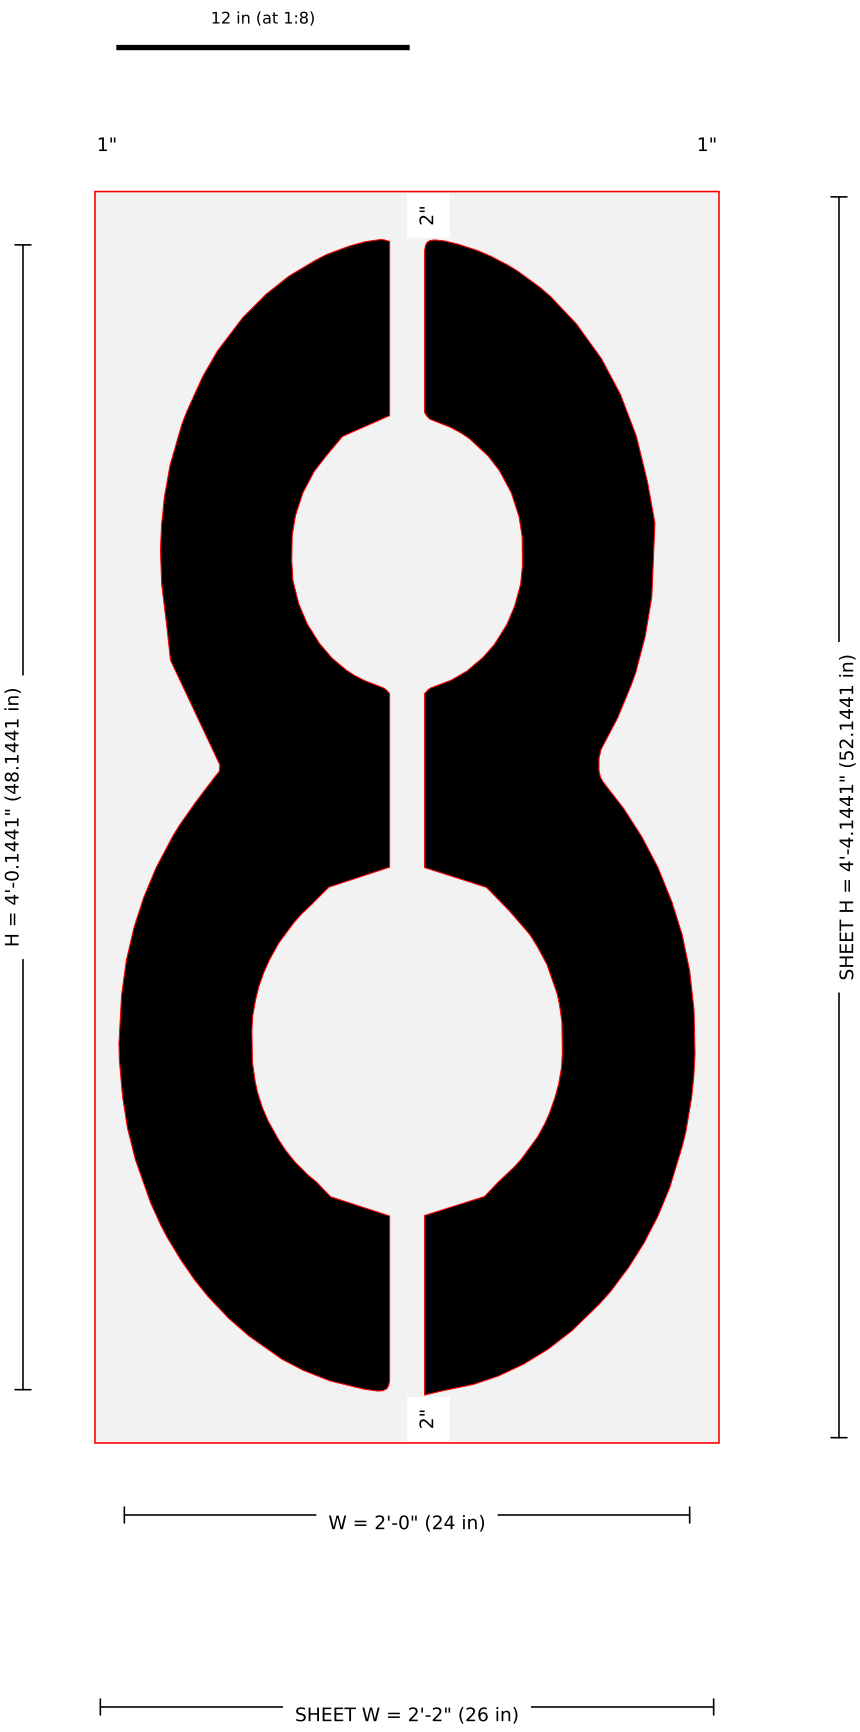


Pieces: 1 · sheet 26 x 52.144 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-048-48in-FAA-Airport-Number-8-Stencil-2.jpg: width = kit listing 24 (image-scale 23.87); kit sheet 30 x 56 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.19 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-048-01-9

48" FAA Airport "9" - kit SSS-FAA-048-01, traced from 1-800-Stencil image, 24 W x 48 H

Scale 1:8 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

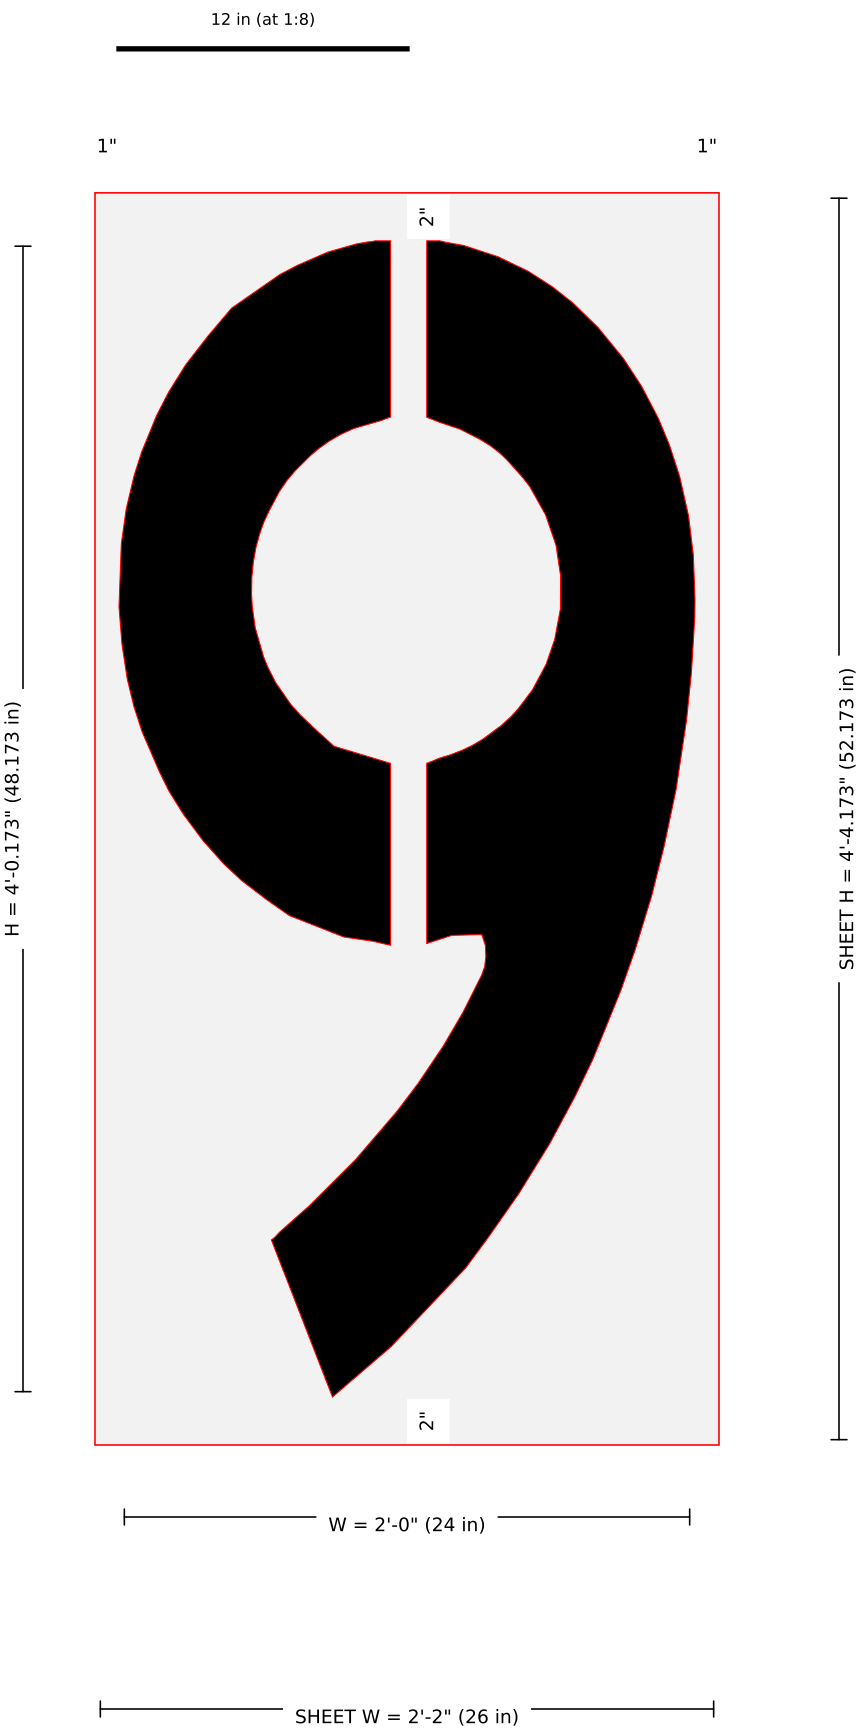


Pieces: 1 · sheet 26 x 52.173 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-048-48in-FAA-Airport-Number-9-Stencil-2.jpg: width = kit listing 24 (image-scale 23.97); kit sheet 30 x 56 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.19 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 15 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-048-01-A

48" FAA Airport "A" - kit SSS-FAA-048-01, traced from 1-800-Stencil image, 24 W x 48 H

Scale 1:8 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

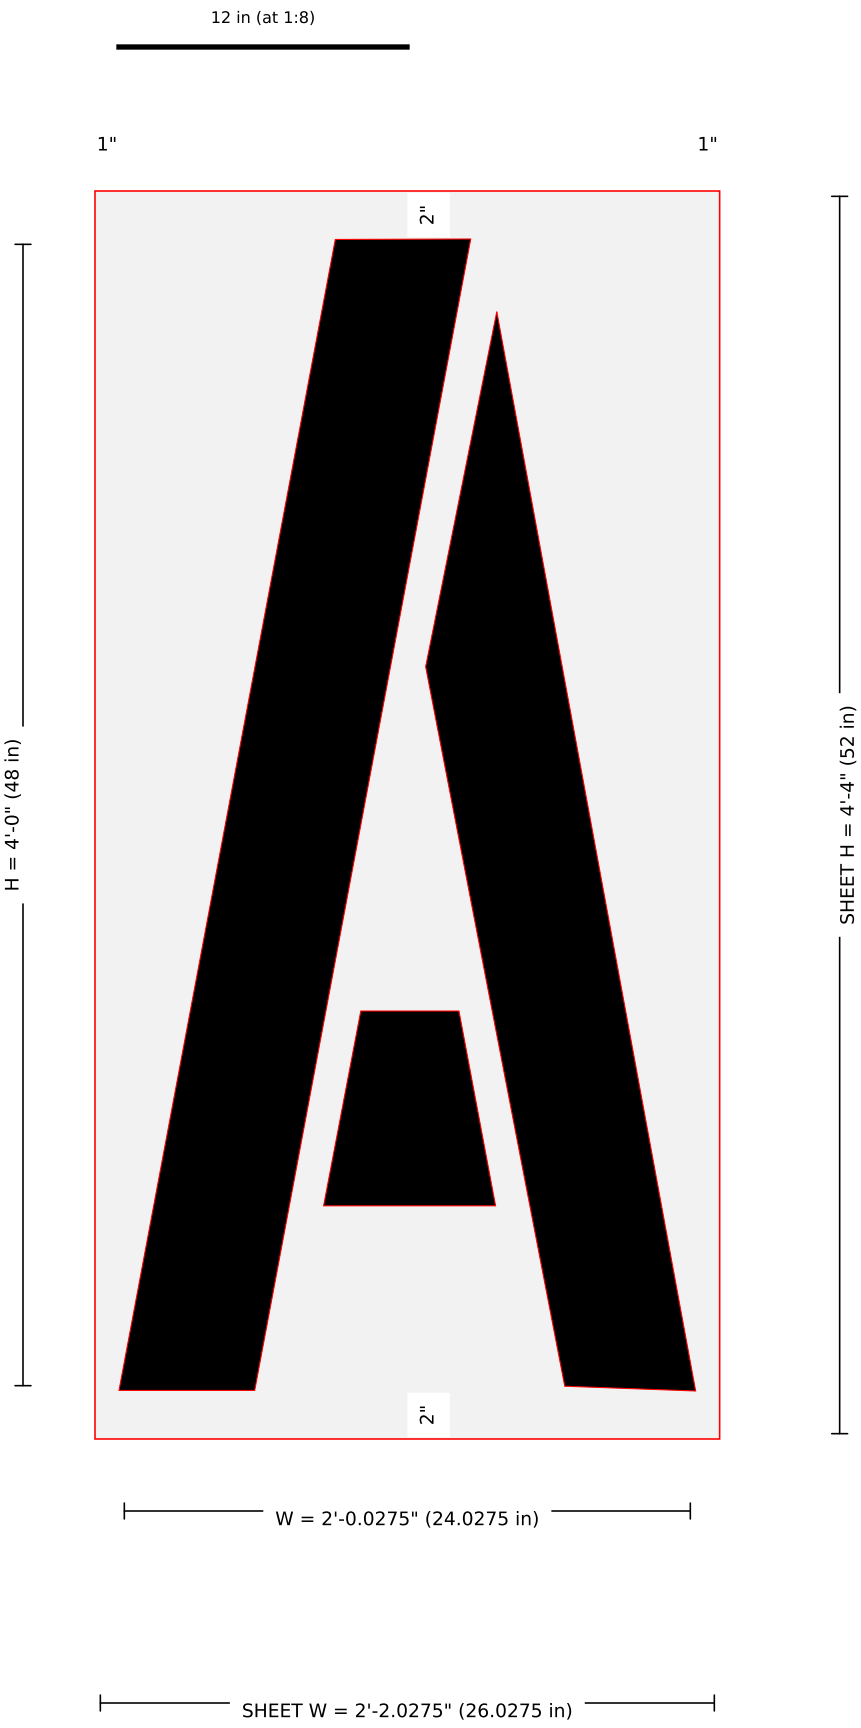


Pieces: 1 · sheet 26.027 x 52 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-048-48in-FAA-Airport-Letter-A-Stencil-2.jpg: width = kit listing 24 (image-scale 23.77); kit sheet 30 x 56 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.19 in (smoothing level 0.5); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-048-01-B

48" FAA Airport "B" - kit SSS-FAA-048-01, traced from 1-800-Stencil image, 24 W x 48 H

Scale 1:8 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

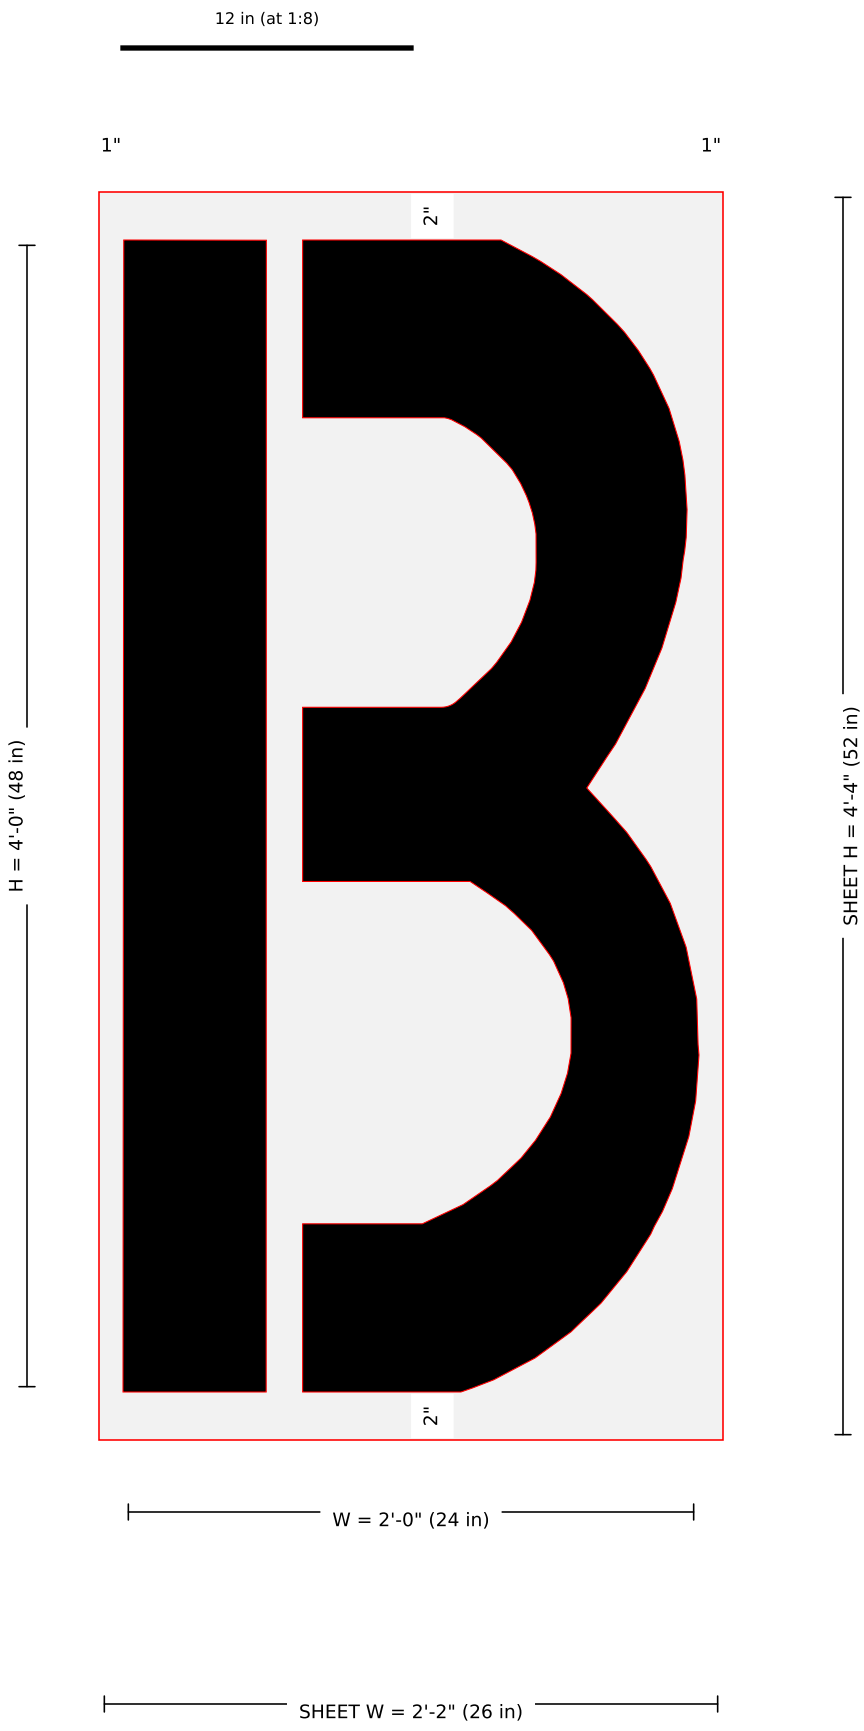


Pieces: 1 · sheet 26 x 52 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-048-48in-FAA-Airport-Letter-B-Stencil-2.jpg: width = kit listing 24 (image-scale 23.87); kit sheet 30 x 56 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.19 in (smoothing level 0.5); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 4 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-048-01-C

48" FAA Airport "C" - kit SSS-FAA-048-01, traced from 1-800-Stencil image, 24 W x 48 H

Scale 1:8 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

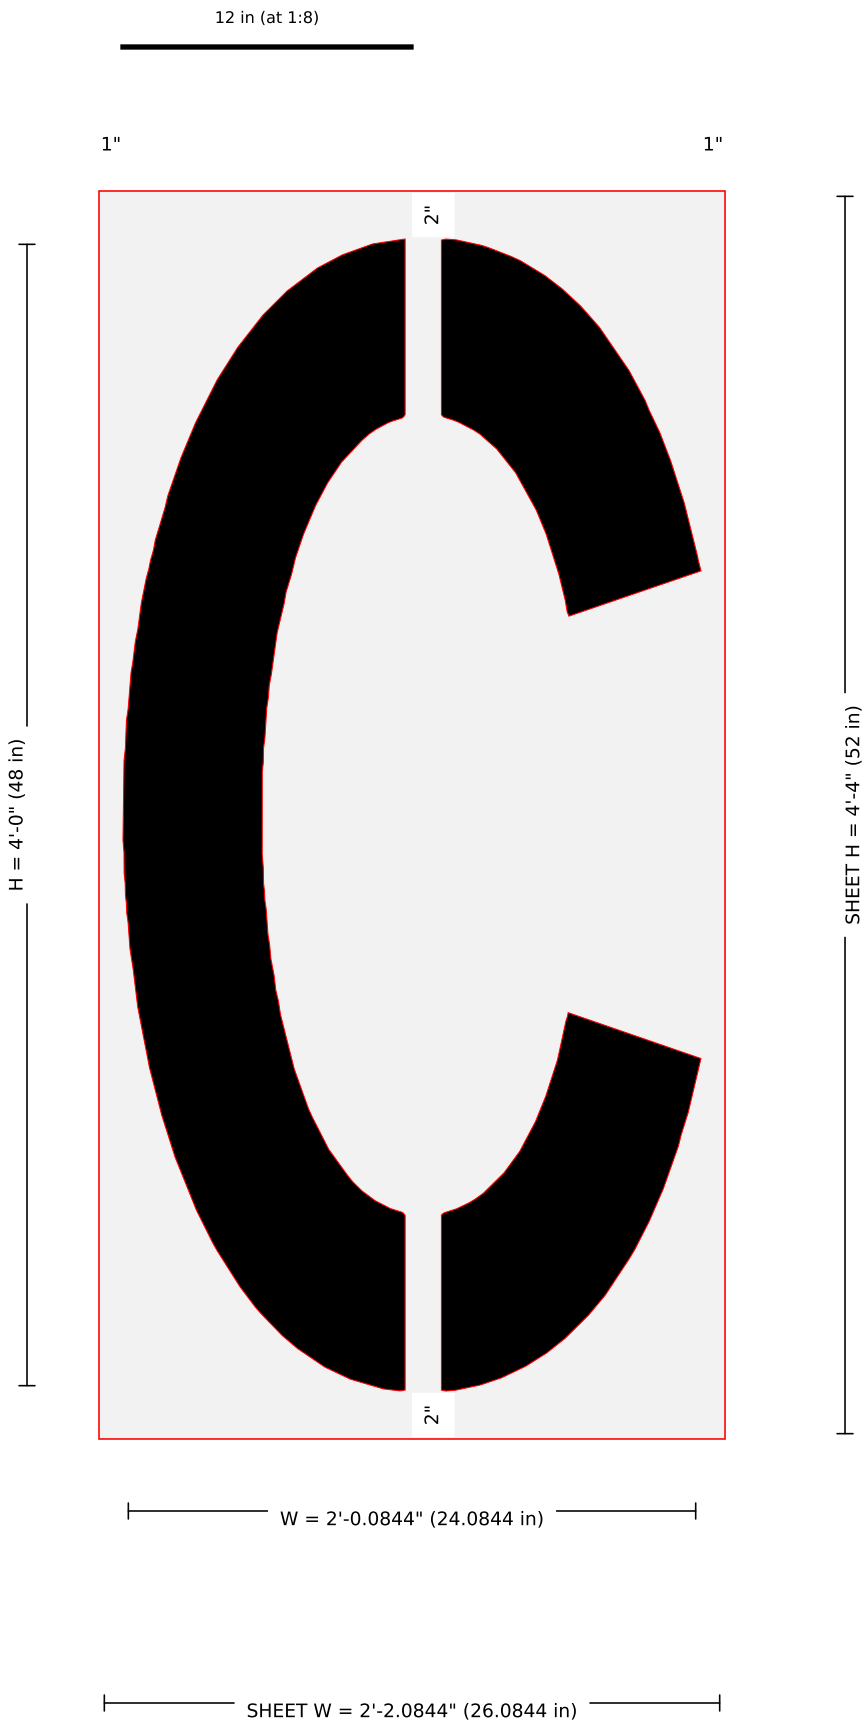


Pieces: 1 · sheet 26.084 x 52 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-048-48in-FAA-Airport-Letter-C-Stencil-2.jpg: width = kit listing 24 (image-scale 23.82); kit sheet 30 x 56 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.19 in (smoothing level 0.5); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-048-01-D

48" FAA Airport "D" - kit SSS-FAA-048-01, traced from 1-800-Stencil image, 24 W x 48 H

Scale 1:8 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

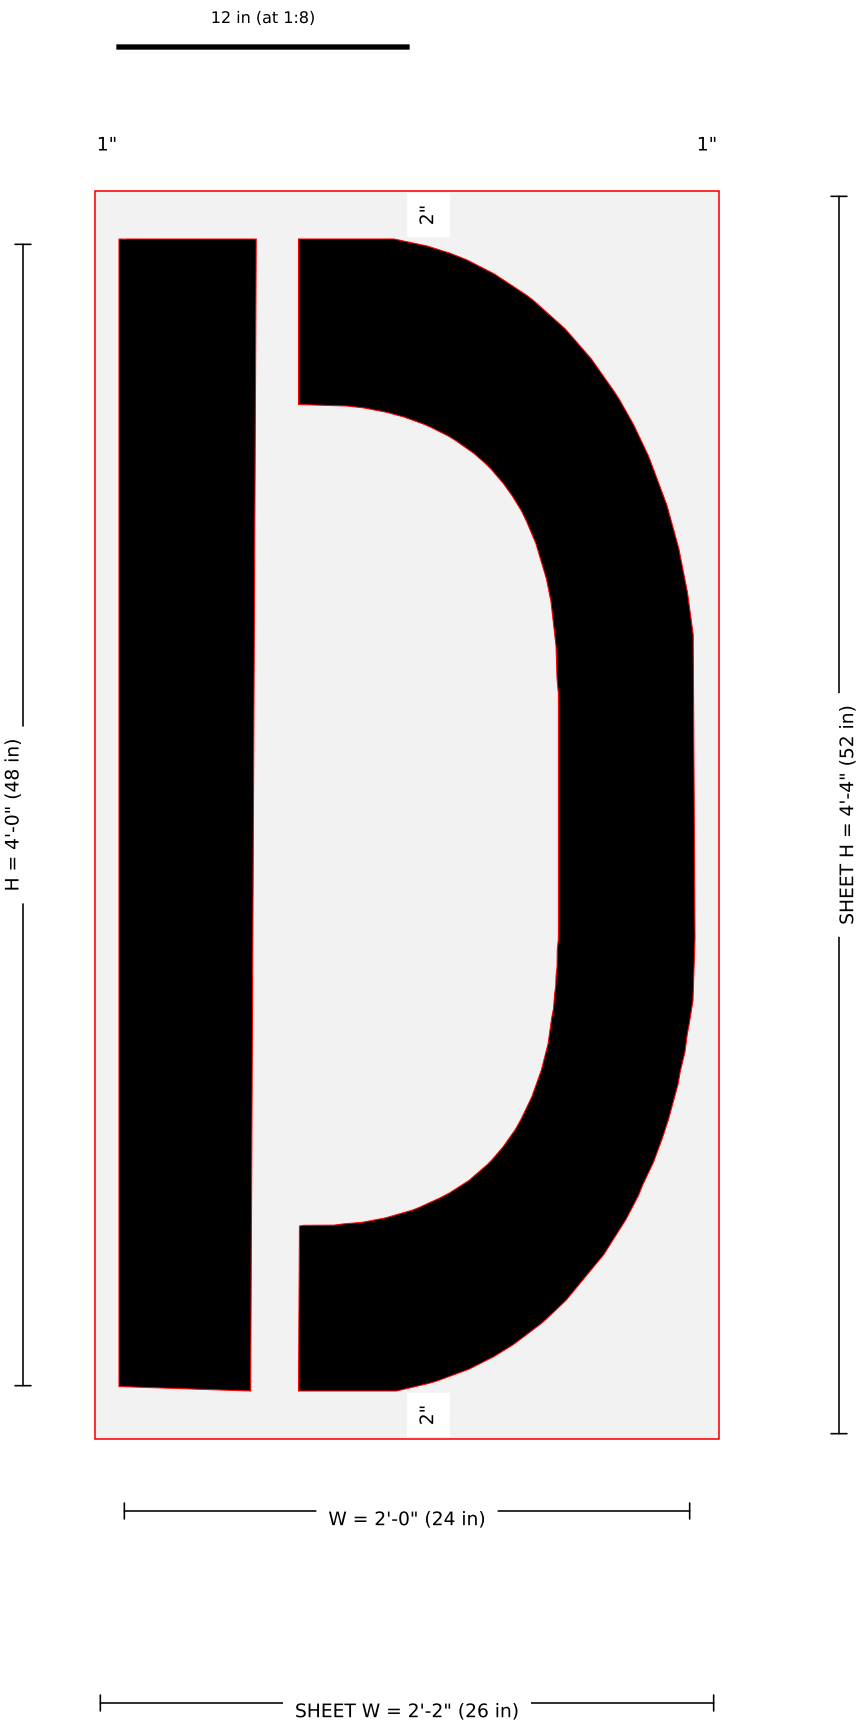


Pieces: 1 · sheet 26 x 52 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-048-48in-FAA-Airport-Letter-D-Stencil-2.jpg: width = kit listing 24 (image-scale 23.87); kit sheet 30 x 56 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.19 in (smoothing level 0.5); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-048-01-E

48" FAA Airport "E" - kit SSS-FAA-048-01, traced from 1-800-Stencil image, 24 W x 48 H

Scale 1:8 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

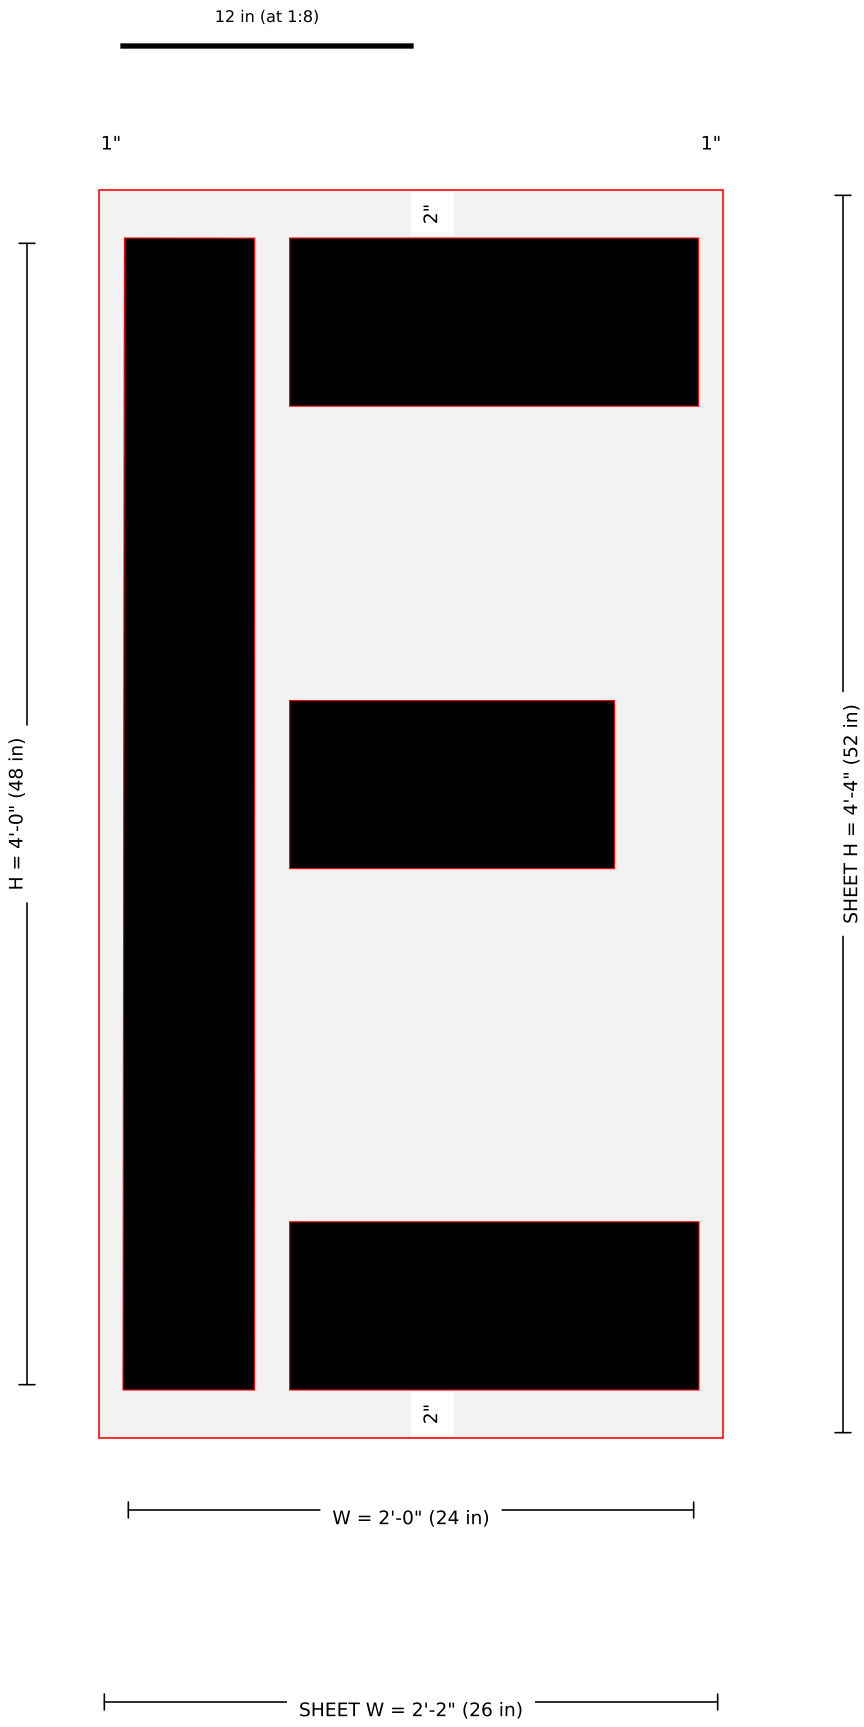


Pieces: 1 · sheet 26 x 52 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-048-48in-FAA-Airport-Letter-E-Stencil-2.jpg: width = kit listing 24 (image-scale 23.87); kit sheet 30 x 56 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.10 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-048-01-F

48" FAA Airport "F" - kit SSS-FAA-048-01, traced from 1-800-Stencil image, 24 W x 48 H

Scale 1:8 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

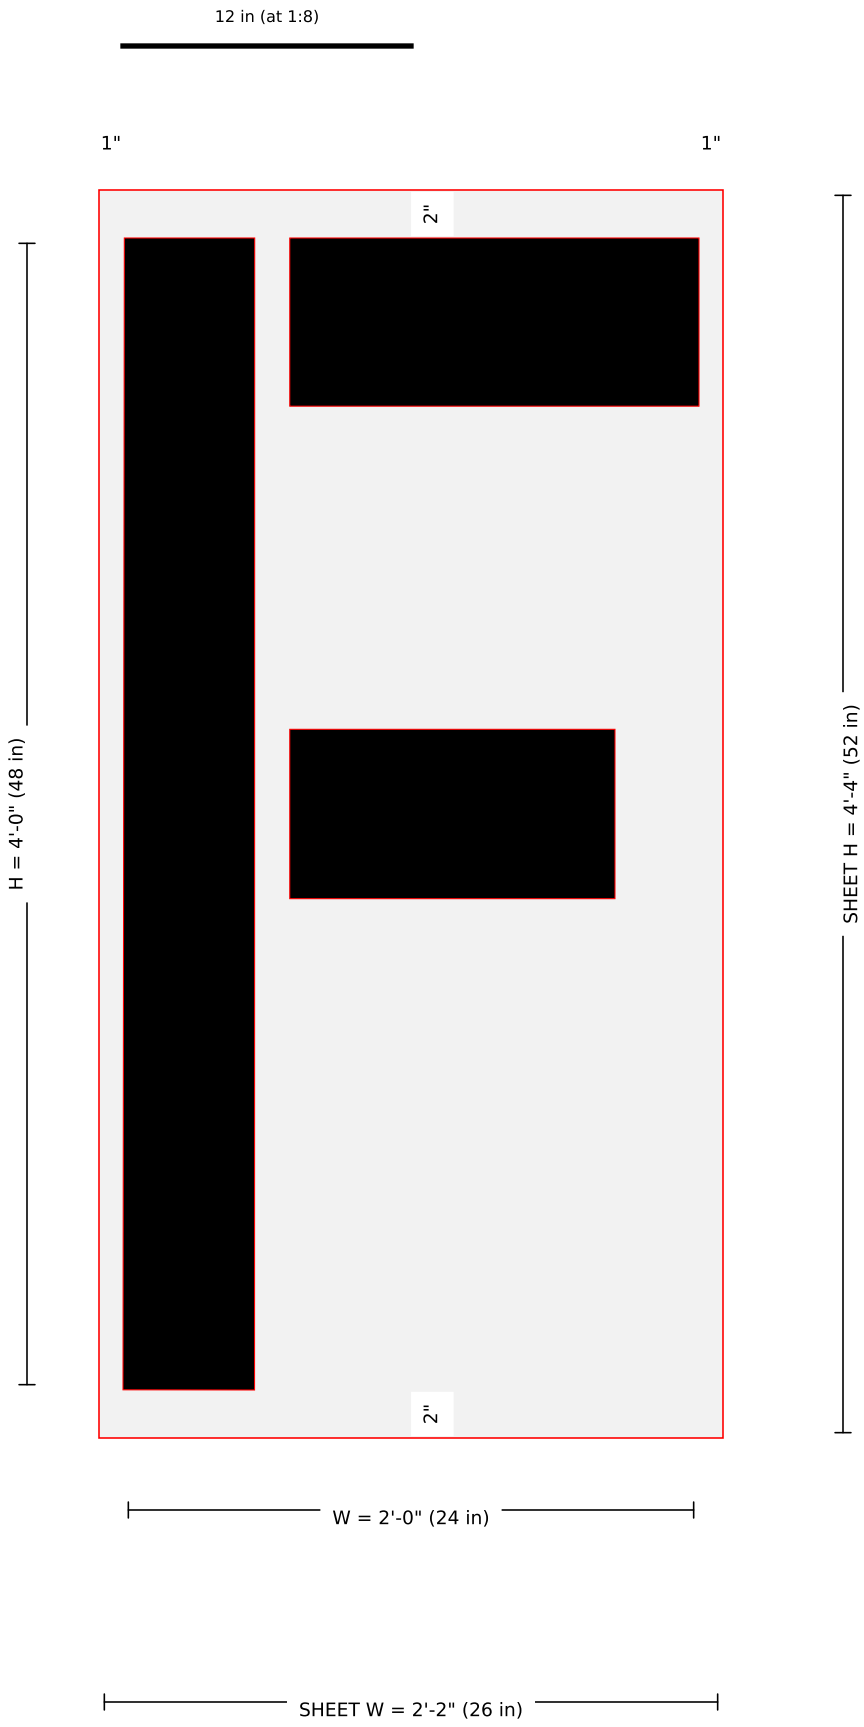


Pieces: 1 · sheet 26 x 52 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-048-48in-FAA-Airport-Letter-F-Stencil-2.jpg: width = kit listing 24 (image-scale 23.87); kit sheet 30 x 56 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.10 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-048-01-G

48" FAA Airport "G" - kit SSS-FAA-048-01, traced from 1-800-Stencil image, 24 W x 48 H

Scale 1:8 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

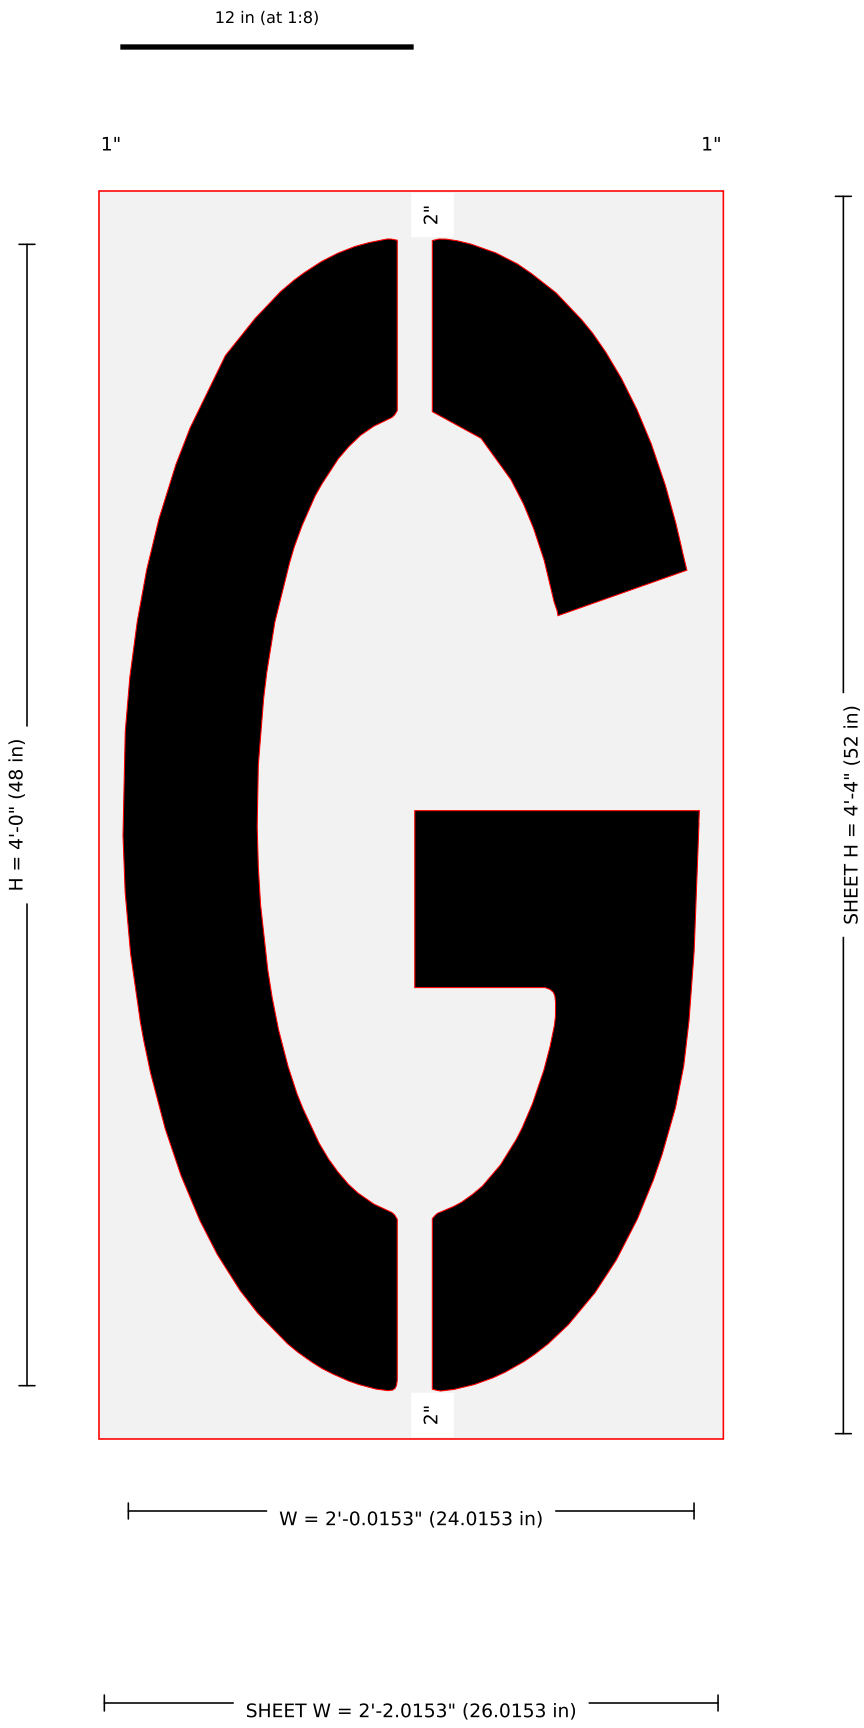


Pieces: 1 · sheet 26.015 x 52 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-048-48in-FAA-Airport-Letter-G-Stencil-2.jpg: width = kit listing 24 (image-scale 23.87); kit sheet 30 x 56 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.19 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-048-01-H

48" FAA Airport "H" - kit SSS-FAA-048-01, traced from 1-800-Stencil image, 24 W x 48 H

Scale 1:8 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

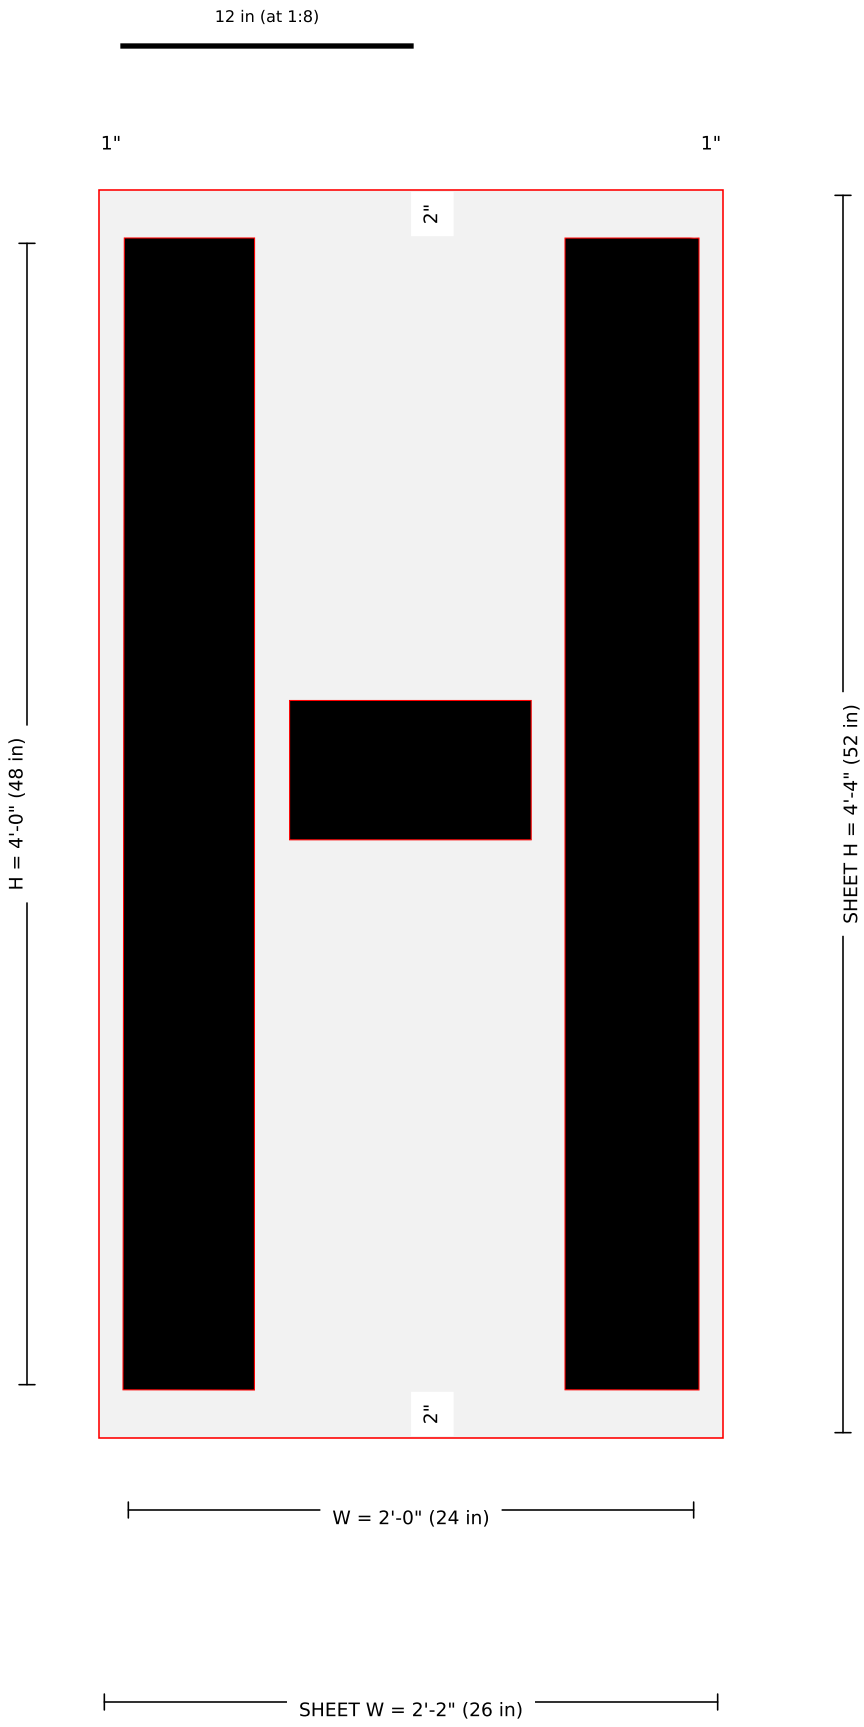


Pieces: 1 · sheet 26 x 52 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-048-48in-FAA-Airport-Letter-H-Stencil-2.jpg: width = kit listing 24 (image-scale 23.87); kit sheet 30 x 56 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.10 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-048-01-I

48" FAA Airport "I" - kit SSS-FAA-048-01, traced from 1-800-Stencil image, 6 W x 48 H

Scale 1:8 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

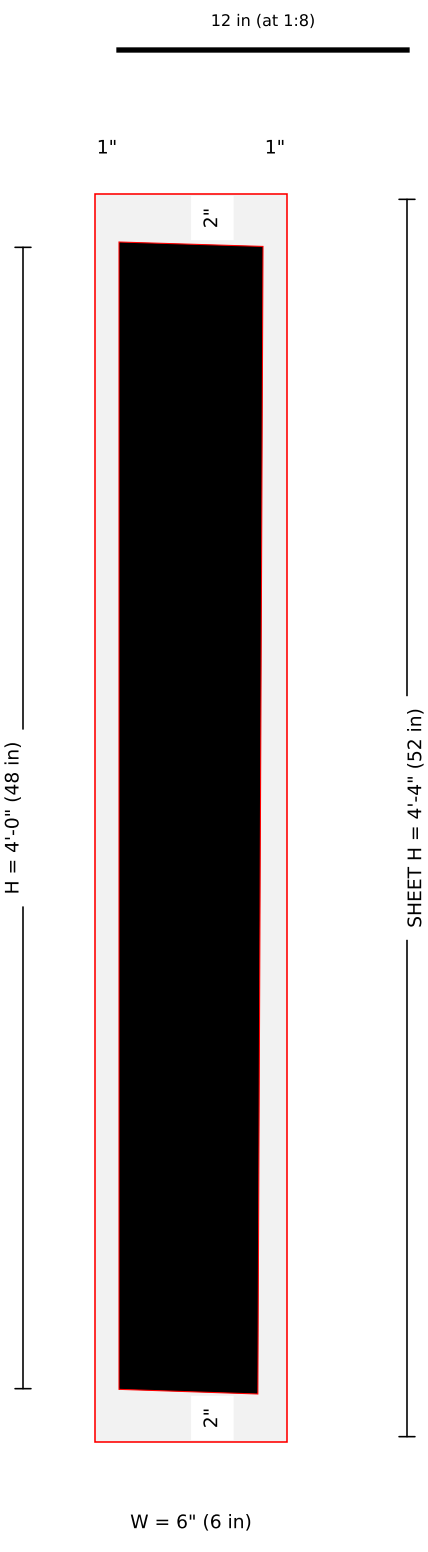


Pieces: 1 · sheet 8 x 52 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-048-48in-FAA-Airport-Letter-I-Stencil-2.jpg: width 6 from image scale (5.76); NOT the kit listing width; kit sheet 30 x 56 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.10 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-048-01-J

48" FAA Airport "J" - kit SSS-FAA-048-01, traced from 1-800-Stencil image, 24 W x 48 H

Scale 1:8 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

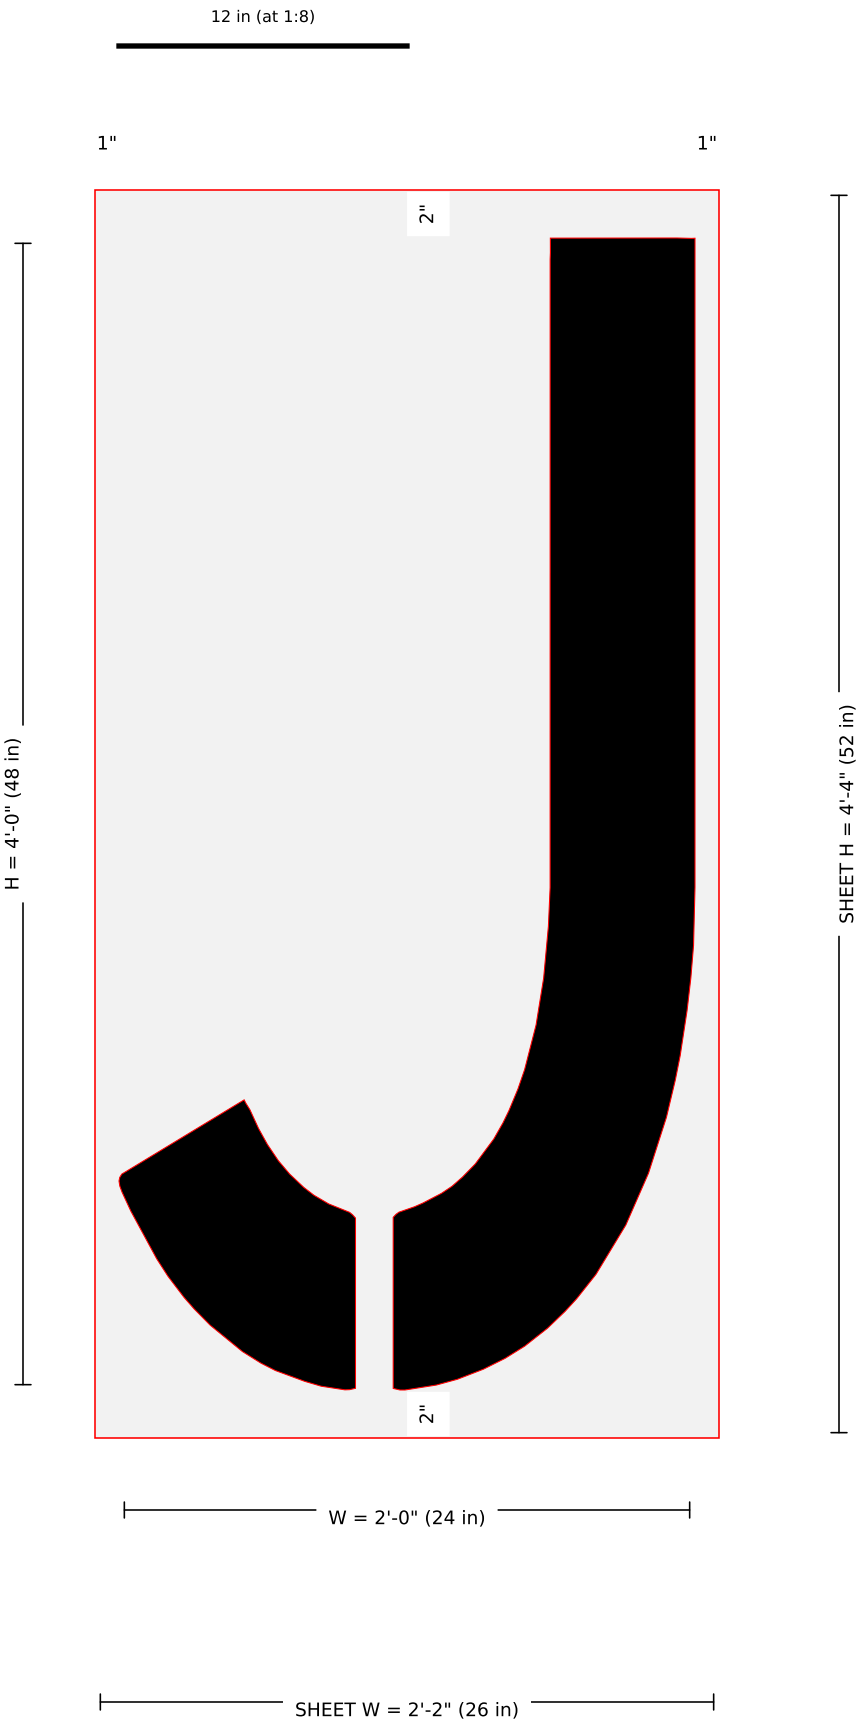


Pieces: 1 · sheet 26 x 52 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-048-48in-FAA-Airport-Letter-J-Stencil-2.jpg: width = kit listing 24 (image-scale 23.82); kit sheet 30 x 56 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.19 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-048-01-K

48" FAA Airport "K" - kit SSS-FAA-048-01, traced from 1-800-Stencil image, 24 W x 48 H

Scale 1:8 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

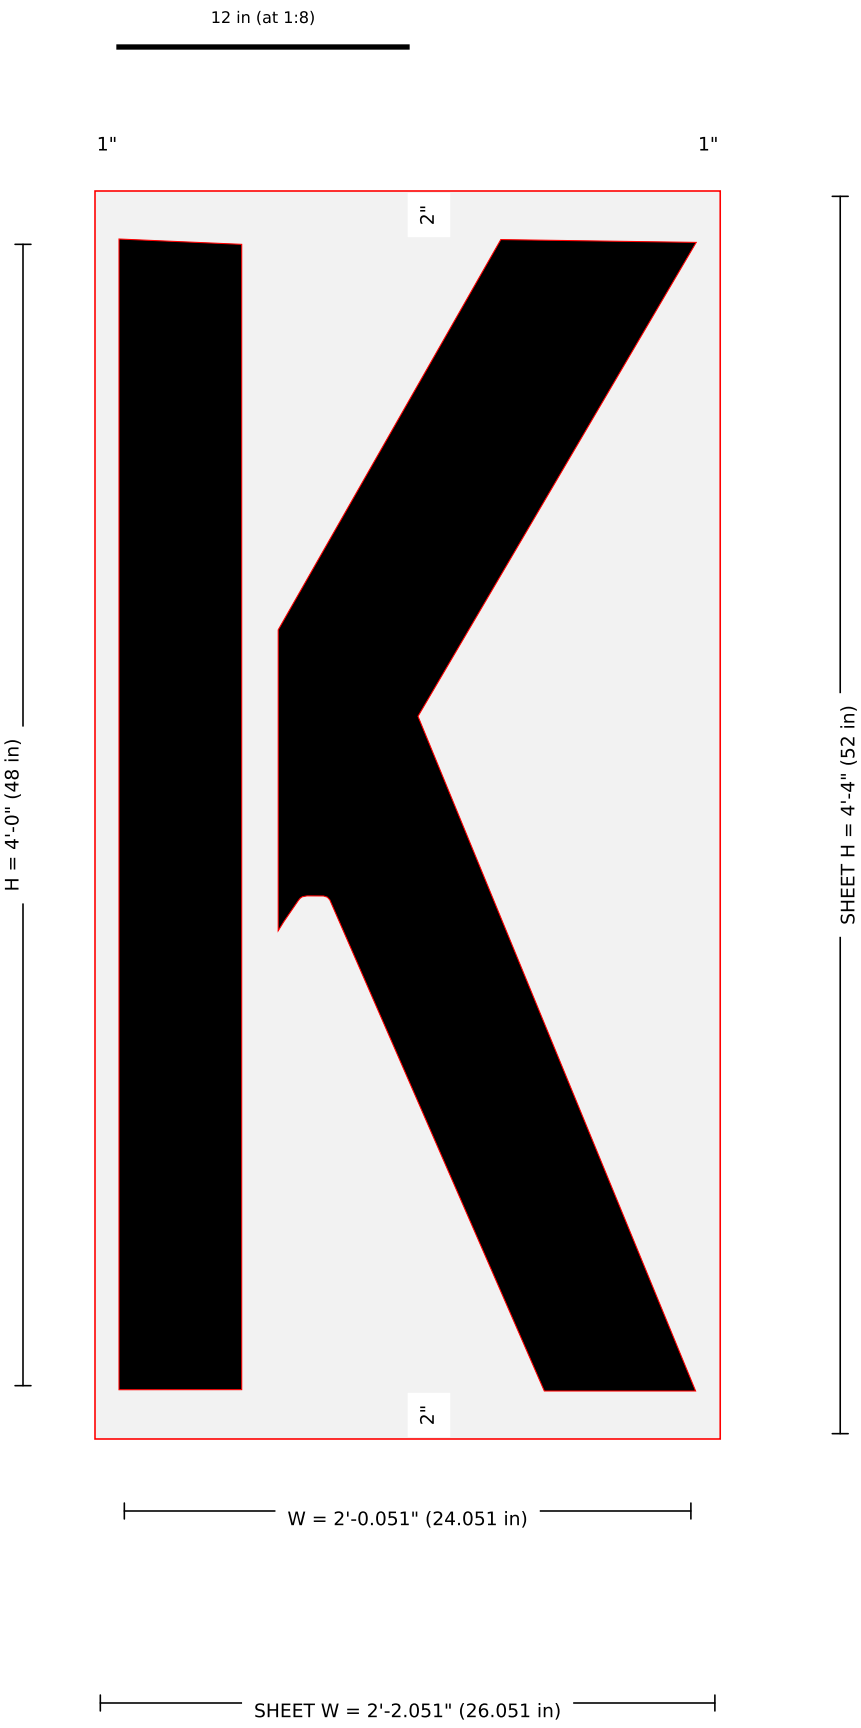


Pieces: 1 · sheet 26.051 x 52 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-048-48in-FAA-Airport-Letter-K-Stencil-2.jpg: width = kit listing 24 (image-scale 23.72); kit sheet 30 x 56 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.10 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-048-01-L

48" FAA Airport "L" - kit SSS-FAA-048-01, traced from 1-800-Stencil image, 24 W x 48 H

Scale 1:8 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

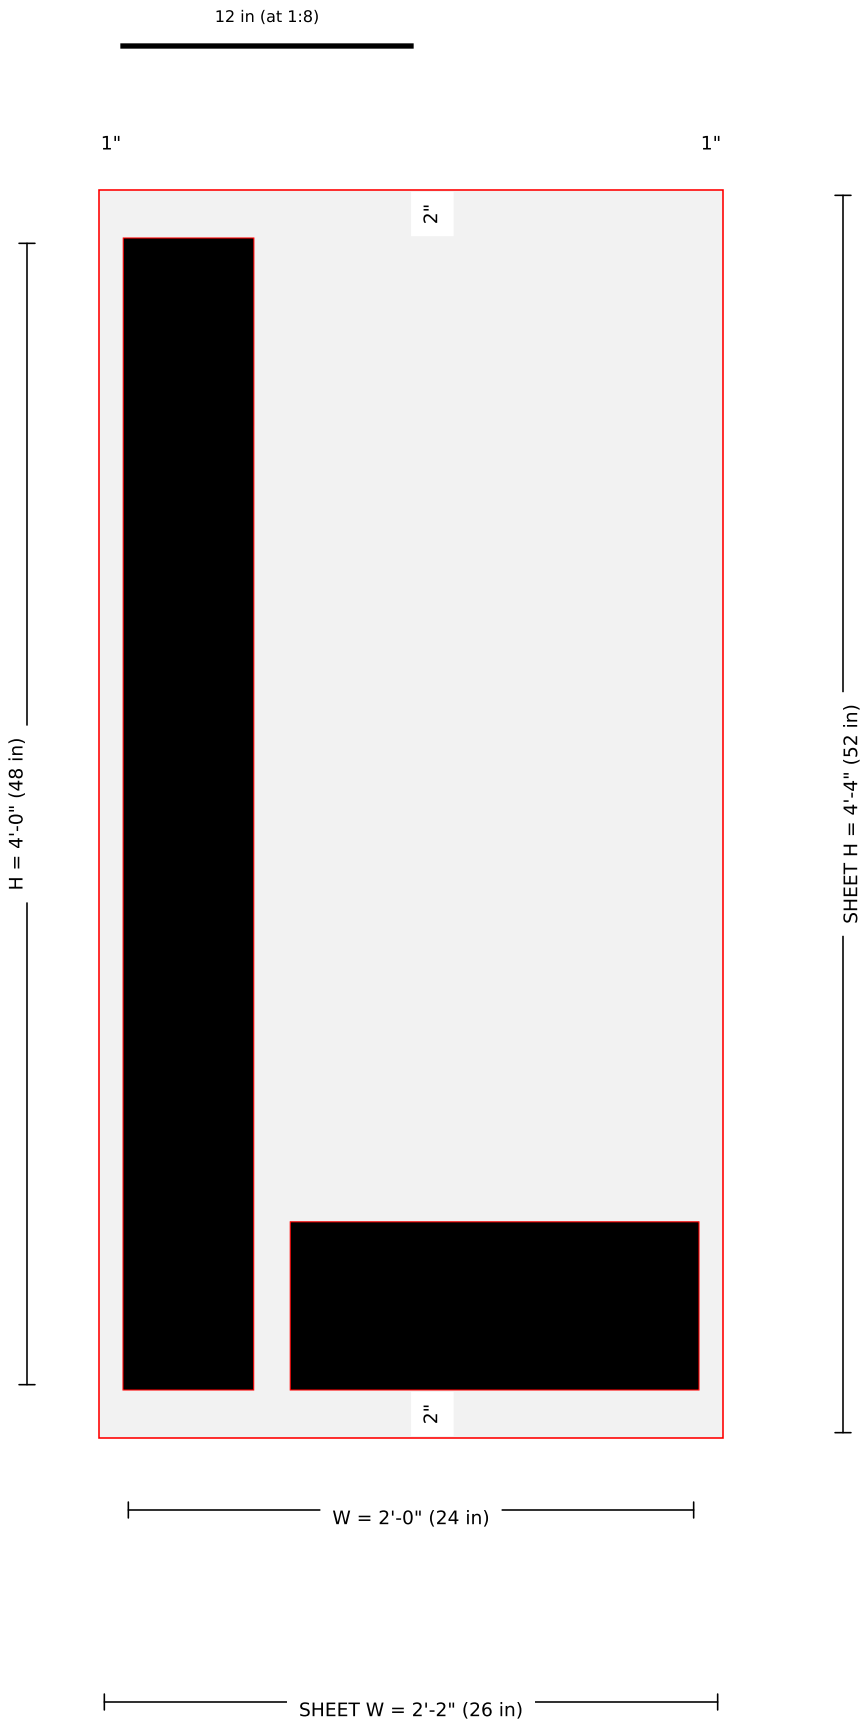


Pieces: 1 · sheet 26 x 52 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-048-48in-FAA-Airport-Letter-L-Stencil-2.jpg: width = kit listing 24 (image-scale 23.87); kit sheet 30 x 56 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.10 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-048-01-M

48" FAA Airport "M" - kit SSS-FAA-048-01, traced from 1-800-Stencil image, 24 W x 48 H

Scale 1:8 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

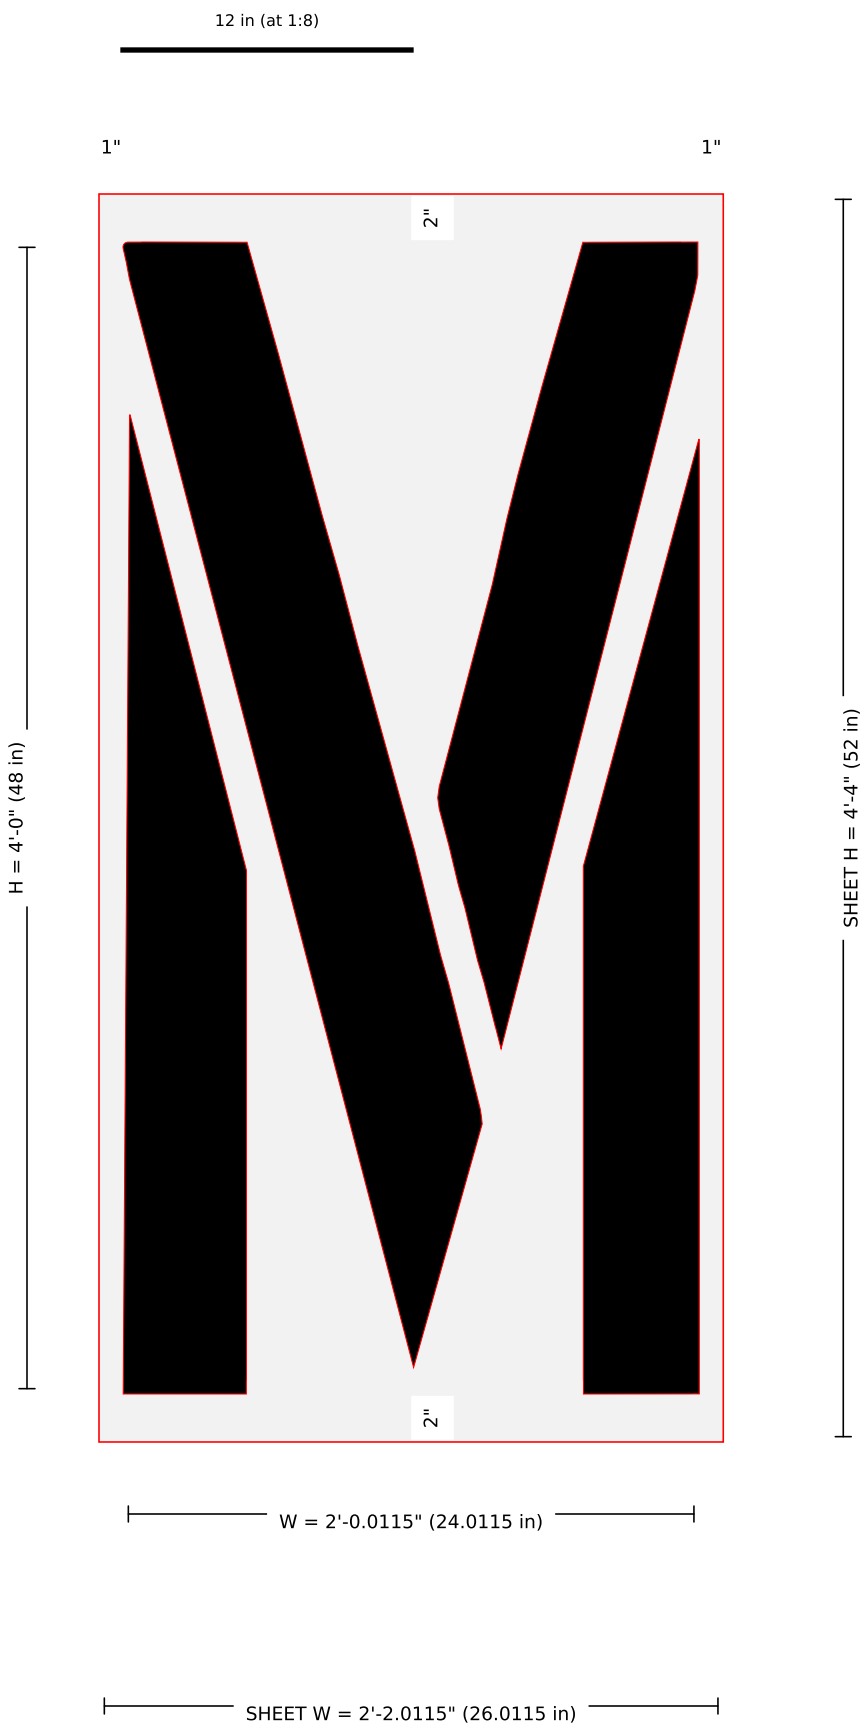


Pieces: 1 · sheet 26.011 x 52 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-048-48in-FAA-Airport-Letter-M-Stencil-2.jpg: width = kit listing 24 (image-scale 23.87); kit sheet 30 x 56 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.19 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 3 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-048-01-N

48" FAA Airport "N" - kit SSS-FAA-048-01, traced from 1-800-Stencil image, 24 W x 48 H

Scale 1:8 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

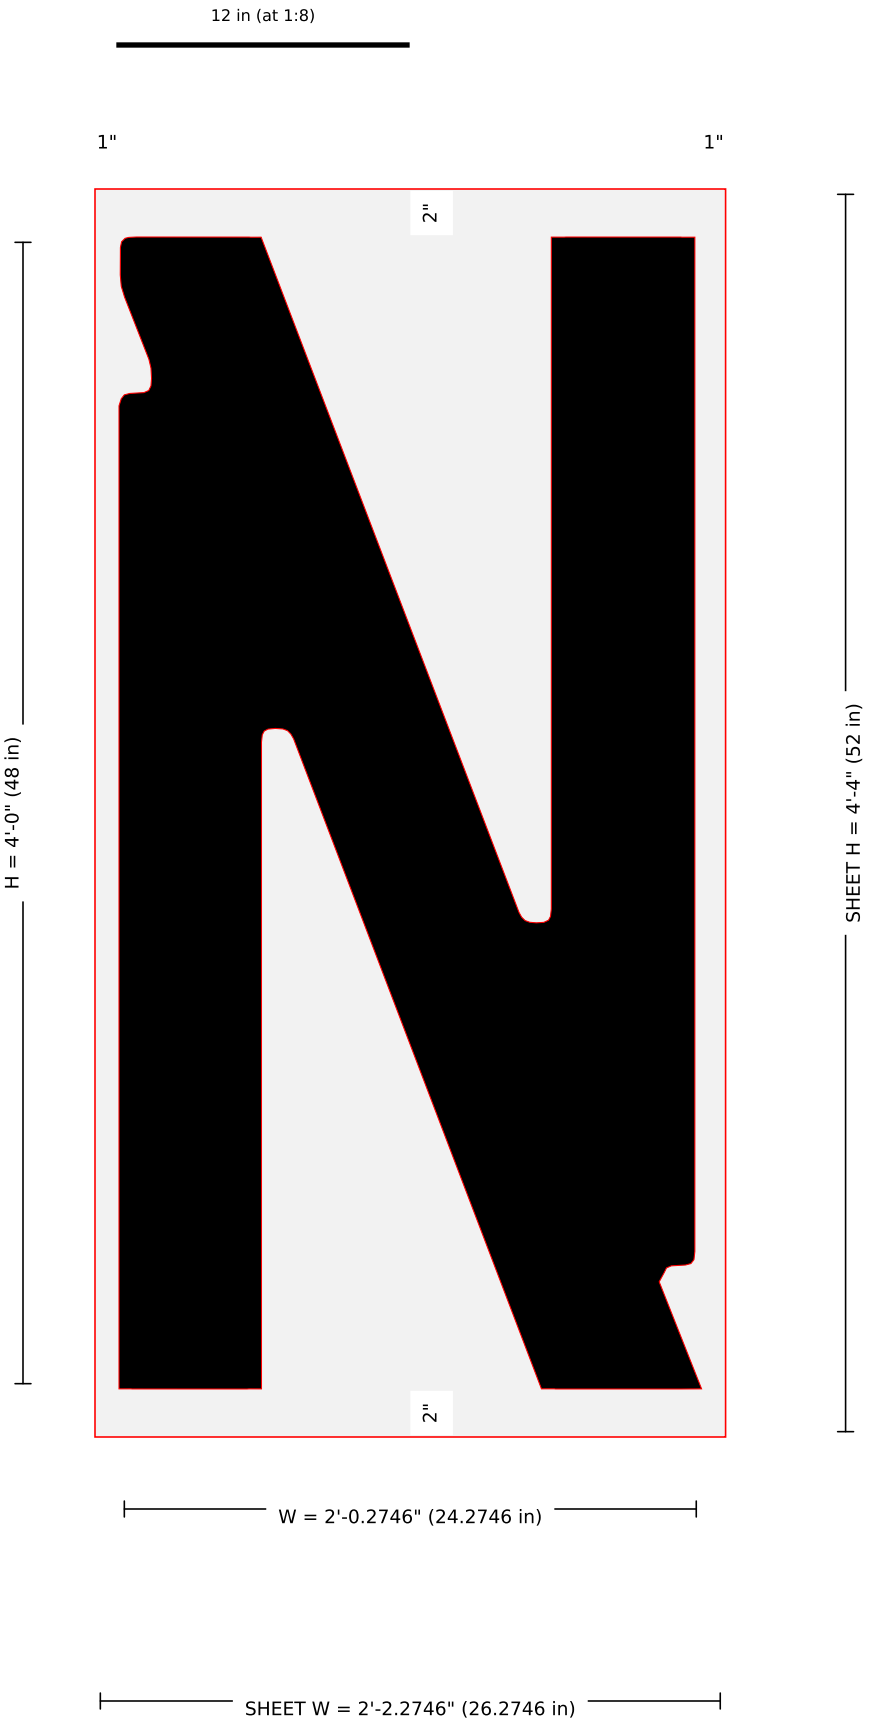


Pieces: 1 · sheet 26.275 x 52 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-048-48in-FAA-Airport-Letter-N-Stencil-2.jpg: width = kit listing 24 (image-scale 23.87); kit sheet 30 x 56 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.19 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-048-01-O

48" FAA Airport "O" - kit SSS-FAA-048-01, traced from 1-800-Stencil image, 24 W x 48 H

Scale 1:8 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

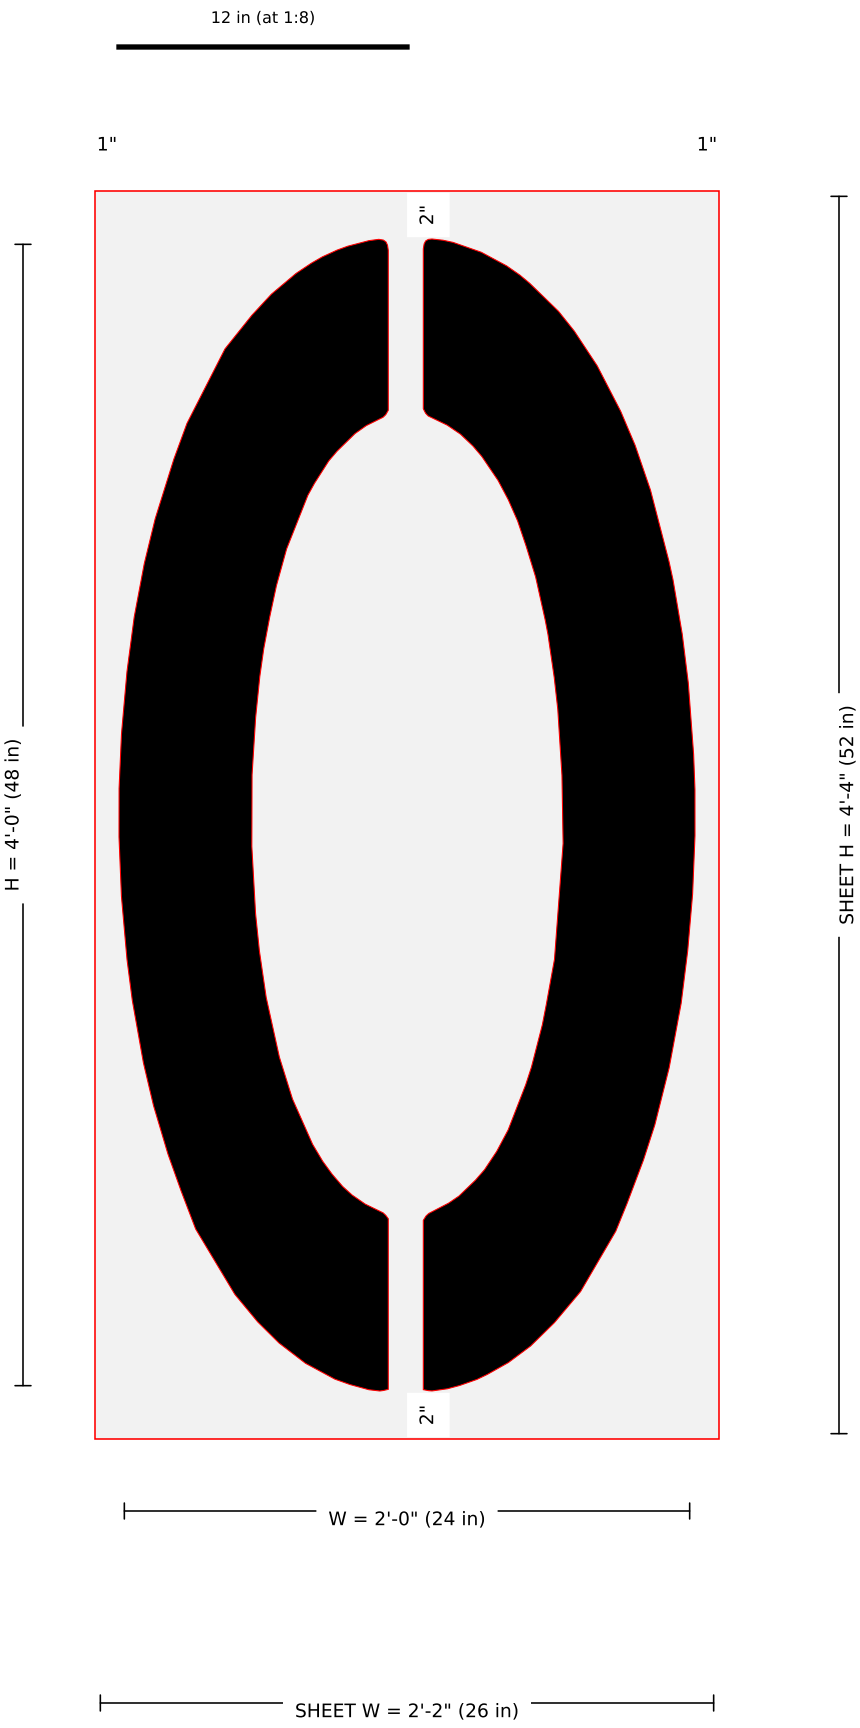


Pieces: 1 · sheet 26 x 52 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-048-48in-FAA-Airport-Letter-O-Stencil-2.jpg: width = kit listing 24 (image-scale 23.87); kit sheet 30 x 56 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.19 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-048-01-P

48" FAA Airport "P" - kit SSS-FAA-048-01, traced from 1-800-Stencil image, 24 W x 48 H

Scale 1:8 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

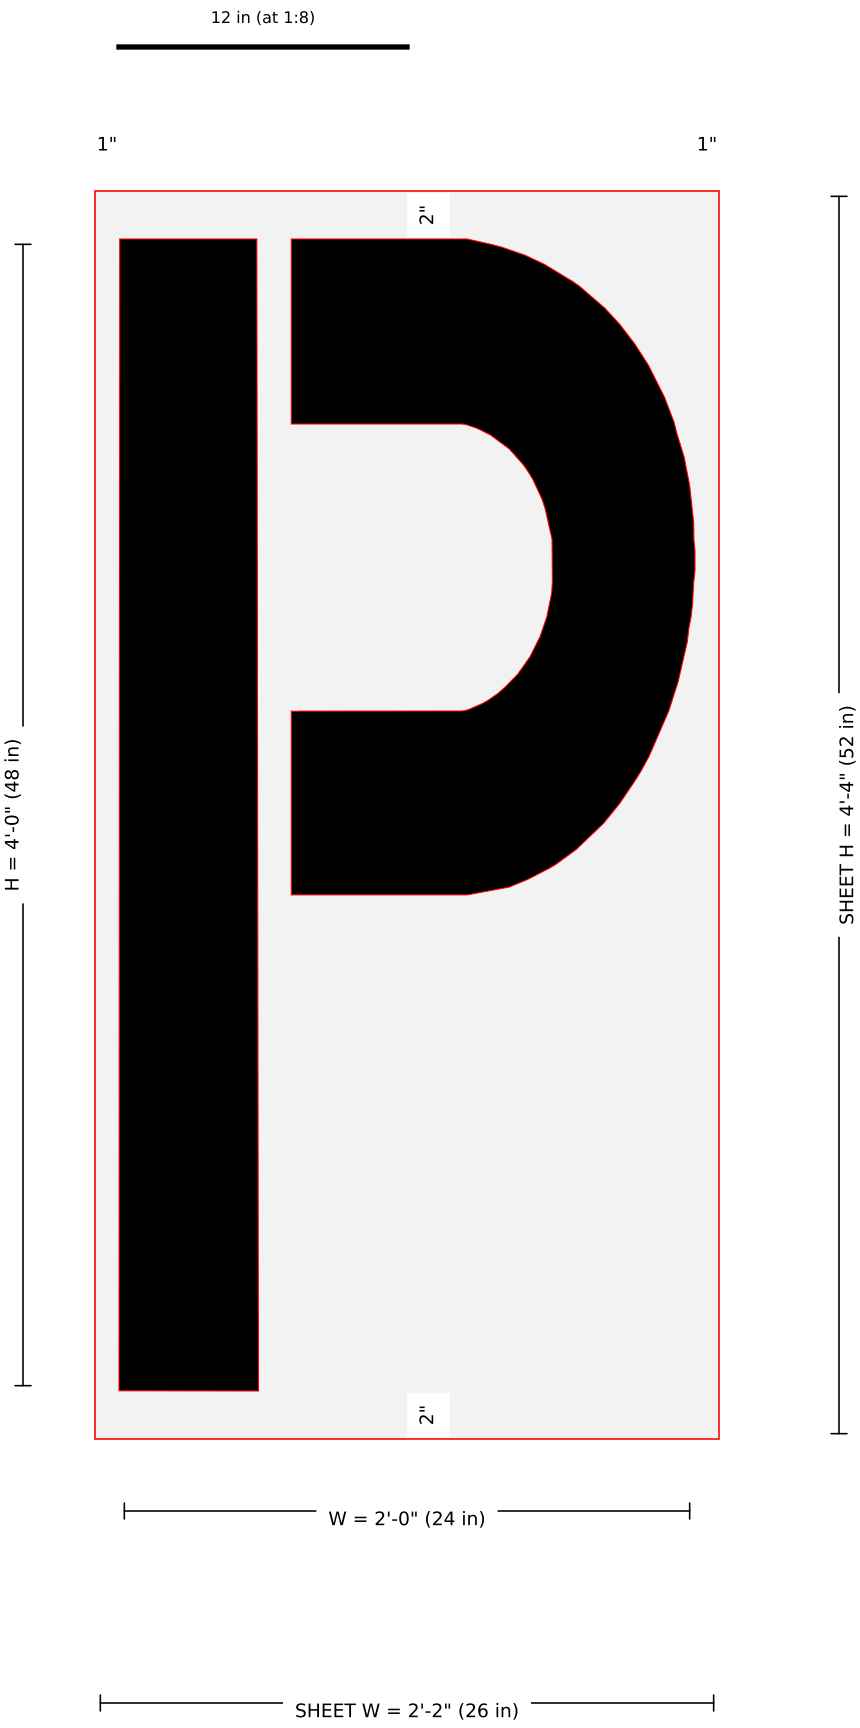


Pieces: 1 · sheet 26 x 52 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-048-48in-FAA-Airport-Letter-P-Stencil-2.jpg: width = kit listing 24 (image-scale 23.87); kit sheet 30 x 56 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.10 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-048-01-Q

48" FAA Airport "Q" - kit SSS-FAA-048-01, traced from 1-800-Stencil image, 24 W x 48 H

Scale 1:8 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

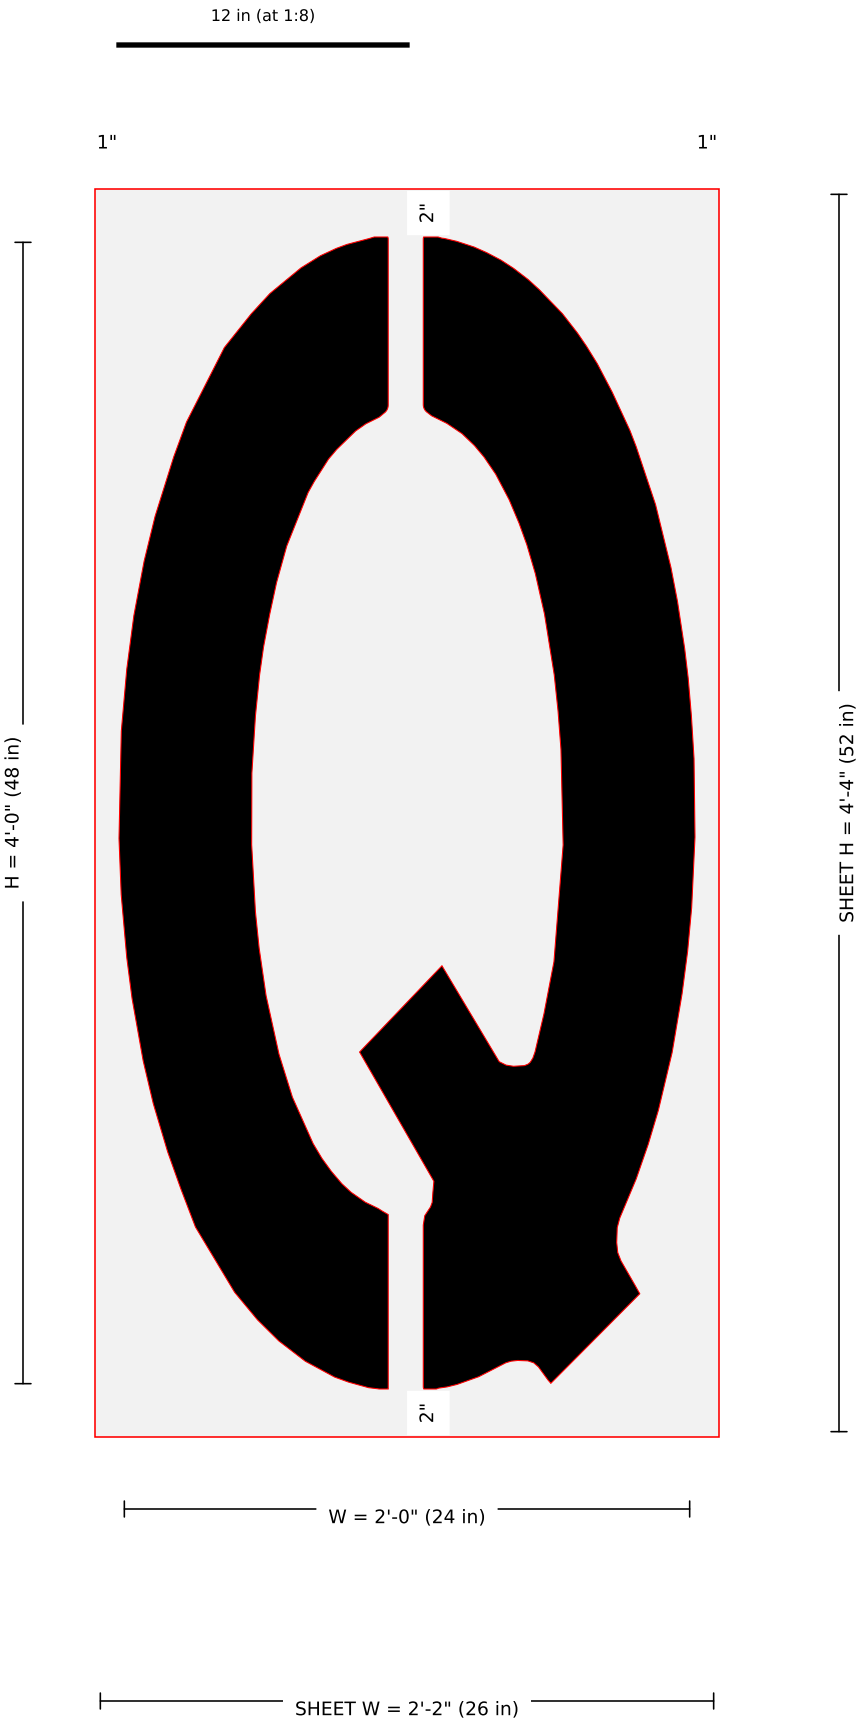


Pieces: 1 · sheet 26 x 52 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-048-48in-FAA-Airport-Letter-Q-Stencil-2.jpg: width = kit listing 24 (image-scale 23.87); kit sheet 30 x 56 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.19 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 21 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-048-01-R

48" FAA Airport "R" - kit SSS-FAA-048-01, traced from 1-800-Stencil image, 24 W x 48 H

Scale 1:8 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

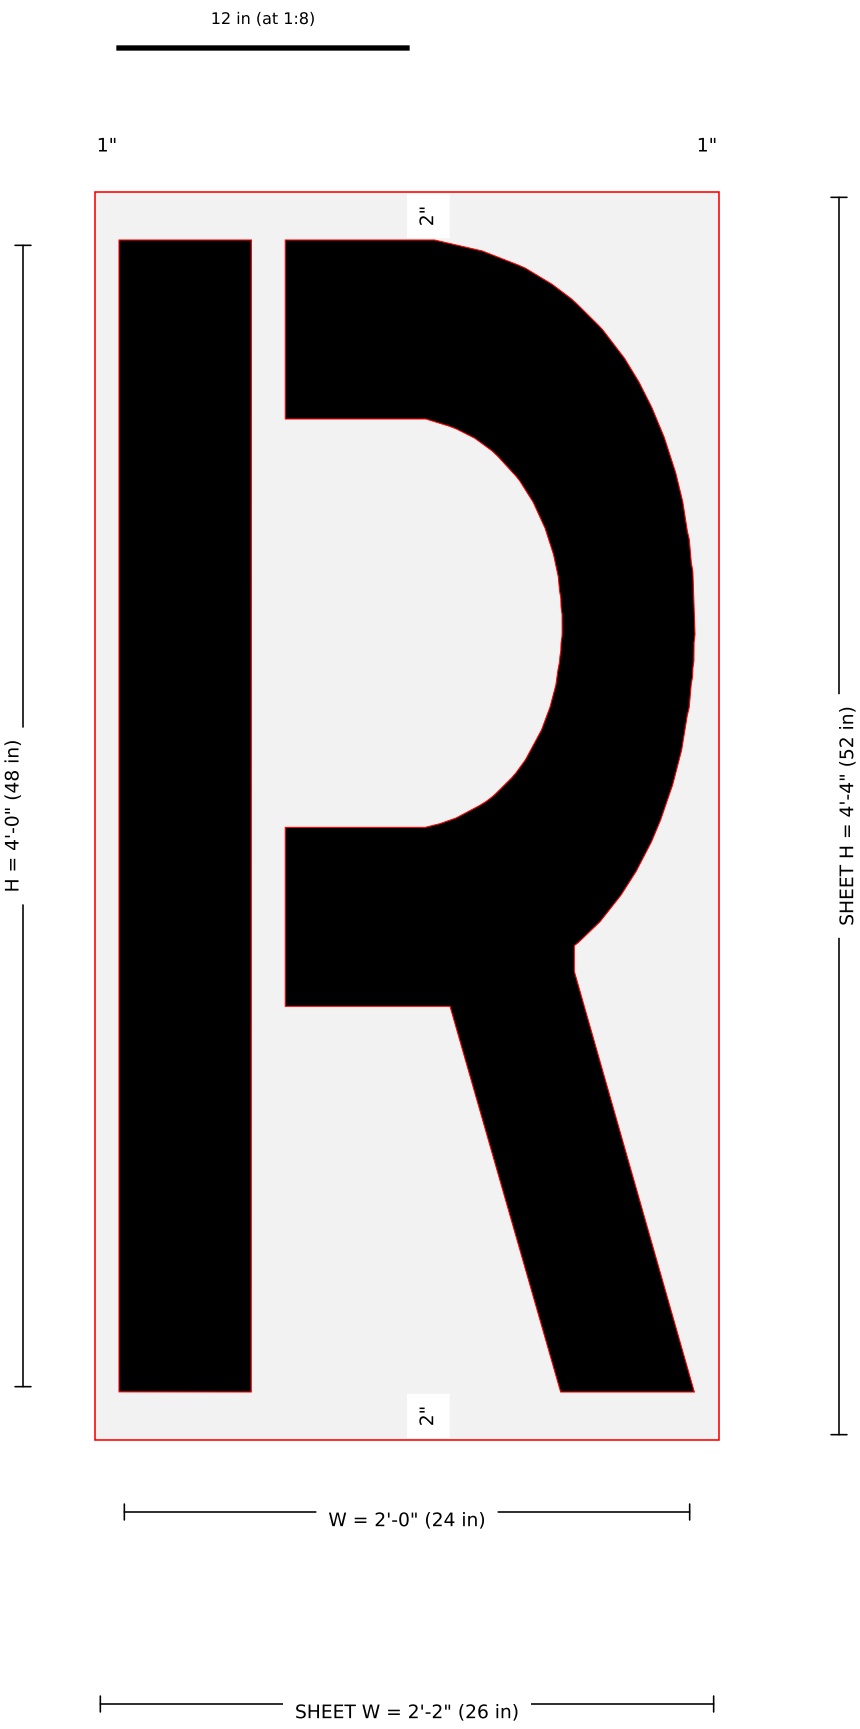


Pieces: 1 · sheet 26 x 52 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-048-48in-FAA-Airport-Letter-R-Stencil-2.jpg: width = kit listing 24 (image-scale 23.87); kit sheet 30 x 56 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.15 in (smoothing level 0.5); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-048-01-S

48" FAA Airport "S" - kit SSS-FAA-048-01, traced from 1-800-Stencil image, 24 W x 48 H

Scale 1:8 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

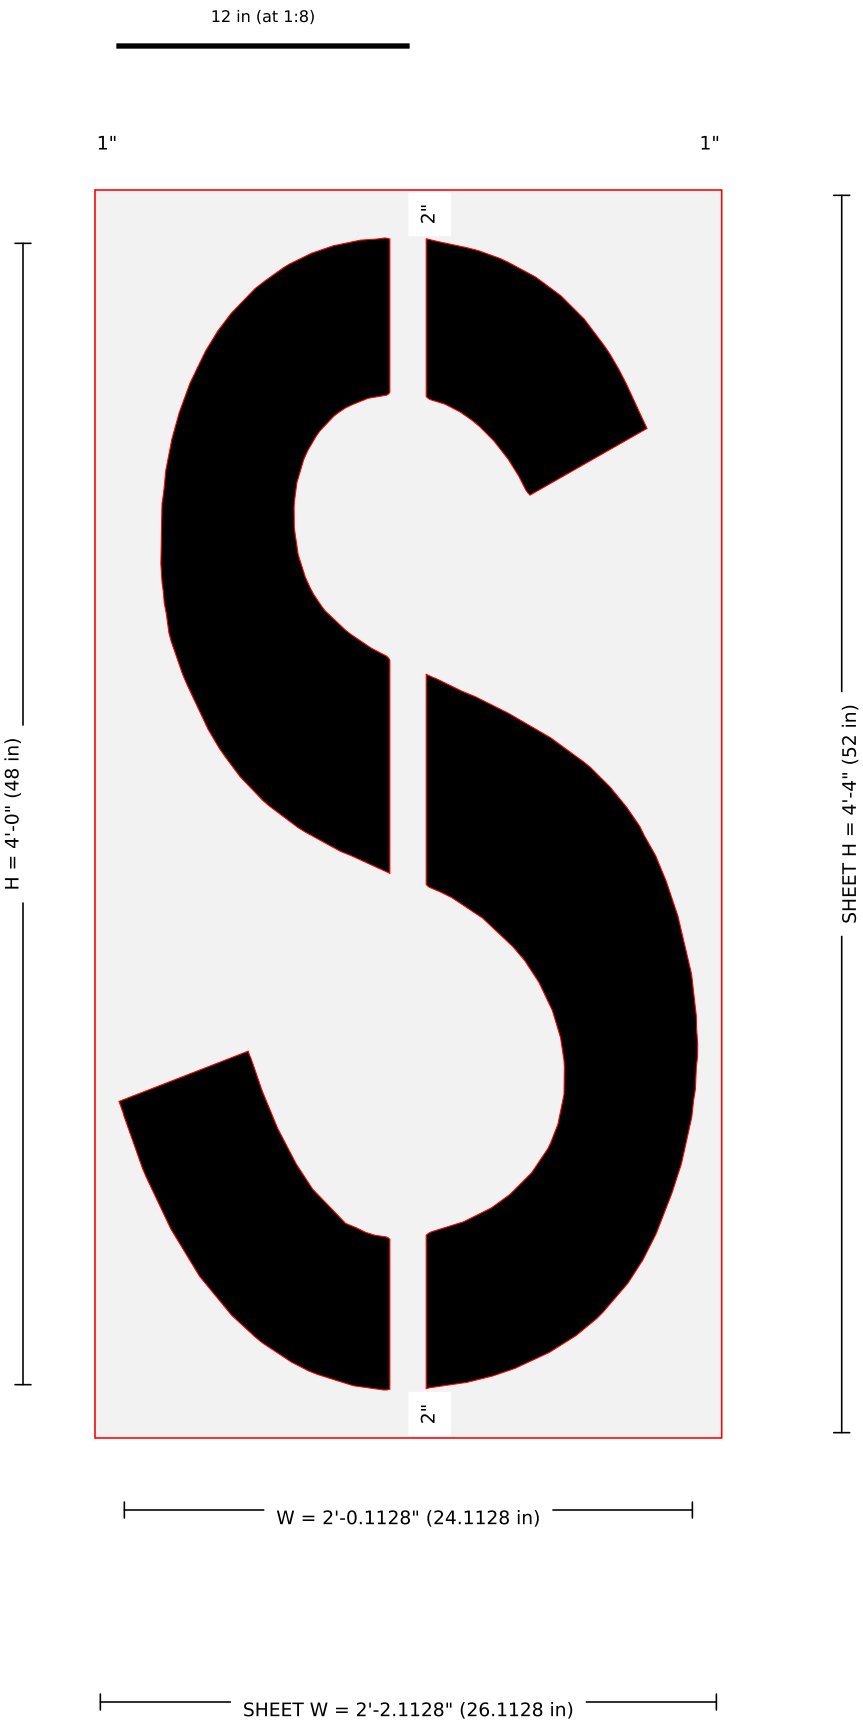


Pieces: 1 · sheet 26.113 x 52 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-048-48in-FAA-Airport-Letter-S-Stencil-2.jpg: width = kit listing 24 (image-scale 23.82); kit sheet 30 x 56 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.19 in (smoothing level 0.5); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-048-01-T

48" FAA Airport "T" - kit SSS-FAA-048-01, traced from 1-800-Stencil image, 24 W x 48 H

Scale 1:8 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

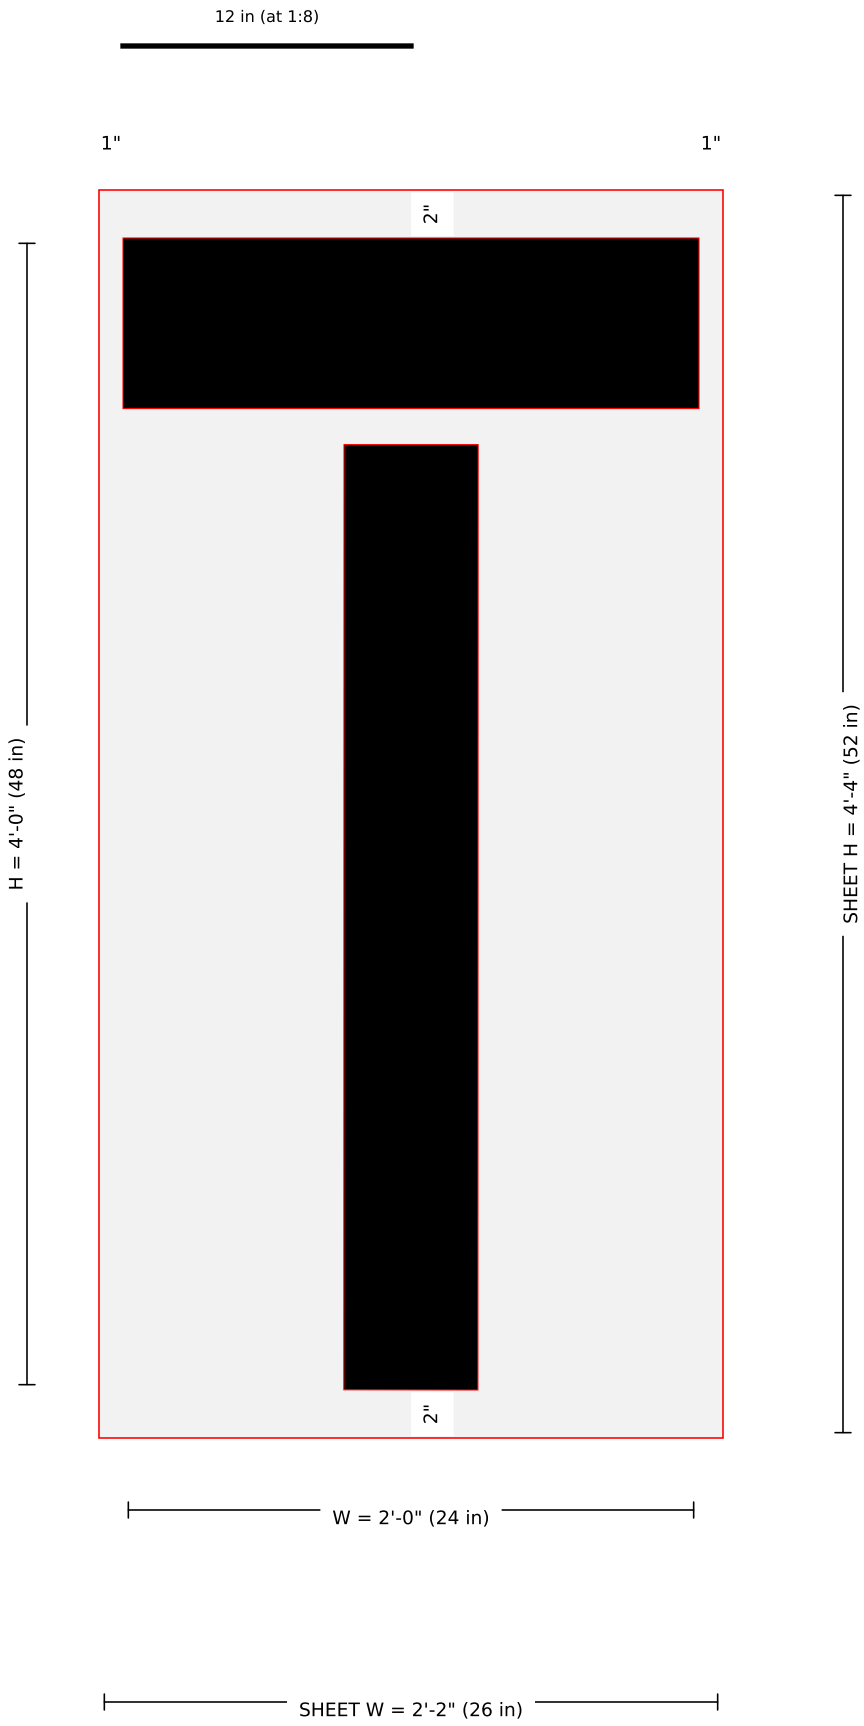


Pieces: 1 · sheet 26 x 52 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-048-48in-FAA-Airport-Letter-T-Stencil-2.jpg: width = kit listing 24 (image-scale 23.87); kit sheet 30 x 56 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.10 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-048-01-U

48" FAA Airport "U" - kit SSS-FAA-048-01, traced from 1-800-Stencil image, 24 W x 48 H

Scale 1:8 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

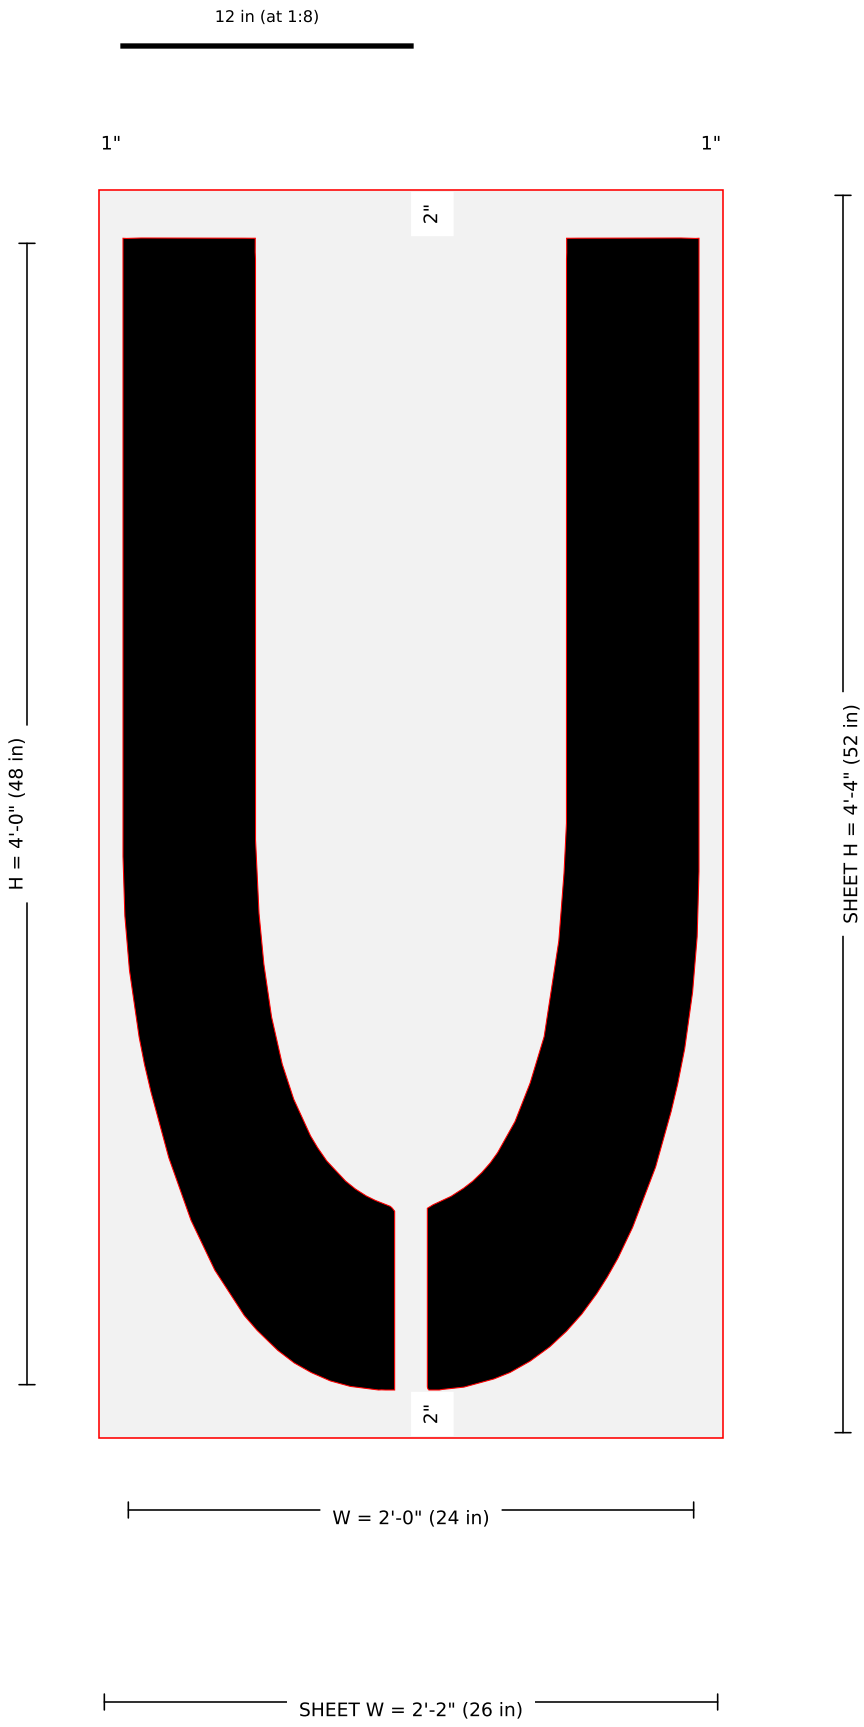


Pieces: 1 · sheet 26 x 52 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-048-48in-FAA-Airport-Letter-U-Stencil-2.jpg: width = kit listing 24 (image-scale 23.87); kit sheet 30 x 56 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.19 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 7 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-048-01-V

48" FAA Airport "V" - kit SSS-FAA-048-01, traced from 1-800-Stencil image, 24 W x 48 H

Scale 1:8 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

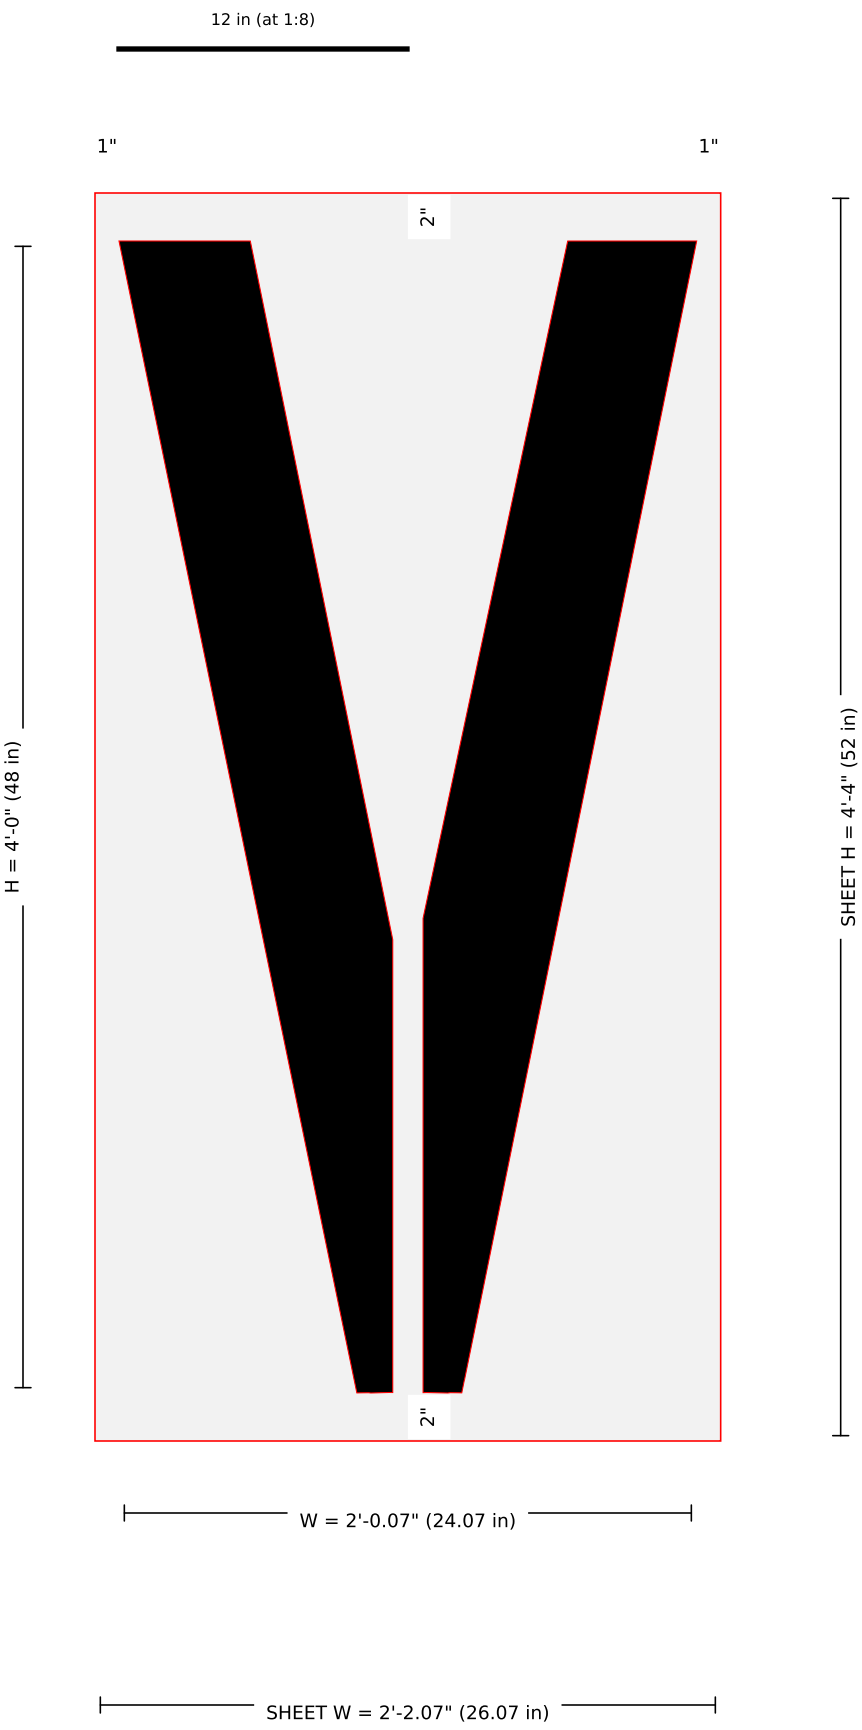


Pieces: 1 · sheet 26.07 x 52 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-048-48in-FAA-Airport-Letter-V-Stencil-2.jpg: width = kit listing 24 (image-scale 23.77); kit sheet 30 x 56 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.19 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-048-01-W

48" FAA Airport "W" - kit SSS-FAA-048-01, traced from 1-800-Stencil image, 24 W x 48 H

Scale 1:8 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

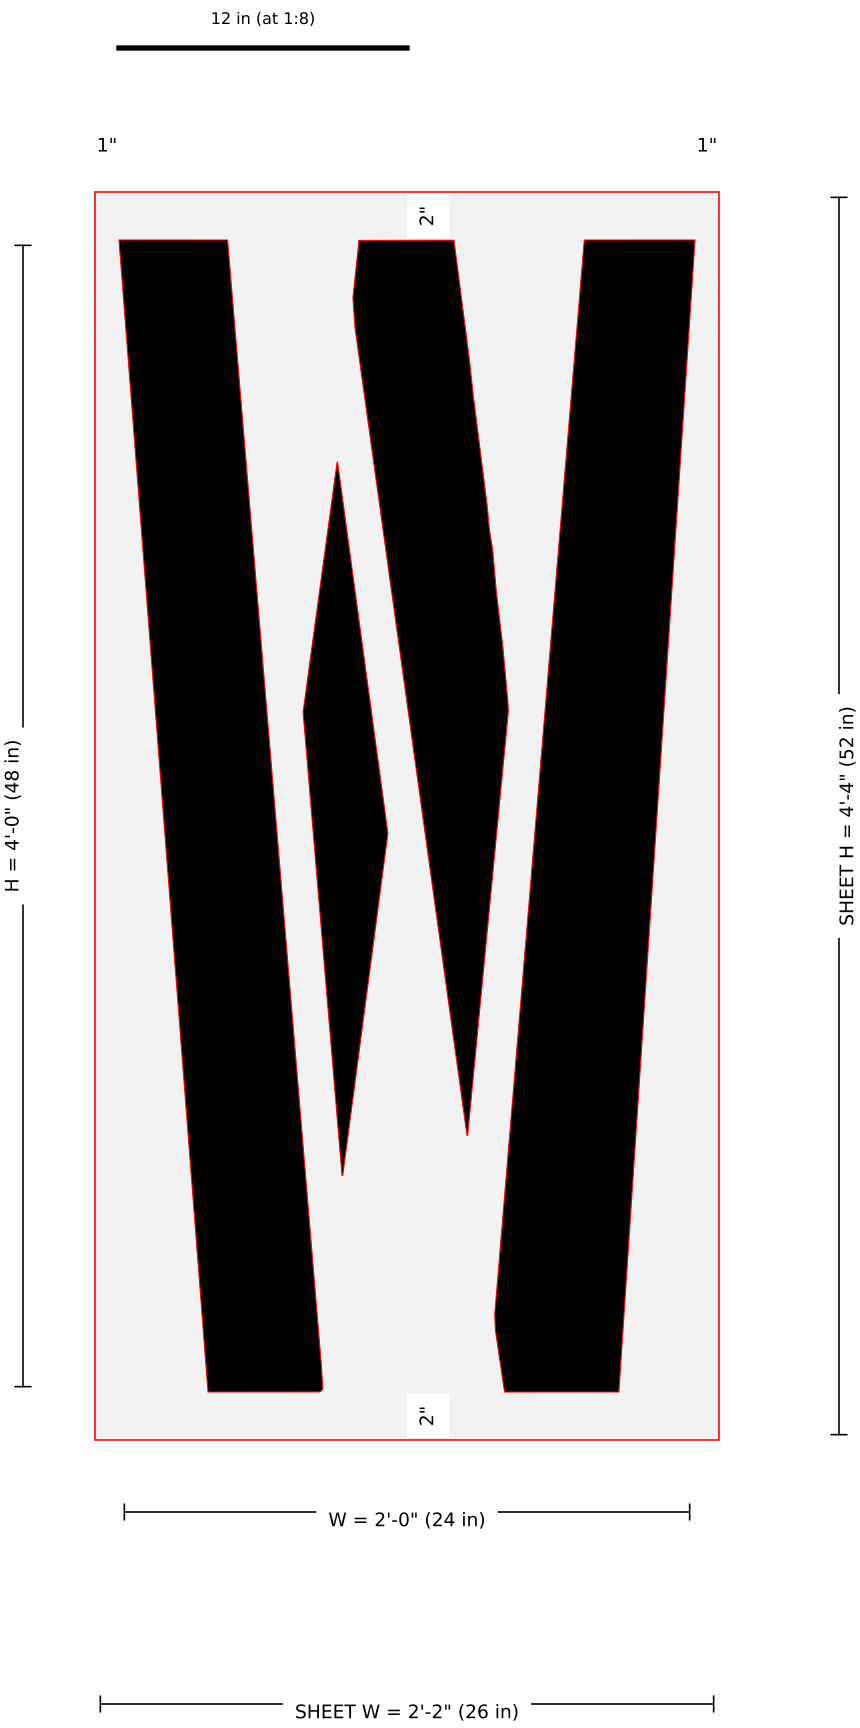


Pieces: 1 · sheet 26 x 52 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-048-48in-FAA-Airport-Letter-W-Stencil-2.jpg: width = kit listing 24 (image-scale 23.87); kit sheet 30 x 56 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.19 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-048-01-X

48" FAA Airport "X" - kit SSS-FAA-048-01, traced from 1-800-Stencil image, 24 W x 48 H

Scale 1:8 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

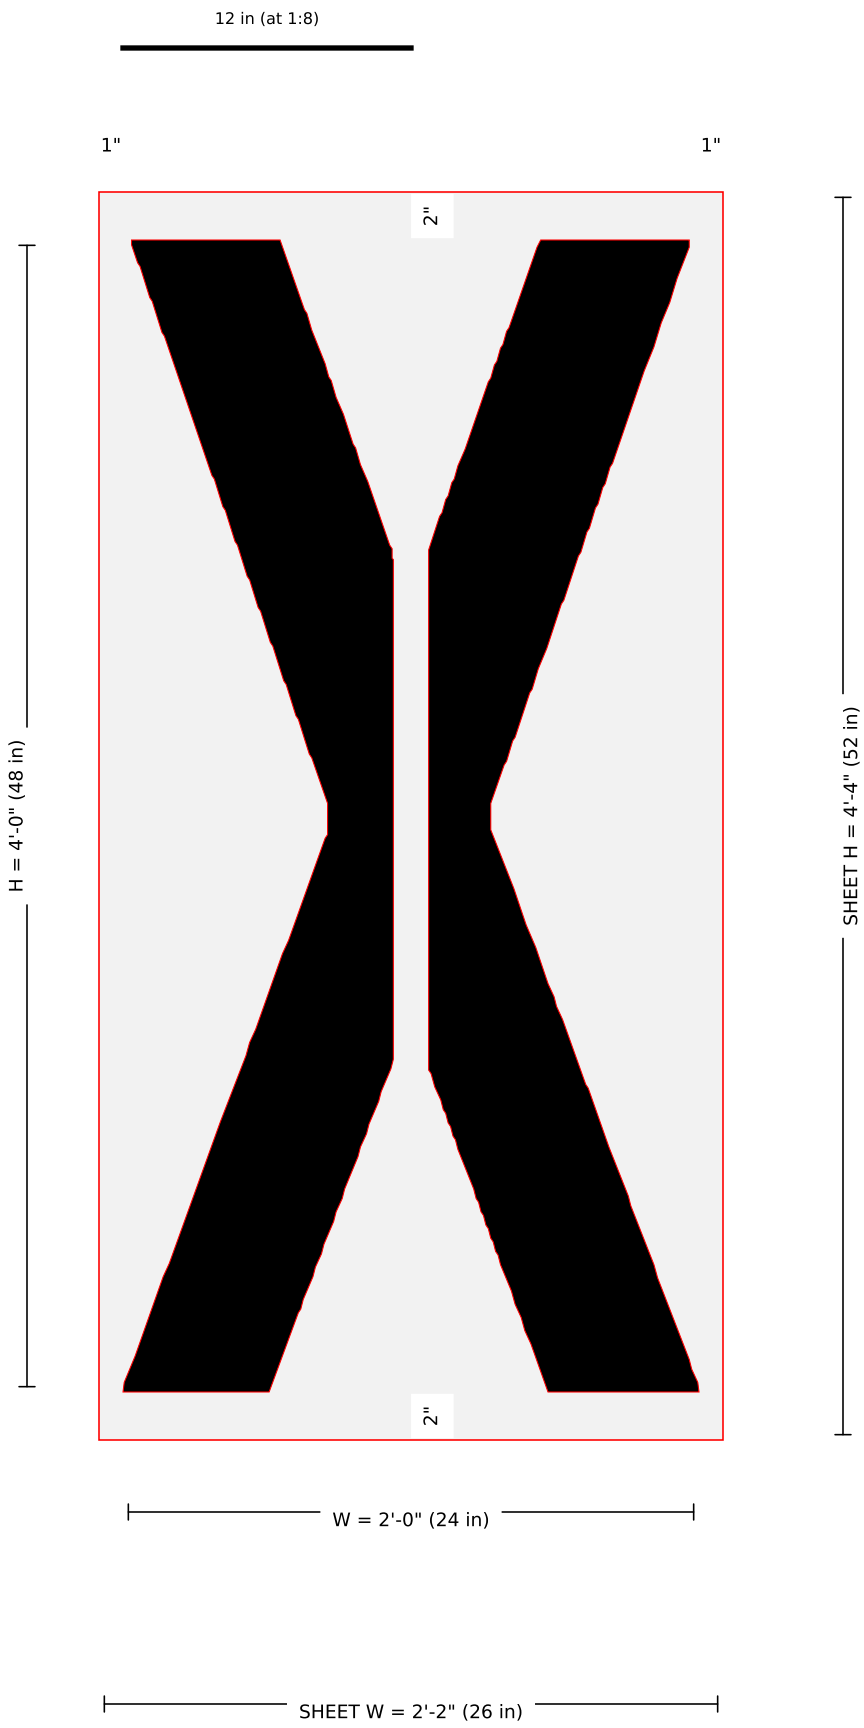


Pieces: 1 · sheet 26 x 52 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-048-48in-FAA-Airport-Letter-X-Stencil-2.jpg: width = kit listing 24 (image-scale 23.67); kit sheet 30 x 56 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-048-01-Y

48" FAA Airport "Y" - kit SSS-FAA-048-01, traced from 1-800-Stencil image, 24 W x 48 H

Scale 1:8 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

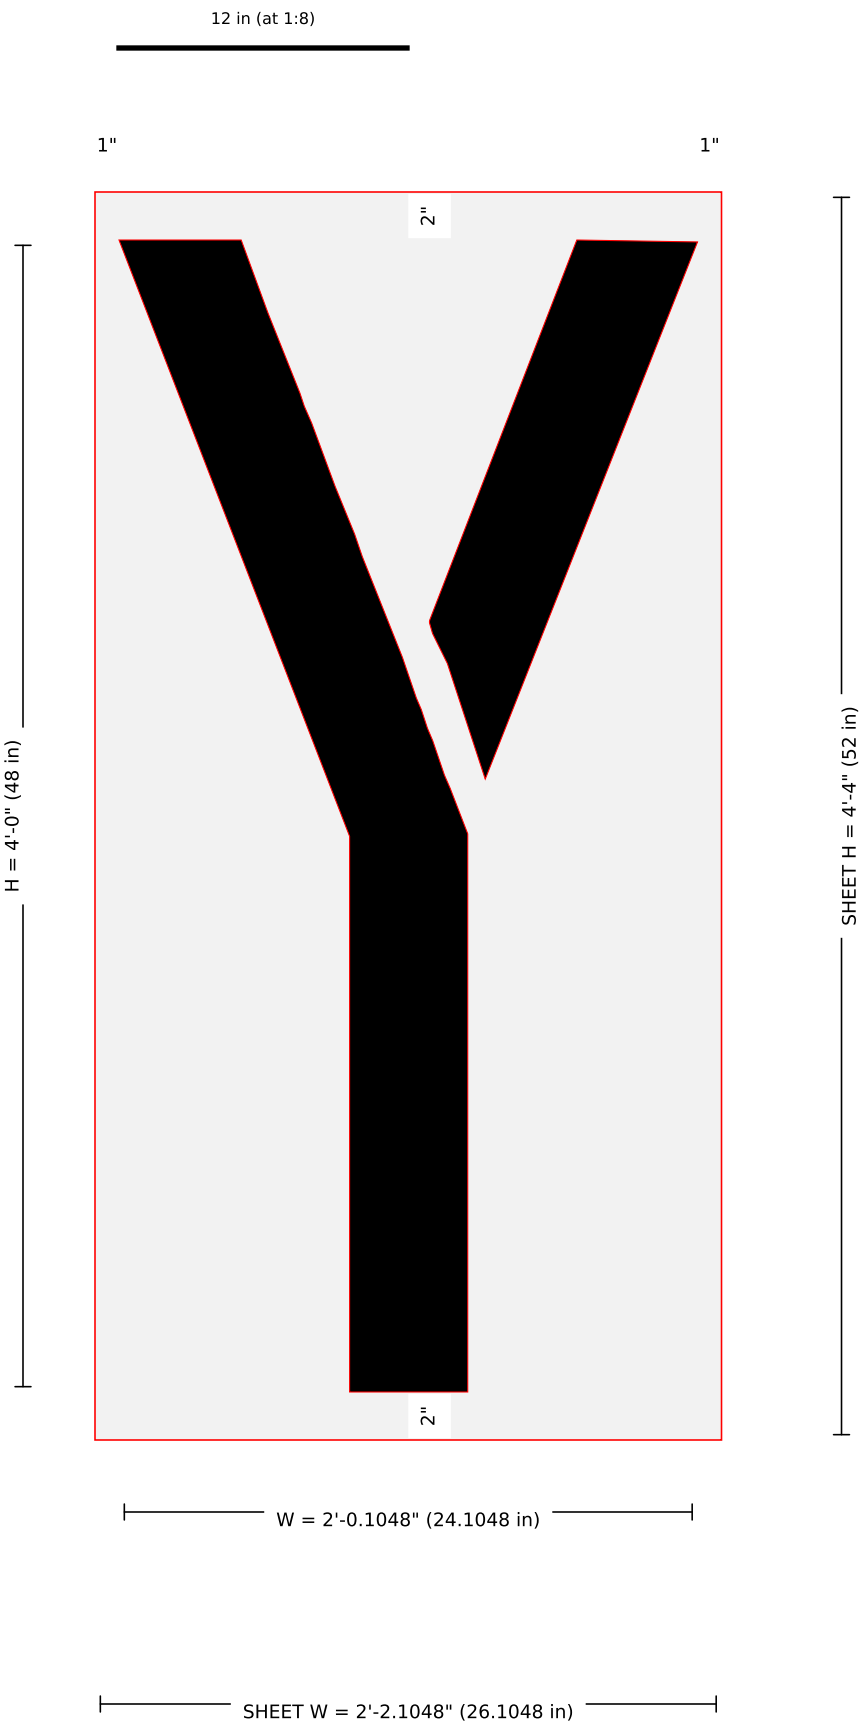


Pieces: 1 · sheet 26.105 x 52 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-048-48in-FAA-Airport-Letter-Y-Stencil-2.jpg: width = kit listing 24 (image-scale 23.67); kit sheet 30 x 56 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.10 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 3 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-048-01-Z

48" FAA Airport "Z" - kit SSS-FAA-048-01, traced from 1-800-Stencil image, 24 W x 48 H

Scale 1:8 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

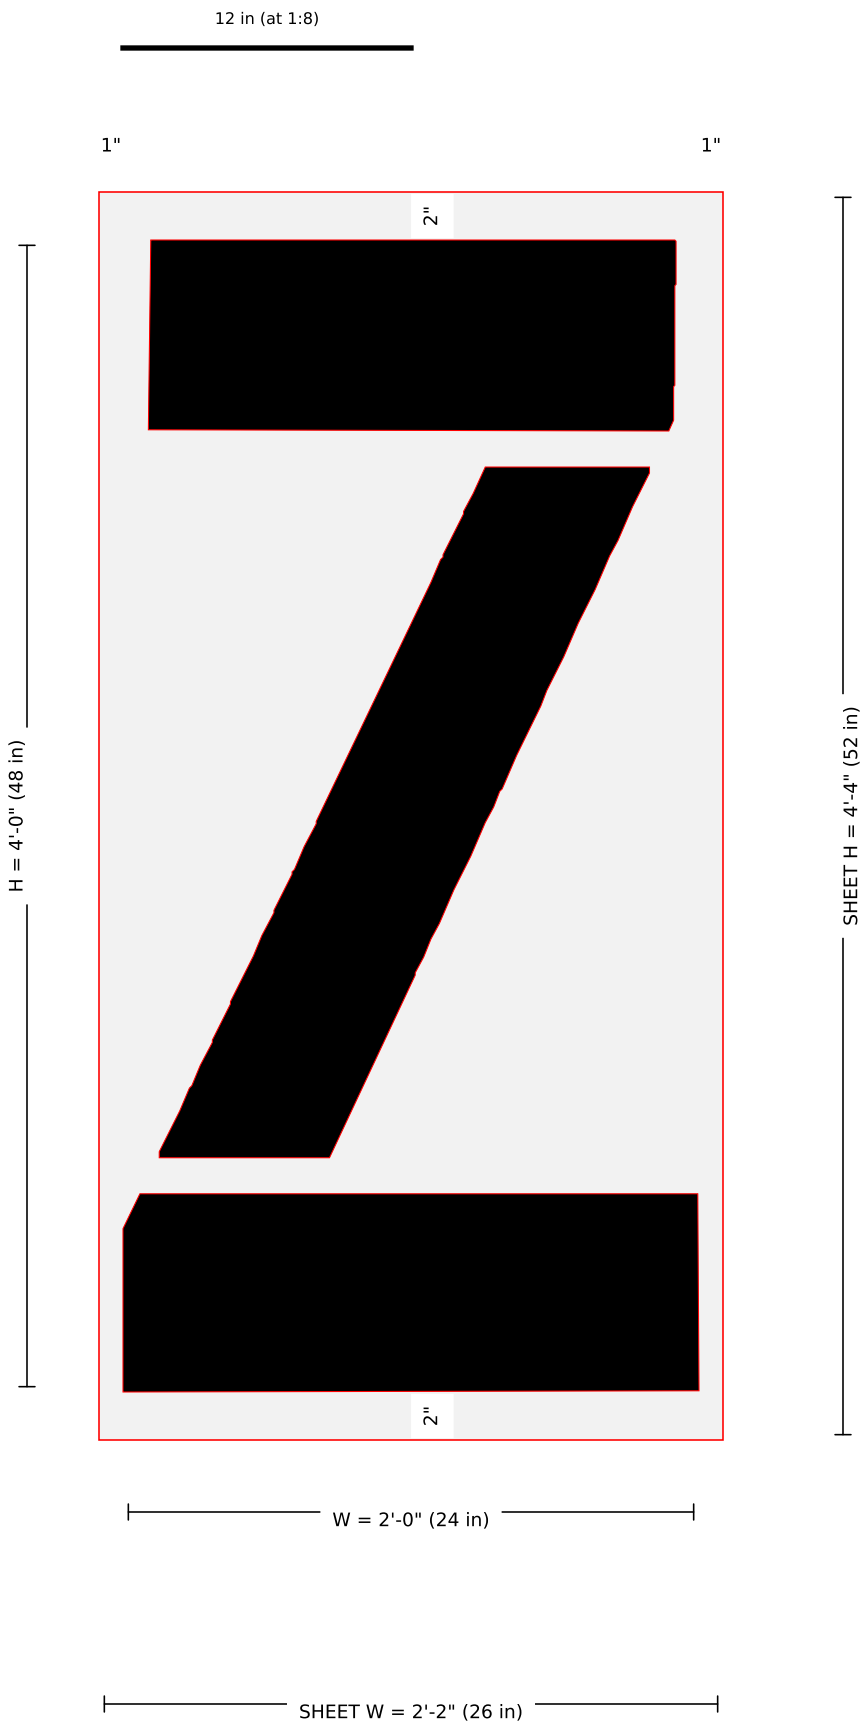


Pieces: 1 · sheet 26 x 52 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-048-48in-FAA-Airport-Letter-Z-Stencil-2.jpg: width = kit listing 24 (image-scale 23.87); kit sheet 30 x 56 (side margin 3).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-048-01-1

48" FAA Airport "1" - kit SSS-FAA-048-01, traced from 1-800-Stencil image, 7 W x 48 H

Scale 1:8 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

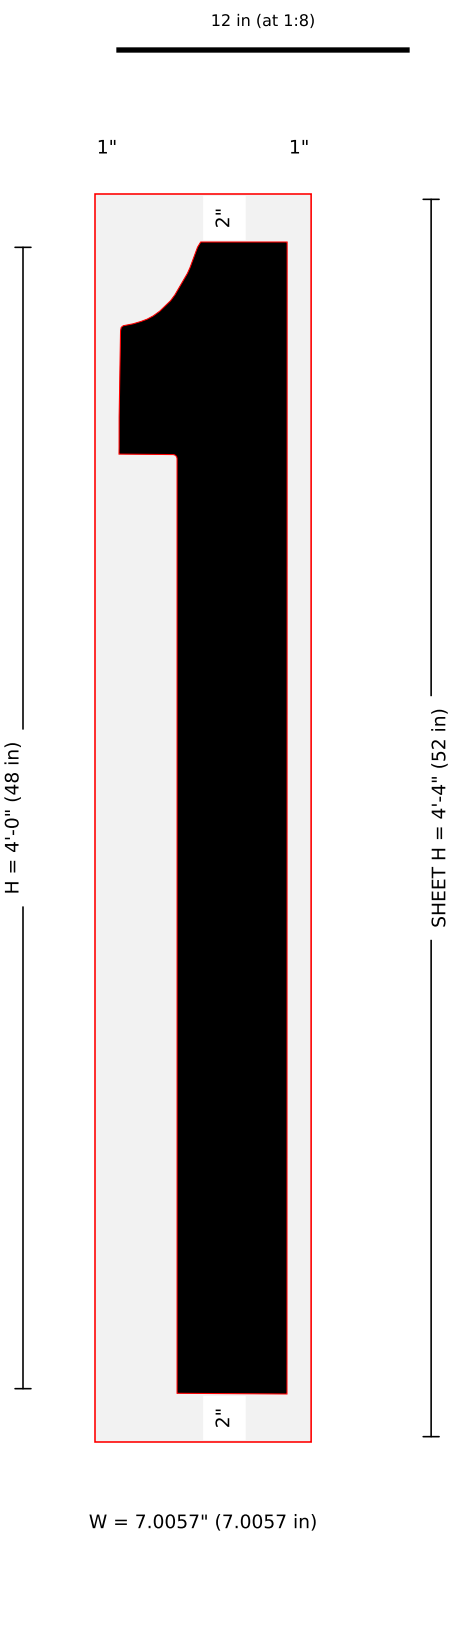


Pieces: 1 · sheet 9.006 x 52 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-048-48in-FAA-Airport-Number-1-Stencil-2.jpg: width = 1-800 image width label 7 in (image-scale 7.26); kit sheet 30 x 56 (side margin 3).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.10 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-048-01-X

48" FAA Airport "X" - kit SSS-FAA-048-01, traced from 1-800-Stencil image, 23 W x 48 H

Scale 1:8 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

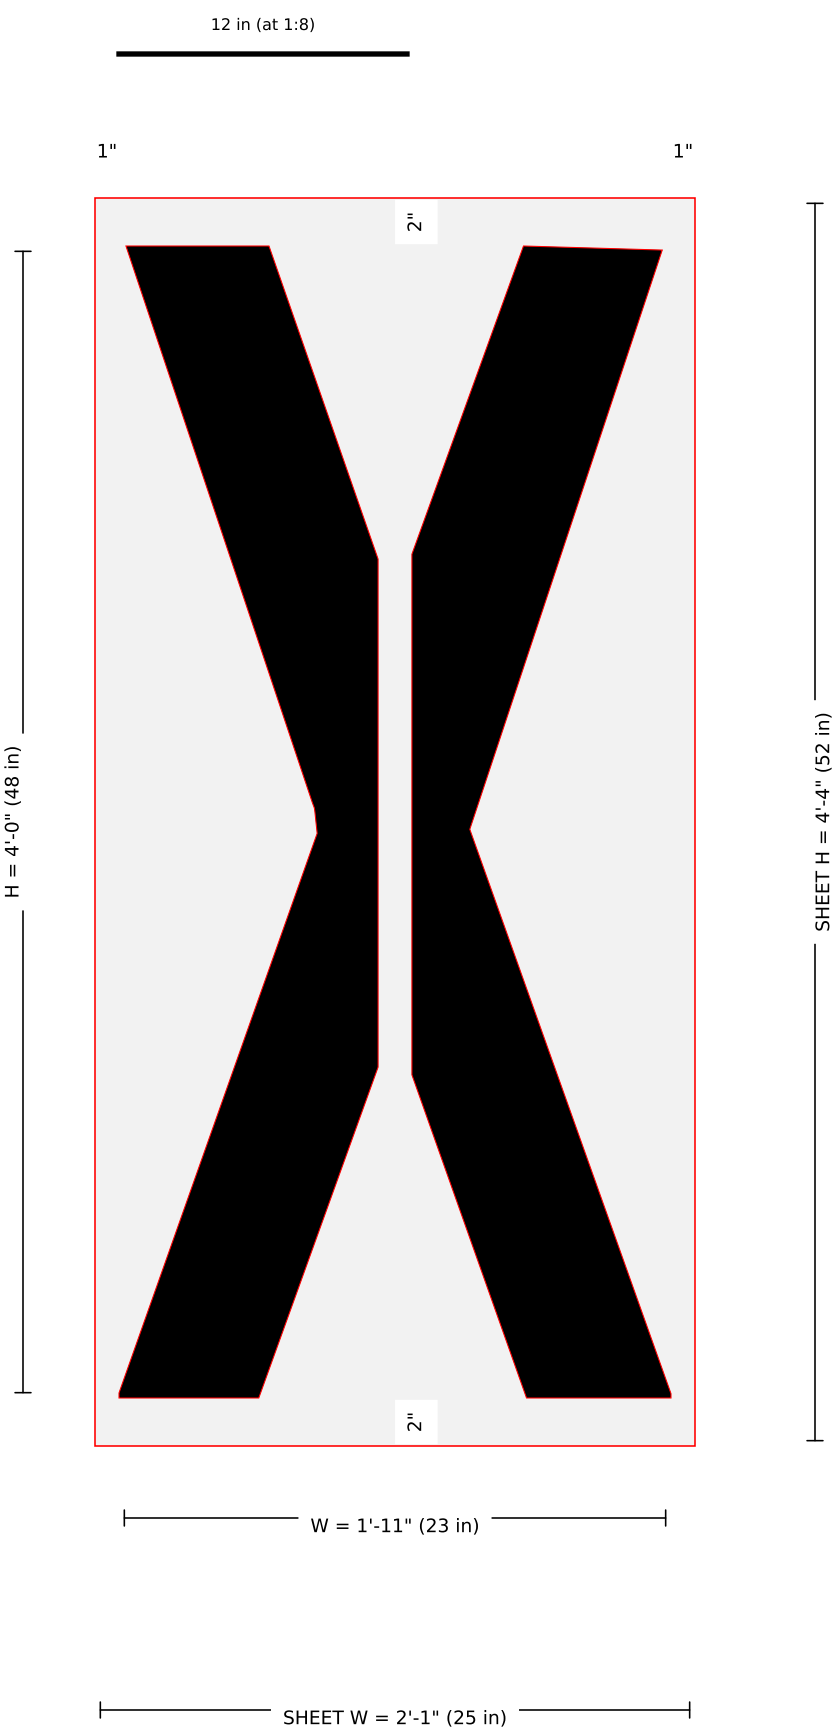


Pieces: 1 · sheet 25 x 52 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-048-48in-FAA-Airport-Letter-X-Stencil-2.jpg: width = 1-800 image width label 23 in (image-scale 23.67); kit sheet 30 x 56 (side margin 3).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.10 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-048-01-Z

48" FAA Airport "Z" - kit SSS-FAA-048-01, traced from 1-800-Stencil image, 22 W x 48 H

Scale 1:8 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

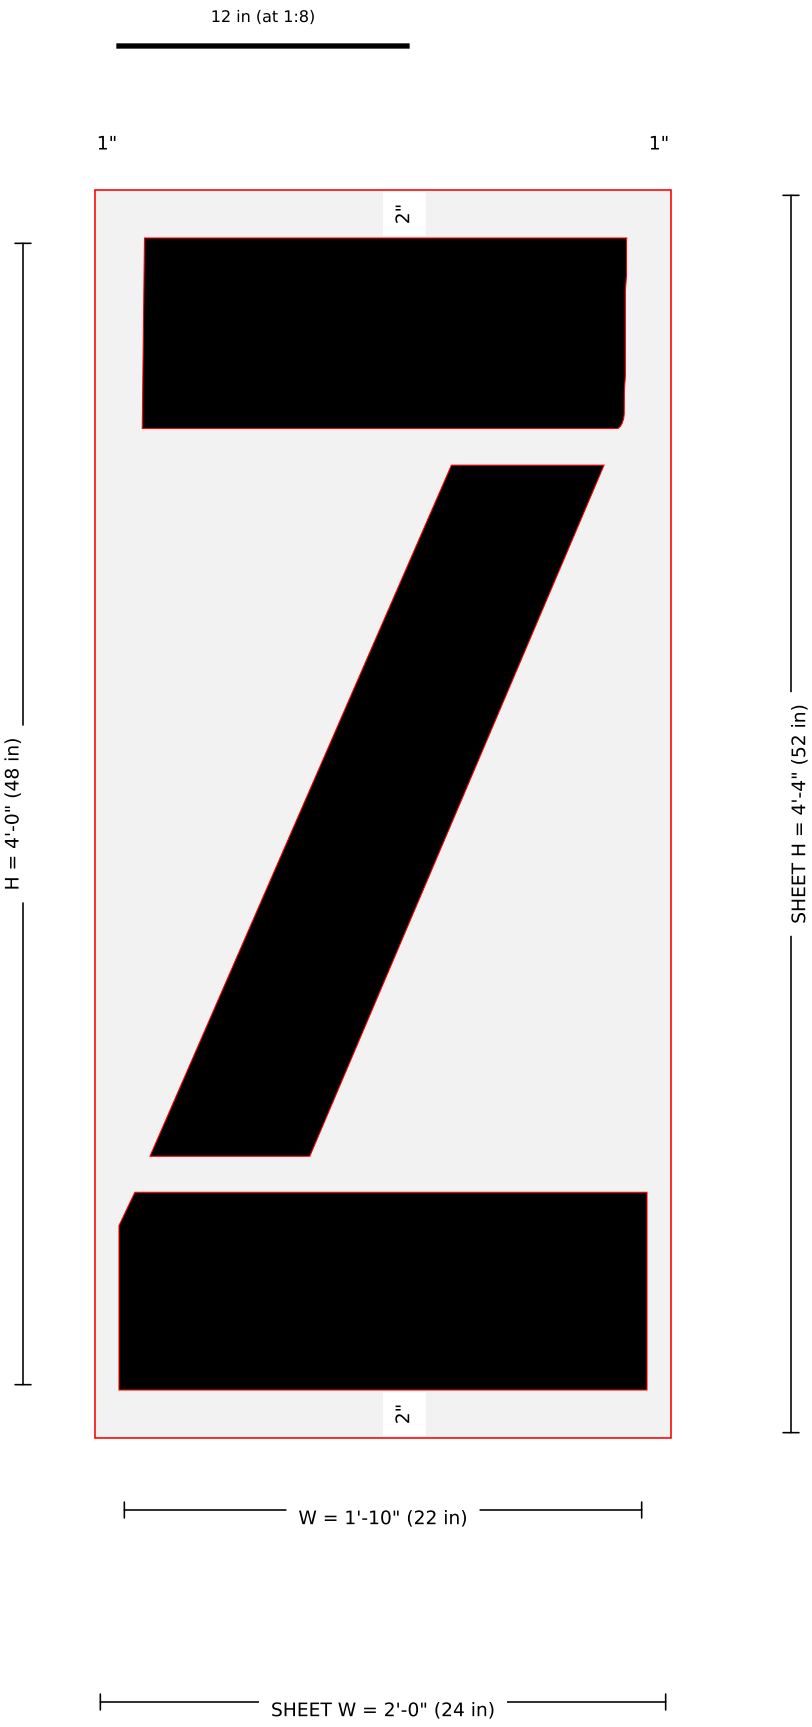

Pieces: 1 · sheet 24 x 52 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-0450-048-48in-FAA-Airport-Letter-Z-Stencil-2.jpg: width = 1-800 image width label 22 in (image-scale 23.87); kit sheet 30 x 56 (side margin 3).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.10 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.