


SSS-FAA-108-01-0

108" FAA Airport "0" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 31 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

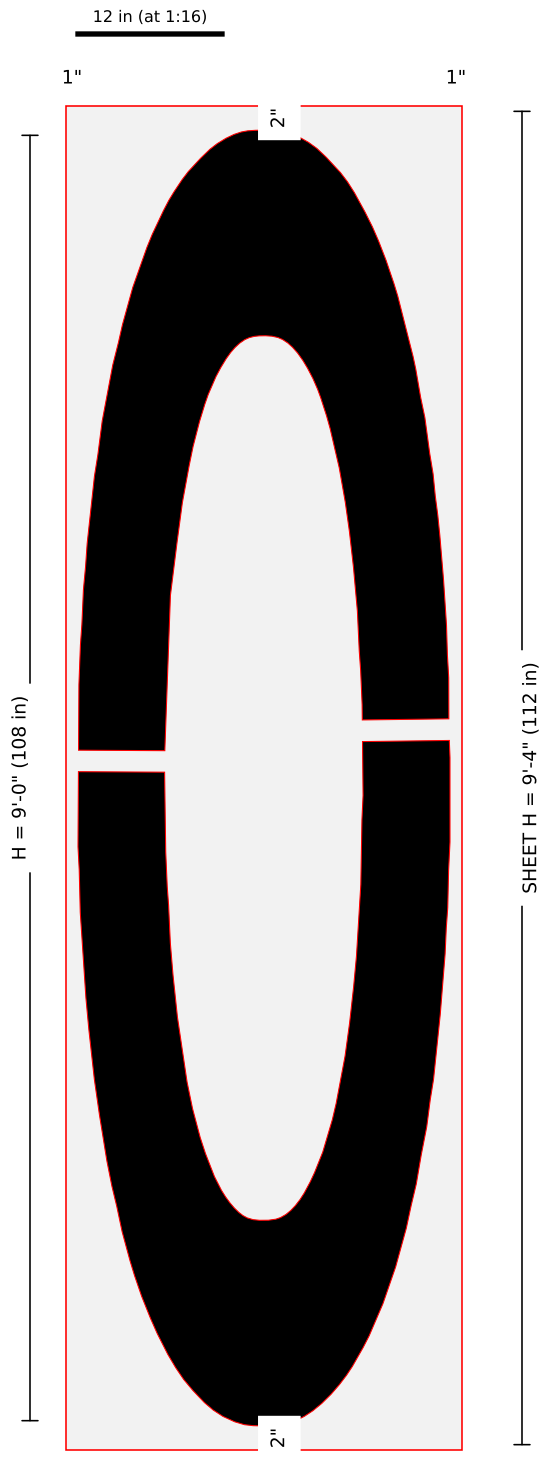






Pieces: 1 · sheet 33 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F1080-108in-FAA-Airport-Number-0-120x48-2.jpg: width = kit listing 31 (image-scale 30.70); kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.43 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
ISLAND BRIDGES (2026-11-04): (3.62,55.4) stroke 7.164" w=1.791"; (27.3,57.98) stroke 7.207" w=1.802" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-1

108" FAA Airport "1" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 11 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

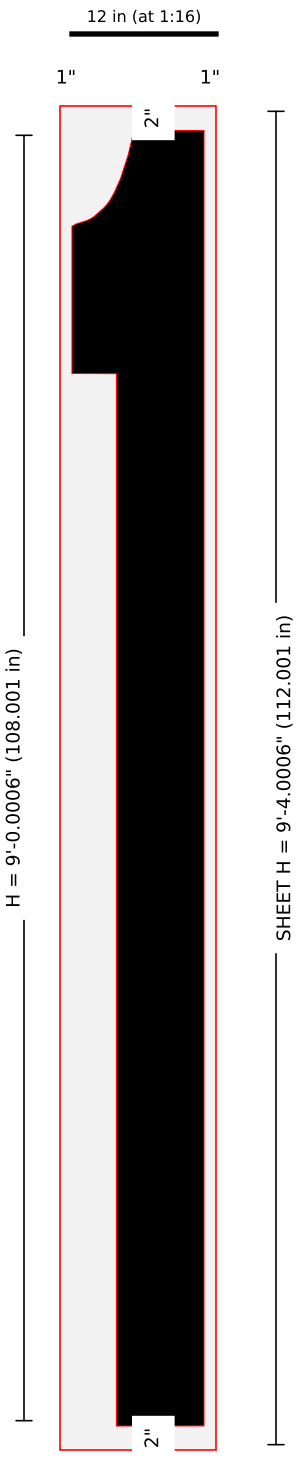

W = 11" (11 in)


SHEET W = 1'-1" (13 in)

Pieces: 1 · sheet 13 x 112.001 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F1081-108in-FAA-Airport-Number-1-120x48-2.jpg: width 11 from image scale (10.82); NOT the kit listing width; kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.22 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-2

108" FAA Airport "2" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 29.5 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

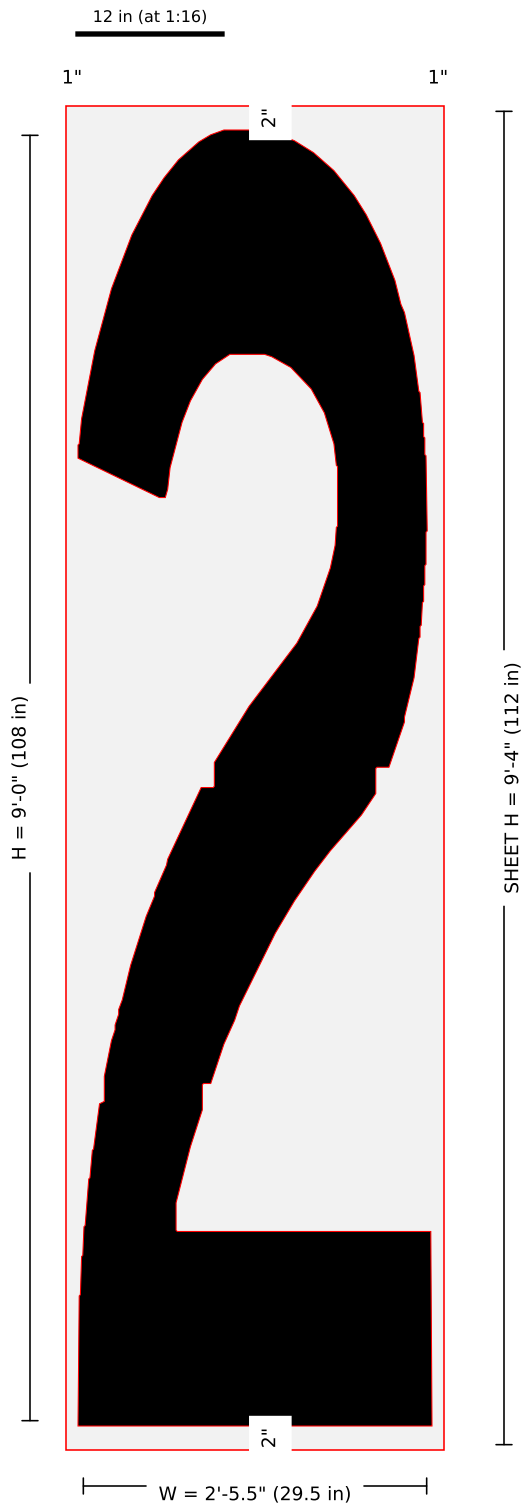


Pieces: 1 · sheet 31.5 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F1082-108in-FAA-Airport-Number-2-120x48-2.jpg: width 29.5 from image scale (29.44); NOT the kit listing width; kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-3

108" FAA Airport "3" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 29.5 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

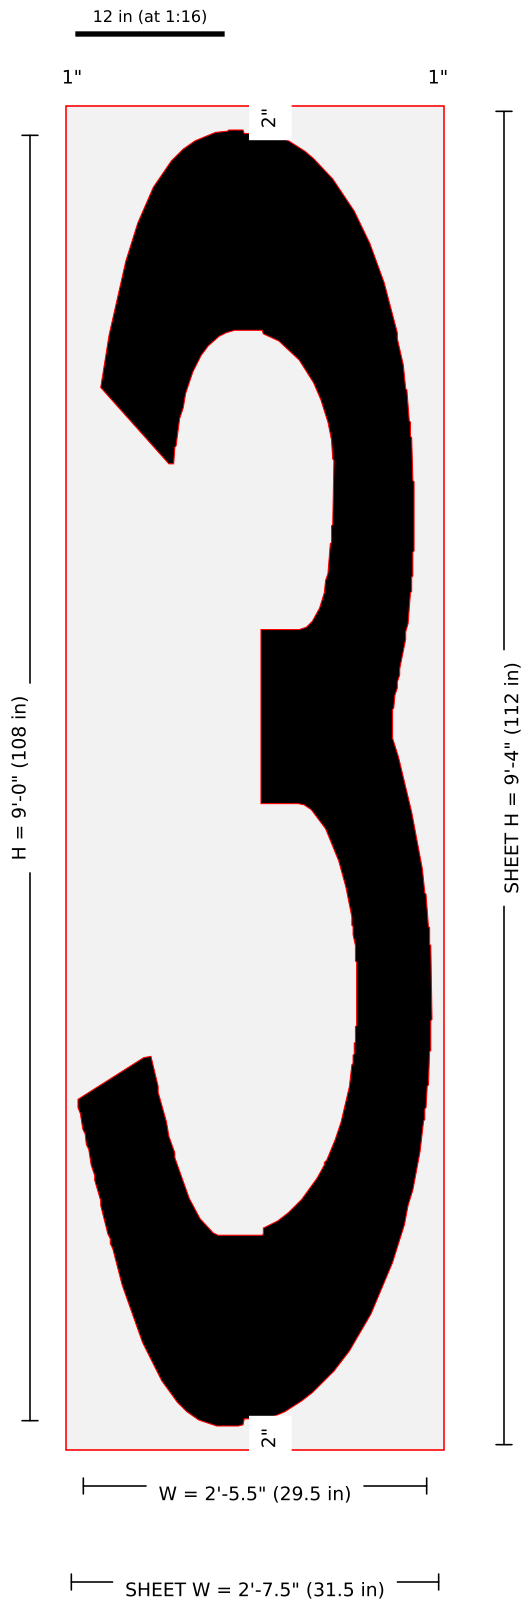


Pieces: 1 · sheet 31.5 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F1083-108in-FAA-Airport-Number-3-120x48-2.jpg: width 29.5 from image scale (29.41); NOT the kit listing width; kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-4

108" FAA Airport "4" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 32.5 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

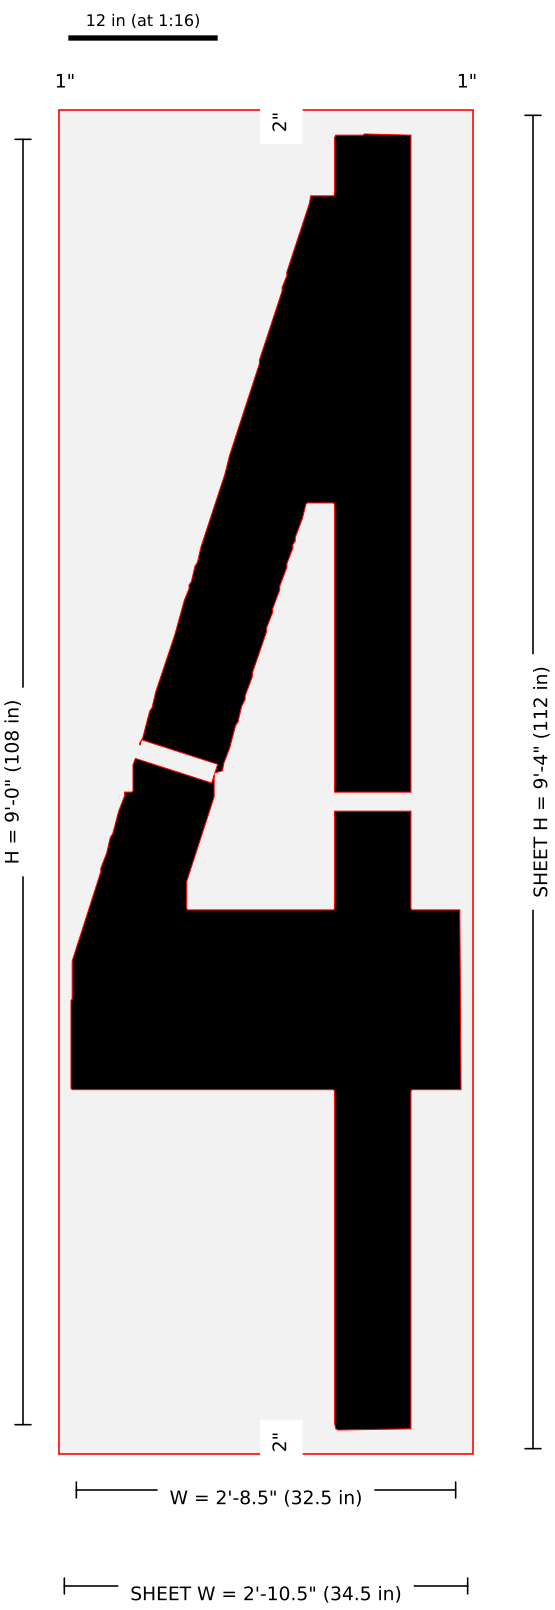


Pieces: 1 · sheet 34.5 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F1084-108in-FAA-Airport-Number-4-120x48-2.jpg: width 32.5 from image scale (32.43); NOT the kit listing width; kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
ISLAND BRIDGES (2026-11-04): (25.15,52.36) stroke 6.361" w=1.59"; (8.8,55.72) stroke 6.578" w=1.644" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-5

108" FAA Airport "5" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 29.5 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

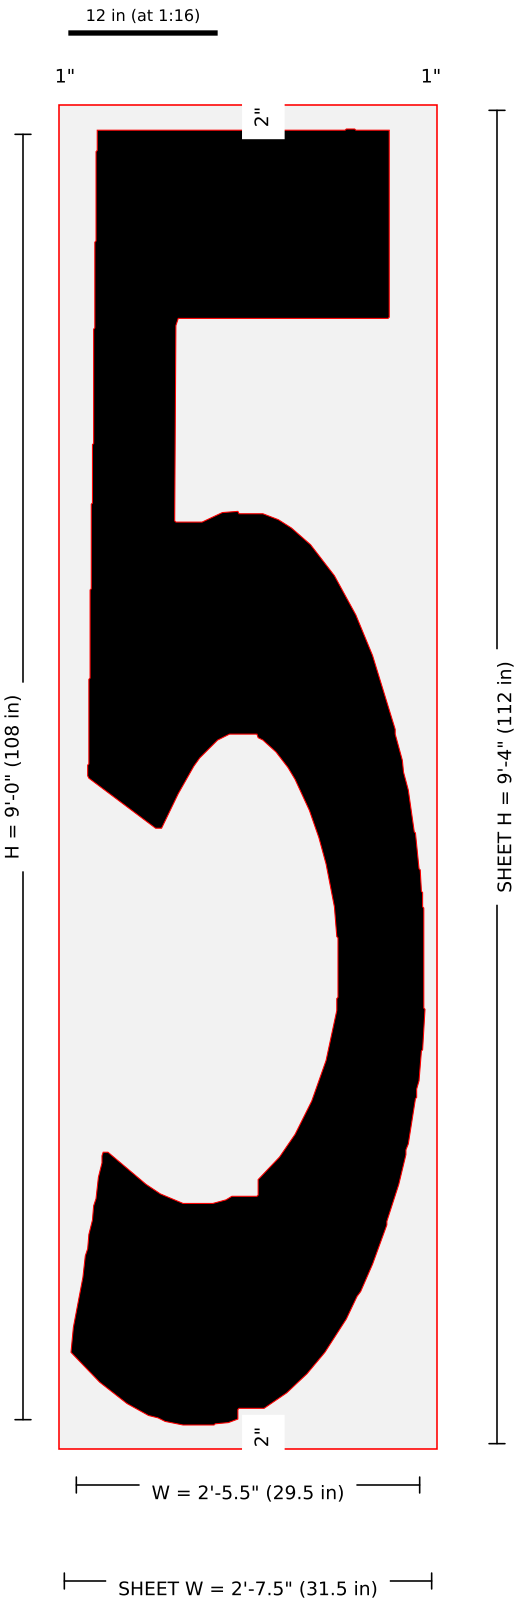


Pieces: 1 · sheet 31.5 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F1085-108in-FAA-Airport-Number-5-120x48-2.jpg: width 29.5 from image scale (29.48); NOT the kit listing width; kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-6

108" FAA Airport "6" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 29.5 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

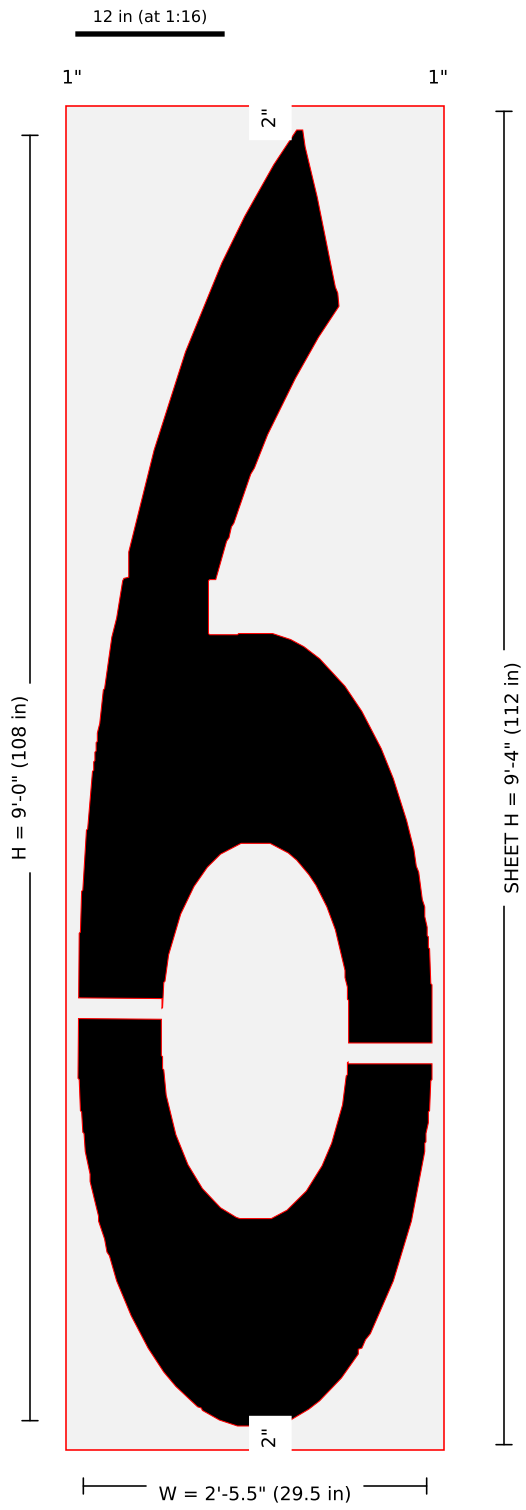


Pieces: 1 · sheet 31.5 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F1086-108in-FAA-Airport-Number-6-120x48-2.jpg: width 29.5 from image scale (29.27); NOT the kit listing width; kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
ISLAND BRIDGES (2026-11-04): (3.5,34.79) stroke 6.899" w=1.725"; (26.03,31.05) stroke 6.947" w=1.737" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-7

108" FAA Airport "7" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 29.5 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

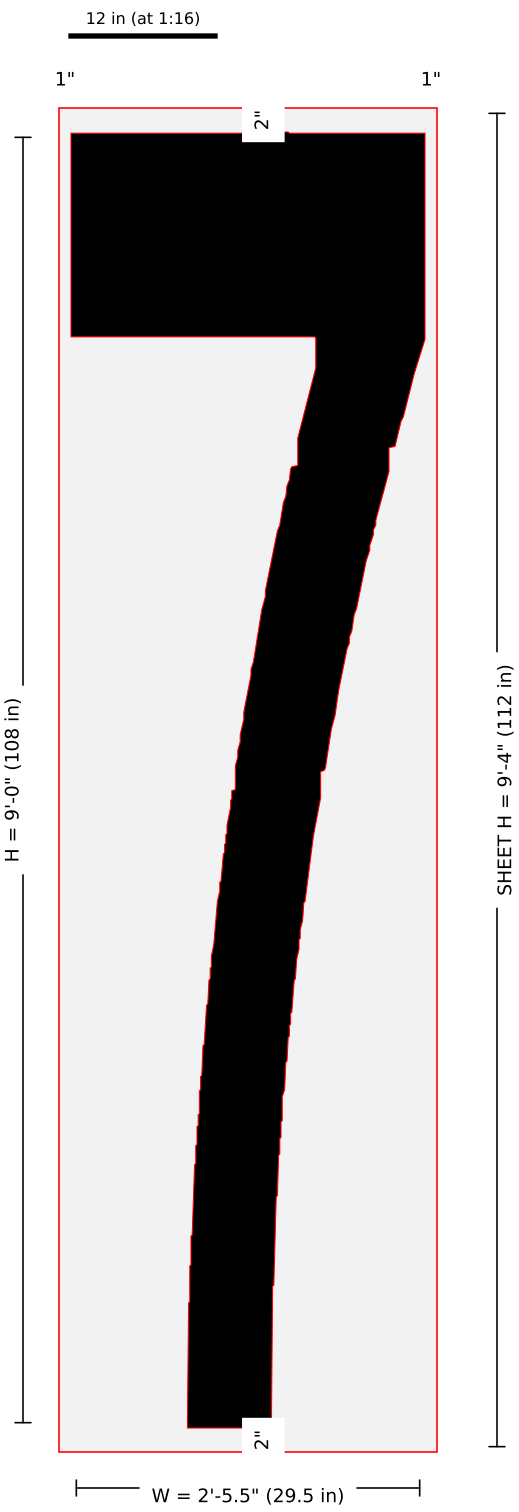


Pieces: 1 · sheet 31.5 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F1087-108in-FAA-Airport-Number-7-120x48-2.jpg: width 29.5 from image scale (29.28); NOT the kit listing width; kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-8

108" FAA Airport "8" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 29.5 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

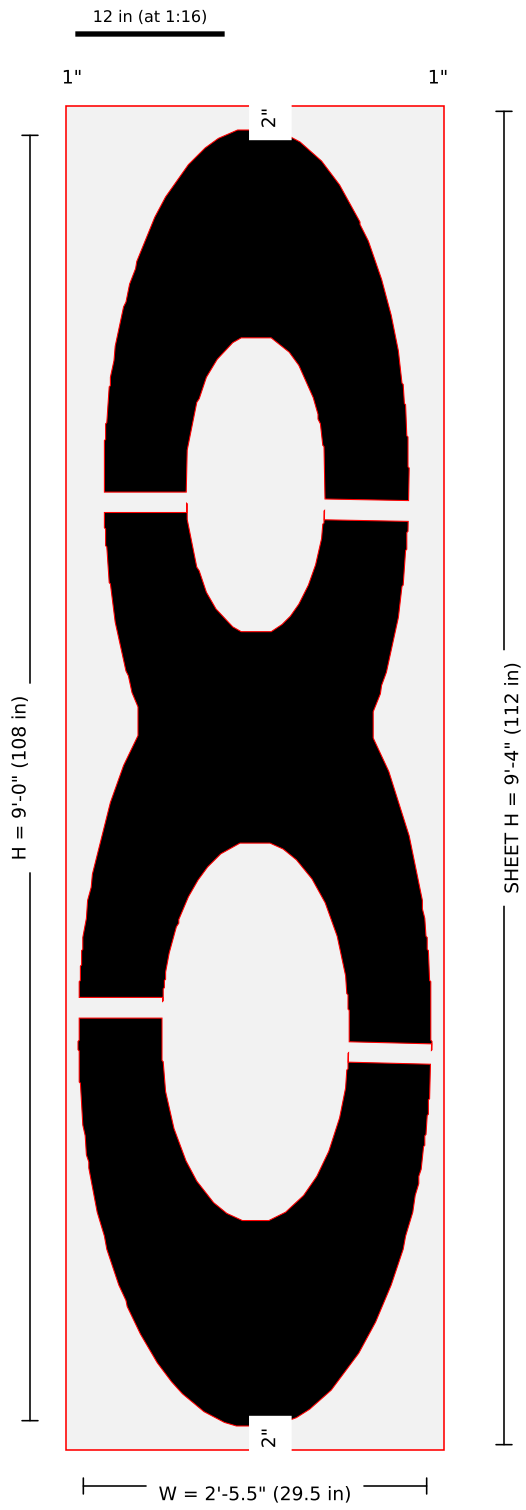



Pieces: 1 · sheet 31.5 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F1088-108in-FAA-Airport-Number-8-120x48-2.jpg: width 29.5 from image scale (29.36); NOT the kit listing width; kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
ISLAND BRIDGES (2026-11-04): (26.0,31.08) stroke 6.796" w=1.699"; (3.55,34.85) stroke 6.9" w=1.725"; (5.6,76.97) stroke 6.801" w=1.7"; (24.07,76.32) stroke 6.934" w=1.734" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-108-01-9

108" FAA Airport "9" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 29.5 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

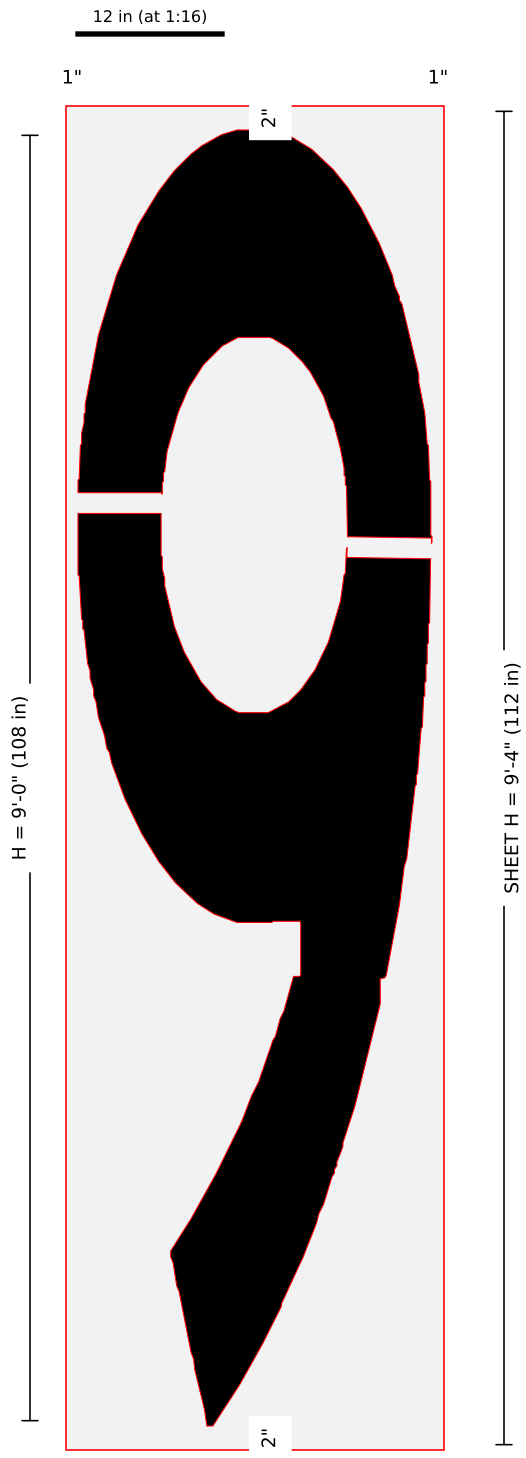






Pieces: 1 · sheet 31.5 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F1089-108in-FAA-Airport-Number-9-120x48-2.jpg: width 29.5 from image scale (29.37); NOT the kit listing width; kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
ISLAND BRIDGES (2026-11-04): (25.93,73.19) stroke 6.918" w=1.73"; (3.46,76.91) stroke 6.923" w=1.731" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-A

108" FAA Airport "A" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 31 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

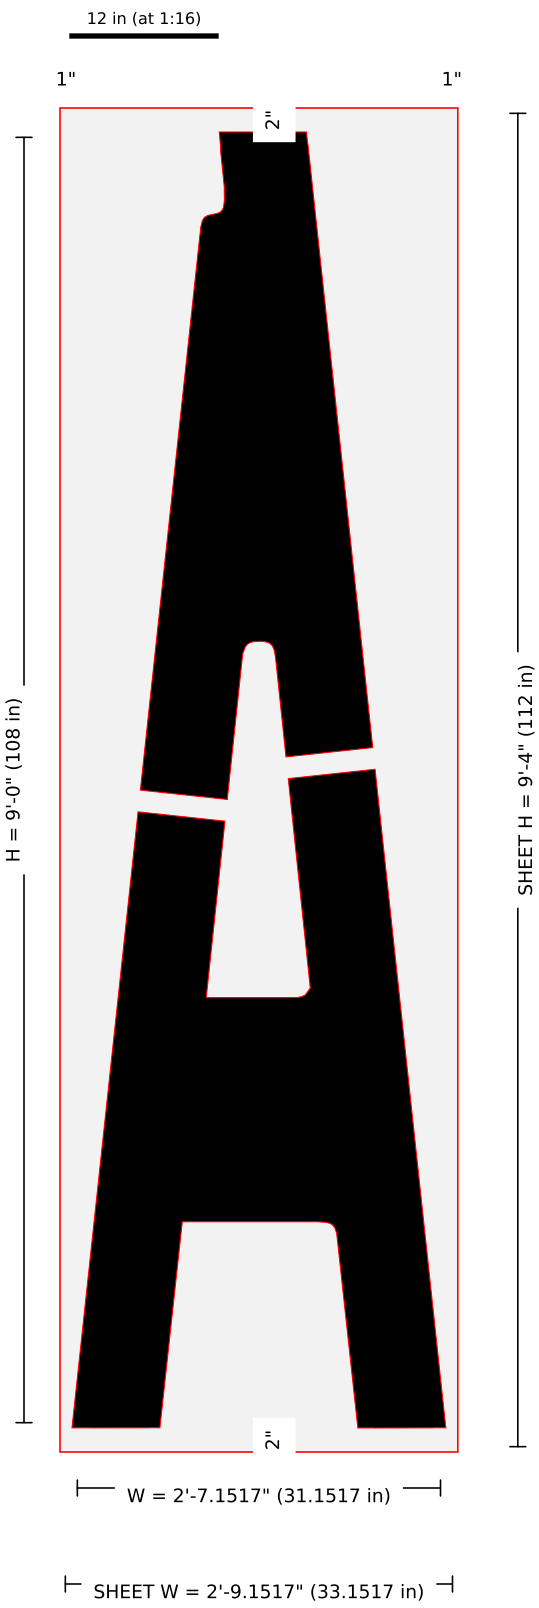


Pieces: 1 · sheet 33.152 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F108A-108in-FAA-Airport-Letter-A-120x48-2.jpg: width = kit listing 31 (image-scale 30.70); kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.43 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
ISLAND BRIDGES (2026-11-04): (9.14,51.86) stroke 7.281" w=1.82"; (21.46,55.41) stroke 7.273" w=1.818" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-B

108" FAA Airport "B" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 29 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

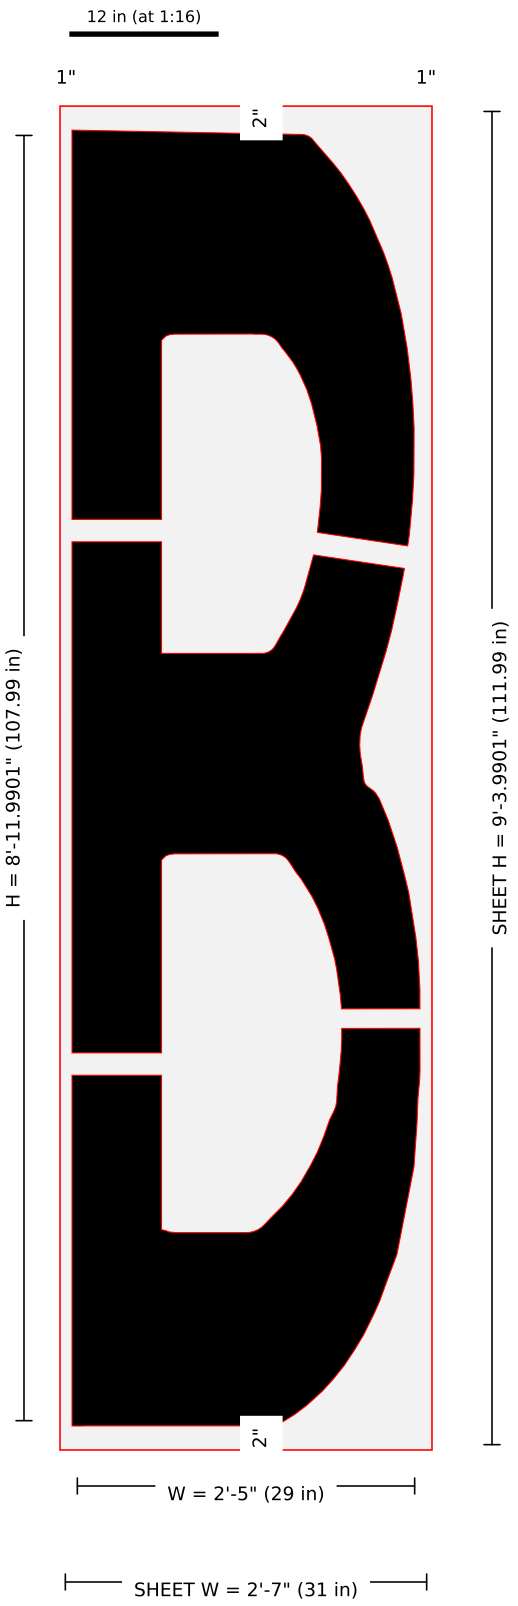


Pieces: 1 · sheet 31 x 111.99 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F108B-108in-FAA-Airport-Letter-B-120x48-2.jpg: width 29 from image scale (29.18); NOT the kit listing width; kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.43 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 12 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
ISLAND BRIDGES (2026-11-04): (25.74,33.96) stroke 6.515" w=1.629"; (3.73,30.17) stroke 7.459" w=1.865"; (3.73,74.62) stroke 7.46" w=1.865"; (24.07,72.97) stroke 7.6" w=1.9" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-C

108" FAA Airport "C" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 29.5 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

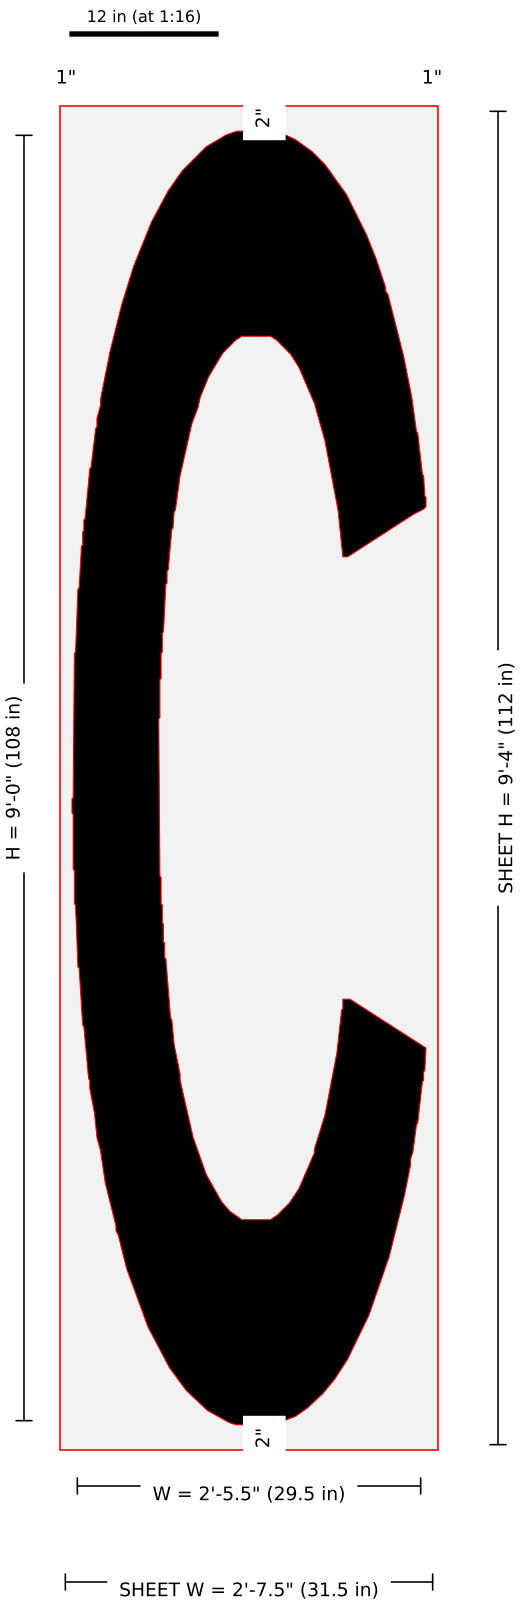


Pieces: 1 · sheet 31.5 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F108C-108in-FAA-Airport-Letter-C-120x48-2.jpg: width 29.5 from image scale (29.61); NOT the kit listing width; kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-D

108" FAA Airport "D" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 31 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

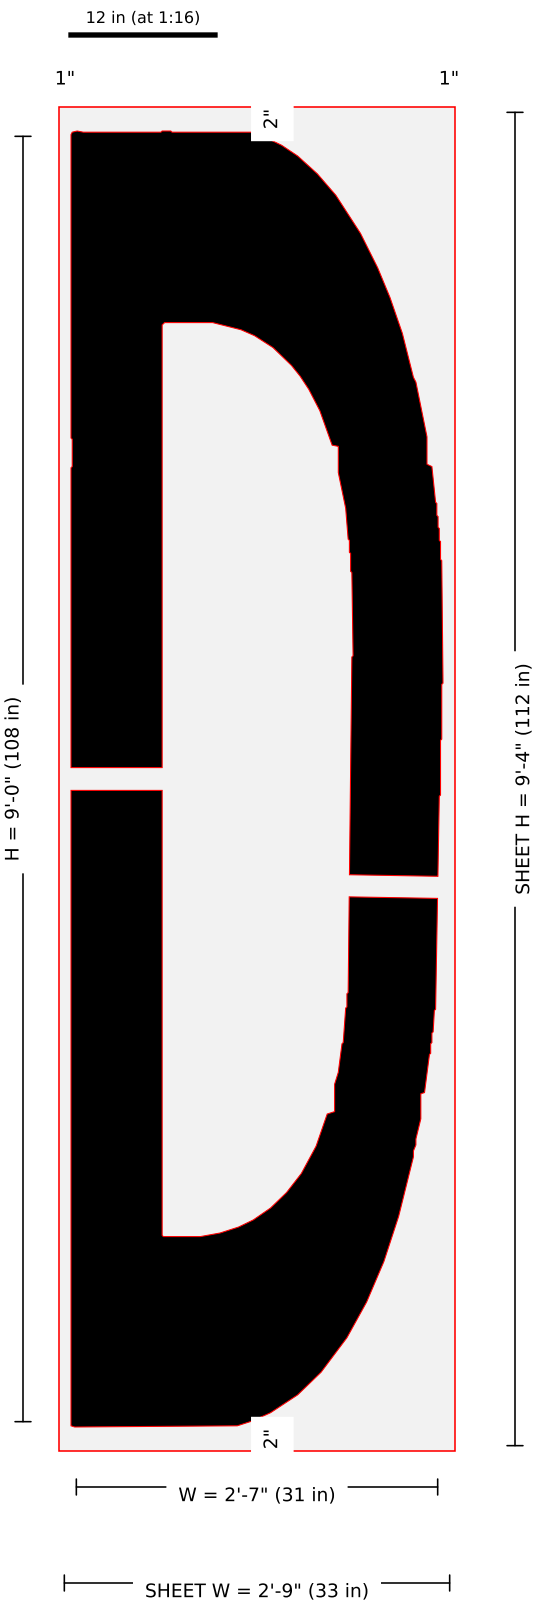


Pieces: 1 · sheet 33 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F108D-108in-FAA-Airport-Letter-D-120x48-2.jpg: width = kit listing 31 (image-scale 29.95); kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
ISLAND BRIDGES (2026-11-04): (26.88,45.04) stroke 7.367" w=1.842"; (3.8,54.0) stroke 7.596" w=1.899" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-E

108" FAA Airport "E" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 31 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

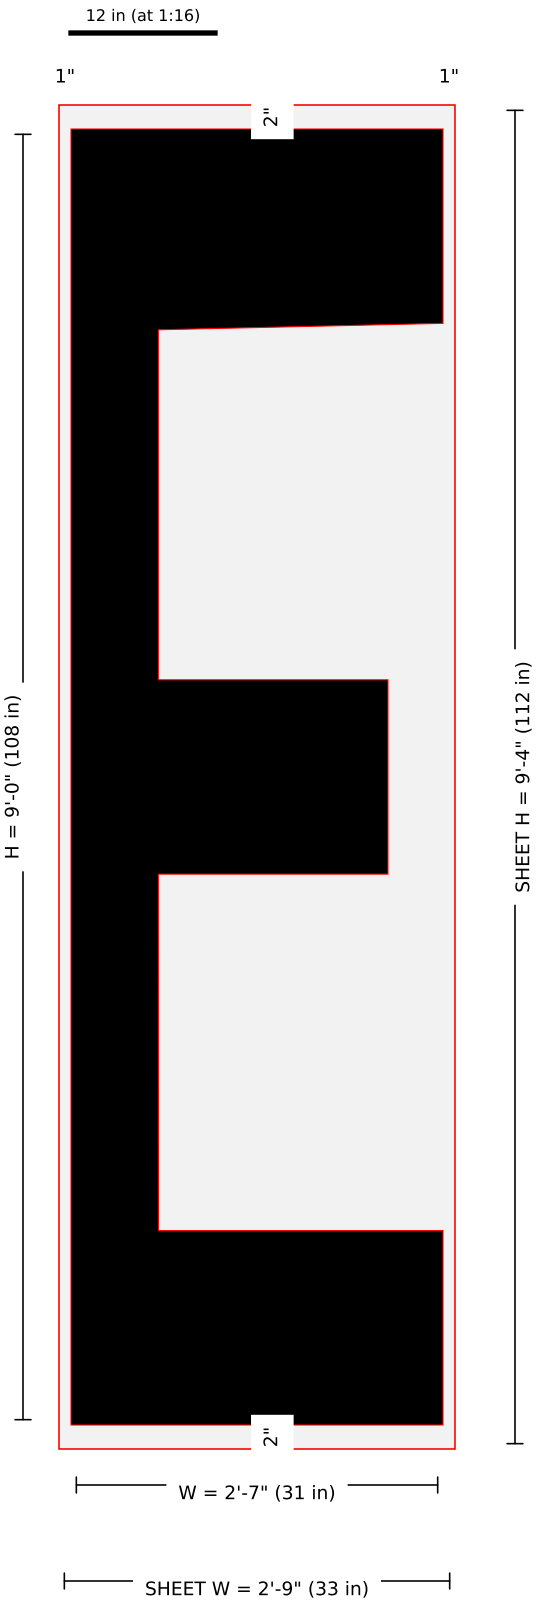


Pieces: 1 · sheet 33 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F108E-108in-FAA-Airport-Letter-E-120x48-2.jpg: width = kit listing 31 (image-scale 30.84); kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.22 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-F

108" FAA Airport "F" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 31 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

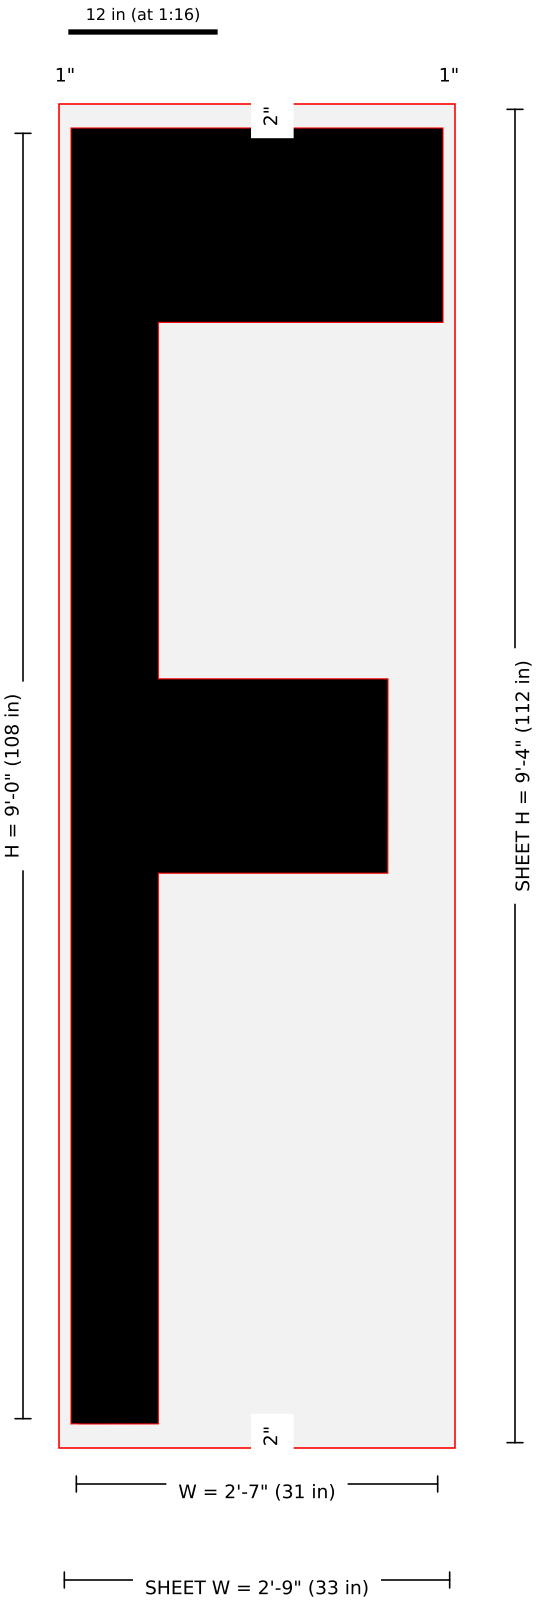


Pieces: 1 · sheet 33 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F108F-108in-FAA-Airport-Letter-F-120x48-2.jpg: width = kit listing 31 (image-scale 30.87); kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.22 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-G

108" FAA Airport "G" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 31 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

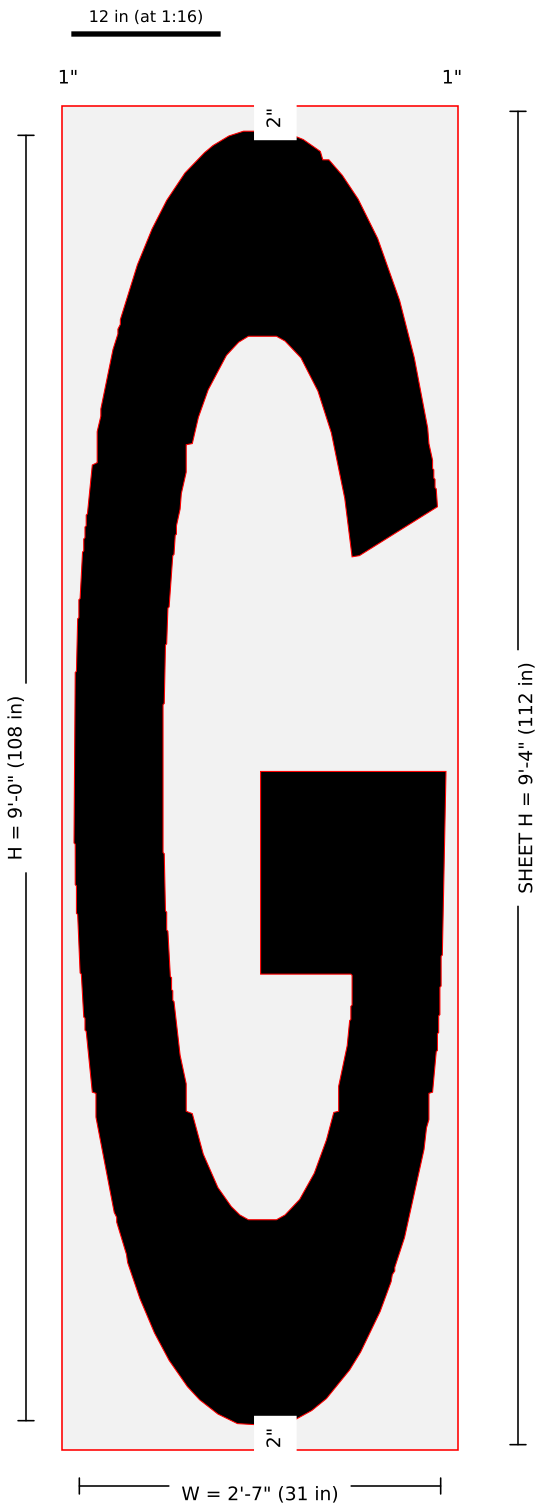


Pieces: 1 · sheet 33 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F108G-108in-FAA-Airport-Letter-G-120x48-2.jpg: width = kit listing 31 (image-scale 30.30); kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-H

108" FAA Airport "H" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 31 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

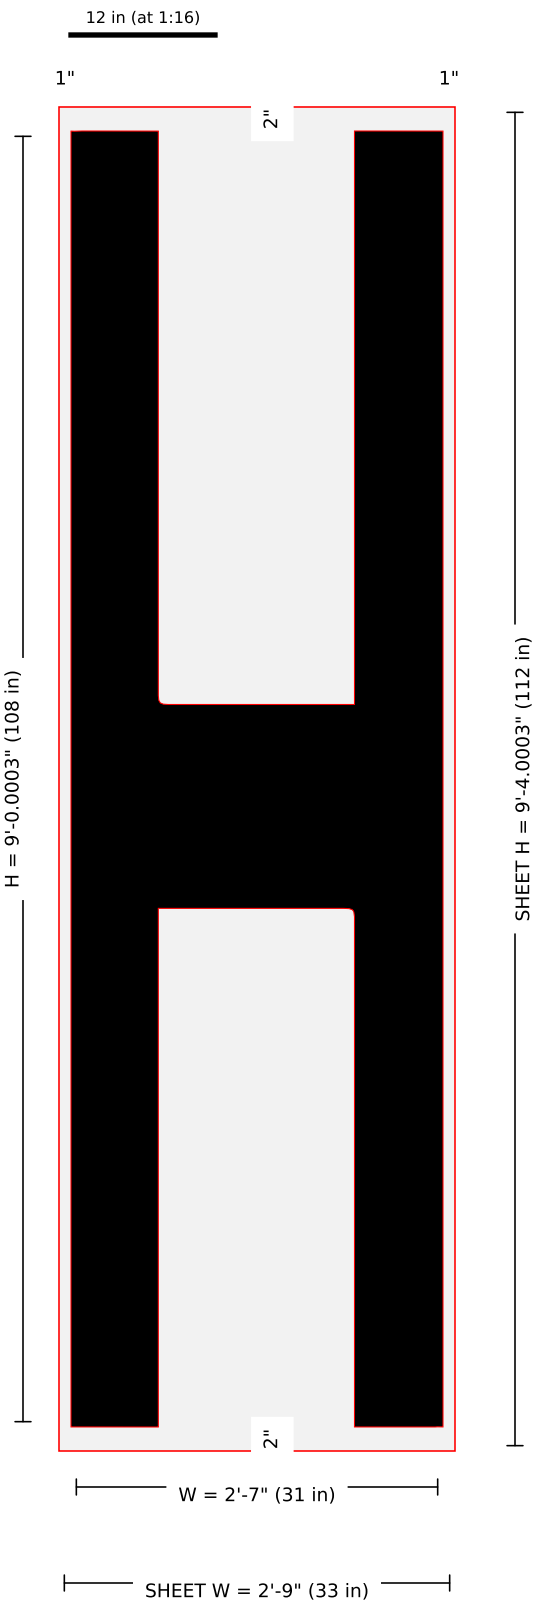


Pieces: 1 · sheet 33 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F108H-108in-FAA-Airport-Letter-H-120x48-2.jpg: width = kit listing 31 (image-scale 30.90); kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.22 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-I

108" FAA Airport "I" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 7 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

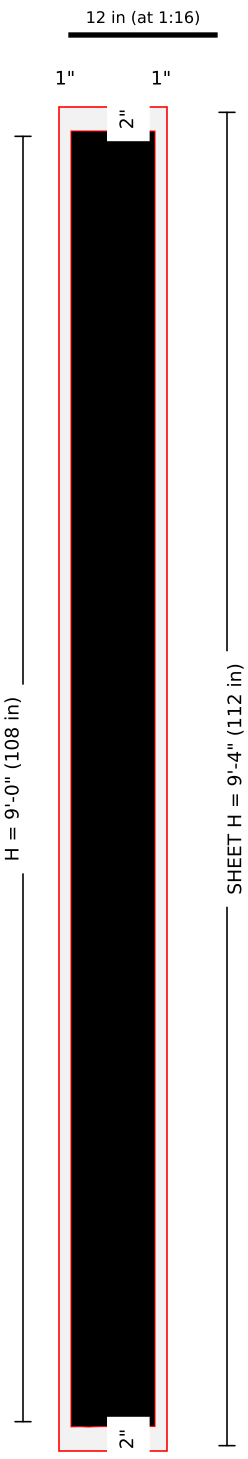


Pieces: 1 · sheet 9 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F108I-108in-FAA-Airport-Letter-I-120x48-2.jpg: width 7 from image scale (7.25); NOT the kit listing width; kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.22 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-J

108" FAA Airport "J" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 28 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

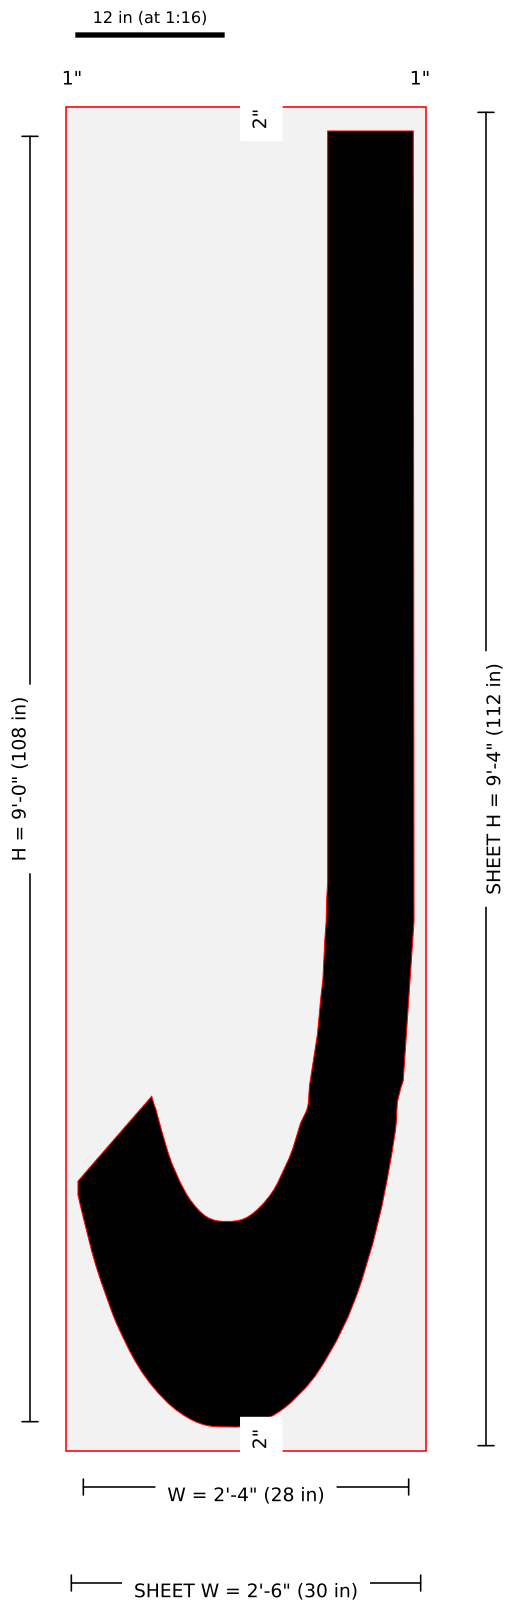


Pieces: 1 · sheet 30 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F108J-108in-FAA-Airport-Letter-J-120x48-2.jpg: width 28 from image scale (28.22); NOT the kit listing width; kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.43 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 1 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-K

108" FAA Airport "K" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 31 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

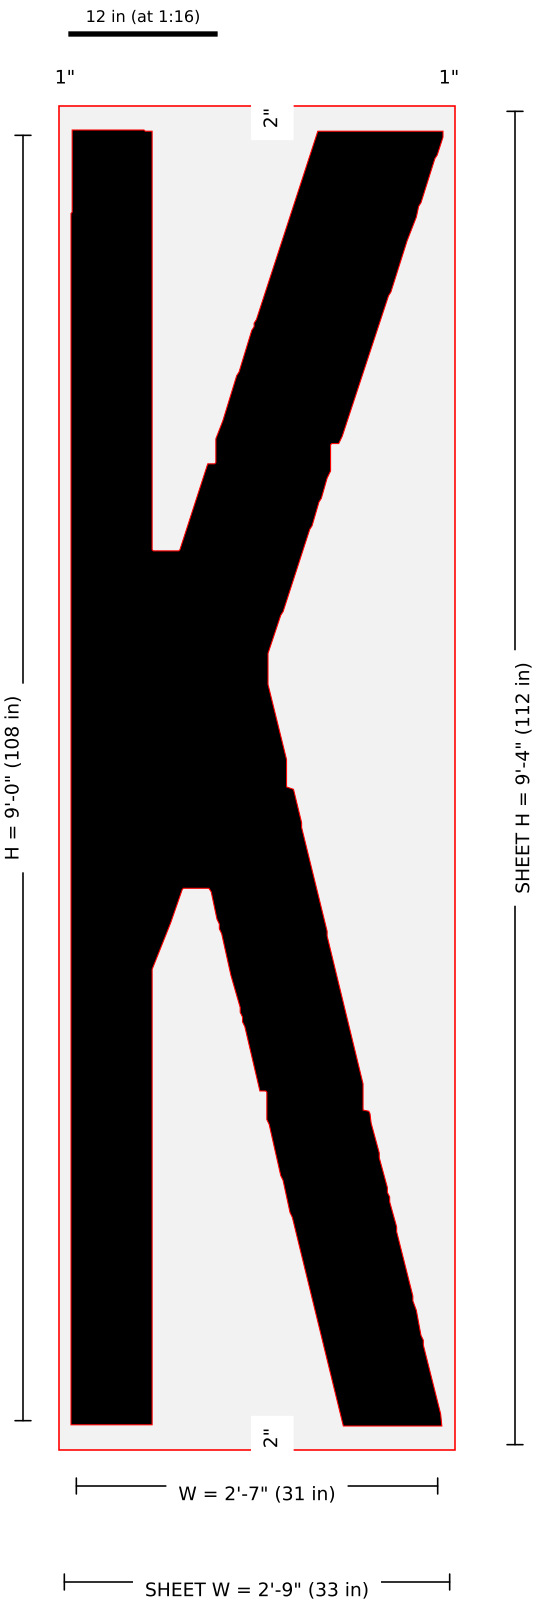


Pieces: 1 · sheet 33 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F108K-108in-FAA-Airport-Letter-K-120x48-2.jpg: width = kit listing 31 (image-scale 31.89); kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-L

108" FAA Airport "L" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 31 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

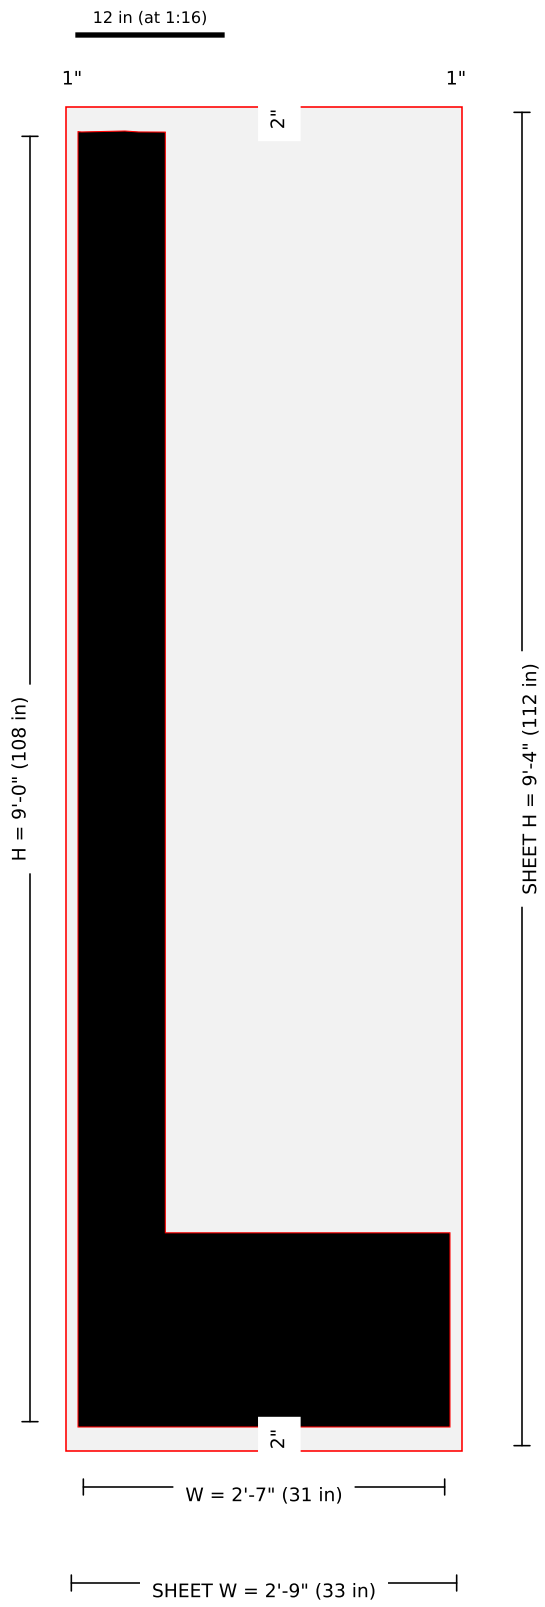



Pieces: 1 · sheet 33 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F108L-108in-FAA-Airport-Letter-L-120x48-2.jpg: width = kit listing 31 (image-scale 30.84); kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.22 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-108-01-M

108" FAA Airport "M" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 35 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

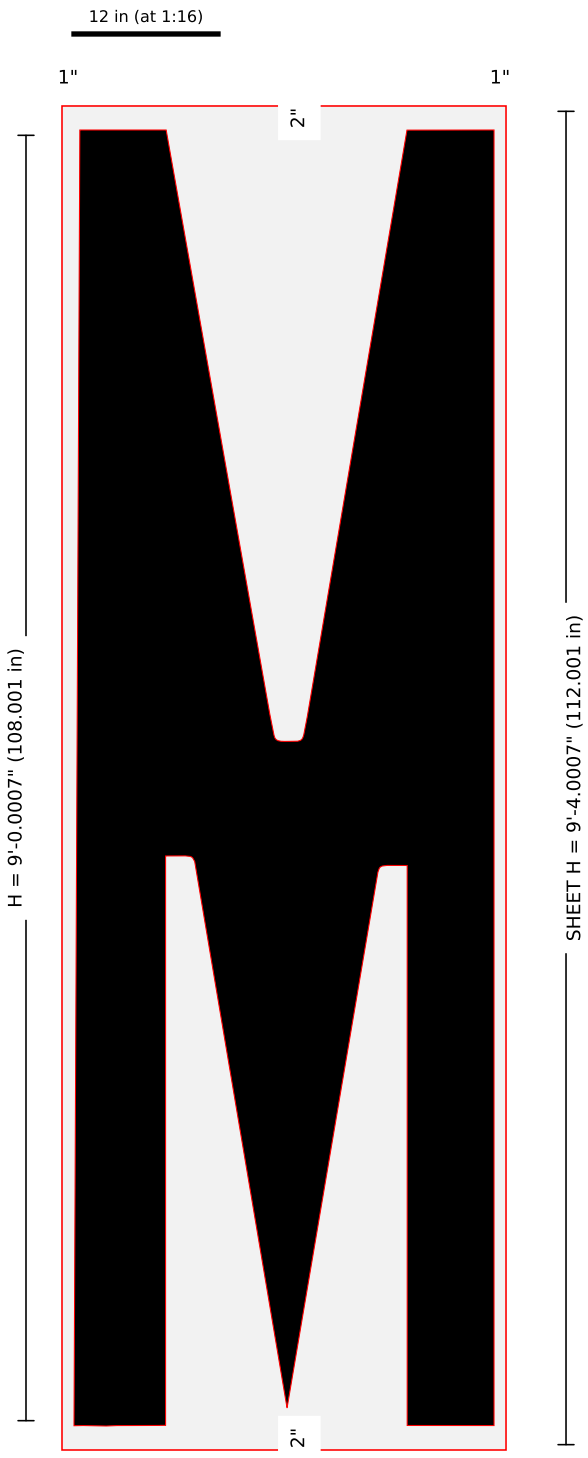






Pieces: 1 · sheet 37.002 x 112.001 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F108M-108in-FAA-Airport-Letter-M-120x48-2.jpg: width 35 from image scale (35.04); NOT the kit listing width; kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.43 in (smoothing level 0.5); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-N

108" FAA Airport "N" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 31 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

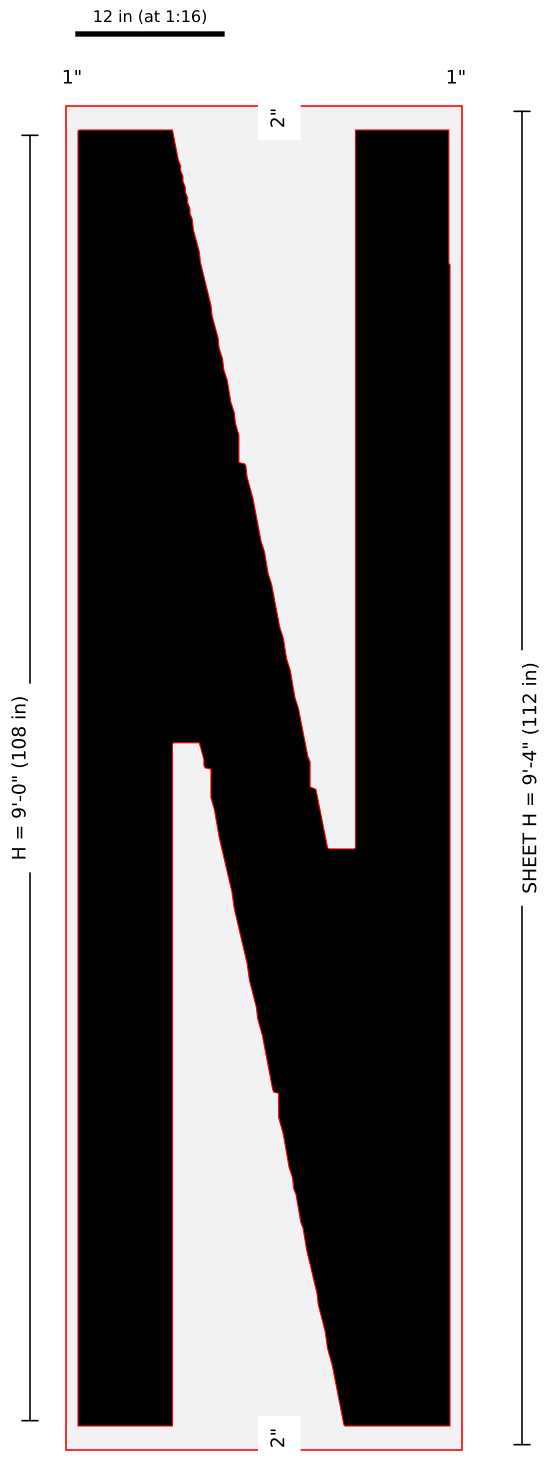


Pieces: 1 · sheet 33 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F108N-108in-FAA-Airport-Letter-N-120x48-2.jpg: width = kit listing 31 (image-scale 31.69); kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-O

108" FAA Airport "O" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 31 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

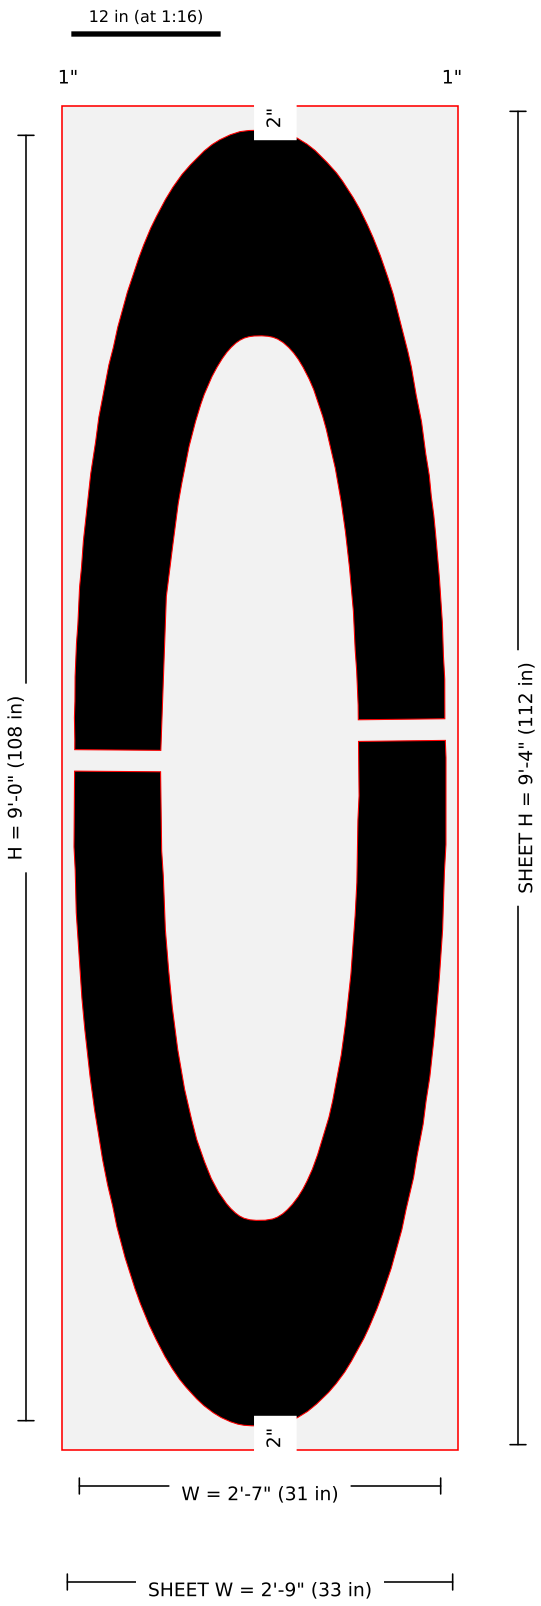


Pieces: 1 · sheet 33 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F108O-108in-FAA-Airport-Letter-O-120x48-2.jpg: width = kit listing 31 (image-scale 30.70); kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.43 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
ISLAND BRIDGES (2026-11-04): (3.63,55.44) stroke 7.149" w=1.787"; (27.3,57.99) stroke 7.208" w=1.802" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-P

108" FAA Airport "P" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 31 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

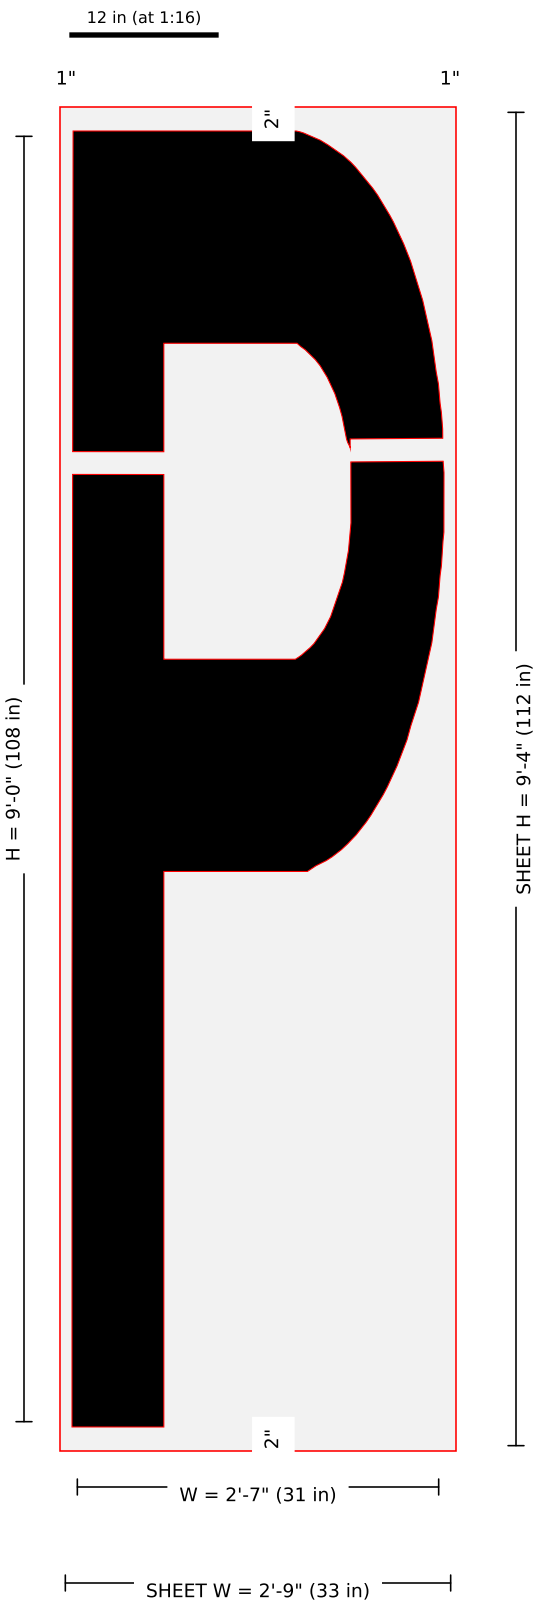



Pieces: 1 · sheet 33 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F108P-108in-FAA-Airport-Letter-P-120x48-2.jpg: width = kit listing 31 (image-scale 31.37); kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.22 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
ISLAND BRIDGES (2026-11-04): (3.85,80.33) stroke 7.597" w=1.899"; (27.07,81.41) stroke 7.669" w=1.917" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-Q

108" FAA Airport "Q" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 31 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

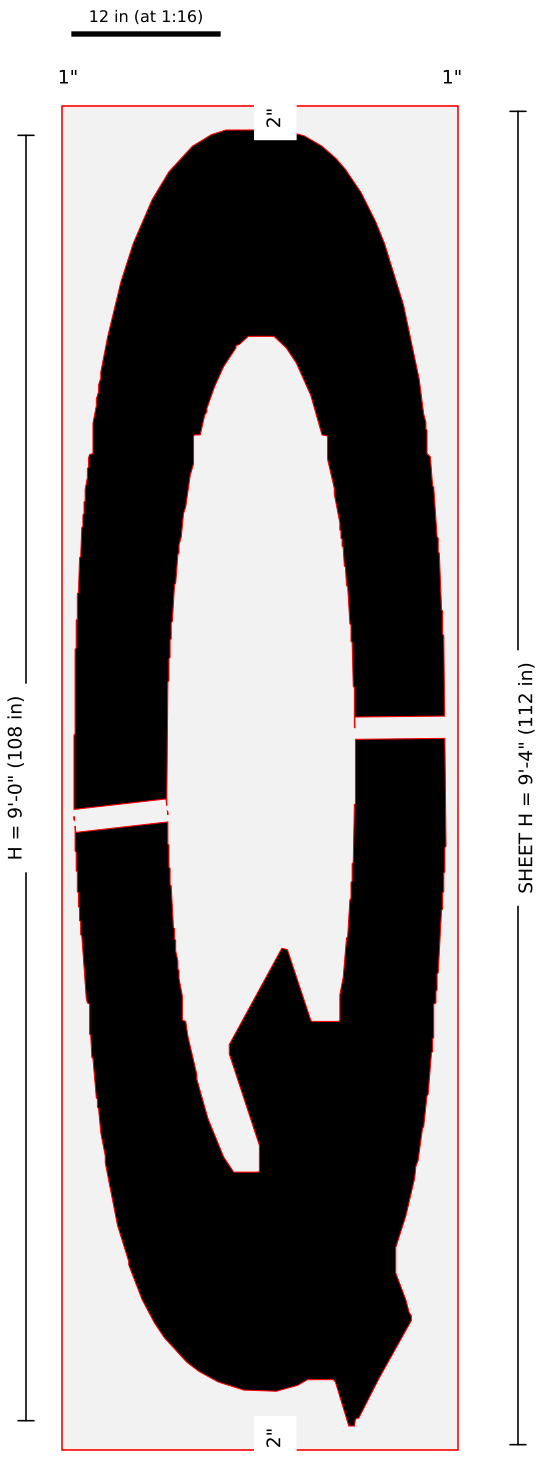

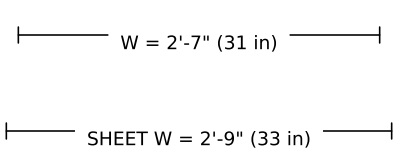


Pieces: 1 · sheet 33 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F108Q-108in-FAA-Airport-Letter-Q-120x48-2.jpg: width = kit listing 31 (image-scale 32.17); kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
ISLAND BRIDGES (2026-11-04): (27.18,58.19) stroke 7.436" w=1.859"; (3.91,50.86) stroke 7.683" w=1.921" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-R

108" FAA Airport "R" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 31 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

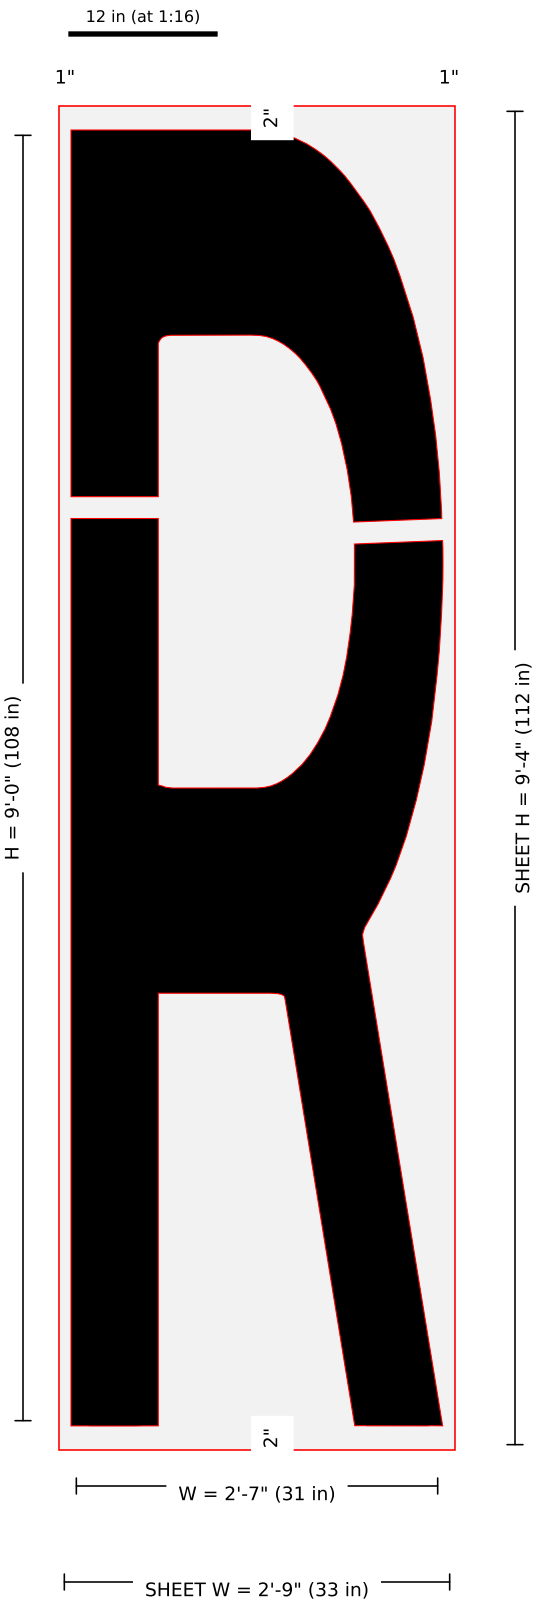


Pieces: 1 · sheet 33 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F108R-108in-FAA-Airport-Letter-R-120x48-2.jpg: width = kit listing 31 (image-scale 30.90); kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.43 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
ISLAND BRIDGES (2026-11-04): (3.64,76.53) stroke 7.27" w=1.818"; (27.26,74.56) stroke 7.327" w=1.832" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-S

108" FAA Airport "S" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 31 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

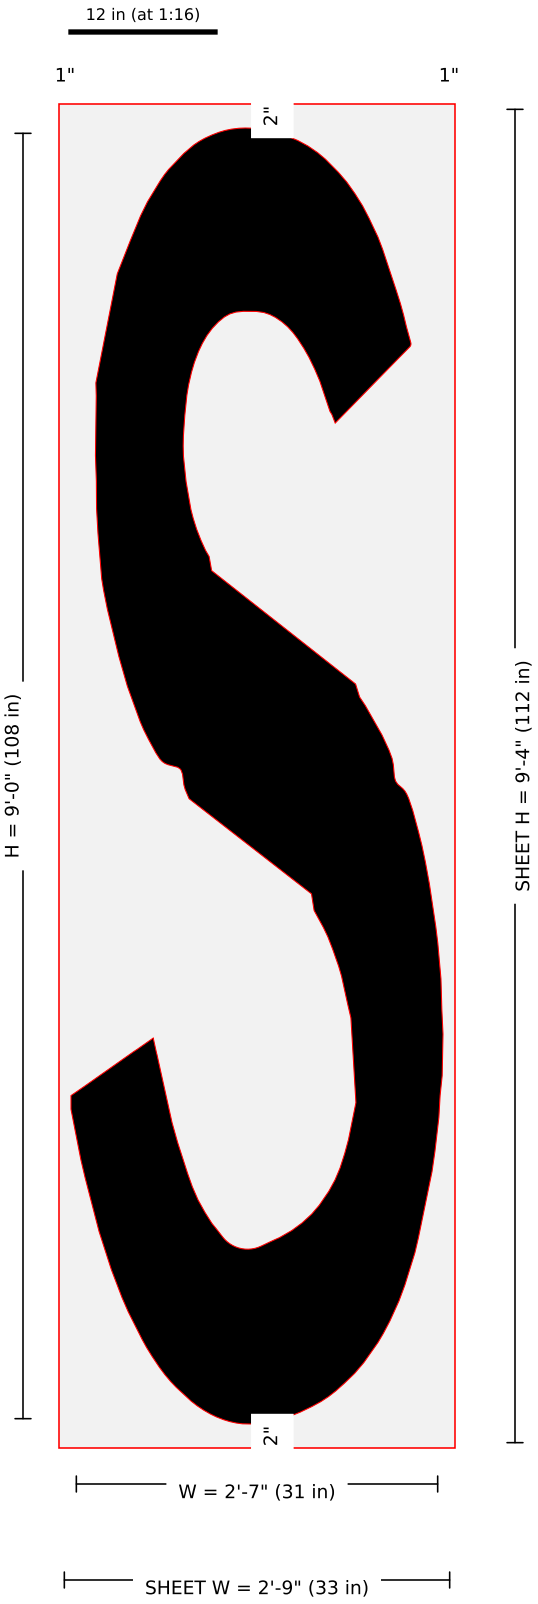


Pieces: 1 · sheet 33 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F108S-108in-FAA-Airport-Letter-S-120x48-2.jpg: width = kit listing 31 (image-scale 30.80); kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.43 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 7 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-U

108" FAA Airport "U" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 33.5 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

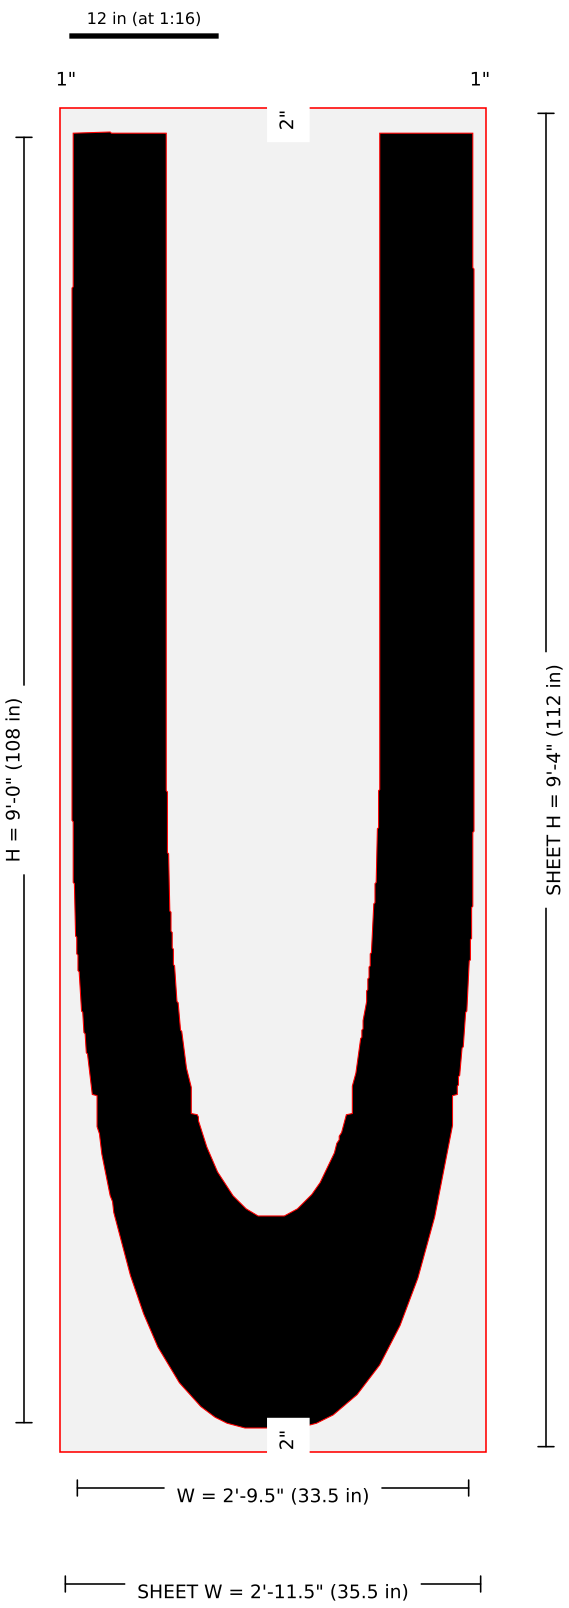


Pieces: 1 · sheet 35.5 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F108U-108in-FAA-Airport-Letter-U-120x48-2.jpg: width 33.5 from image scale (33.45); NOT the kit listing width; kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-V

108" FAA Airport "V" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 36.5 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

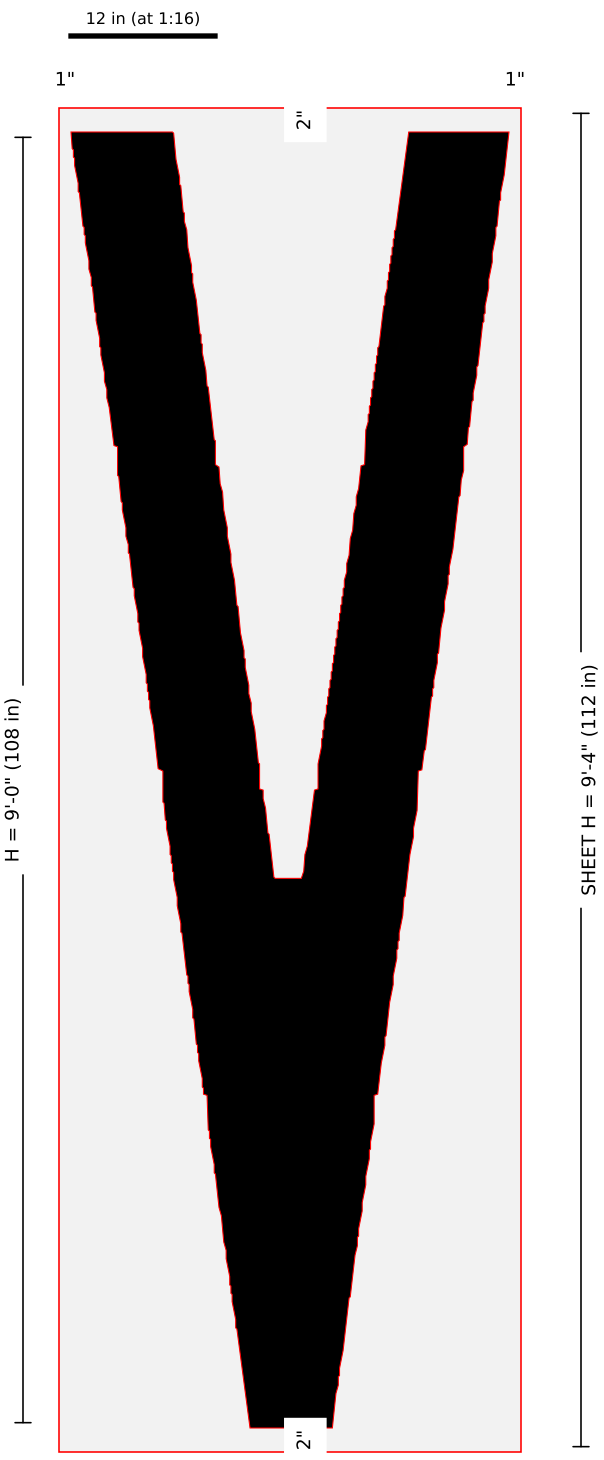


Pieces: 1 · sheet 38.5 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F108V-108in-FAA-Airport-Letter-V-120x48-2.jpg: width 36.5 from image scale (36.46); NOT the kit listing width; kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-W

108" FAA Airport "W" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 40.5 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

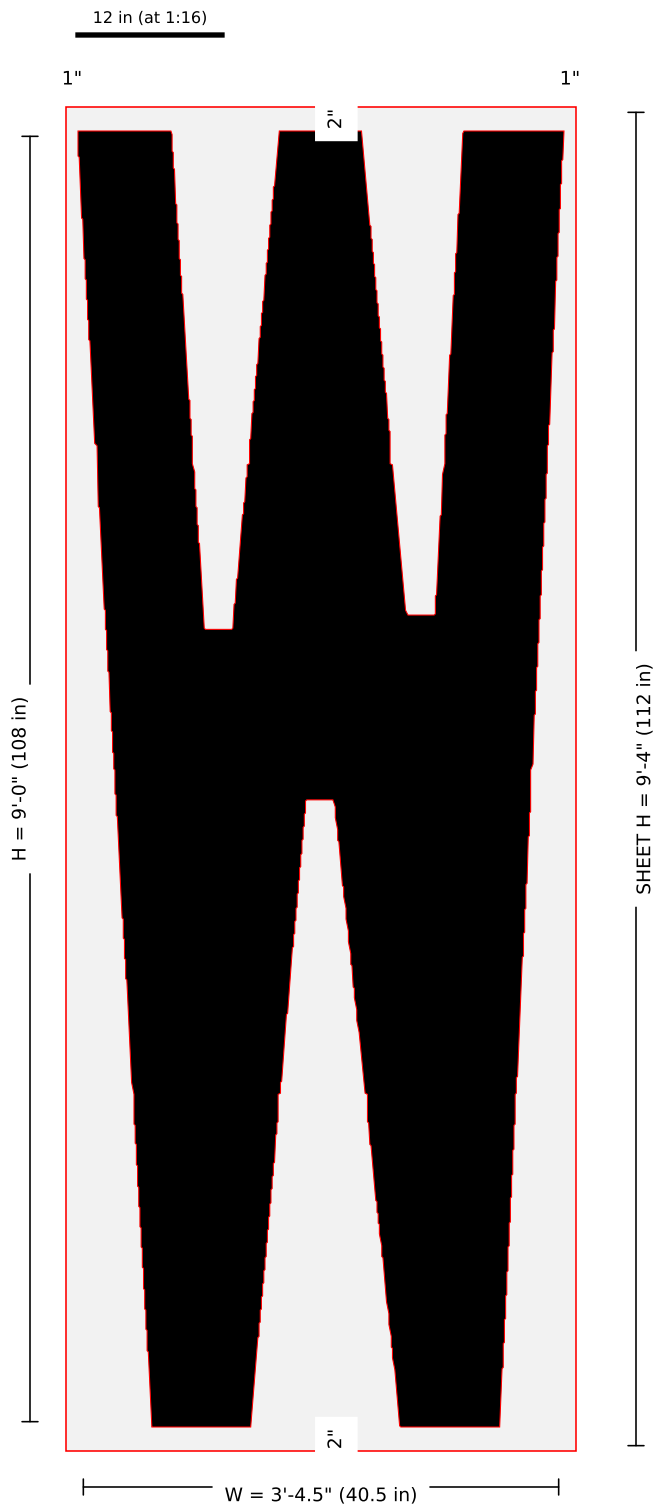


Pieces: 1 · sheet 42.5 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F108W-108in-FAA-Airport-Letter-W-120x48-2.jpg: width 40.5 from image scale (40.54); NOT the kit listing width; kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-X

108" FAA Airport "X" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 31 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

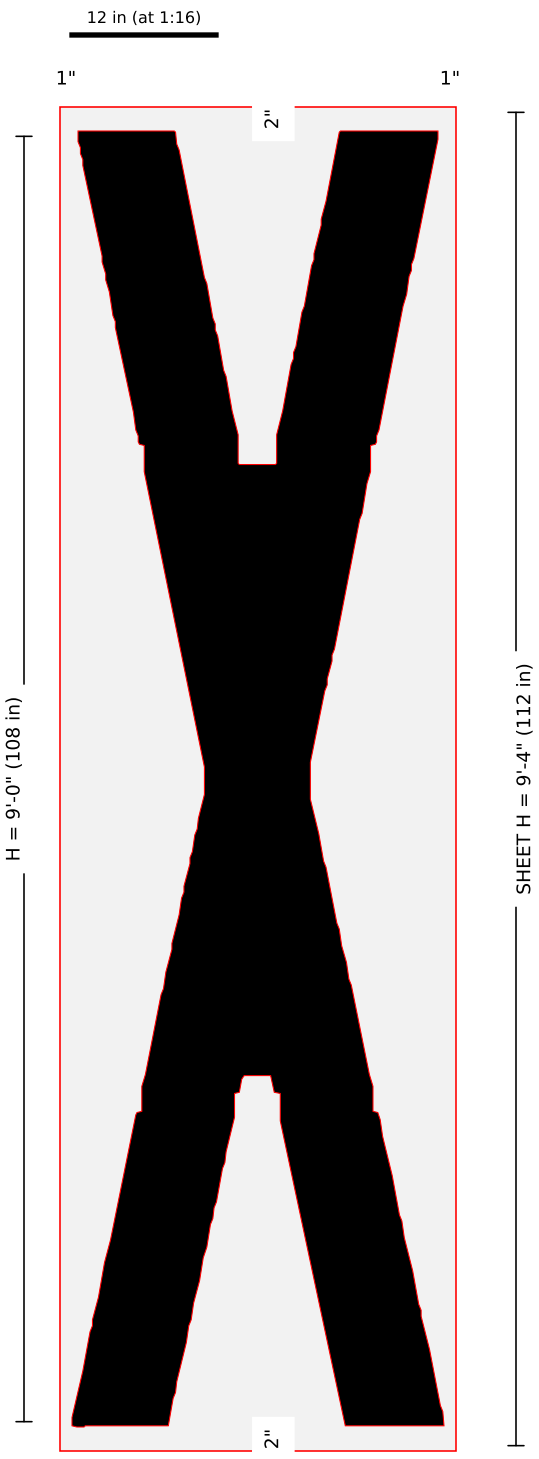


Pieces: 1 · sheet 33 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F108X-108in-FAA-Airport-Letter-X-120x48-2.jpg: width = kit listing 31 (image-scale 30.67); kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-Y

108" FAA Airport "Y" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 37.5 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

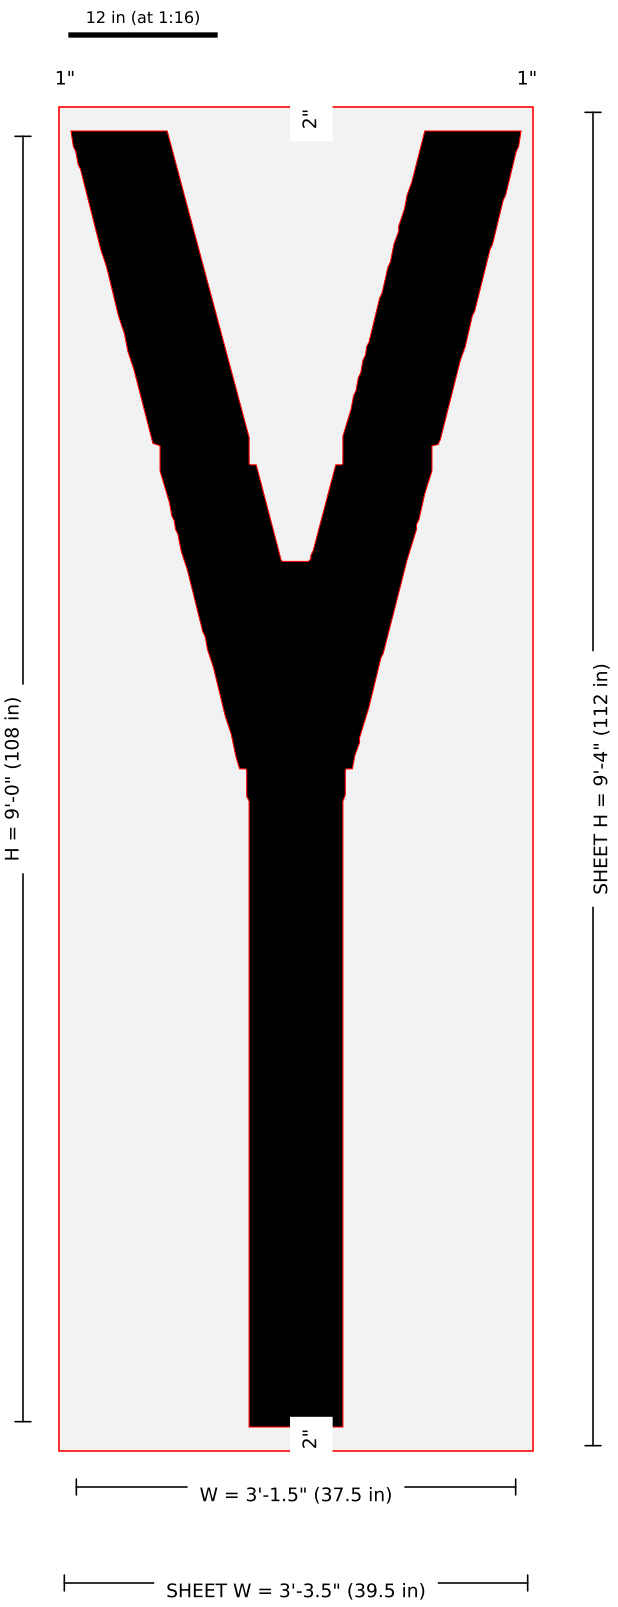


Pieces: 1 · sheet 39.5 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F108Y-108in-FAA-Airport-Letter-Y-120x48-2.jpg: width 37.5 from image scale (37.66); NOT the kit listing width; kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-Z

108" FAA Airport "Z" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 31 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

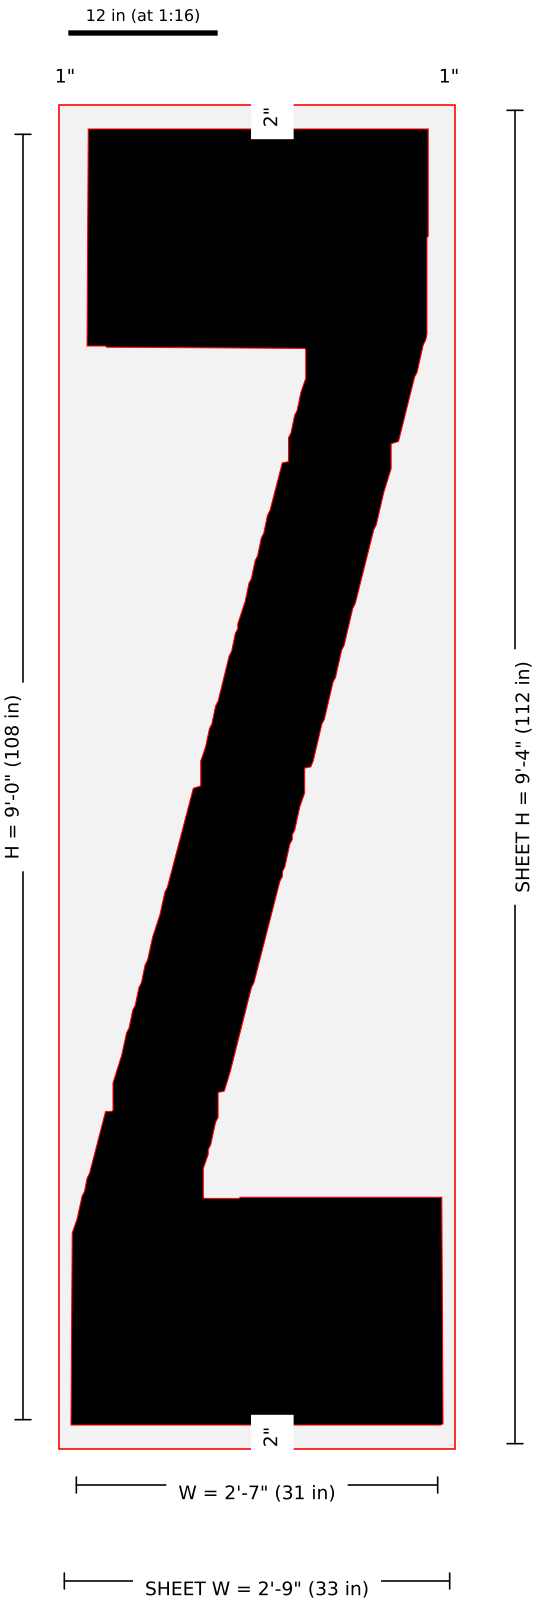


Pieces: 1 · sheet 33 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F108Z-108in-FAA-Airport-Letter-Z-120x48-2.jpg: width = kit listing 31 (image-scale 29.91); kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image (curves, angles, notches). 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-2

108" FAA Airport "2" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 30 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

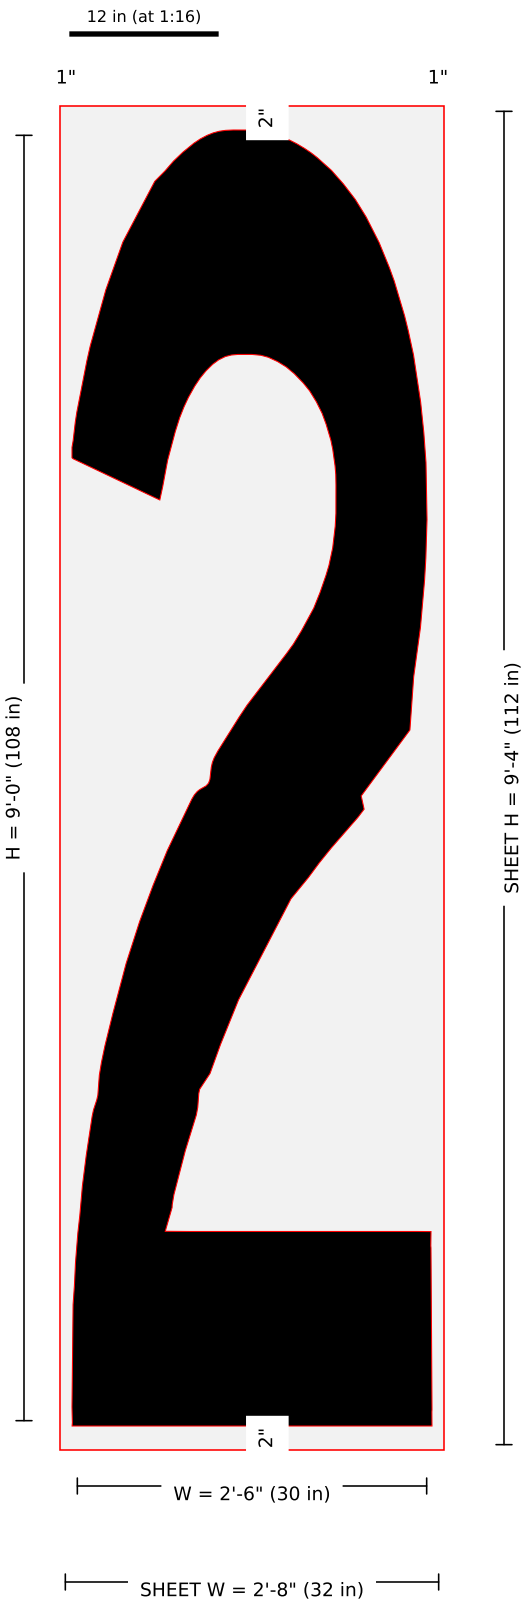



Pieces: 1 · sheet 32 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F1082-108in-FAA-Airport-Number-2-120x48-2.jpg: width = 1-800 image width label 30 in (image-scale 29.44); kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.43 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 4 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-108-01-3

108" FAA Airport "3" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 30 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

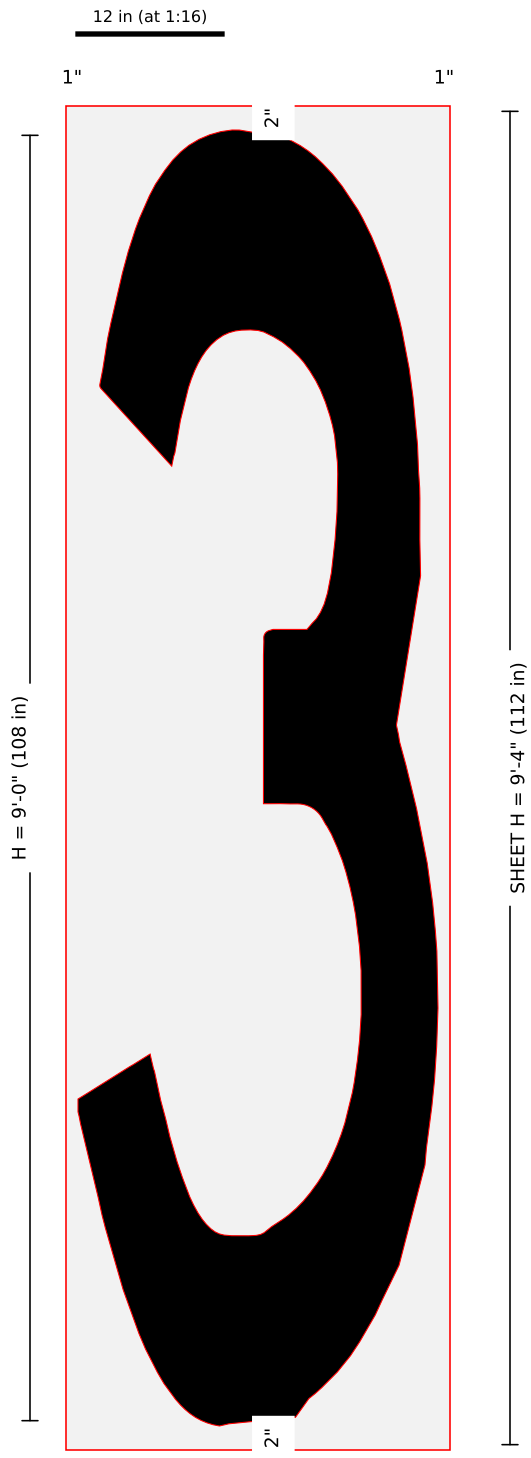






Pieces: 1 · sheet 32 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F1083-108in-FAA-Airport-Number-3-120x48-2.jpg: width = 1-800 image width label 30 in (image-scale 29.41); kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.43 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 11 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-4

108" FAA Airport "4" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 32 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

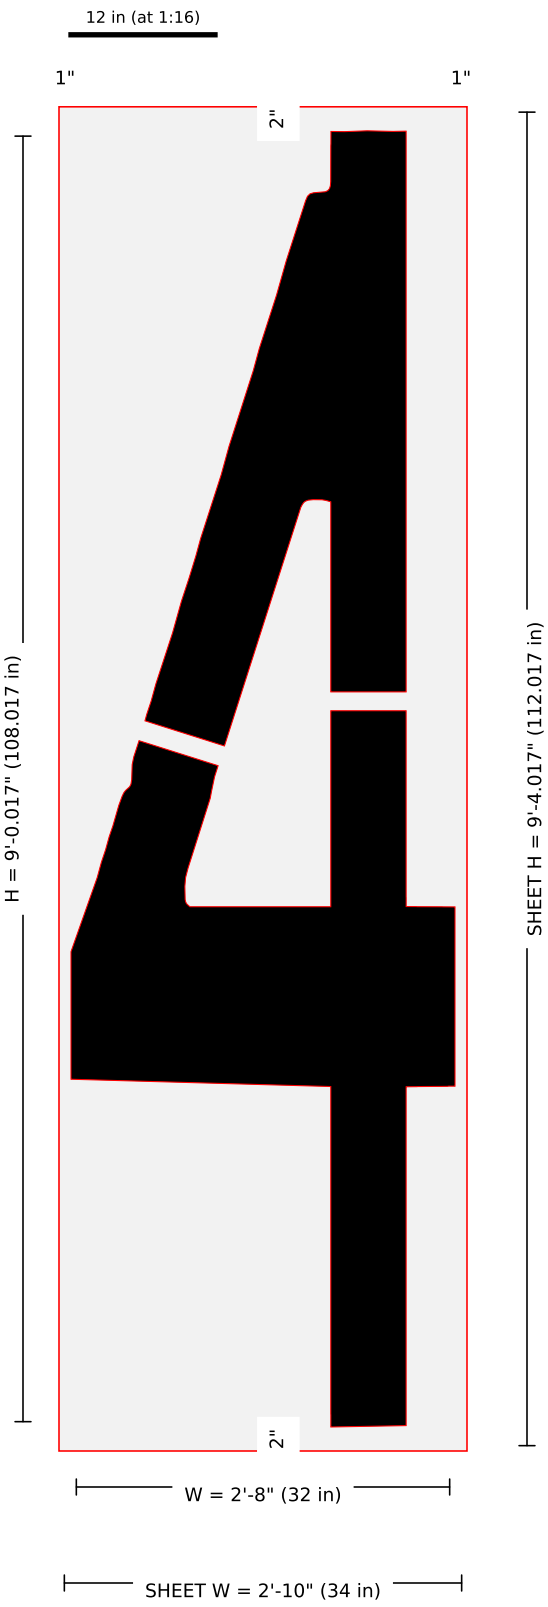


Pieces: 1 · sheet 34 x 112.017 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F1084-108in-FAA-Airport-Number-4-120x48-2.jpg: width = 1-800 image width label 32 in (image-scale 32.43); kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.30 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
ISLAND BRIDGES (2026-11-04): (24.79,60.46) stroke 6.278" w=1.57"; (9.23,56.96) stroke 6.906" w=1.727" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-5

108" FAA Airport "5" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 30 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

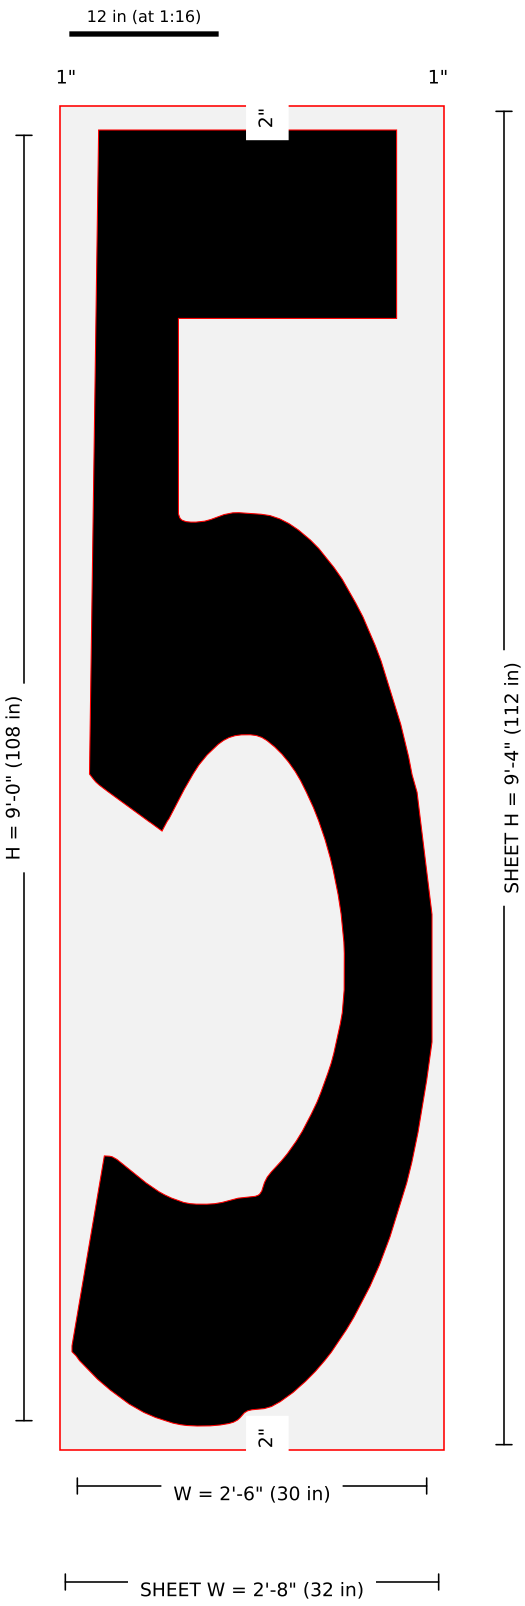


Pieces: 1 · sheet 32 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F1085-108in-FAA-Airport-Number-5-120x48-2.jpg: width = 1-800 image width label 30 in (image-scale 29.48); kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.43 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-6

108" FAA Airport "6" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 29 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

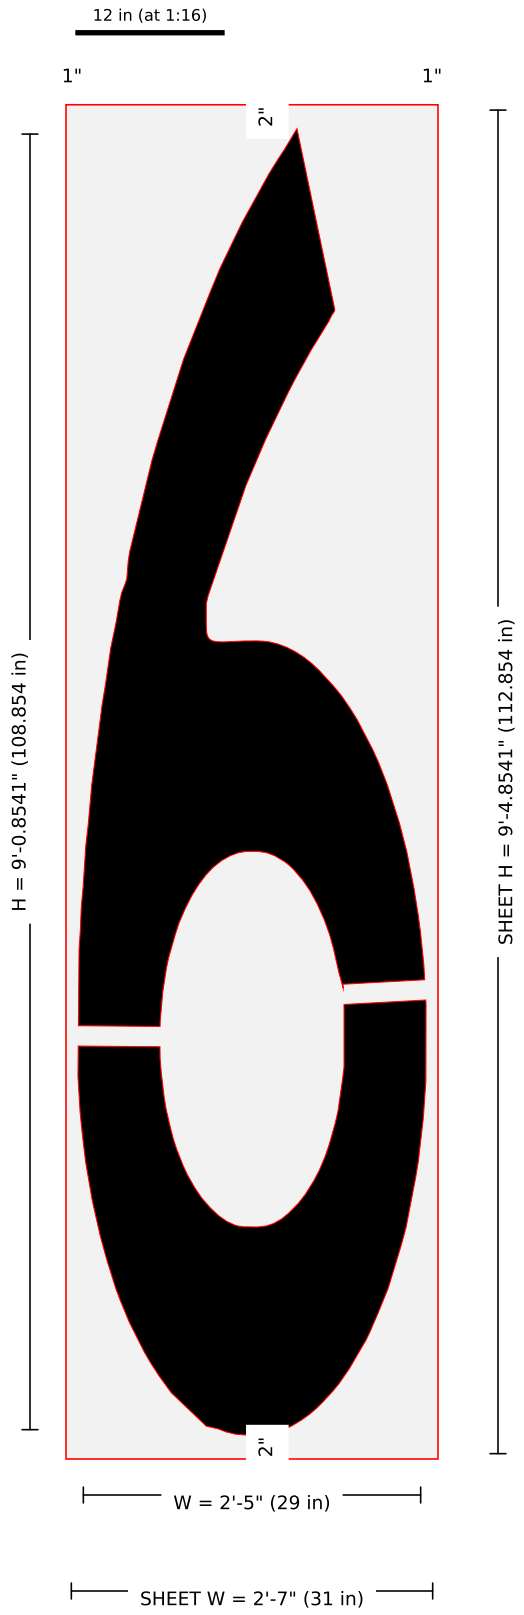


Pieces: 1 · sheet 31 x 112.854 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F1086-108in-FAA-Airport-Number-6-120x48-2.jpg: width = 1-800 image width label 29 in (image-scale 29.27); kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.43 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
ISLAND BRIDGES (2026-11-04): (25.55,36.91) stroke 6.772" w=1.693"; (3.42,33.23) stroke 6.79" w=1.698" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-7

108" FAA Airport "7" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 29 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

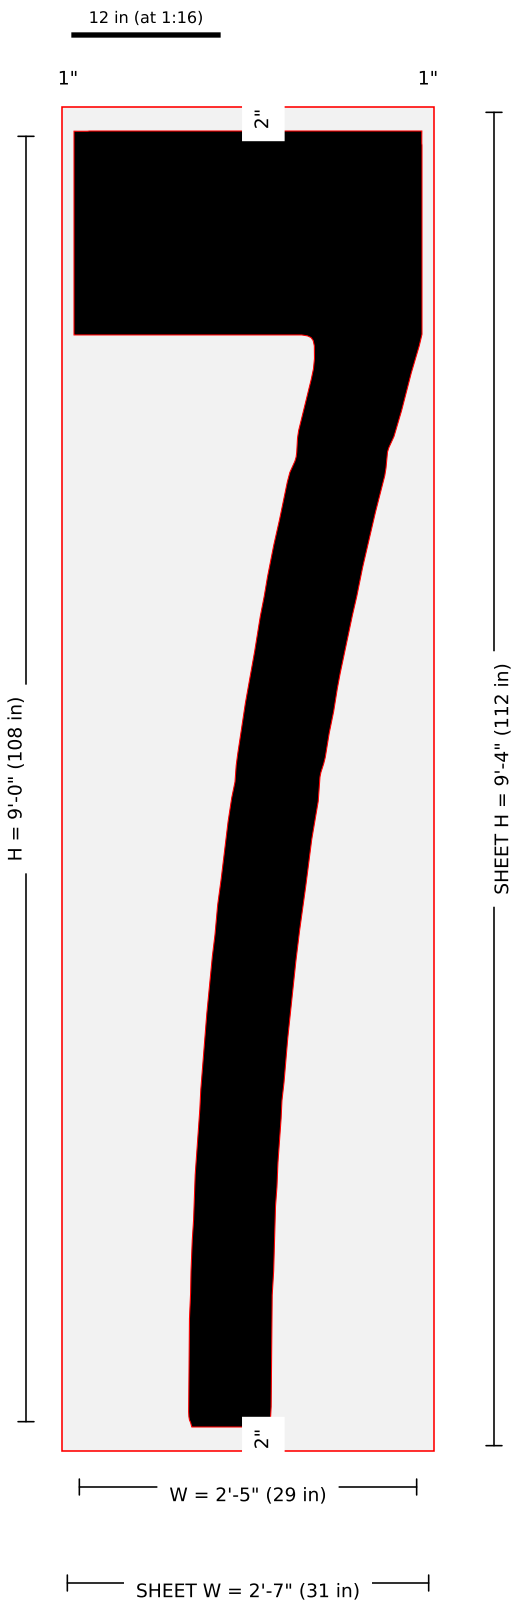


Pieces: 1 · sheet 31 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F1087-108in-FAA-Airport-Number-7-120x48-2.jpg: width = 1-800 image width label 29 in (image-scale 29.28); kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.43 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-8

108" FAA Airport "8" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 29 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

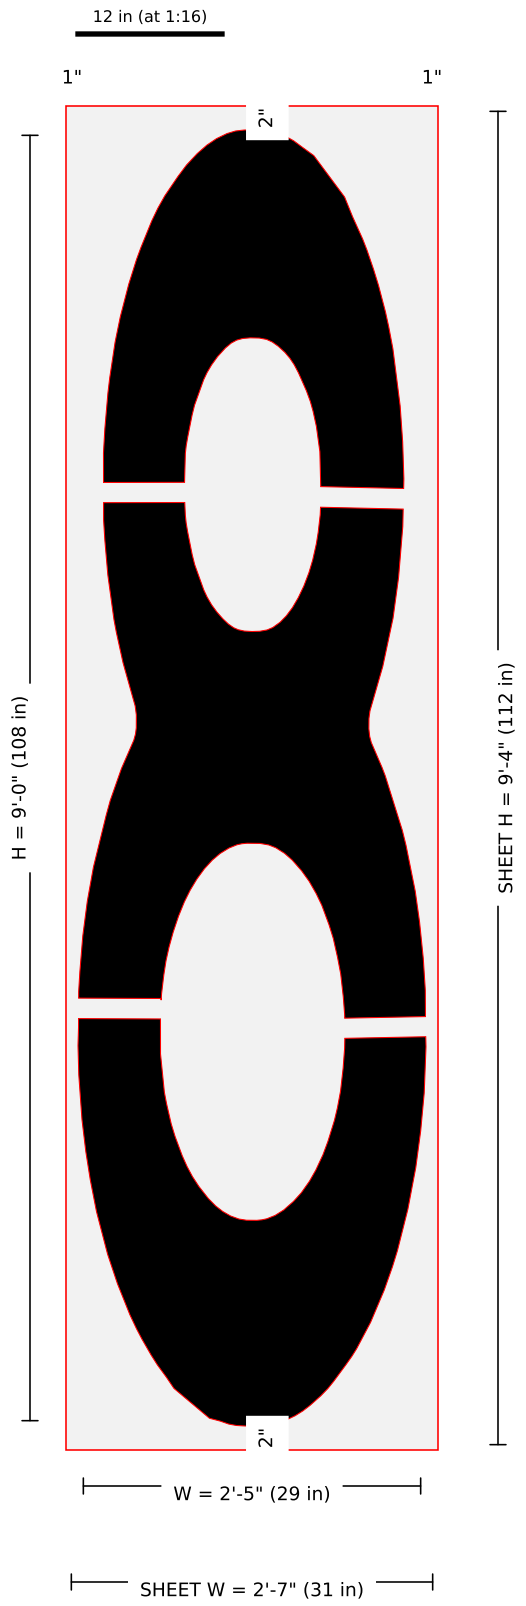


Pieces: 1 · sheet 31 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F1088-108in-FAA-Airport-Number-8-120x48-2.jpg: width = 1-800 image width label 29 in (image-scale 29.36); kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.43 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
ISLAND BRIDGES (2026-11-04): (25.6,33.21) stroke 6.719" w=1.68"; (3.46,34.79) stroke 6.822" w=1.706"; (5.49,77.79) stroke 6.727" w=1.682"; (23.68,77.34) stroke 6.871" w=1.718" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-9

108" FAA Airport "9" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 29 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

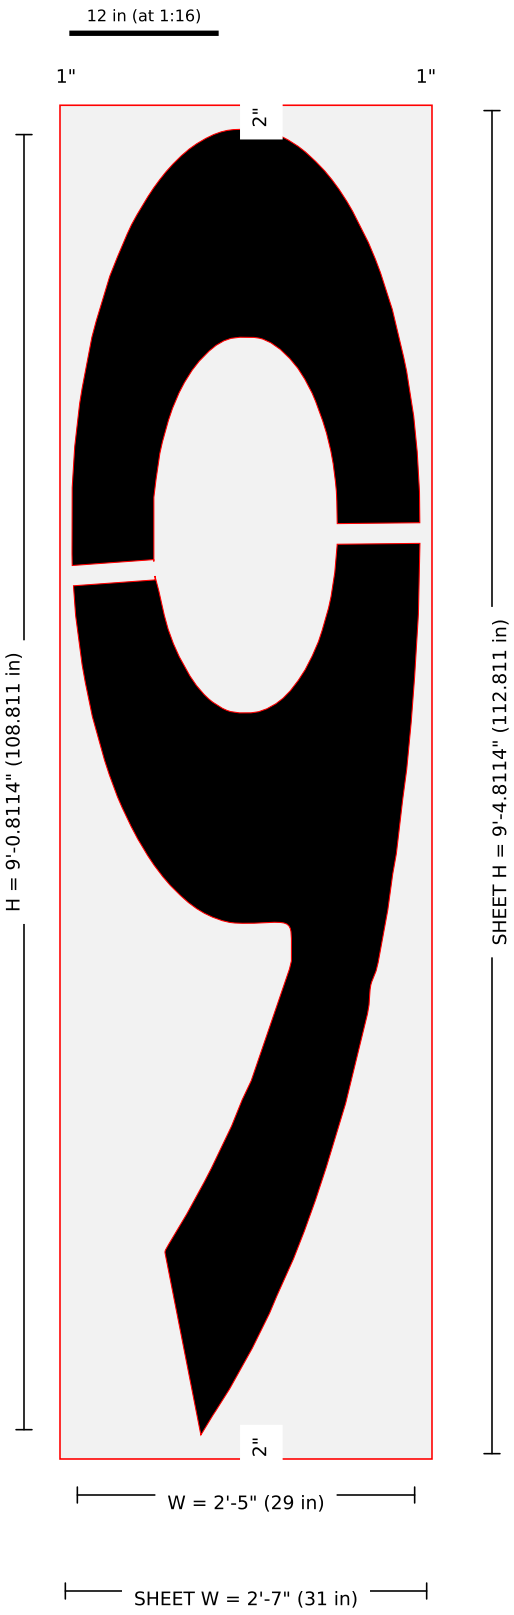


Pieces: 1 · sheet 31 x 112.811 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F1089-108in-FAA-Airport-Number-9-120x48-2.jpg: width = 1-800 image width label 29 in (image-scale 29.37); kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.43 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
ISLAND BRIDGES (2026-11-04): (3.44,71.04) stroke 6.776" w=1.694"; (25.56,74.31) stroke 6.876" w=1.719" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-C

108" FAA Airport "C" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 30 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

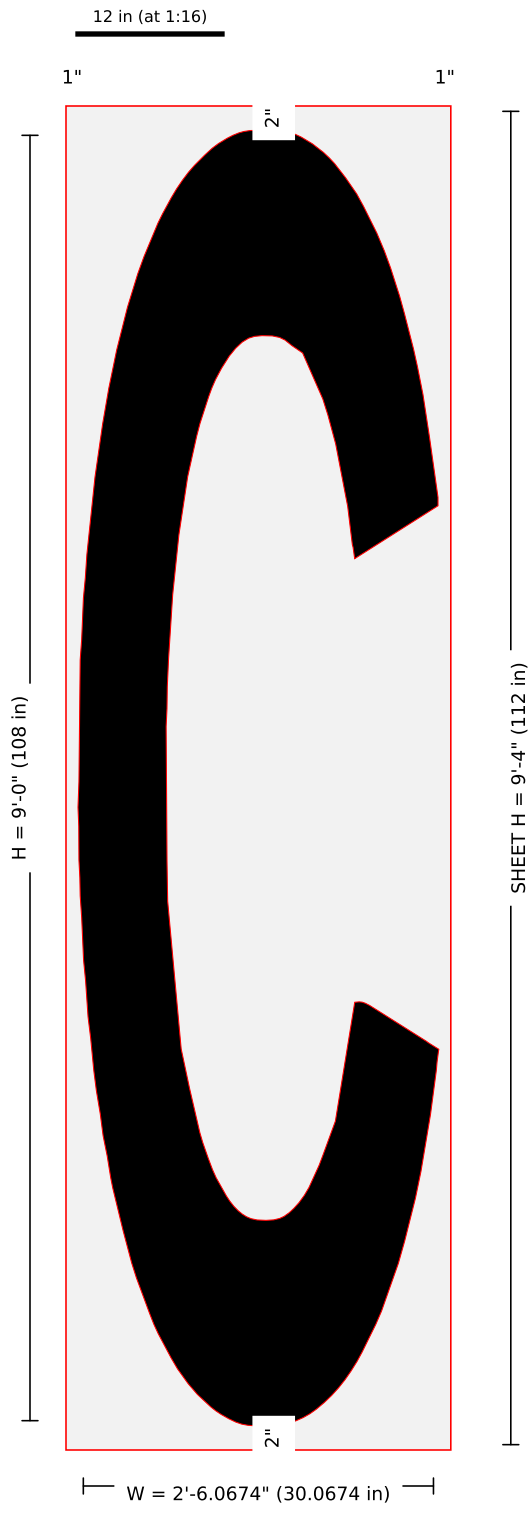


Pieces: 1 · sheet 32.067 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F108C-108in-FAA-Airport-Letter-C-120x48-2.jpg: width = 1-800 image width label 30 in (image-scale 29.61); kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.43 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-D

108" FAA Airport "D" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 30 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

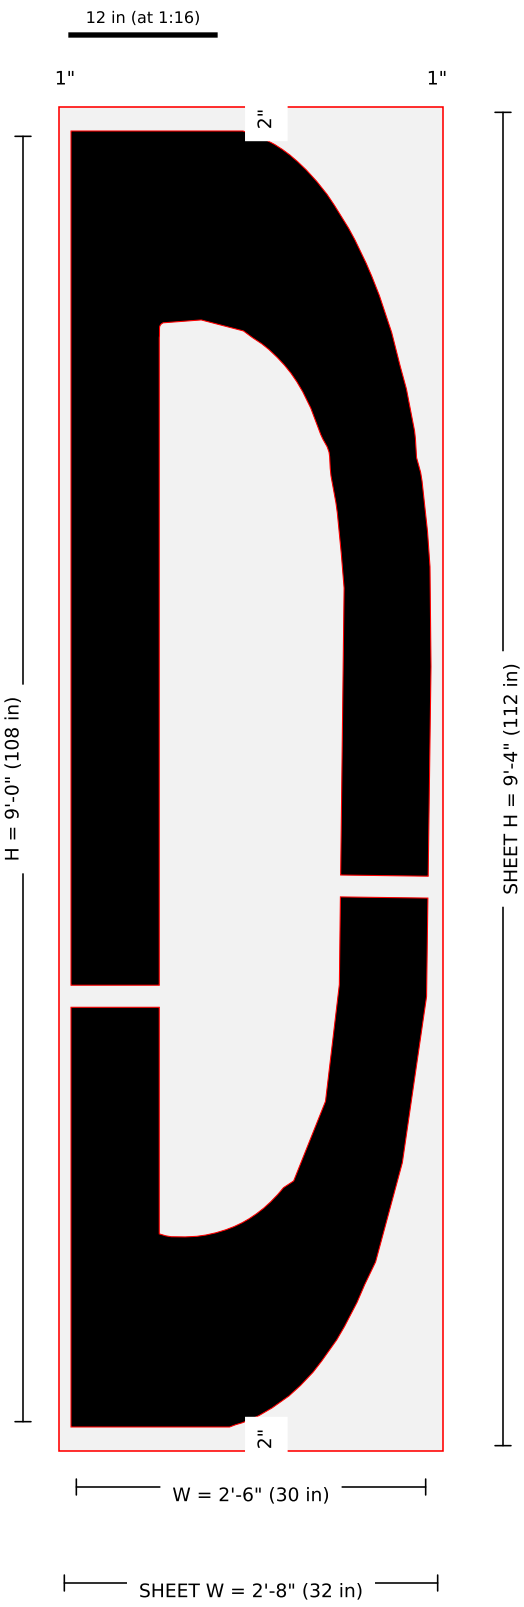



Pieces: 1 · sheet 32 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F108D-108in-FAA-Airport-Letter-D-120x48-2.jpg: width = 1-800 image width label 30 in (image-scale 29.95); kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.43 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
ISLAND BRIDGES (2026-11-04): (26.11,45.04) stroke 7.293" w=1.823"; (3.68,35.9) stroke 7.356" w=1.839" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-108-01-G

108" FAA Airport "G" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 30 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

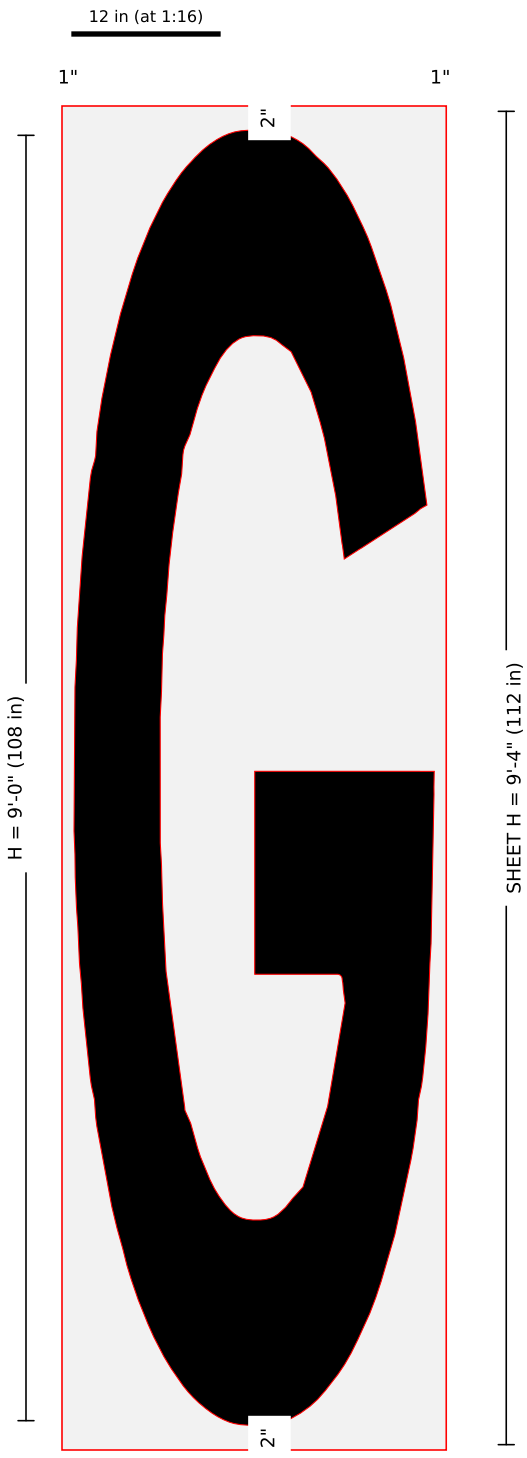






Pieces: 1 · sheet 32.021 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F108G-108in-FAA-Airport-Letter-G-120x48-2.jpg: width = 1-800 image width label 30 in (image-scale 30.30); kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.43 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-K

108" FAA Airport "K" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 32 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

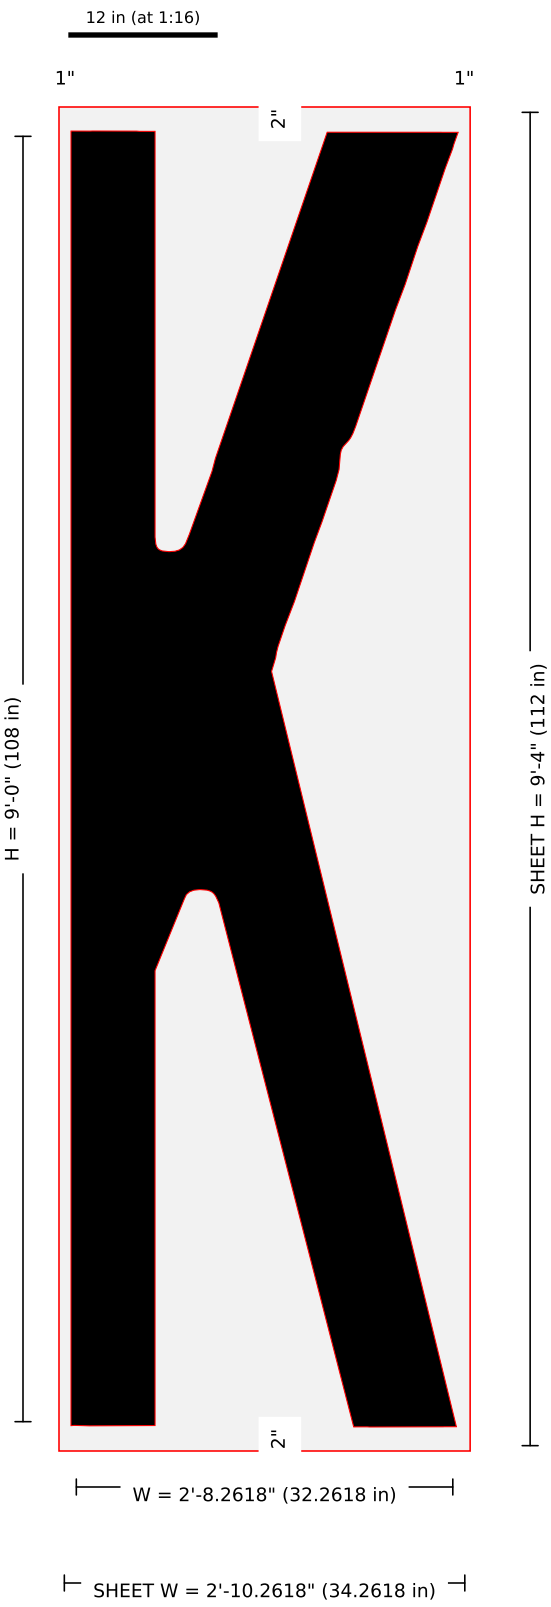


Pieces: 1 · sheet 34.262 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F108K-108in-FAA-Airport-Letter-K-120x48-2.jpg: width = 1-800 image width label 32 in (image-scale 31.89); kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.43 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 1 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-N

108" FAA Airport "N" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 32 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

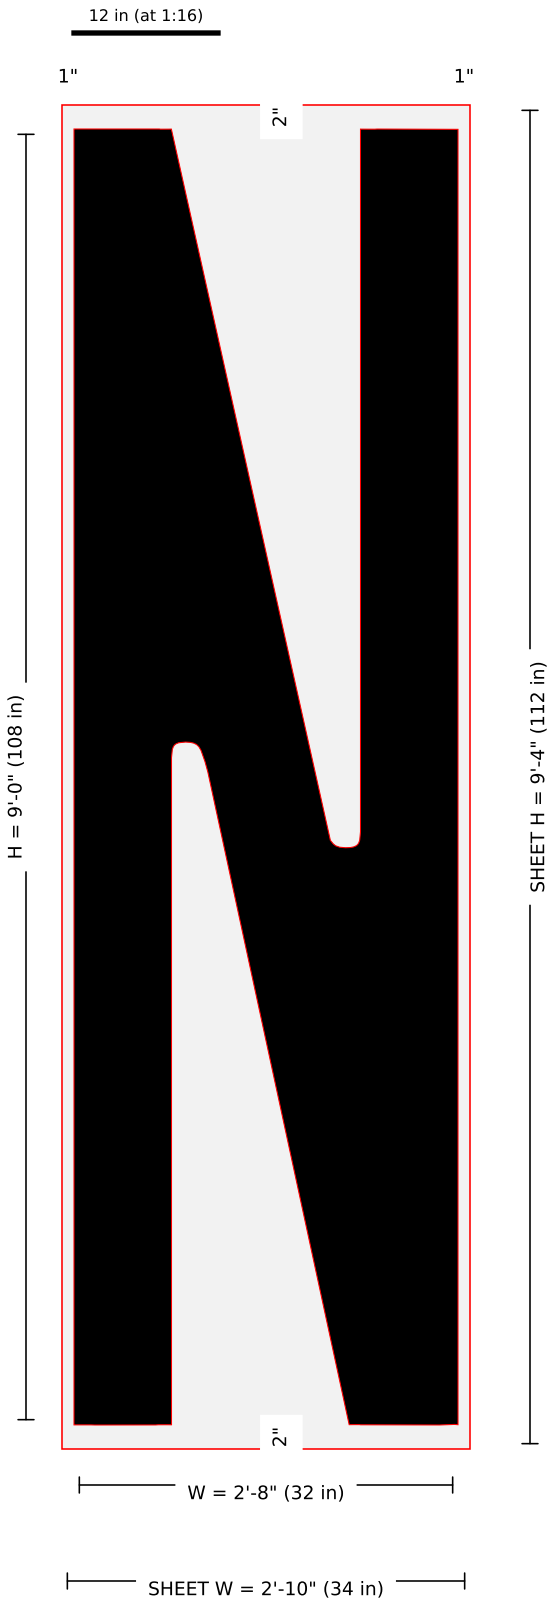



Pieces: 1 · sheet 34 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F108N-108in-FAA-Airport-Letter-N-120x48-2.jpg: width = 1-800 image width label 32 in (image-scale 31.69); kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.43 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.


SSS-FAA-108-01-Q

108" FAA Airport "Q" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 33 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

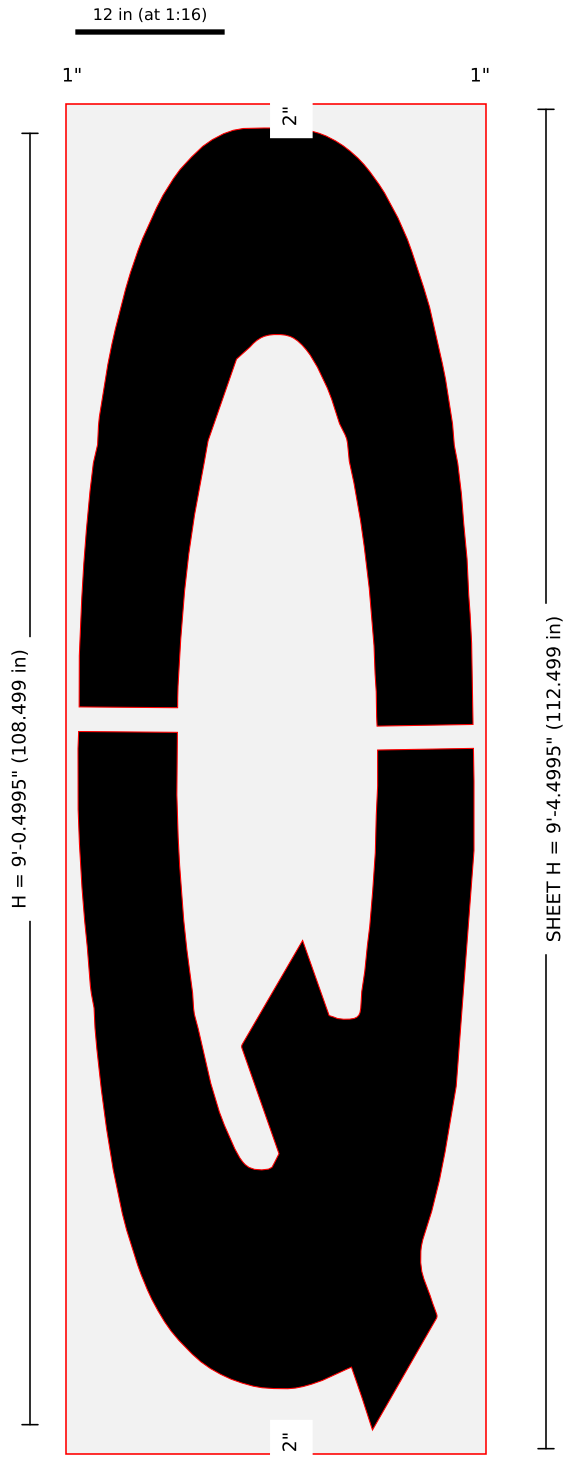






Pieces: 1 · sheet 35 x 112.5 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F108Q-108in-FAA-Airport-Letter-Q-120x48-2.jpg: width = 1-800 image width label 33 in (image-scale 32.17); kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.43 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
CORNERS REBUILT (corner triage r5, 2026-11-04): 6 corners rebuilt locally from the 1-800 reference geometry (sharp = exact vertex, rounded = true fillet of the reference radius); edges, bridges, split and size unchanged.
ISLAND BRIDGES (2026-11-04): (28.95,57.23) stroke 7.97" w=1.992"; (4.19,58.7) stroke 8.2" w=2.05" - short ties across the stroke, max(0.5 in, 25% stroke).
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-T

108" FAA Airport "T" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 29 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

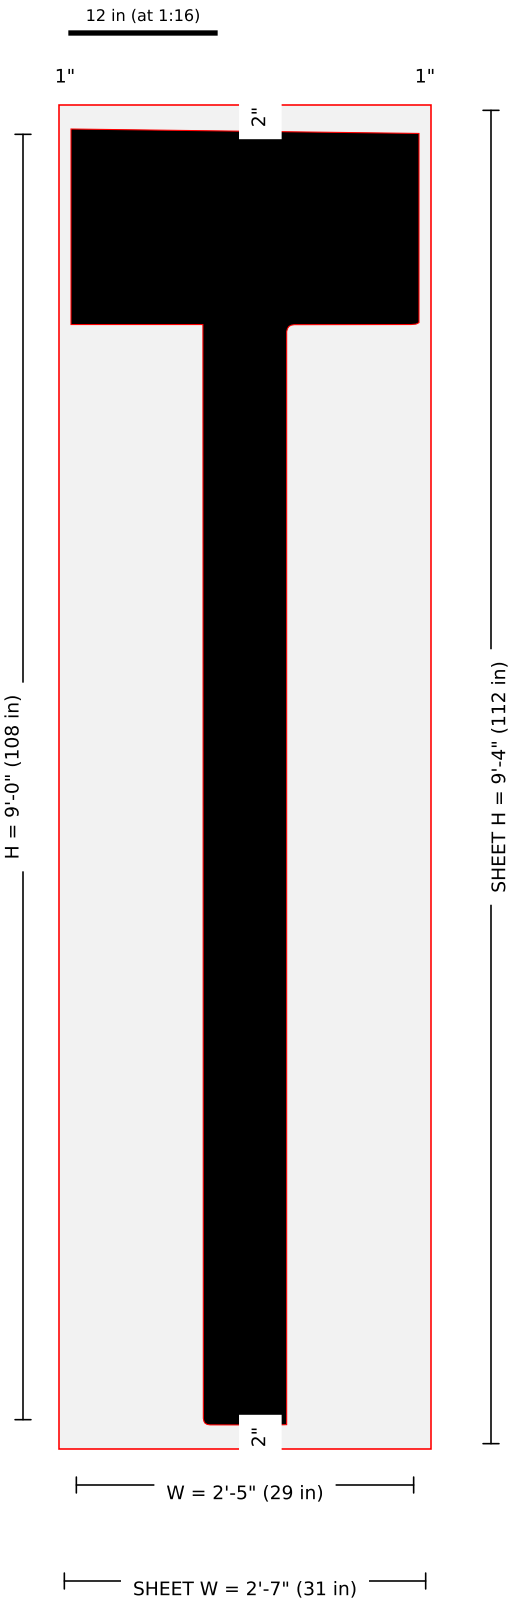


Pieces: 1 · sheet 31 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F108T-108in-FAA-Airport-Letter-T-120x48-2.jpg: width = 1-800 image width label 29 in (image-scale 28.69); kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r2, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.22 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-U

108" FAA Airport "U" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 33 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

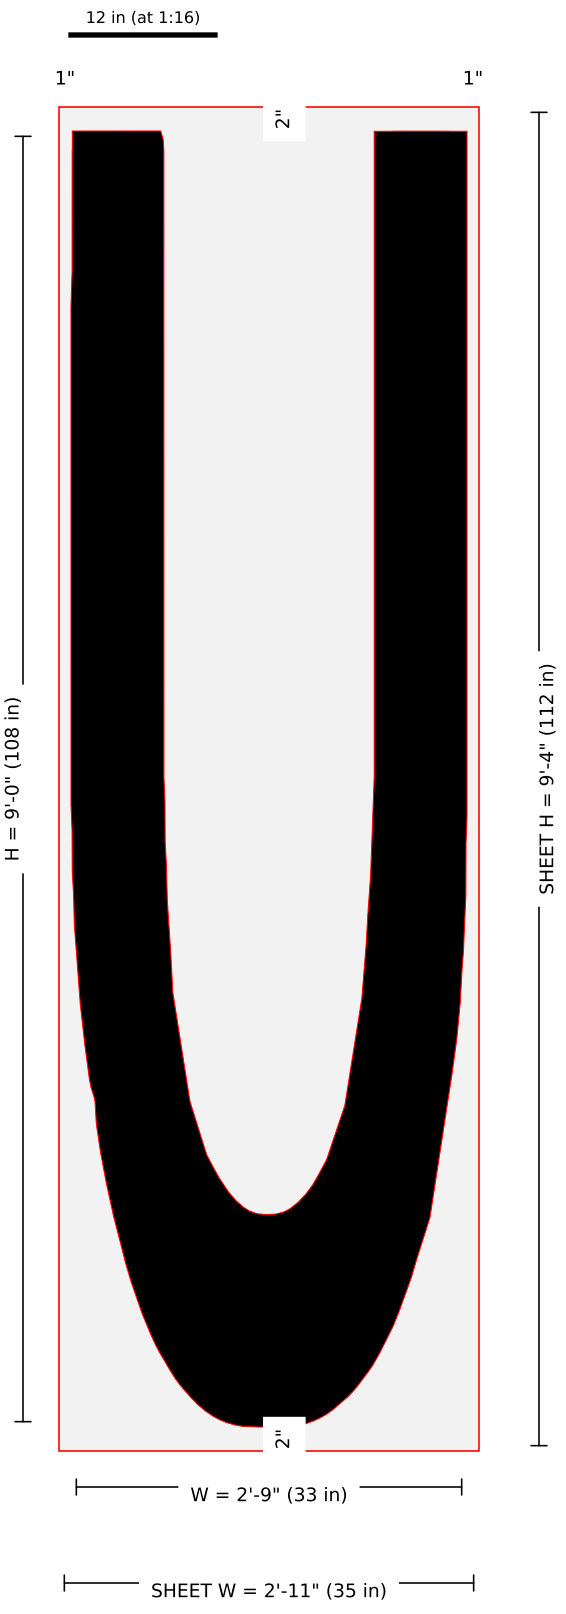


Pieces: 1 · sheet 35 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F108U-108in-FAA-Airport-Letter-U-120x48-2.jpg: width = 1-800 image width label 33 in (image-scale 33.45); kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.43 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-V

108" FAA Airport "V" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 37 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

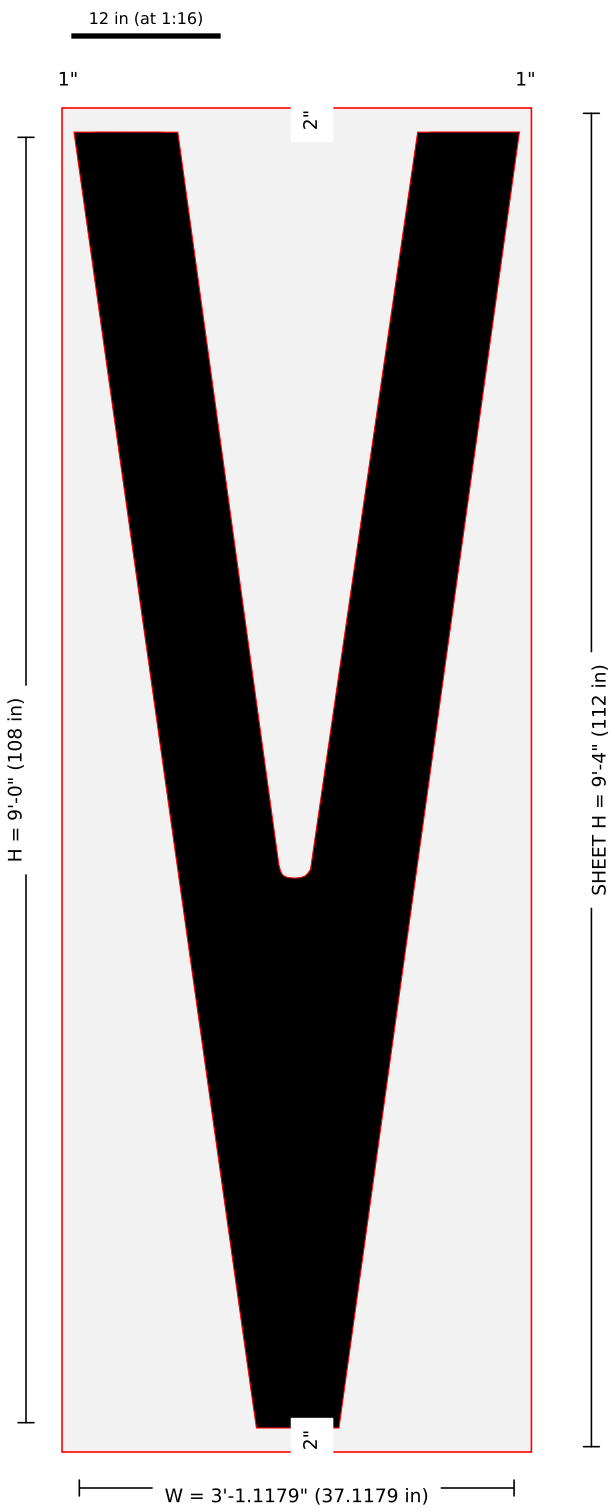


Pieces: 1 · sheet 39.118 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F108V-108in-FAA-Airport-Letter-V-120x48-2.jpg: width = 1-800 image width label 37 in (image-scale 36.46); kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.43 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-W

108" FAA Airport "W" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 41 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

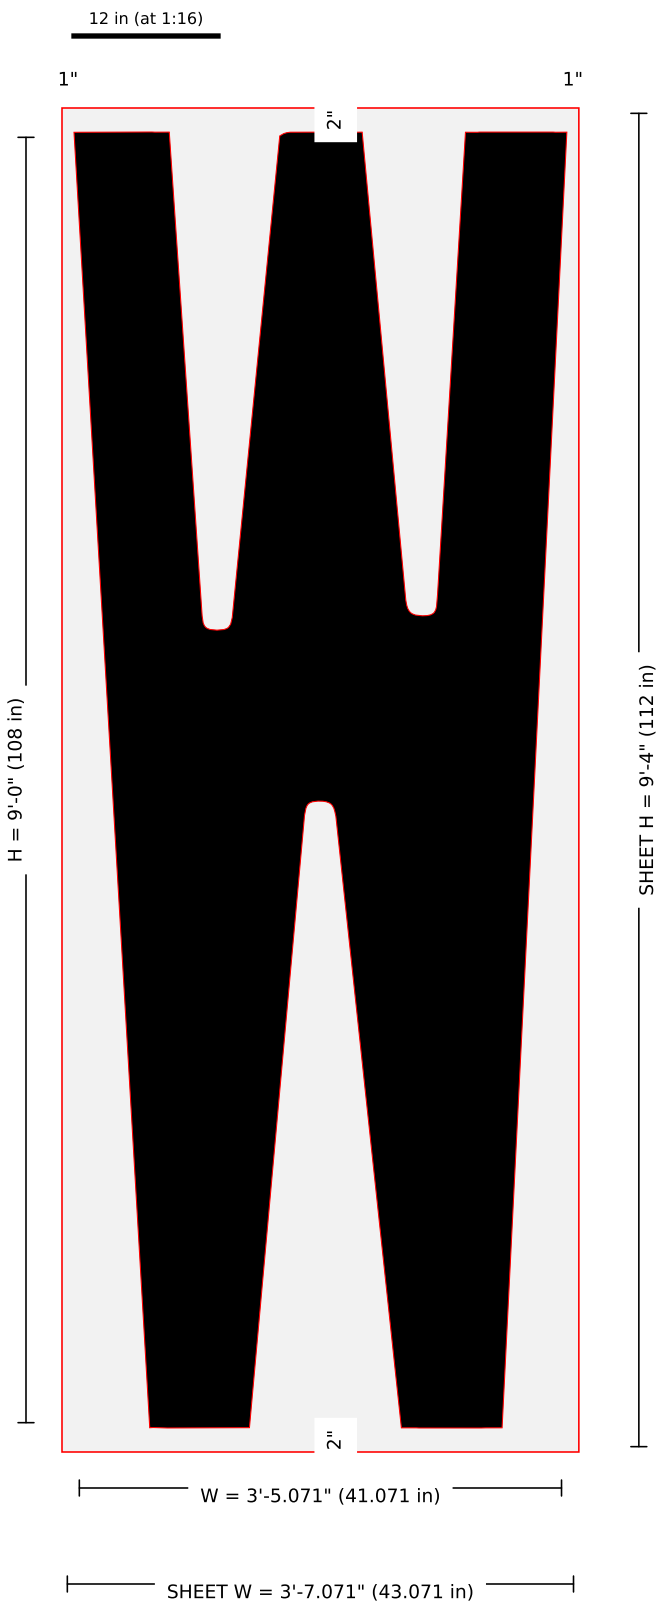


Pieces: 1 · sheet 43.071 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F108W-108in-FAA-Airport-Letter-W-120x48-2.jpg: width = 1-800 image width label 41 in (image-scale 40.54); kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.43 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-X

108" FAA Airport "X" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 30 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

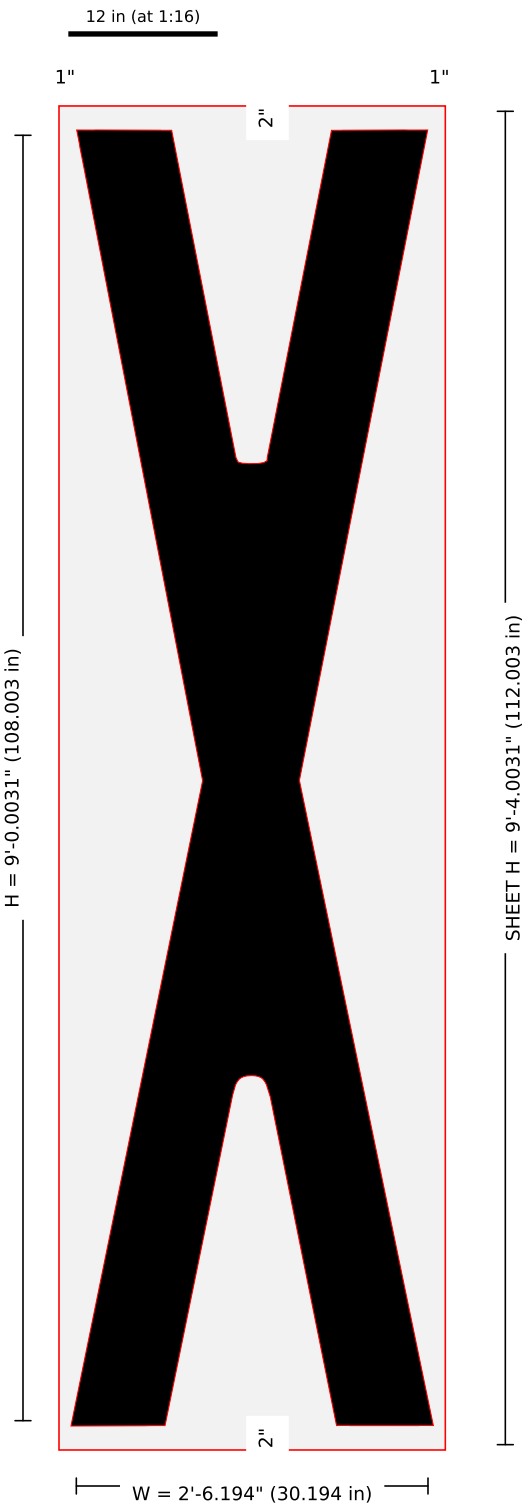


Pieces: 1 · sheet 32.194 x 112.003 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F108X-108in-FAA-Airport-Letter-X-120x48-2.jpg: width = 1-800 image width label 30 in (image-scale 30.67); kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.43 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-Y

108" FAA Airport "Y" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 38 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

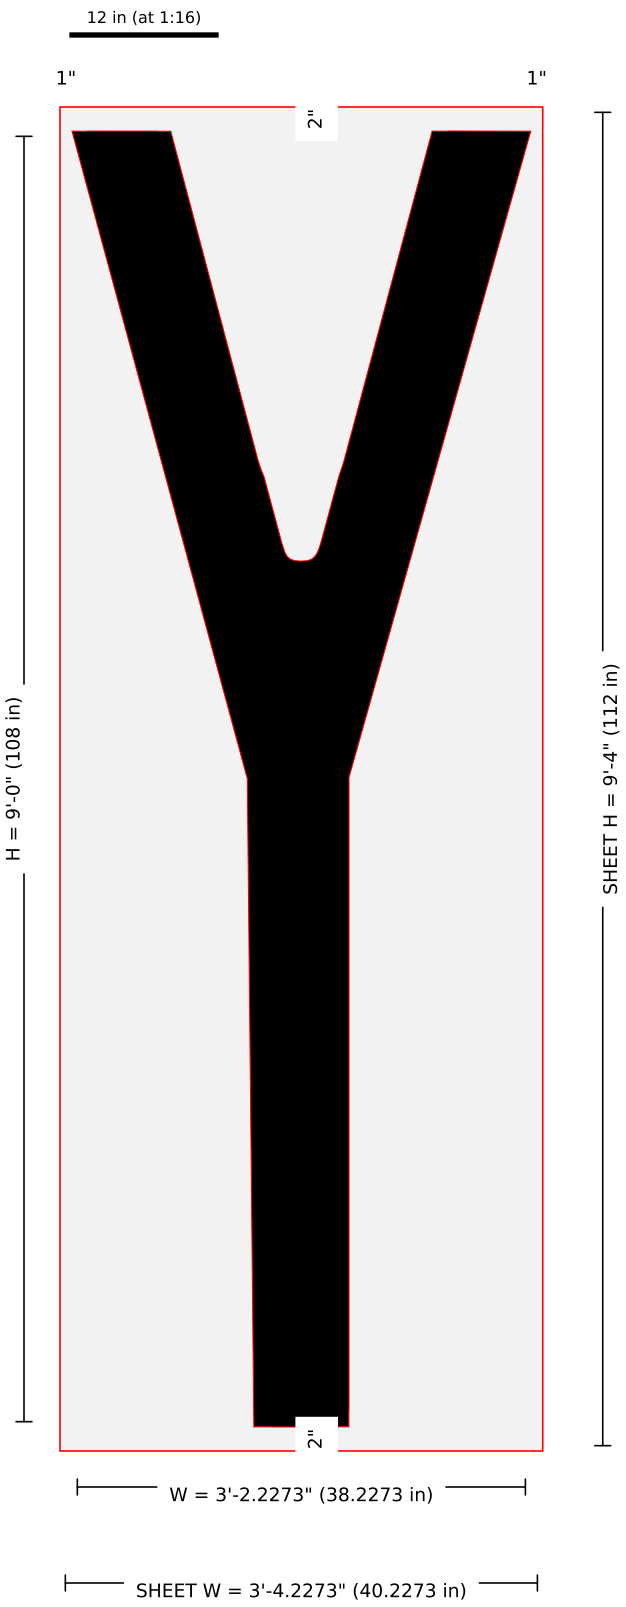


Pieces: 1 · sheet 40.227 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F108Y-108in-FAA-Airport-Letter-Y-120x48-2.jpg: width = 1-800 image width label 38 in (image-scale 37.66); kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.43 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.

SSS-FAA-108-01-Z

108" FAA Airport "Z" - kit SSS-FAA-108-01, traced from 1-800-Stencil image, 30 W x 108 H

Scale 1:16 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

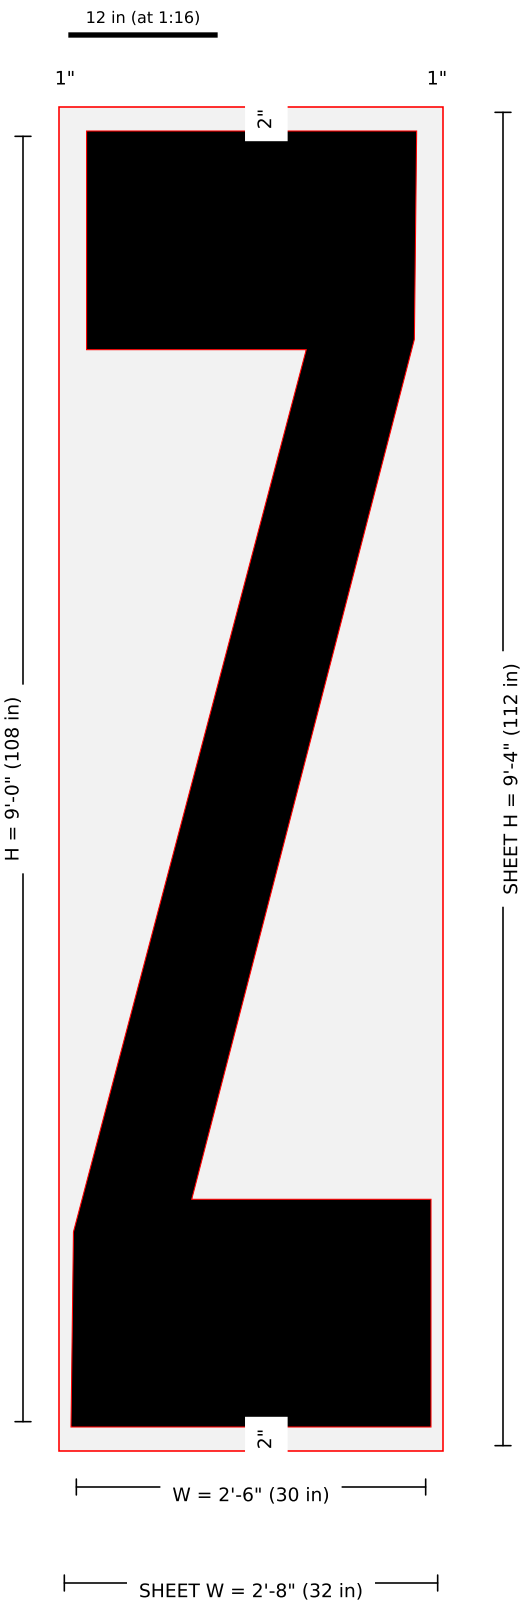

Pieces: 1 · sheet 32 x 112 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
Matches 1-800-Stencil per-character image 1800-F108Z-108in-FAA-Airport-Letter-Z-120x48-2.jpg: width = 1-800 image width label 30 in (image-scale 29.91); kit sheet 48 x 120 (side margin 8.5).
Whole character traced from the 1-800 image. 1-800 bridge gaps closed and re-bridged to spec (25% stroke, min 0.5 in).
EDGES CLEANED (rebuild r3, 2026-11-04): contour smoothed and line-fitted (straight runs snapped to single lines, near-0/90 deg edges snapped exact, curves smoothed, burrs/notches removed) BEFORE splitting; est. trace resolution 0.43 in (smoothing level 1); existing spec bridges (25% stroke, min 0.5 in) kept as gaps; size unchanged.
Corners restored to match the 1-800 reference: sharp corners rebuilt as crisp vertices, rounded corners as true fillets of the reference radius.
SHEET (2026-11-04): material outline cut on CUT layer; letter/number material: H+2 in top/bottom, 1 in each side; border L/R/B/T 1/1/2/2 in.